INCH-POUND

MIL-DTL-3933/19B
7 November 2002
SUPERSEDING
MIL-A-3933/19A
24 April 1985

DETAIL SPECIFICATION SHEET

ATTENUATORS, FIXED, COAXIAL LINE (BNC CONNECTORS),

FREQUENCY RANGE: DC TO 4.5 GHz, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and the latest issue of MIL-DTL-3933.

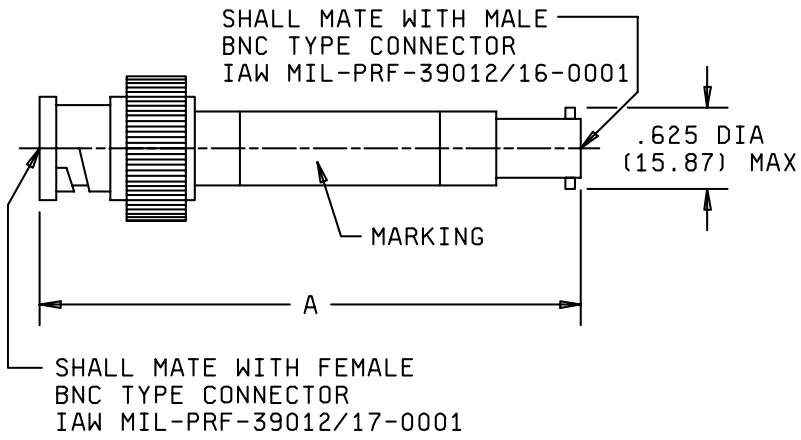

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Attenuators for use in general field equipment.

Operating frequency range: DC to 4.5 GHz.

Test frequency range for SWR and attenuation measurements, measured or recorded, when using an Automatic Network Analyzer (ANA) or equivalent test equipment: 100 MHz (or lower) to 4.5 GHz.

Basic test frequency for sensitive measurements like connector repeatability, temperature sensitivity, power sensitivity and any other measurements where a 'delta' spec is imposed: 2.0 GHz.

Operating temperature range: -55°C to 125°C.

Maximum weight: See table I.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Nominal impedance: 50 ohms.

Attenuation: See table I. Stability and sensitivity:

Maximum change in attenuation after:	up to 10 dB, inclusive (dB)	over 10 dB (dB/dB)
temperature change or thermal shock	0.05	0.005
vibration or shock	0.1	0.01
moisture resistance or salt spray	0.2	0.02
peak power	0.05	0.005

Frequency sensitivity, maximum: 0.1dB/dB/GHz.
Temperature sensitivity of attenuation, maximum: 0.0004 dB/dB/°C.

Power rating: See table I.
Power sensitivity for full input power, maximum: 0.005 dB/dB/Watt.

VSWR: See table I.

Connector repeatability, maximum variation in attenuation: 0.02 dB.

Part or Identifying Number (PIN): M3933/19- (and dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number		Attenuation dB			Maximum power input at 25°C		VSWR maximum 1/				Weight (oz) Maximum	Dimension A (inches) Maximum
		Nominal	Deviation				DC to 1.0 GHz	1.0 to 2.0 GHz	2.0 to 3.0 GHz	3.0 to 4.5 GHz		
				DC to 4.5 GHz	AV (W) 2/ (continuously)	Peak (kW)						
01	N S	1		±0.3	4	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
02	N S	2		±0.3	4	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
03	N S	3		±0.3	4	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
04	N S	4		±0.3	3	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
05	N S	5		±0.3	3	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
06	N S	6		±0.3	3	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
07	N S	8		±0.5	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
08	N S	10		±0.5	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
09	N S	11		±0.5	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
10	N S	12		±0.5	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
11	N S	15		±0.5	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
12	N S	20		±0.5	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Attenuation dB			Maximum power input at 25°C		VSWR maximum 1/				Weight (oz) Maximum	Dimension A (inches) Maximum
	Nominal	Deviation				DC to 1.0 GHz	1.0 to 2.0 GHz	2.0 to 3.0 GHz	3.0 to 4.5 GHz		
			DC to 4.5 GHz	AV (W) 2/ (continuously)	Peak (kW)						
13 N S	25		±0.9	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
14 N S	30		±0.9	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)
15 N S	40		±0.9	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	3.0 (76.2)
16 N S	50		±1.2	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	3.0 (76.2)
17 N S	60		±1.4	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	3.0 (76.2)
18 N S	13		±0.5	2	0.5	1.10:1	1.15:1	1.20:1	1.25:1	4	2.7 (68.6)

1/ VSWR value is for both ends.

2/ Power input is derated linearly to 0.5 watts at +125°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - MI
Navy - AS, MC, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5985-1229-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:32Z
Check the source to verify that this is the current version before use.