
MILITARY SPECIFICATION SHEET

ATTENUATORS, FIXED, MINATURE, COAXIAL LINE (SMA CONNECTORS), FREQUENCY RANGE: DC TO 18 GHz, CLASS IV, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the attenuators described herein shall consist of this specification and the latest issue of MIL-A-3933.

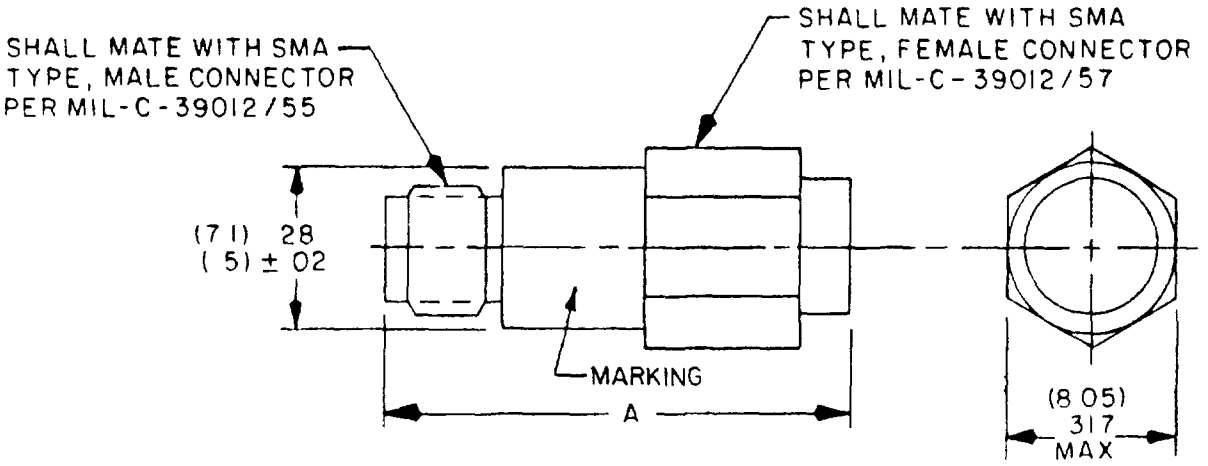

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Metric equivalents are in parentheses

FIGURE 1. Dimensions and configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Class: IV.

Operating frequency range: dc to 18 GHz (see table I).

Test frequencies for VSWR and attenuation measurements:

dc, 0.5, 1.0, 1.5, and 2 GHz for dash numbers 01 thru 26.

dc, 4, 8, and 12.4 GHz for dash numbers 27 thru 57.

dc, 4, 8, 12.4, and 18 GHz for dash numbers 58 thru 95.

Basic test frequency.

1 GHz for dash numbers 01 thru 26.

8 GHz for dash numbers 27 thru 95.

Operating temperature range: -55°C to +125°C. Power input is derated linearly to 0.5 watt at +125°C.

Maximum weight: 0.45 ounce.

REQUIREMENTS:

Dimensions and configuration. See figure 1 and table I.

Nominal impedance: 50 ohms.

Attenuation: See table I.

Input power: See table I.

VSWR: See table I.

Part number M3933/25- (and dash number from table I)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics

Dash number	Attenuation dB							Maximum power input		VSWR maximum 3/					Dimension A (inches) maximum
	Nominal	Deviation (±)						AV (W) 1/ (continuously) 0 25°C	Peak (W) 2/	dc to 2.0 GHz	2 0 to 4.0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz	
		DC	dc to 2 0 GHz	dc to 4 0 GHz	dc to 8 0 GHz	dc to 12.4 GHz	dc to 18 0 GHz								
01 N S	1	0 15	0 3	---	---	---	---	2	500	1 15 1	---	---	---	---	0.87 (22.10)
02 N S	2	0 15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	0.87 (22.10)
03 N S	3	0 15	0.3	---	---	---	---	2	500	1 15 1	---	---	---	---	0.87 (22.10)
04 N S	4	0 15	0.3	---	---	---	---	2	500	1 15 1	---	---	---	---	0.87 (22.10)
05 N S	5	0 15	0 3	---	---	---	---	2	500	1 15 1	---	---	---	---	0.87 (22.10)
06 N S	6	0 15	0 3	---	---	---	---	2	500	1.15 1	---	---	---	---	0.87 (22.10)
07 N S	7	0 15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	0.87 (22.10)
08 N S	8	0 15	0 3	---	---	---	--	2	500	1.15 1	---	---	---	---	0.87 (22.10)
09 N S	9	0 15	0 3	---	---	---	---	2	500	1 15 1	---	---	---	---	0.87 (22.10)
10 N S	10	0 15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	0.87 (22.10)
11 N S	11	0 15	0 3	---	---	---	---	2	500	1.15 1	---	---	---	---	0.87 (22.10)
12 N S	12	0.15	0 3	---	---	---	---	2	500	1.15 1	---	---	---	---	0.87 (22.10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Attenuation dB							Maximum power input		VSWR maximum 3/					Dimension A (inches) maximum
	Nominal	Deviation (+)						AV (W) 1/ (continuously) @ 25°C	Peak (W) 2/	dc to 2.0 GHz	2.0 to 4.0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz	
		DC	dc to 2.0 GHz	dc to 4.0 GHz	dc to 8.0 GHz	dc to 12.4 GHz	dc to 18.0 GHz								
13 N S	13	0.15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
14 N S	14	0.15	0.3	---	---	---	---	2	500	1.15.1	---	---	---	---	1.03 (26.16)
15 N S	15	0.15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
16 N S	16	0.15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
17 N S	17	0.15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
18 N S	18	0.15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
19 N S	19	0.15	0.3	---	---	---	---	2	500	1.15·1	---	---	---	---	1.03 (26.16)
20 N S	20	0.15	0.3	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
21 N S	21	0.25	0.5	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
22 N S	22	0.25	0.5	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
23 N S	23	0.25	0.5	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)
24 N S	24	0.25	0.5	---	---	---	---	2	500	1.15 1	---	---	---	---	1.03 (26.16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics - Continued

Dash number	Attenuation dB							Maximum power input		VSWR maximum 3/					Dimension A (inches) maximum
	Nominal	Deviation (+)						AV (W) 1/ (continuously) @ 25°C	Peak (W) 2/	dc to 2.0 GHz	2.0 to 4.0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz	
		DC	dc to 2.0 GHz	dc to 4.0 GHz	dc to 8.0 GHz	dc to 12.4 GHz	dc to 18.0 GHz								
25 N S	25	0.25	0.5	---	---	---	---	2	500	1.15:1	---	---	---	---	1.03 (26.16)
26 N S	30	0.25	0.5	---	---	---	---	2	500	1.15:1	---	---	---	---	1.03 (26.16)
27 N S	1	0.15	---	---	---	0.3	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
28 N S	2	0.15	---	---	---	0.3	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
29 N S	3	0.15	---	---	---	0.3	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
30 N S	4	0.15	---	---	---	0.3	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
31 N S	5	0.15	---	---	---	0.3	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
32 N S	6	0.15	---	---	---	0.3	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
33 N S	7	0.2	---	---	---	0.4	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
34 N S	8	0.2	---	---	---	0.4	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
35 N S	9	0.2	---	---	---	0.4	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)
36 N S	10	0.2	---	---	---	0.4	---	2	500	1.10:1	1.15:1	1.20:1	1.25:1	---	0.87 (22.10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics - Continued.

Dash number	Attenuation dB							Maximum power input		VSWR maximum 3/					Dimension A (inches) maximum
	Nominal	Deviation (+)						AV (W) 1/ (continuously) 0 25°C	Peak (W) 2/	dc to 2.0 GHz	2 0 to 4 0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz	
		DC	dc to 2 0 GHz	dc to 4.0 GHz	dc to 8.0 GHz	dc to 12.4 GHz	dc to 18 0 GHz								
37 N S	11	0.2	---	---	---	0.4	---	2	500	1.10.1	1.15 1	1.20 1	1.25:1	---	0.87 (22.10)
38 N S	12	0 2	---	---	---	0.4	---	2	500	1.10 1	1.15 1	1.20 1	1.25 1	---	0.87 (22.10)
39 N S	13	0 2	---	---	---	0.4	---	2	500	1 10·1	1.15 1	1.20.1	1.25 1	---	0.94 (23.88)
40 N S	14	0 2	---	---	---	0.4	---	2	500	1 10 1	1.15 1	1.20 1	1.25:1	---	0.94 (23.88)
41 N S	15	0 2	---	---	---	0 4	---	2	500	1.10 1	1.15 1	1.20 1	1.25 1	---	0.94 (23.88)
42 N S	16	0 2	---	---	---	0.4	---	2	500	1.10 1	1.15 1	1.20 1	1.25 1	---	0.94 (23.88)
43 N S	17	0 2	---	---	---	0.4	---	2	500	1 10 1	1.15 1	1 20 1	1.25 1	---	0.94
44 N S	18	0 2	---	---	---	0 4	---	2	500	1 10 1	1.15 1	1.20 1	1 25.1	---	0.94 (23.88)
45 N S	19	0 2	---	---	---	0 4	---	2	500	1 10 1	1.15 1	1.20 1	1.25 1	---	0.94 (23.88)
46 N S	20	0.3	---	---	---	0 7	---	2	500	1.10 1	1.15 1	1.20 1	1.25 1	---	1.04 (26.42)
47 N S	21	0.3	---	---	---	0 7	---	2	500	1.10·1	1.15 1	1.20 1	1.25 1	---	1.04 (26.42)
48 N S	22	0 3	---	---	---	0 7	---	2	500	1.10 1	1.15 1	1.20 1	1.25·1	---	1.04 (26.42)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics - Continued

Dash number	Attenuation dB							Maximum power input		VSWR maximum 3/					Dimension A (inches) maximum
	Nominal	Deviation (+)						AV (W) 1/ (continuously) 0 25°C	Peak (W) 2/	dc to 2 0 GHz	2.0 to 4 0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz	
		DC	dc to 2 0 GHz	dc to 4.0 GHz	dc to 8 0 GHz	dc to 12 4 GHz	dc to 18 0 GHz								
49 N S	23	0 3	---	---	---	0.7	---	2	500	1 10 1	1 15 1	1.20 1	1.25 1	---	1.04 (26.42)
50 N S	24	0 3	---	---	---	0 7	---	2	500	1 10 1	1 15 1	1.20 1	1.25 1	---	1.04 (26.42)
51 N S	25	0.3	---	---	---	0.7	---	2	500	1 10 1	1 15 1	1.20 1	1.25 1	---	1.04 (26.42)
52 N S	30	0.5	---	---	---	1 0	---	2	500	1 10 1	1 15 1	1.20 1	1 25 1	---	1.04 (26.42)
53 N S	35	0 5	---	---	---	1 0	---	2	500	1.10 1	1.15 1	1 20 1	1.25 1	---	1 35 (34.29)
54 N S	40	0.5	---	---	---	1.0	---	2	500	1.10 1	1.15 1	1 20 1	1.25 1	---	1.35 (34.29)
55 N S	45	0.7	---	---	---	1.5	---	2	500	1 10 1	1.15 1	1.20 1	1.25 1	---	1.35 (34.29)
56 N S	50	1 0	---	---	---	2 0	---	2	500	1 10 1	1 15 1	1.20 1	1.25 1	---	1.35 (34.29)
57 N S	60	1 0	---	---	---	2.0	---	2	500	1 10 1	1 15 1	1 20 1	1.25 1	---	1.35 (34.29)
58 N S	0	0.15	---	---	---	---	0.3	2	500	1.10 1	1 15 1	1.20 1	1 25 1	1.35 1	0.87 (22.10)
59 N S	0.5	0 15	---	---	---	---	0.3	2	500	1.10 1	1 15·1	1.20 1	1.25 1	1.35 1	0.87 (22.10)
60 N S	1.0	0 15	---	---	---	---	0.3	2	500	1.10 1	1.15 1	1.20 1	1.25 1	1.35·1	0.87 (22.10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Attenuation dB							Maximum power input		VSWR maximum 3/					Dimension A (inches) maximum
	Nominal	Deviation (+)						AV (W) 1/ (continuously) @ 25°C	Peak (W) 2/	dc to 2.0 GHz	2.0 to 4.0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz	
		DC	dc to 2.0 GHz	dc to 4.0 GHz	dc to 8.0 GHz	dc to 12.4 GHz	dc to 18 0 GHz								
61 N S	1.5	0.15	---	---	---	---	0.3	2	500	1.10 1	1.15·1	1.20 1	1.25:1	1.35:1	0.87 (22.10)
62 N S	2 0	0.15	---	---	---	---	0.3	2	500	1.10 1	1.15 1	1.20:1	1.25.1	1.35·1	0.87 (22.10)
63 N S	2.5	0.15	---	---	---	---	0.3	2	500	1.10 1	1.15 1	1.20·1	1.25.1	1.35 1	0.87 (22.10)
64 N S	3.0	0.15	---	---	---	---	0.3	2	500	1.10 1	1.15·1	1.20 1	1.25:1	1.35.1	0.87 (22.10)
65 N S	3.5	0.15	---	---	---	---	0 3	2	500	1.10 1	1 15 1	1.20·1	1.25 1	1.35 1	0.87 (22.10)
66 N S	4 0	0.15	---	---	---	---	0.3	2	500	1.10 1	1 15·1	1.20 1	1.25·1	1.35 1	0.87 (22 10)
67 N S	4.5	0.15	---	---	---	---	0 3	2	500	1 10 1	1 15 1	1.20 1	1.25 1	1.35·1	0.87 (22.10)
68 N S	5 0	0.15	---	---	---	---	0 3	2	500	1.10 1	1 15 1	1.20·1	1.25 1	1.35 1	0.87 (22.10)
69 N S	5.5	0.15	---	---	---	---	0 3	2	500	1 10·1	1 15 1	1.20·1	1.25·1	1.35·1	0.87 (22.10)
70 N S	6 0	0.15	---	---	---	---	0.3	2	500	1.10 1	1 15 1	1 20·1	1.25 1	1 35 1	0.87 (22.10)
71 N S	6.5	0.15	---	---	---	---	0 3	2	500	1 10 1	1 15 1	1.20 1	1.25.1	1.35 1	0.87 (22 10)
72 N S	7.0	0.2	---	---	---	---	0.4	2	500	1.10 1	1.15 1	1.20 1	1.25·1	1.35 1	0.87 (22.10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics - Continued

Dash number	Attenuation dB							Maximum power input		VSWR maximum 3/					Dimension A (inches) maximum
	Nominal	Deviation (+)						AV (W) 1/ (continuously) @ 25°C	Peak (W) 2/	dc to 2.0 GHz	2.0 to 4.0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz	
		DC	dc to 2.0 GHz	dc to 4.0 GHz	dc to 8.0 GHz	dc to 12.4 GHz	dc to 18.0 GHz								
73 N S	7.5	0.2	---	---	---	---	0.4	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.87 (22.10)
74 N S	8.0	0.2	---	---	---	---	0.4	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.87 (22.10)
75 N S	8.5	0.2	---	---	---	---	0.4	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.87 (22.10)
76 N S	9.0	0.2	---	---	---	---	0.5	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.87 (22.10)
77 N S	9.5	0.2	---	---	---	---	0.5	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.87 (22.10)
78 N S	10.0	0.2	---	---	---	---	0.5	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.87 (22.10)
79 N S	11.0	0.2	---	---	---	---	0.5	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.87 (22.10)
80 N S	12.0	0.2	---	---	---	---	0.5	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.87 (22.10)
81 N S	13.0	0.2	---	---	---	---	0.5	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.94 (23.88)
82 N S	14.0	0.2	---	---	---	---	0.5	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	0.94 (23.88)
83 N S	15.0	0.3	---	---	---	---	0.6	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	1.04 (26.42)
84 N S	16.0	0.3	---	---	---	---	0.6	2	500	1.10:1	1.15:1	1.20:1	1.25:1	1.35:1	1.04 (26.42)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics - Continued.

Dash number	Attenuation dB							Maximum power input		VSWR maximum 3/					Dimension A (inches) maximum
	Nominal	Deviation (+)						AV (W) 1/ (continuously) @ 25°C	Peak (W) 2/	dc to 2.0 GHz	2.0 to 4.0 GHz	4.0 to 8.0 GHz	8.0 to 12.4 GHz	12.4 to 18.0 GHz	
		DC	dc to 2.0 GHz	dc to 4.0 GHz	dc to 8.0 GHz	dc to 12.4 GHz	dc to 18.0 GHz								
85 N S	17.0	0.3	---	---	---	---	0.6	2	500	1.10 1	1.15.1	1.20·1	1.25:1	1.35 1	1.04 (26.42)
86 N S	18.0	0.3	---	---	---	---	0.6	2	500	1.10 1	1.15:1	1.20 1	1.25 1	1.35 1	1.04 (26.42)
87 N S	19.0	0.3	---	---	---	---	0.6	2	500	1.10 1	1.15 1	1.20 1	1.25 1	1.35 1	1.04 (26.42)
88 N S	20.0	0.3	---	---	---	---	0.6	2	500	1 10 1	1 15 1	1 20 1	1.25 1	1.35 1	1.04 (26.42)
89 N S	25.0	0.5	---	---	---	---	1.0	2	500	1.10 1	1.15·1	1.20.1	1.25.1	1.35 1	1.04 (26.42)
90 N S	30.0	0.5	---	---	---	---	1 0	2	500	1 10 1	1.15 1	1.20 1	1.25 1	1.35·1	1.04 (26.42)
91 N S	35.0	0.5	---	---	---	---	1.0	2	500	1.10 1	1.15 1	1.20 1	1.25·1	1.35·1	1.35 (34.29)
92 N S	40 0	0.5	---	---	---	---	1.0	2	500	1.10 1	1 15 1	1 20 1	1.25 1	1.35 1	1.35 (34.29)
93 N S	45.0	0.5	---	---	---	---	1 0	2	500	1 10 1	1.15 1	1 20 1	1 25 1	1.35·1	1.35 (34.29)
94 N S	50 0	1.0	---	---	---	---	2 0	2	500	1.10 1	1 15·1	1 20 1	1 25 1	1.35·1	1.35 (34.29)
95 N S	60 0	1.0	---	---	---	---	2.0	2	500	1 10 1	1.15 1	1.20.1	1.25 1	1.35·1	1.35 (34.29)

1/ Power input is derated linearity from ±25°C to 0 5 watts at +125°C

2/ Duty cycle of 4 percent and a maximum pulse width of 10 microseconds.

3/ VSWR value is both ends.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

NOTE Attenuators covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table II. This information in no way implies that the manufacturer's part number or NSN is suitable as a substitute for the military part number.

TABLE II. Substitution information.

Military part number M3933/25-	Manufacturer's code	Manufacturer's part number	NSN
01	13499	379-0541-041	5905-01-060-1215
01	34078	294-1DB	5905-01-060-1215
02	13499	379-0541-051	5905-01-060-1216
02	34078	294-2DB	5905-01-060-1216
03	34078	294-3DB	5905-01-060-1214
03	13499	379-0541-011	---
03	34078	294-3	5985-01-048-7620
03	93459	9416-3	5985-01-048-7620
03	61362	012-105-462-01	---
04	13499	379-0541-061	5905-01-060-4294
04	34078	294-4DB	5905-01-060-4294
05	13499	379-0541-071	5905-01-060-1217
05	34078	294-5DB	5905-01-060-1217
06	34078	294-6DB	5985-01-032-0109
06	13499	379-0541-021	5905-01-060-4559
06	61836	012-105-162-02	---
07	34078	294-7	5985-01-048-7621
07	93459	9416-7	5985-01-048-7621
07	13499	379-0541-081	5905-01-060-1218
07	34078	294-7DB	5905-01-060-1218
08	13499	379-0541-091	5905-01-060-1219
08	34078	294-8DB	5905-01-060-1219
09	13499	379-0541-101	5905-01-060-1220
09	34078	294-9	5985-01-110-3389
10	34078	294-10DB	5985-01-077-6308
10	61836	012-105462-03	---
26	61836	012-105462-04	---
27	93459	3T-1	5985-01-155-9315

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution information - Continued.

Military part number M3933/25-	Manufacturer's code	Manufacturer's part number	NSN
28	93459	3T-2	5985-01-124-9363
29	34078	291-3DB	5985-01-142-6464
29	93459	3T-3	5985-01-142-9598
29	00929	AG-03F	6625-01-047-4556
30	34078	292-4	5985-01-132-8749
30	93459	3T-4	5985-01-155-9315
31	34078	292-5	5985-01-132-8750
31	93459	3T-5	5985-01-155-9317
32	34078	291-6DB	5985-01-142-6463
32	00929	AG-06F	6625-01-047-4555
32	00929	AG06F	5985-01-146-4829
33	93459	3T-7	5985-01-155-9318
34	93459	3T-8	5985-01-155-9319
35	93459	3T-9	5985-01-155-9320
36	34078	292-10	5985-01-085-7078
36	00929	AG-10F	5985-01-151-4538
36	18203	A373DS	5985-01-151-4538
36	00929	AG-10FDB	5985-01-139-9381
38	97942	583R965H04	---
39	97942	583R965H05	---
40	97942	583R965H06	---
41	97942	583R965H07	---
42	97942	583R965H08	---
46	00929	AG-20F	5985-00-146-4831
54	00929	AG-40F	5985-00-146-4832

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution information - Continued.

Military part number M3933/25-	Manufacturer's code	Manufacturer's part number	NSN
58	97871	550-6273-001	---
58	93439	4T-0	---
59	05869	733310-1	---
59	16179	2082-4156-01	---
59	93459	4T-.5	---
60	93459	4T-1	---
60	16179	2082-4156-02	---
60	05869	733310-2	---
60	97871	550-6274-001	---
60	34078	290-1	5950-01-052-0783
60	24602	4401	5985-01-025-7285
60	34078	444-1	5995-01-102-1576
61	05869	733310-3	---
61	93459	4T-1.5	---
61	16179	2082-4156-03	---
62	05869	733310-4	---
62	93459	4T-2.0	---
62	16179	2082-4156-04	---
62	97871	550-6275-001	---
62	13499	379-0545-020	---
62	24602	4402	5985-01-150-1666
62	34078	444-2	5985-01-101-8658
63	05869	733310-5	---
63	93459	4T-2.5	5985-01-157-7867
63	16179	2082-4156-05	5985-01-157-7867
64	97871	550-6276-001	---
64	93459	4T-3.0	5985-01-157-7868
64	05869	733310-6	---
64	16179	2082-4156-06	5985-01-157-7868
64	91417	143492-001	---
64	34078	290-3	5950-01-052-0785
64	13499	379-0545-030	---
64	00929	AH03F	5985-00-421-3045
64	16179	2082-6040-03	5985-01-118-3514
64	24602	4403	5985-00-404-5539
64	34078	222-3	5985-00-311-8590
64	34078	444-3	5985-01-014-9580
65	05869	733310-7	---
65	93459	4T-3.5	5985-01-157-7869
65	16179	2082-4156-07	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution information - Continued.

Military part number M3933/25-	Manufacturer's code	Manufacturer's part number	NSN
66	05869	733310-8	---
66	93459	4T-4.0	---
66	16179	2082-4156-08	---
66	97871	550-6277-001	---
66	13499	379-0545-040	---
66	24602	4404	---
66	34078	444-4	5985-01-101-7912
67	05869	733310-9	---
67	93459	4T-4.5	---
67	16179	2082-4156-09	---
68	05869	733310-10	---
68	93459	4T-5.0	---
68	16179	2082-4156-10	---
68	97871	550-6278-001	---
68	13499	379-0545-050	---
68	24602	4405	5985-01-009-6436
68	34078	444-5	5985-01-103-0049
68	34078	290-5	5950-01-053-7688
68	34078	290-5DB	5985-01-148-0388
69	05869	733310-11	---
69	16179	2082-4156-11	---
69	93459	4T-5.5	---
70	05869	733310-12	---
70	16179	2082-4156-12	---
70	93459	4T-6.0	5985-01-157-7873
70	34078	222-6	5985-01-029-6571
70	34078	444-6	5985-01-035-7464
70	34078	290-6DB	5985-01-117-0117
70	16179	2082-6041-06	5985-01-153-7613
70	00929	AH10F	5985-00-421-3046
70	06401	2279563-00	---
70	34078	290-6	---
70	13499	379-0545-060	---
70	24602	4406	---
70	97871	550-6279-001	---
71	05869	733310-13	---
71	16179	2082-4156-13	---
71	93459	4T-6.5	---
72	05869	733310-14	---
72	16179	2082-4156-14	---
72	93459	4T-7.0	---
72	97871	550-6280-001	---
72	13499	379-0545-070	---
72	24602	4407	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution information - Continued.

Military part number M3933/25-	Manufacturer's code	Manufacturer's part number	NSN
72	34078	290-7	---
72	16179	2082-6042-07	---
72	06401	2279563-02	---
72	34078	144-7	5985-01-102-1577
73	05869	733310-15	---
73	93459	4T-7.5	---
73	16179	2082-4156-15	---
74	05869	733310-16	---
74	16179	2082-4156-16	---
74	93459	4T-8.0	---
74	13499	379-0545-080	---
74	24602	4408	5985-01-097-2044
74	97871	550-6281-001	---
74	34078	444-8	5985-01-102-1578
75	05869	733310-17	---
75	93459	4T-8.5	---
75	16179	2082-4156-17	---
76	05869	733310-18	---
76	16179	2082-4156-18	---
76	93459	4T-9.0	---
76	13499	379-0545-090	---
76	24602	4409	---
76	97871	550-6282-001	---
76	34078	444-9	5985-01-101-8659
77	05869	733310-19	---
77	16179	2082-4156-19	---
77	93459	4T-9.5	---
78	05869	733310-20	---
78	93459	4T-10.0	5985-01-157-7870
78	16179	2082-4156-20	5985-01-157-7870
78	06401	2279563-01	---
78	34078	290-10	5985-01-128-8843
78	16179	2082-6042-10	---
78	34078	444-10	5985-01-036-8821
78	97871	550-6283-001	---
78	34078	222-10	5985-00-313-2911
78	34078	290-10DB	5985-01-154-7342
78	00929	AH10F	5985-00-421-3047
79	34078	444-11	5985-01-101-7913
80	34078	444-12	5985-01-101-3556

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution information - Continued.

Military part number M3933/25-	Manufacturer's code	Manufacturer's part number	NSN
81	34078	444-13	5985-01-101-3972
81	34078	290-13	---
81	16179	2082-6042-13	---
81	06401	2279563-03	---
82	34078	444-14	5985-01-102-1579
83	34078	444-15	5985-01-101-3557
83	24602	4415	5985-01-025-9281
83	05869	733310-21	---
83	03459	4T-15.0	5985-01-157-7871
83	16179	2082-4156-21	5985-01-157-7871
83	91417	143492-002	---
83	34078	290-15	---
84	34078	444-16	5985-01-101-3558
84	34078	290-16DB	5985-01-122-0564
85	34078	444-17	5985-01-101-3559
86	34078	444-18	5985-01-101-3973
87	34078	444-19	5985-01-101-3560
88	34078	444-20	5985-01-101-3561
88	16179	2082-6043-20	5985-01-118-9489
88	00929	AH20F	5985-00-004-7578
88	05869	733310-22	---
88	93459	4T-20.0	---
88	16179	2082-4156-22	---
89	05869	733310-23	---
89	93459	4T-25.0	---
89	16179	2082-4156-23	---
90	05869	733310-24	---
90	93459	4T-30.0	5985-01-119-6233
90	16179	2082-4156-24	---
90	34078	290-30DB	5985-01-118-0454
90	34078	444-30	5985-01-110-3376
90	00929	AH30F	5985-00-121-7702
92	93459	4T-40	5985-01-157-7872
92	05869	733310-25	---
92	00929	AH40F	6625-00-731-7391

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force -85

Review activities:
Army - MI
Air Force - 11, 99
DLA - ES

User activity:
Navy _AS, MC, SH

Agent:
DLA - ES

Preparing activity.
Navy - EC

(Project 5985-0983-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department of the Navy
Washington, DC 20363
Attn: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.