
MILITARY SPECIFICATION SHEET

Ⓐ TRANSFORMER, AUDIO FREQUENCY, TF4R21AJ


This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

Ⓐ CIRCUIT DIAGRAM & MARKING READABLE WITH TRANSFORMER IN THIS POSITION

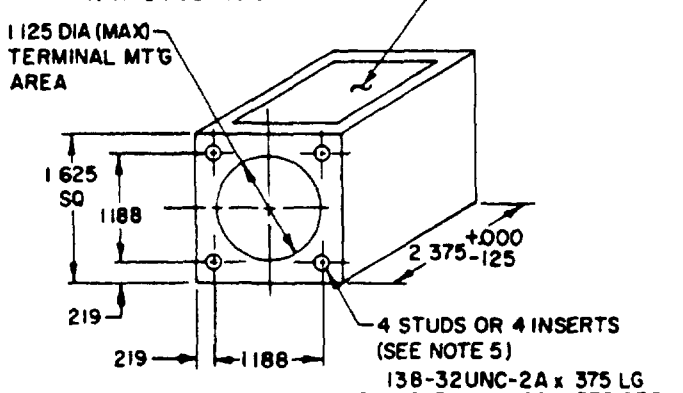

MINIMUM CHASSIS CUTOUT



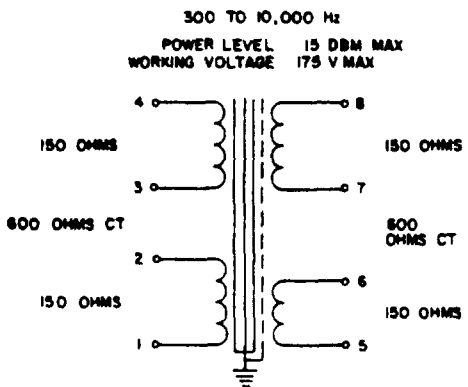

INCHES	MM
.125	3 18
.138	3 51
.219	5 56
.375	9.53
1.125	28 58
1 188	30 18
1 625	41 28
2 375	60 33

NOTES

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance on overall case dimensions is +.000 (.00 mm) -.063 (1.60 mm).
4. Tolerance on mounting dimensions is +.016 (.41 mm).
5. Inserts not recommended for new design.
6. Terminal arrangement optional within mounting area indicated.
7. When numbers in parentheses, e g (1-2), are used, they indicate the winding and the extreme terminals of the winding When the extreme terminals of two windings are used, e.g (1-4), the windings are connected in series, i.e., terminals 2 and 3 are connected.

Ⓐ denotes change

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Electrical rating:

Primary power level - +15 dBm, maximum; -8 dBm, minimum.

Working voltage (1-2) - 175 V, maximum.
(3-4) - 175 V, maximum.
(5-6) - 175 V, maximum.
(7-8) - 175 V, maximum.

Primary impedance (1-2) - 150 ohms.
(3-4) - 150 ohms.
(1-4) - 600 ohms ct.

Design, configuration, and physical dimensions: See figure.

Material: Metal encased, steel.

Weight: .72 pound, maximum.

Duty cycle: Continuous.

Altitude: 50,000 feet, maximum.

Life expectancy: 10,000 hours, minimum.

Temperature range: -55°C to 105°C.

Terminals Solder terminals, No. 20 AWG.

Terminal height .312 (7.92 mm) $^{+.000}_{-.156}$ (3.96 mm).

Terminal strength: Method 211 of MIL-STD-202, test condition A, 5 pounds.

Operating temperature: 105°C, maximum.

Dielectric withstanding voltage: Method 301 of MIL-STD-202; test voltage at sea level, 500 Vrms. At reduced barometric pressure, 300 Vrms.

Electrical characteristics:

Harmonic distortion - Not more than 1 percent with 4.9 V, 300 Hz across (1-4).

No load (center-tap voltage unbalance only) - With 4.9 V, 1,000 Hz across (1-4):
Unbalance (5-6) and (7-8) - 1 percent, maximum.
Unbalance (1-2) and (3-4) - 1 percent, maximum.

Secondary load impedance (5-6) - 150 ohms.
(7-8) - 150 ohms ±10 percent.
(5-8) - 600 ohms ct.

Primary impedance - With approximately .25 V, 1,000 Hz across (1-4) and 600 ohms ct across (5-8), the primary impedance shall be 600 ohms ct ±10 percent across (1-4).

Frequency response:
Range - 300 to 10,000 Hz at rated power, flat within ±2 dB; reference frequency = 1,000 Hz; test voltage .25 Vrms (1-4).

Insertion loss - 1.0 dB maximum, with 4.9 V, input at 1,000 Hz across (1-4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:09Z
Check the source to verify that this is the current version before use.

Resonance - Second resonant frequency = 20,000 Hz minimum.

Polarity - Additive, with terminals 2 and 3, 4 and 5, and 6 and 7 connected.


Temperature rise: 40°C maximum, above an ambient of 65°C, with rated power at 300 Hz.

Vibration, high frequency: Method 204, test condition B.

Shock (specified pulse): Method 213, test condition I.

Electrostatic shielding: Voltage ratio - 5 to 1 at 20,000 Hz, minimum.

Part number example:

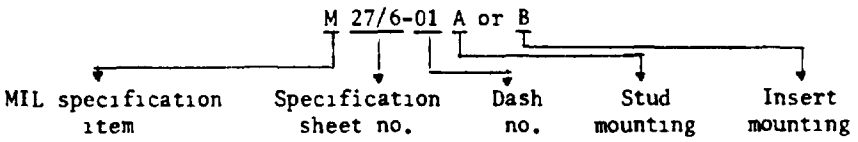

(For cross reference of MS part number to military part number, see table I.)

TABLE I. Cross reference.

Mounting	MS90003C		M27/6	
	Dash no.	Type designation	Dash no.	Ⓐ Type designation
Studs	-A	TF4RX16AJ001	-01A	TF4R21AJ
Inserts	-B	TF4RX16AJ001	-01B	TF4R21AJ

Ⓐ NOTE: Qualification approval to MIL-T-27/6 shall be sufficient to grant qualification approval to MIL-T-27/4.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MU
Navy - EC
Air Force - 11, 17, 99
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - EL

Agent.
DSA - FS

(Project 5950-0533-3)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:09Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDING OFFICER
U.S. ARMY ELECTRONICS COMMAND
ATTN. AMSEL-TD-S
FORT MONMOUTH, N.J. 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:09Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:09Z
Check the source to verify that this is the current version before use.