INCH-POUND

MIL-C-83723/78B
27 December 1991

SUPERSEDING
MIL-C-83723/78A
13 Nov 1975

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (RFI, BAYONET COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES G, R, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.


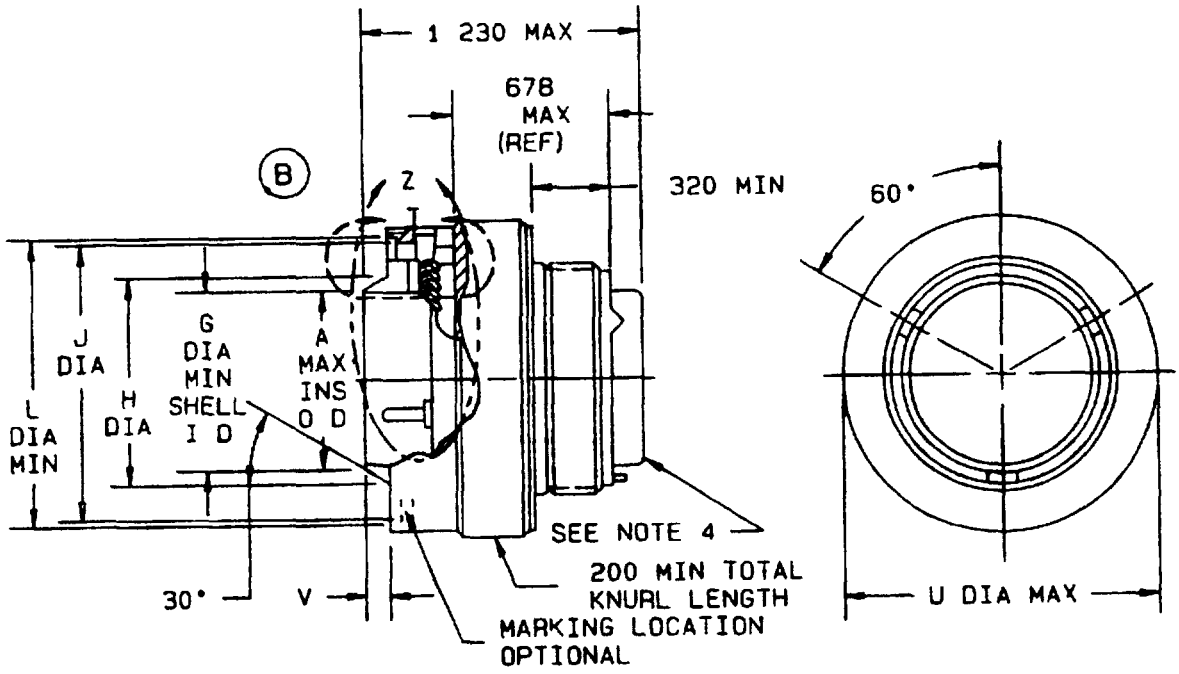


FIGURE 1. Dimensions and configuration.


(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

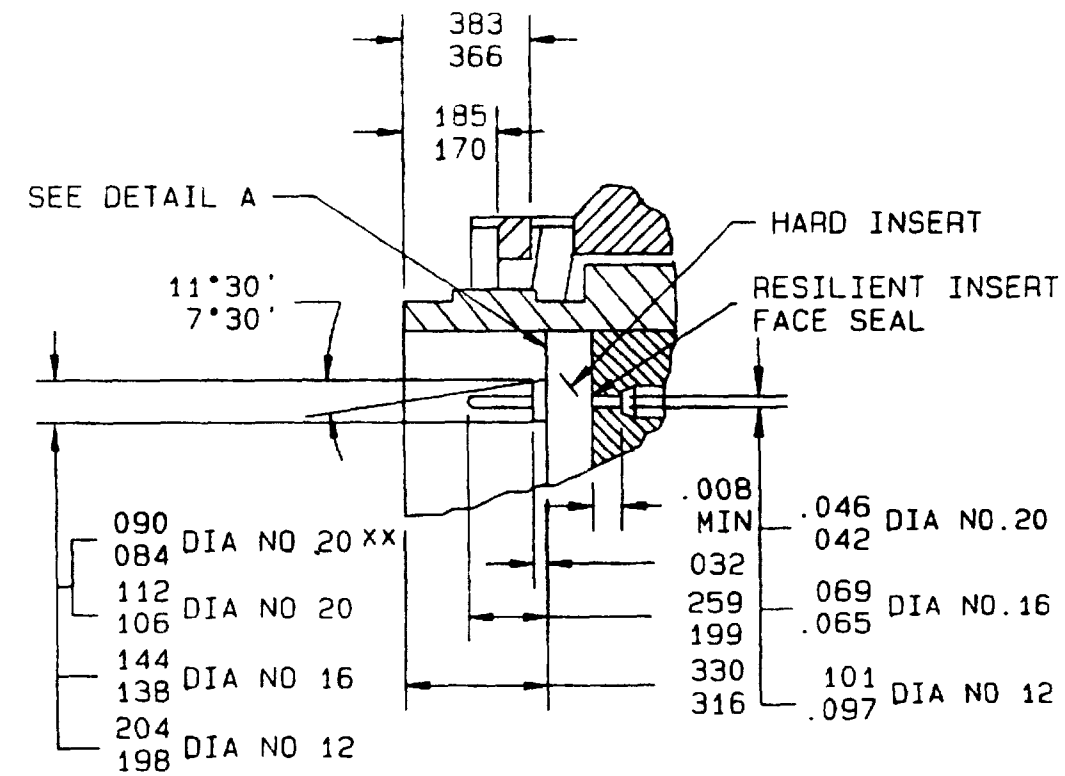

DETAIL Z

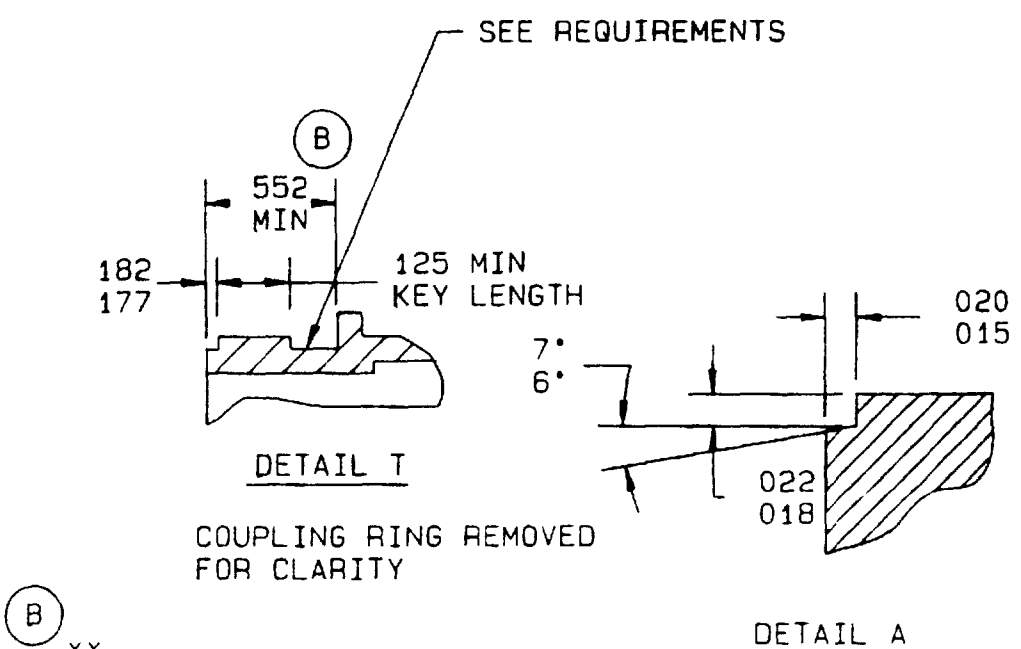

DETAIL T

DETAIL A

COUPLING RING REMOVED
FOR CLARITY

B
XX SEE TABLE I FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

(B)

Shell size	A	G	H	J	L	U	V
8	.312	.352	.415 .424	.540 .545	.632	.776	.025
10	388	.428	.517 .526	.662 .667	.760	.906	.031
12	.558	.598	.687 .696	.832 .837	.930	1.078	.031
14	.627	.667	.756 .765	.901 .906	.999	1.141	.031
16	.772	.794	.883 .892	1.028 1.033	1.126	1.266	.031
18	.860	.900	.989 .998	1.134 1.139	1.232	1.375	.031
20	.985	1.025	1.114 1.123	1.261 1.266	1.357	1.510	.031
22	1.110	1.150	1.239 1.248	1.384 1.389	1.482	1.625	.031
24	1.235	1.275	1.364 1.373	1.511 1.516	1.607	1.760	.031

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.008	0.20	177	4.50	.552	14.20	.900	22.86	1.232	31 29
015	0.38	.182	4.62	.558	14 17	901	22.89	1.235	31.37
018	0 46	185	4.70	.598	15.19	.906	23 01	1.239	31 47
020	0.51	200	5.08	.627	15.93	.930	23.62	1.248	31.70
022	0 56	204	5.18	.632	16.05	.985	25.02	1.261	32.03
.025	0.64	.259	6.58	.662	16.81	.989	25.12	1.266	32.16
.031	0.79	.312	7.92	.667	16.94	.998	25.35	1.275	32.39
.032	0.81	.316	8.03	.678	17.22	.999	25.37	1.357	34.47
.042	1.07	320	8.13	.687	17.45	1.025	26.04	1.373	34.87
.046	1.17	330	8.38	.696	17.68	1.028	19.84	1.375	34.93
.065	1.65	.352	8.94	.756	19.20	1.033	26.24	1.384	35.15
.069	1.75	.366	9.30	.760	19.30	1.078	27.38	1.389	35.28
.090	2.29	.383	9.73	.765	19.43	1.110	28.19	1.482	37.64
.097	2.46	.388	9.86	.772	19.61	1.114	28.30	1.510	38.35
.101	2.57	.415	10.54	.776	19.71	1.123	28.52	1.511	38.38
.106	2.69	.424	10.77	.794	20.17	1.126	28.60	1.516	38.51
.112	2.84	.428	10.87	.832	21.13	1.134	28.80	1.607	40.82
.125	3.18	.517	13.13	.837	21.26	1.139	28.93	1.625	41.28
.138	3.51	.526	13.36	.860	21.84	1.141	28.98	1.760	44.70
.144	3.66	.540	13.72	.883	22.43	1.150	29.21		
.170	4.32	545	13.84	.892	22.66	1.230	31.24		

(B) NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals an ±1 for all angles.
4. Rear accessory interchangeability dimensions shall be in with MIL-C-83723.

FIGURE 1. Dimensions and configuration - Continued.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	(B) 03	1, 2, and 3
10	(B) 06	1, 2, 3, 4, 5, 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

(E) For insert arrangements, see MIL-STD-1554 and table I.


(B) For connector accessories, see MIL-C-85049.

This connector mates with MIL-C-83723/71 and 73.

Mating force: Shall not exceed the values specified in the procurement document by more than 20 percent.

RFI spring strip shall have a minimum of six finger per inches and shall point to rear of connector.

(B) Part or Identifying Number (PIN) example:

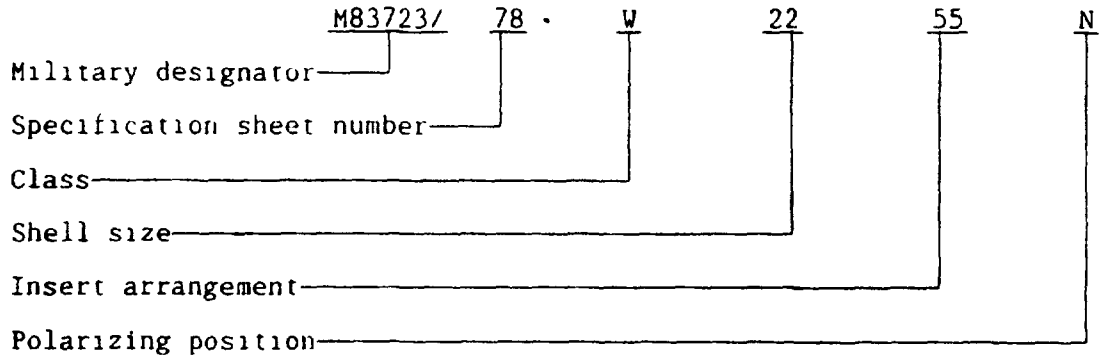

CONCLUDING MATERIAL

(B) Custodians:
Army - CR
Navy - AS
Air Force - 85

(B) Review activities.
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 80
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA - ES

Project 5935-3728-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.