INCH-POUND

MIL-C-83723/91C
30 June 1992

SUPERSEDING
MIL-C-83723/91B
17 April 1981

MILITARY SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (RFI,THREADED COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES G, R, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓒ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.

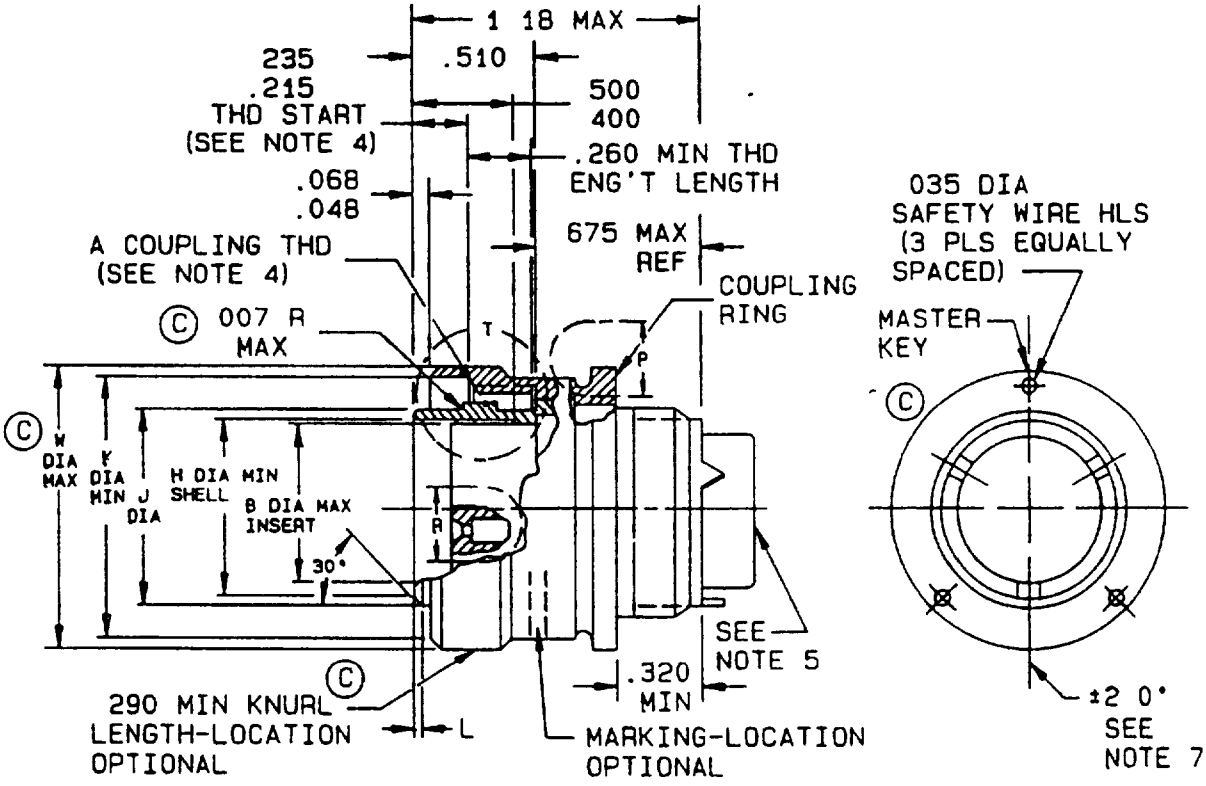



FIGURE 1. Dimensions and configurations.

Ⓒ denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

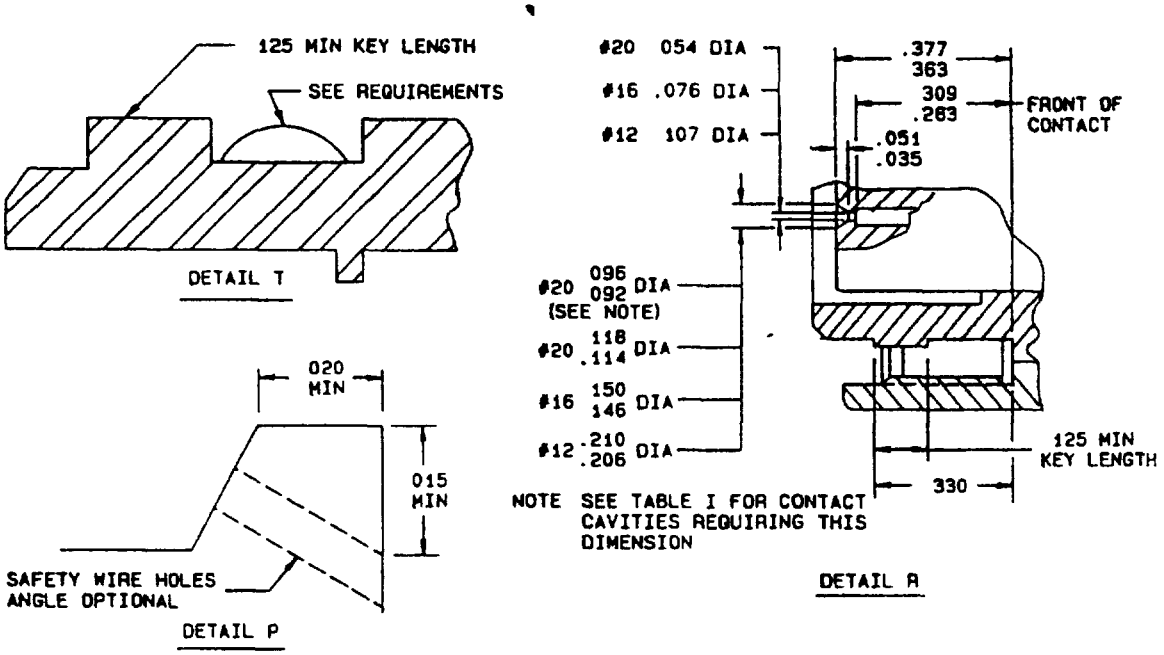



FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Connectors dimensions.

| Shell size | A thread UNRF-2B | B | H | J | K | C L | C W |
|---|---|---|---|---|---|---|---|
| 8 | .562-24 | .290 | .294 | .405<br>.396 | .575 | .025 | .776 |
| 10 | .688-24 | .388 | .428 | .526<br>.517 | .707 | .031 | .906 |
| 12 | .875-20 | .558 | .598 | .696<br>.687 | .895 | .031 | 1.078 |
| 14 | .938-20 | .627 | .667 | .765<br>.756 | .957 | .031 | 1.141 |
| 16 | 1.062-18 | .772 | .794 | .892<br>.883 | 1.084 | .031 | 1.266 |
| 18 | 1.188-18 | .860 | .900 | .998<br>.989 | 1.209 | .031 | 1.375 |
| 20 | 1.312-18 | .985 | 1.025 | 1.123<br>1.114 | 1.334 | .031 | 1.510 |
| 22 | 1.438-18 | 1.110 | 1.150 | 1.248<br>1.239 | 1.459 | .031 | 1.625 |
| 24 | 1.562-18 | 1.235 | 1.275 | 1.373<br>1.364 | 1.584 | .031 | 1.760 |

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .005 | 0.13 | .215 | 5.46 | .687 | 17.45 | 1.110 | 28.19 |
| .007 | 0.18 | .235 | 5.97 | .696 | 17.68 | 1.114 | 28.30 |
| .015 | 0.38 | .260 | 6.60 | .707 | 17.96 | 1.123 | 28.52 |
| .020 | 0.51 | .263 | 6.68 | .756 | 19.20 | 1.141 | 28.98 |
| .025 | 0.64 | .290 | 7.37 | .765 | 19.43 | 1.150 | 29.21 |
| .031 | 0.79 | .294 | 7.47 | .772 | 19.61 | 1.180 | 30.00 |
| .035 | 0.89 | .309 | 7.85 | .776 | 19.01 | 1.209 | 30.71 |
| .048 | 1.22 | .320 | 8.13 | .794 | 20.17 | 1.235 | 31.37 |
| .051 | 1.30 | .330 | 8.38 | .860 | 21.84 | 1.239 | 31.47 |
| .054 | 1.37 | .363 | 9.22 | .864 | 21.95 | 1.248 | 31.70 |
| .068 | 1.73 | .377 | 9.58 | .883 | 22.43 | 1.266 | 32.16 |
| .076 | 1.93 | .388 | 9.86 | .892 | 22.66 | 1.275 | 32.38 |
| .092 | 2.34 | .396 | 10.06 | .895 | 22.73 | 1.334 | 33.88 |
| .096 | 2.44 | .400 | 10.16 | .900 | 22.86 | 1.364 | 34.65 |
| .107 | 2.72 | .428 | 10.87 | .906 | 23.01 | 1.373 | 34.87 |
| .114 | 2.90 | .500 | 12.70 | .957 | 24.31 | 1.375 | 34.93 |
| .118 | 3.00 | .517 | 13.13 | .985 | 25.02 | 1.459 | 37.06 |
| .125 | 3.18 | .526 | 13.36 | .989 | 25.12 | 1.510 | 38.35 |
| .146 | 3.71 | .558 | 14.17 | .998 | 25.35 | 1.584 | 40.23 |
| .150 | 3.81 | .575 | 14.61 | 1.025 | 26.04 | 1.625 | 41.28 |
| .206 | 5.23 | .598 | 15.91 | 1.078 | 27.38 | 1.760 | 44.70 |
| .210 | 5.33 | .627 | 15.93 | 1.084 | 27.53 | | |

NOTES:
1. Dimensions are inches.
2. Metric equivlaents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals. Angles ±1°.
4. The dimensions showing relationship of coupling to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.
7. The centerline of indicated projection must be located on vertical centerline within 2°.

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83723/83, 85, 88, 89 and 90.

Ⓒ Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.


TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

| Shell size | Insert arrangements | Contact cavities |
|---|---|---|
| 8 | Ⓒ 03 | 1, 2, and 3 |
| Ⓒ 10 | 06 | 1, 2, 3, 4, 5, 6 |

Ⓒ Connector accessories: See MIL-C-85049.

"O" ring: See MIL-C-83723.

Ⓒ Part or Identifying Number (PIN) example:

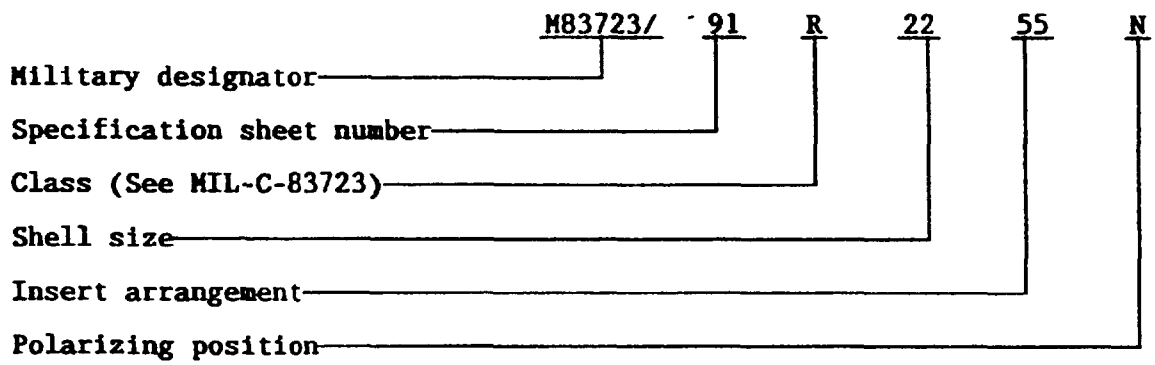


## CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3728-24)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.