
METRIC
MIL-C-5501/18
30 June 1989

MILITARY SPECIFICATION SHEET

CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL
(PLUG-FLARED TUBE END AND STRAIGHT THREADED BOSS), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the plugs described herein shall consist of this specification and the latest issue of MIL-C-5501.

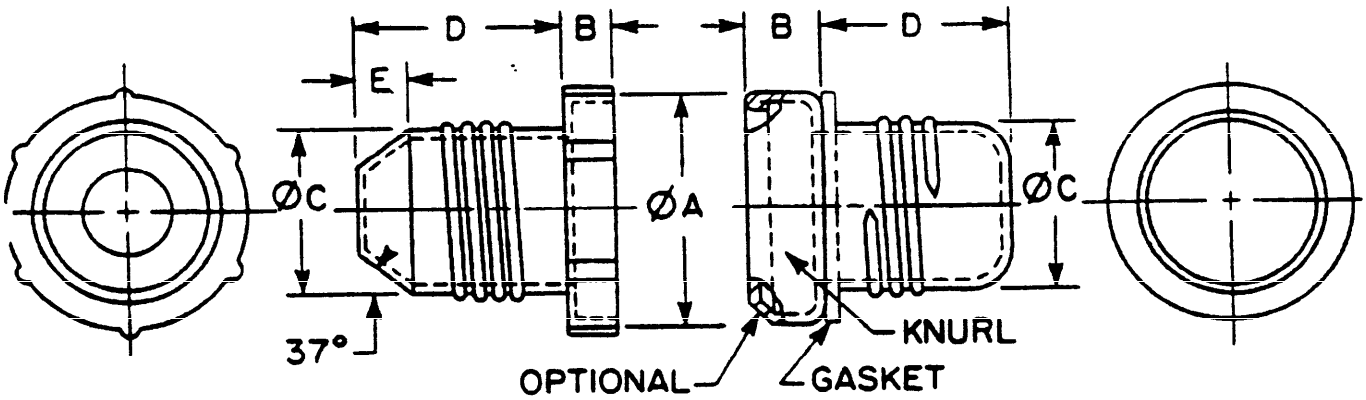

NOTES:
1. All dimensions are in millimeters.

FIGURE 1. CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (PLUG-FLARED TUBE END AND STRAIGHT THREADED BOSS), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Aluminum alloy 3003 rigid plastic and flexible plastic, neoprene gasket (see general specification).

2. Protective coating: Aluminum alloy shall be chemically treated in accordance with MIL-C-5541, Class 1A.

3. Threads: Standard fine pitch "M" profile tolerance class 6g, in accordance with FED-STD-H28/21. Acceptability of screw threads shall be in accordance with FED-STD-H28/20, system 21.

4. Part number code letters:

   Dash number only - Aluminum alloy plug.


   "G" after dash number - Aluminum alloy plug with neoprene gasket.

   "R" before dash number - Rigid plastic plug.

   "F" before dash number - Flexible plastic plug.

5. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from Table I and a code letter before or after the dash number when applicable.

EXAMPLE: D5501/18-2G

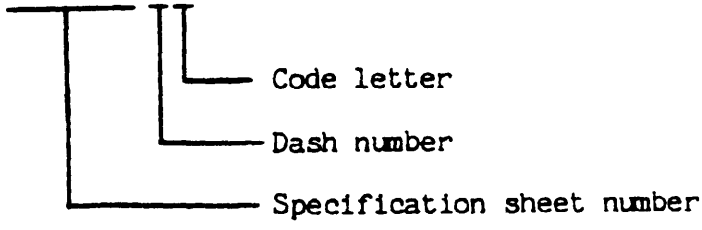

D5501/18-2G Indicates - Caps and Plugs, Protective, Dust and Moisture Seal (Plug-Flared Tube End and Straight Threaded Boss) Metric; Aluminum Alloy Plug with Neoprene Gasket; Thread M8 x 1.

D5501/18-2 Indicates - Same as above except dash number only indicates Aluminum Alloy Plug.

D5501/18-R2 Indicates - Rigid Plastic Plug; Thread M8 x 1.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T04:56Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.(ALUMINUM AND PLASTIC PLUGS)

DASH NUMBER	THREAD	ØA FLANGE ±1.0	B FLANGE LENGTH ±0.5	ØC BODY ±0.5	D BODY LENGTH ±0.5	E CHAMFER ±0.5
2	M8 X 1	14	6	7	8	2
3	M9 X 1	16	6	8	12	3
4	M11 X 1	19	6	10	13	3
5	M12 X 1.25	20	6	11	14	3
6	M14 X 1.25	23	7	13	14	3
8	M18 X 1.5	27	7	17	19	5
10	M22 X 2	30	7	20	22	6
12	M27 X 3	34	7	24	22	6
16	M33 X 2	42	7	31	23	6
20	M42 X 3	52	8	39	24	6
24	M48 X 3	58	8	45	27	8
28	M56 X 2	68	10	54	33	8
32	M64 X 3	72	10	61	33	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:56Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 82

Review activities:
Army - AV, ER, GL
DLA - IS

User activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5340-1756)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:56Z
Check the source to verify that this is the current version before use.