
MILITARY SPECIFICATION SHEET

CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (CAP-FLARED AND FLARELESS FITTING), METRIC


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the caps described herein shall consist of this specification and the latest issue of MIL-C-5501.

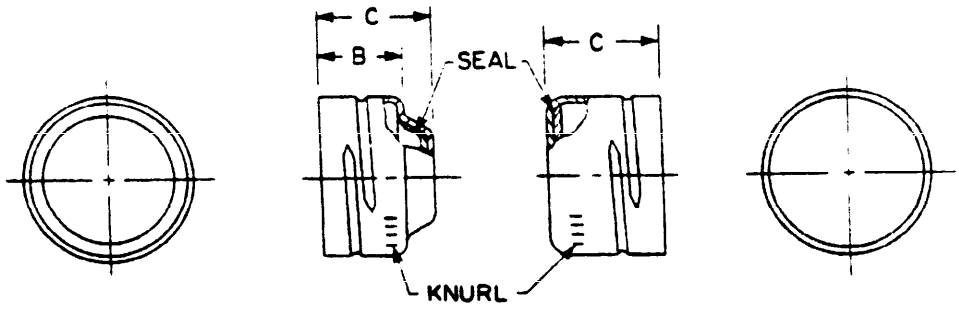

ALUMINUM ALLOY TYPE I (FLARED FITTING)

ALUMINUM ALLOY TYPE II (FLARELESS FITTING)

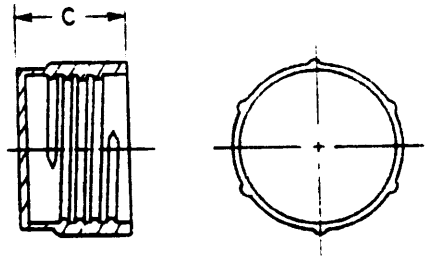

PLASTIC

NOTES:
1. All dimensions are in millimeters.

FIGURE 1. CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (CAP FLARED AND FLARELESS FITTING), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Aluminum alloy 3003 and rigid plastic, neoprene seal (see general specification).

2. Protective coating: Aluminum alloy shall be chemically treated in accordance with MIL-C-5541, Class 1A.

3. Threads: Standard fine pitch "M" profile tolerance 6H, in accordance with FED-STD-H28/21. Acceptability of screw threads shall be in accordance with FED-STD-H28/20, system 21.

4. Part number code letters:

"G" After dash number - Aluminum alloy cap with neoprene seal.

5. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from Table I and a code letter after the dash number when applicable.

EXAMPLE: D5501/20-2

Dash number

Specification sheet number

D5501/20-2 indicates - Caps and Plugs, Protective, Dust and Moisture Seal (Cap-Flared and Flareless Fitting), Metric; Aluminum alloy cap; Type I; Thread M8 X 1.

D5501/20-2G indicates - Same as above except code letter "G" indicates Aluminum alloy cap with neoprene seal.

D5501/20-R3 indicates - Rigid plastic plug; Thread M10 X 1.

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS (ALUMINUM AND PLASTIC CAPS)

DASH NUMBER ALUMINUM ALLOY TYPE I	DASH NUMBER ALUMINUM ALLOY TYPE II	PLASTIC	THREAD	B ±0.5	C ±0.5
2	102	R2	M8 x 1	8	11
3	103	R3	M10 x 1	8	11
4	104	R4	M11 x 1	10	14
6	106	R6	M14 x 1.5	11	14
8	108	R8	M20 x 1.5	12	17
10	110	R10	M22 x 1.5	13	18
12	112	R12	M27 x 2	16	21
16	116	R16	M33 x 2	18	23
20	120	R20	M42 x 2	20	25
24	124	R24	M48 x 2	21	27
28	128	R28	M58 x 2	23	32
32	132	R32	M64 x 2	24	33

Custodians:
Army - AR
Navy - AS
Air Force - 82

Review activities:
Army - AV, ER, GL
DLA - IS

User activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5340-1758)

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:57Z
Check the source to verify that this is the current version before use.