
MILITARY SPECIFICATION SHEET


CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (PLUG-PIPE THREAD), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the plugs described herein shall consist of this specification and the latest issue of MIL-C-5501.

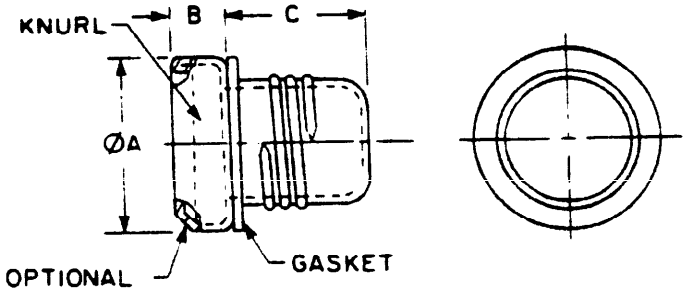

ALUMINUM ALLOY PLUG

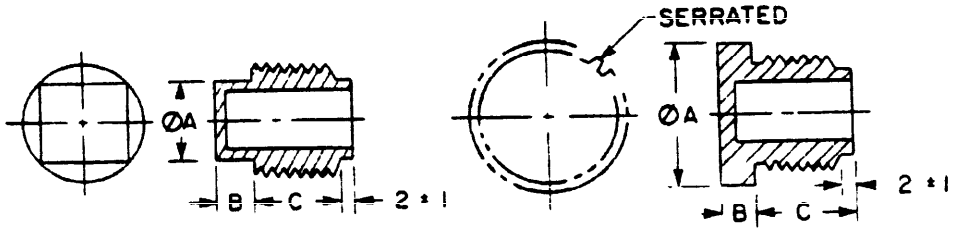

SQUARE HEAD ROUND HEAD

PLASTIC PLUG

NOTES:
1. All dimensions are in millimeters.

FIGURE 1. CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL, (PLUG-PIPE THREAD), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Aluminum alloy 3003, rigid plastic, neoprene gasket (see general specification).

2. Protective coating: Aluminum alloy shall be chemically treated in accordance with MIL-C-5541, Class 1A.

3. Threads: Capable of mating with threads in accordance with ISO7/1.

4. Part number code letters:

   Dash number only - Aluminum alloy plug.

   "G" after dash number - Aluminum alloy plug with neoprene gasket.


   "S" after dash number - Square head plastic plug.

   "R" after dash number - Round head plastic plug.

5. These plugs shall be suitable for use with internal taper pipe threads.

6. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from Table I or TABLE II and a code letter after dash number when applicable.

EXAMPLE: D5501/22-2G

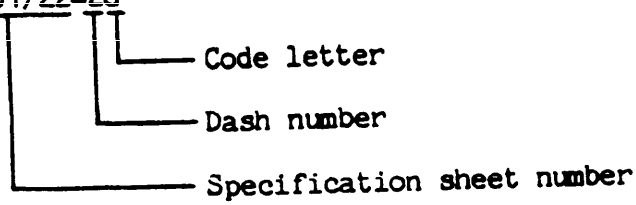

D5501/22-2G indicates - Caps and Plugs, Protective, Dust and Moisture Seal (Plug-Pipe Thread), Metric; Aluminum alloy plug with neoprene gasket; Thread 1/8-28.

D5501/22R2S indicates - Same as above except code letter "S" indicates Square head Rigid plastic plug; Thread 1/8-28.

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS (ALUMINUM ALLOY PLUGS)

DASH NUMBER	THREAD	ØA ±0.5	B ±0.5	C ±0.5
2	1/8-28	18	6	7
4	1/4-19	21	6	10
6	3/8-19	25	8	11
8	1/2-14	31	8	13
12	3/4-14	37	10	14
16	1-11	44	10	17
20	1 1/4-11	50	12	18
24	1 1/2-11	56	12	18

TABLE II. DASH NUMBERS AND DIMENSIONS (RIGID PLASTIC PLUGS)

DASH NUMBER	THREAD	SQUARE HEAD			ROUND HEAD		
		ØA ±.05	B ±0.5	C ±0.5	ØA ±0.5	B ±0.5	C ±0.5
R2	1/8-28	7	6	8	14	6	8
R4	1/4-19	10	6	10	19	6	8
R6	3/8-19	11	6	11	22	6	9
R8	1/2-14	14	6	13	28	10	14
R12	3/4-14	16	6	14	33	10	16
R16	1-11	22	6	16	41	14	19
R20	1 1/4-11	25	9	22	-	-	-
R24	1 1/2-11	32	9	22	-	-	-

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:57Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 82

Review activities:
Army - AV, ER, GL
DLA - IS

User activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5340-1760)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.