MILITARY SPECIFICATION SHEET

CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (CAP-BEADED HOSE CONNECTION)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the caps described herein shall consist of this document and the latest issue of specification MIL-C-5501.

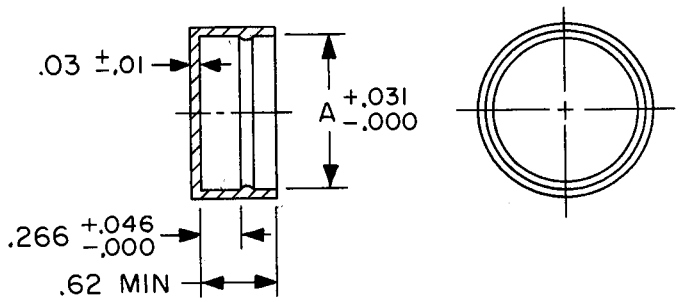

TABLE I

DASH NO.	HOSE I.D.	A DIA	DASH NO.	HOSE I.D.	A DIA	DASH NO.	HOSE I.D.	A DIA
R4	1/4	.250	R12	3/4	.750	R28	1-3/4	1.750
R6	3/8	.375	R16	1	1.000	R32	2	2.000
R8	1/2	.500	R20	1-1/4	1.250	R40	2-1/2	2.500
R10	5/8	.625	R24	1-1/2	1.500	R48	3	3.000

REQUIREMENTS:

1. Material - Rigid plastic.
2. Dimensions - All dimensions are in inches.
3. The part number consists of M5501/4 and a dash number taken from Table I. Example: M5501/4-R4.
4. Caps covered by the dash numbers in Table I supersede the Type IV caps of MIL-C-5501E having the same size numbers as these dash numbers (without the R).
5. These caps shall be suitable for beaded hose connections conforming to MS33658.
6. The sealing pressure requirement of the general specification does not apply to these caps.

Custodians:
Army - WC
Navy - AS
Air Force - 82

Reviewer Activities:
Army - AV, EL, GL, MU
Navy - None
Air Force - None
DSA - IS

Preparing activity:
Army - WC

Project No. 5340-0940

User Activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD
Air Force - None

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:55Z
Check the source to verify that this is the current version before use.