MIL-I-5488A
Amendment 2
5 June 1980
Superseding
Amendment 1
26 February 1963

MILITARY SPECIFICATION

INDICATOR, TURN AND SLIP, 28V., DC,
2-3/4 SIZE, TYPE MD-10

This amendment forms a part of Military Specification MIL-I-5488A dated 30 April 1957, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Paragraph 2.1

SPECIFICATIONS

Federal - Delete the following:

"QQ-P-416 Plating Cadmium (Electrodeposited)"

Military - Delete the following:

"MIL-D-5028 Drawings and Data Lists; Preparation of Manufacturer's (For Production Aircraft, Guided Missiles, Engines, Accessories and Other Auxiliary Equipment).

MIL-N-6880 Lubrication of Aircraft; General Specification for

MIL-P-6064 Packaging of Lightweight Aircraft Accessories

MIL-P-6906 Plates; Information and Identification"

Add the following:

"MIL-D-1000 Drawing, Engineering and Associated Data

MIL-P-15024 Plate Tags and Bands for Identification of Equipment"

Add the following at the bottom of the page:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, ESSD, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

FSC 6610

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:52Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal - Add the following:

FED-STD-595	Colors

Military - Add the following:

"MIL-STD-794	Parts and Equipment, Procedures for Packaging and Packing of
MIL-STD-838	Lubrication of Military Equipment
MIL-STD-889	Dissimilar Metals
MS28069	In title after the word "current" add "2 3/4 Size Type MD-10"
MS28105	Cover Glass, Aircraft Instrument Dial
MS33558	Numerals and Letters, Aircraft Instrument Dial, Standard Form of

DRAWINGS - Delete entire paragraph

Paragraph 3.2.2.1 Delete "Drawing AND 10398" and subsitute "MIL-STD-889'

Paragraph 3.3.1.3, Line 5, Delete "AN5727" and substitute "MS28105"

Paragraph 3.5, Line 7 Delete "specification MIL-D-5028" and substitute "MIL-D-1000"

Paragrpah 3.7.2.2, Line 3, Delete "Cadmium"
Line 4, Delete "QQ-P-416"

Paragrph 3.7.3, Line 2, Delete "Specification MIL-I-6880"
and substitute "MIL-STD-838"
Line 5, Delete "Bureau of Aeronautics" and substitute "Naval Air Systems Command"

Paragraph 3.8, Line 4, Delete "Drawing AND 10400" and substitute "MS33558"

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:52Z
Check the source to verify that this is the current version before use.

PAGE 5

Delete "figure 1" and substitute attached "figure 1"

PAGE 6

Paragraph 3.8.2.1, Delete all after the word "qualification".

PAGE 12


Paragraph 5.2, Delete all after the word "with" and substitute "MIL-STD-794".

Paragraph 5.3.1, Line 2 Delete "specification MIL-P-6064" and substitute "MIL-STD-794".

Custodians
Army - AV
AF - 99

Preparing Activity
NAVY - AS
Project No. 6610-0414

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:52Z
Check the source to verify that this is the current version before use.

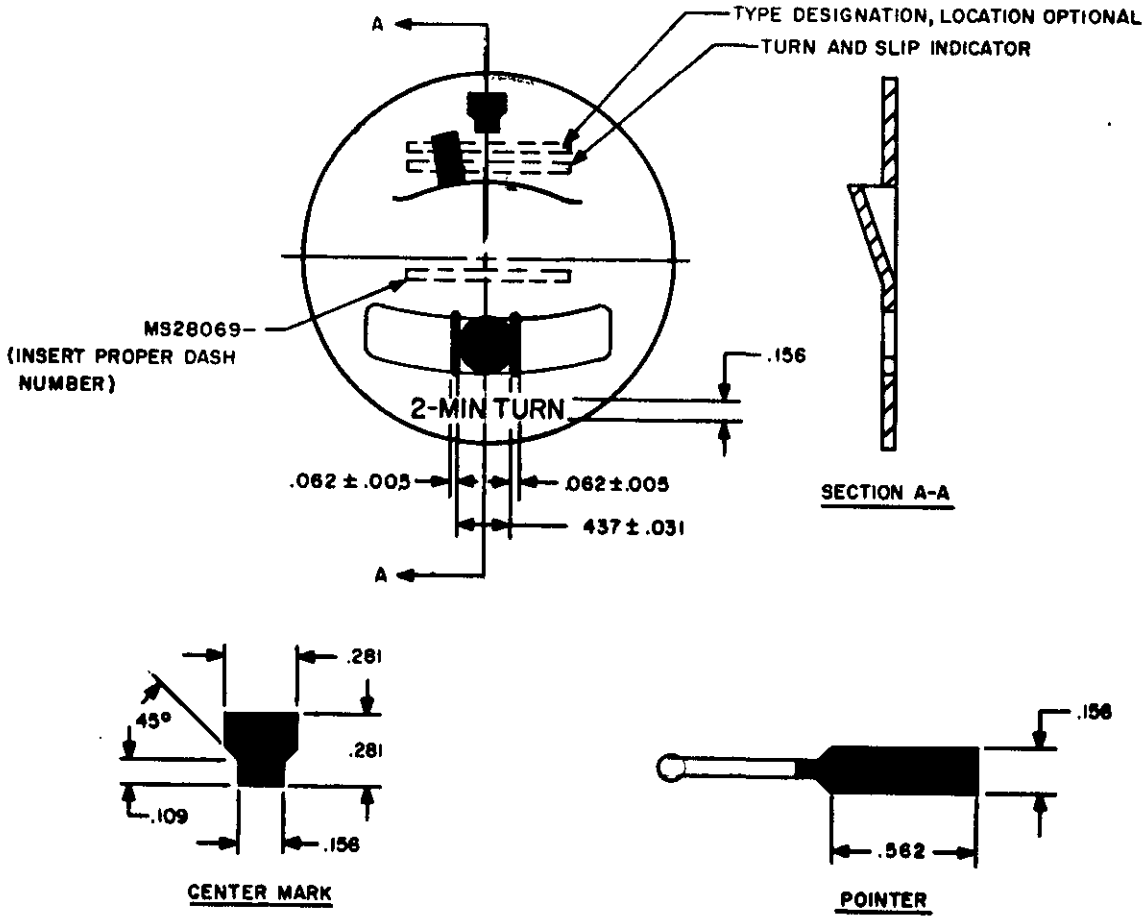

UNLESS OTHERWISE SPECIFIED, ALL LETTERING SHALL BE .047 HIGH.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

MARKINGS	FINISH
Center mark Shaded portion of pointer "2-MIN TURN" Lines marking zero position of ball	Lusterless white Color No. 37875 of FED STD NO. 595
Rear half and bottom of slip indicator tube or suitable card behind inclinometer Unshaded portion of pointer Background of dial Lustering: MS-Part No., Type designation, "TURN AND SLIP INDICATOR"	Lusterless black Color No. 37038 of FED STD NO. 595

FIGURE 1. DIAL AND POINTER MARKINGS

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:52Z
Check the source to verify that this is the current version before use.