INCH-POUND

MIL-M-28787/327
AMENDMENT 1
16 December 1992

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

COMPARATOR, MAGNITUDE, DIGITAL, KEY CODE JHB

This amendment forms a part of Military Specification MIL-M-28787/327(EC), dated 23 August 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test conditions D1-D6, Test type column: Delete "X" and substitute "S".

TABLE I, Test conditions E1-E30, Test type column: Delete "X" and substitute "S".

TABLE I, Test condition L, Test type column: Delete "S" and substitute "X".

PAGE 7

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through T shall be performed in any order with the following exceptions. Test conditions A, B, C, D, and E are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, D, or E are part of a sequence of tests, the order of testing shall be as follows: A, B, C, D, and E where applicable, followed by the remaining tests in the sequence."

4.5.1: Delete and substitute the following:

"4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through T in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25°C ambient. When electrical testing is called for at the end of each temperature

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:46Z
Check the source to verify that this is the current version before use.

stabilization period, test conditions F through P shall be performed in the order specified in 4.4.2 using the initial limits for the applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2."

4.5.3: Delete and substitute the following:

"4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests F through P shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table I. Following the return of the module to 25 ± 5°C, electrical tests F through P shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table I."

PAGE 14

FIGURE 5: Delete and substitute new figure 5 as printed on page 3 of this amendment.

PAGE 34

TABLE IX, Test condition H79, Circuit 1 column, Pin 28 column: Delete "L" and substitute "H".

TABLE IX, Test condition H79, Circuit 1 column, Pin 7 column: Delete "H" and substitute "L".

PAGE 67

FIGURE 21: Delete and substitute new figure 21 as printed on page 4 of this amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0251)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:46Z
Check the source to verify that this is the current version before use.

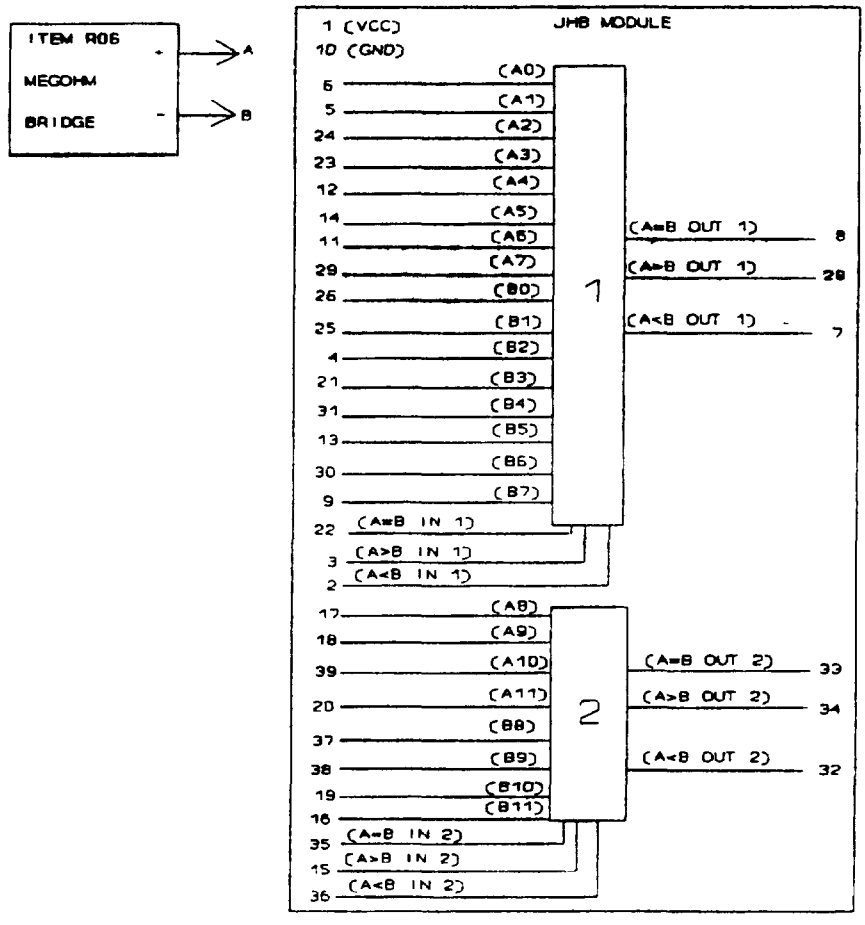

WARNING

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

NOTES:


1. For test condition A1, penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal.

2. For test condition A1, the megohm bridge voltage shall be 100 ± 10 Vdc.

3. For test condition A2, the megohm bridge voltage shall be 30 ± 3 Vdc.

FIGURE 5. Isolation test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:46Z
Check the source to verify that this is the current version before use.

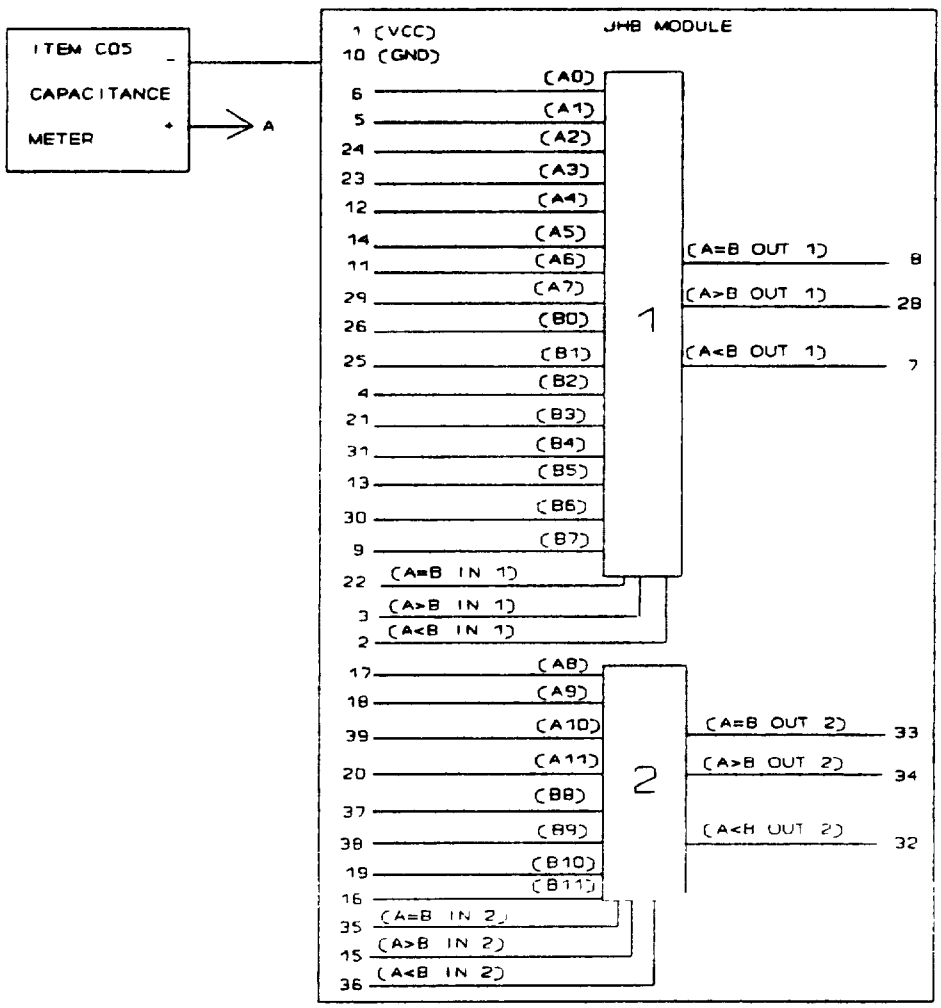

NOTES:

1. Do not attach test connector or wires to any of the module pins other than pin 10 and the pin under test. Stray capacitance added to other pins may affect the readings.

2. Null out the effects of the test leads prior to connecting to the module.

FIGURE 21. Input capacitance test circuit for table XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:46Z
Check the source to verify that this is the current version before use.