INCH-POUND

MIL-M-28787/333
AMENDMENT 2
16 December 1992
SUPERSEDING
AMENDMENT 1
6 October 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

CONVERTER, D/A, KEY CODE MKR

This amendment forms a part of Military Specification MIL-M-28787/333(EC), dated 8 June 1982, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test conditions B1-B12, Test type column: Delete "X" and substitute "S".

TABLE I, Test condition F3, 25° ± 5°C Max column: Delete "0.111" (one place) and substitute "0.120" (one place).

PAGE 5

*TABLE I, Test conditions R1 and R2, Max columns: Delete "5.5" (five places) and substitute "6.5" (five places).

PAGE 16

FIGURE 6: Delete and substitute new figure 6 as printed on page 4 of this amendment.

PAGE 23

TABLE IX, Test condition F3, Max column: Delete "0.111" (one place) and substitute "0.120" (one place).

PAGE 29

TABLE XII, Test condition J2, B to pin column: Delete "9".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:50Z
Check the source to verify that this is the current version before use.

PAGE 33

TABLE XIV, Test condition L15, Min column: Delete "2.4976" (one place) and substitute "2.4956" (one place).

PAGE 35

*TABLE XIV, footnote 3/: Delete "2.4" and substitute "2.44".

PAGE 40

FIGURE 16: Delete and substitute new figure 16 as printed on page 5 of this amendment.

PAGE 41

TABLE XVIII, footnote 1/: Delete "Input impedance = $\frac{10\ V}{\text{Item X05 reading}}$" and substitute "Input impedance = $\frac{10\ V}{\text{Item X05 reading}}$".

*TABLE XIX, Test conditions R1 and R2, Max column: Delete "5.5" (two places) and substitute "6.5" (two places).

TABLE XX, footnote 1/: Delete "PSSR(dB) = 20 log $\frac{\text{Item W04 reading.}}{0.71\ \text{Vrms}}$" and substitute "PSSR(dB) = 20 log $\frac{\text{Item W04 reading}}{0.71\ \text{Vrms}}$".

PAGE 44

FIGURE 18, NOTE 11a., first line: Delete "positive 2" and substitute "position 2".

PAGES 45 AND 46

FIGURE 19: Delete and substitute new figure 19 as printed on pages 6 and 7 of this amendment.

PAGE 47

FIGURE 20, NOTE 5, first line: Delete "1 kHz ± 1%" and substitute "300 Hz ± 1%".

PAGE 58

FIGURE 26, NOTE 2, second line: Delete "XXVII" and substitute "XXVI".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:50Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0256)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:50Z
Check the source to verify that this is the current version before use.

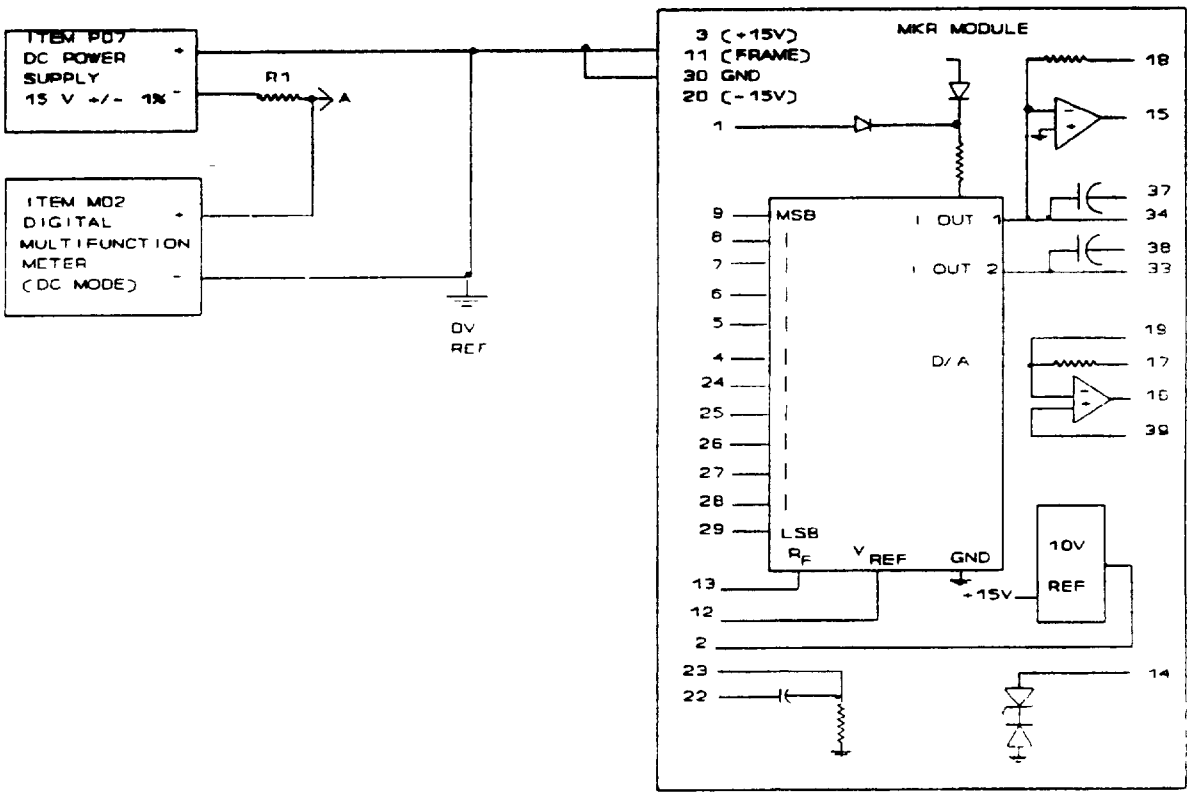

NOTE: R1 = 9.09 kΩ ± 1%, 1/8 W.

FIGURE 6. Input clamp diode voltage (negative) test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:50Z
Check the source to verify that this is the current version before use.

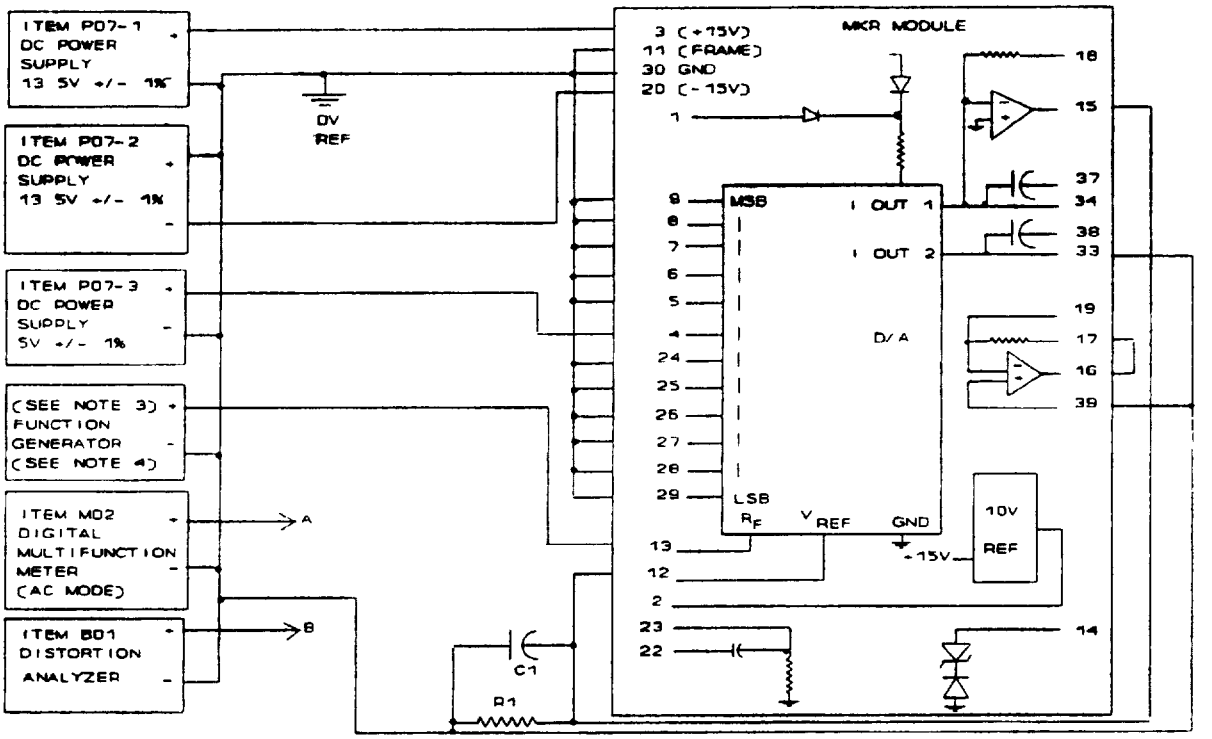

NOTES:

1. R1 = 10 kΩ ± 1%, 1/8 W.
2. C1 = 100 pF ± 10%.
3. Item G10 shall be used for test conditions N1-N3 and item G08 shall be used for test condition P.
4. Sine wave amplitude = 0.030 V rms ± 1% (recheck after frequency change) for test conditions N1-N3.
   = 0.030 V rms ± 5% for test condition P.
   Frequency = 10 kHz ± 1% for test condition N1.
   = 30 kHz ± 1% for test condition N2.
   = 100 kHz ± 1% for test condition N3.
   = 95 kHz ± 5% for test condition P.

FIGURE 16. Gain frequency response check and distortion test circuit for tables XVI and XVII.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:50Z
Check the source to verify that this is the currentversion before use.


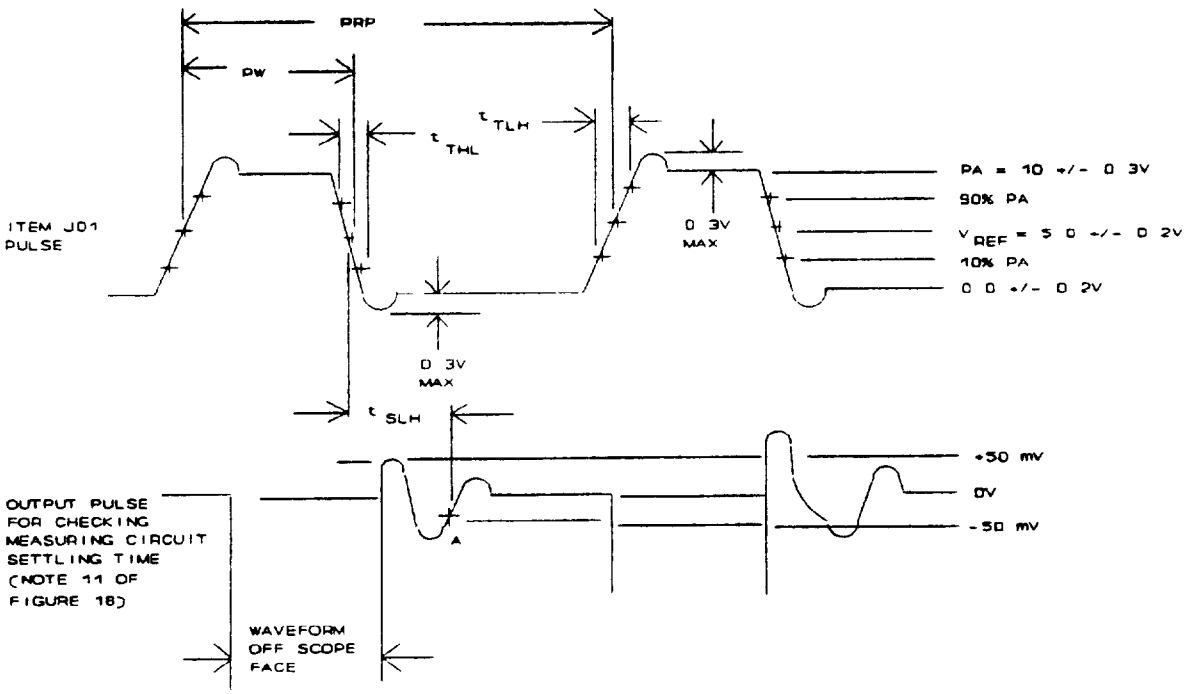


FIGURE 19. Settling time (t_{SHL} and t_{SLH}) test circuit waveforms for table XIX.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:50Z
Check the source to verify that this is the current version before use.

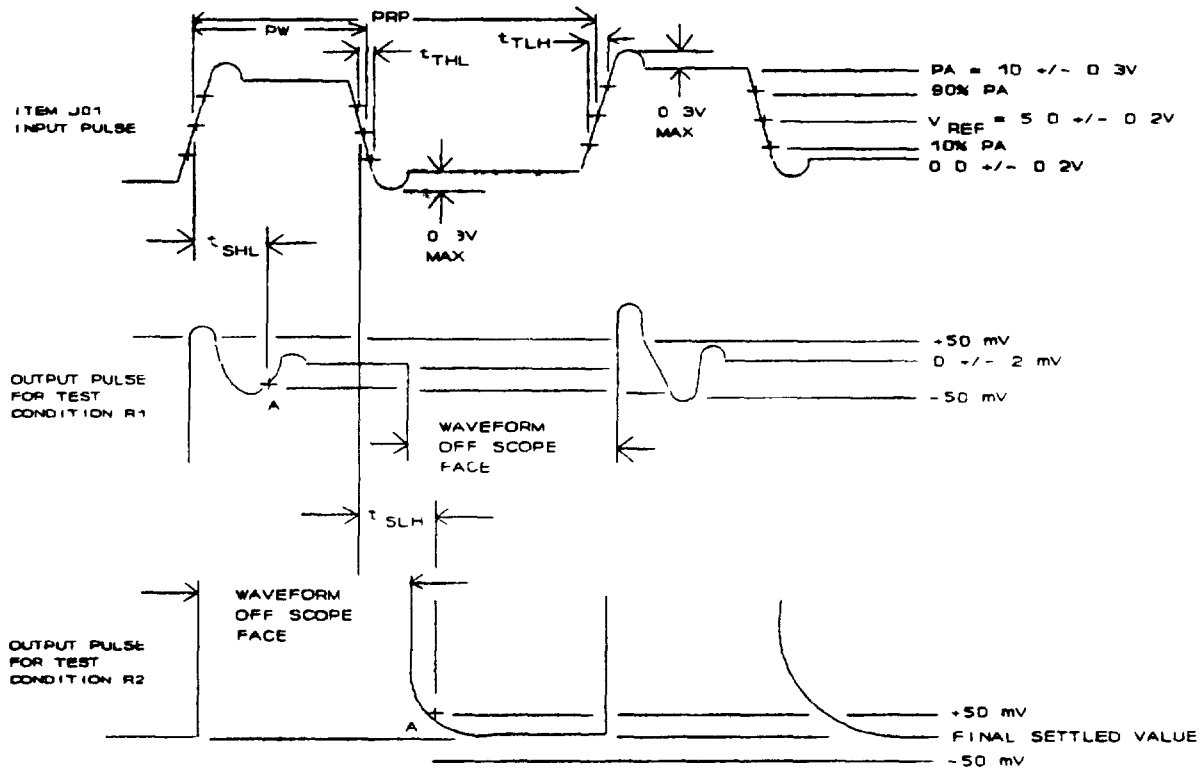

NOTES:

1. Item J01 pulse parameters:
   PRP = 40 ± 1 μS.
   PW = 20.0 ± 0.5 μS.
   $t_{THL} = t_{TLH}$ = 20.0 ± 10 ns.
2. The settling time symbols t_{SHL} and t_{SLH} refer to the signal on pin 15. The amplifier/clipper U1 inverts this signal before it is displayed by item DD7.
3. Point A for t_{SHL} and t_{SLH} measurements is defined as the point where the output waveform last enters a window ±50 mV around the indicated value from either above or below that window.
4. All voltages are references to 0 V_{REF}.

FIGURE 19. Settling time (t_{SHL} and t_{SLH}) test circuit waveforms for table XIX - Continued.

Source: https://assist.dla.mil -- Downloaded: 20260-20T17:50Z
Check the source to verify that this is the current version before use.