MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

AMPLIFIER, ANALOG, KEY CODE EAP

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the acquisition of an electronic amplifier module.

1.2 Classification. This specification covers two classes of modules.

Class I and class II as specified in MIL-STD-1389.

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.

MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.2 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Naval Electronic Systems Command, ATTN: ELEX 8111, Department of the Navy, Washington, DC 20363, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T17:53Z
Check the source to verify that this is the currentversion before use.

3.3 Failure rate requirements. All modules acquired to this specification shall have a predicted failure rate no greater than 0.304 failures per million operating hours for class I or 0.879 failures per million operating hours for class II, when predicted in accordance with MIL-STD-1389. When a class II module is used in a class I environment, failure rate for class I shall be used for reliability prediction (see 6.3).

3.4 Performance requirements. The module shall conform to the electrical requirements specified in table I. Class I modules shall conform to the electrical requirements of class I only, and class II modules shall conform to the electrical requirements of class I and class II (see 6.3).

3.5 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.5.1 Key code. The module key code shall be EAP.

3.5.2 Size. The module size shall be 1A, format A.

3.5.3 Weight. The module shall have a maximum weight of 35 grams.

3.5.4 Contact pins. The module shall have 20 contact pins positioned 1 through 20. Pins 21 through 40 are optional.

3.5.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A.

3.5.6 Depth. The module shall have no additional depth requirements.

3.5.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.5.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part number M28787/340-1 for class I and M28787/340-2 for class II, except no marking shall interfere with heat dissipation from the fin (for example, affixing a label which may be a heat barrier).

3.6 Circuit pin configuration. The function diagram and pin assignments shall conform to figure 1.

3.7 Acceptance tests. All production modules shall be tested in accordance with footnotes 1 and 2 of table I.

3.8 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits of table I (see 6.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.


4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified.

4.4 Test procedures. The module shall be tested as specified in table I.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Program Quality Assurance Activity and they conform to the requirements of MIL-M-28787.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:53Z
Check the source to verify that this is the current version before use.

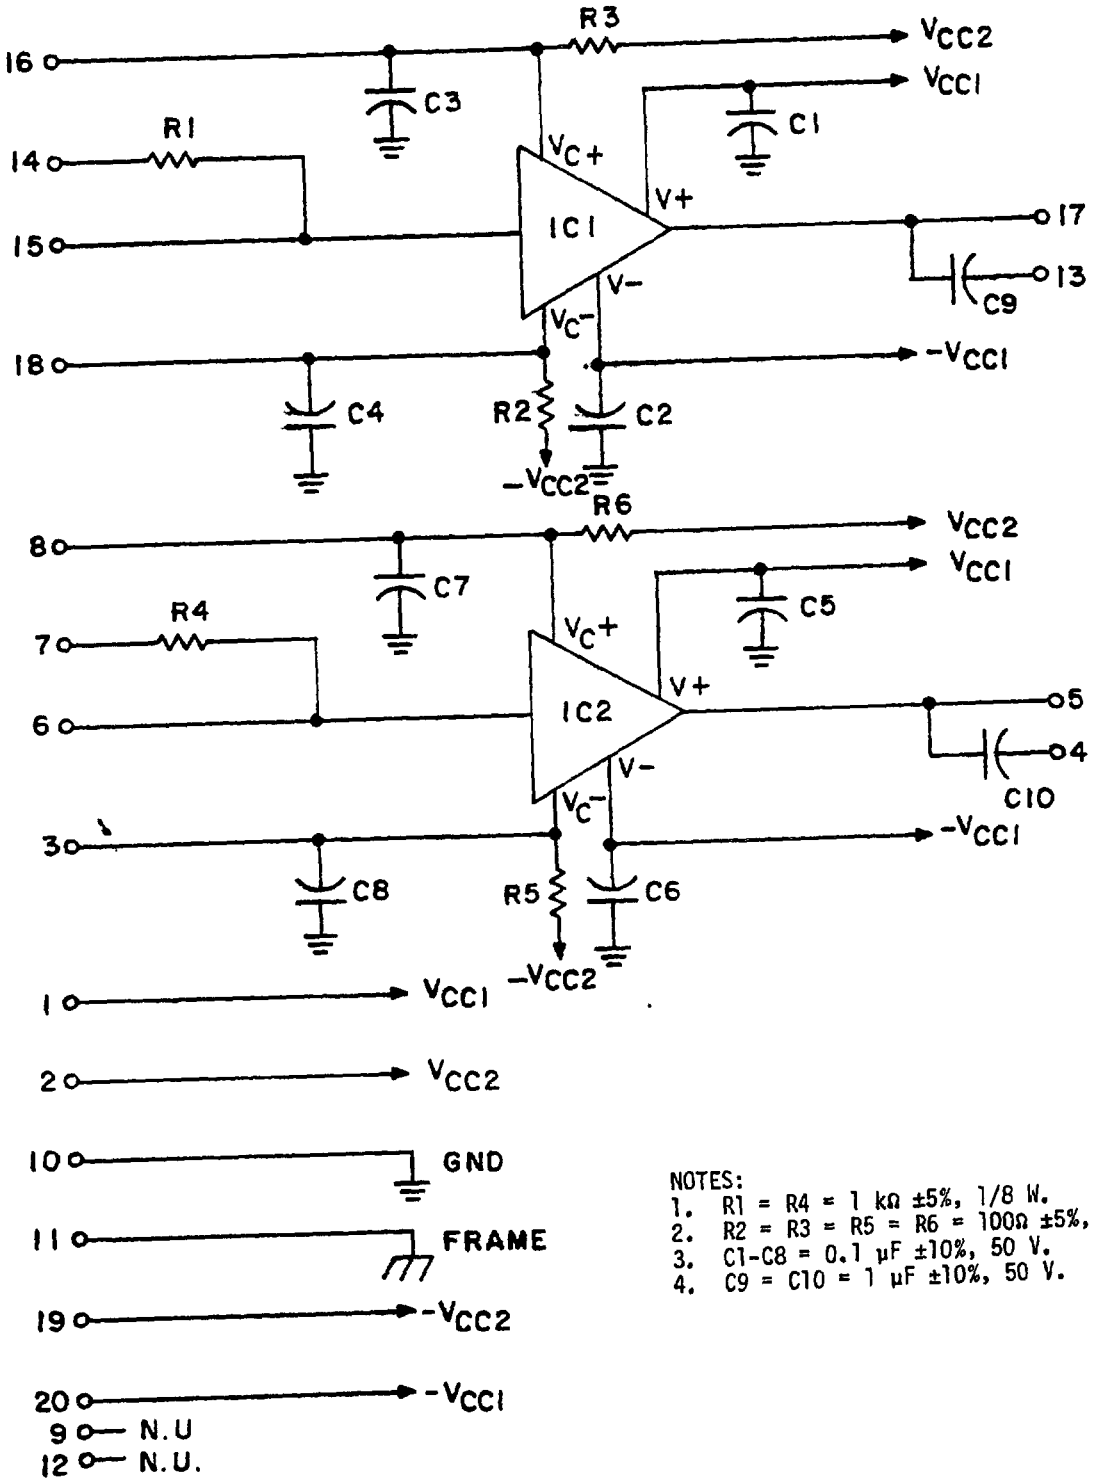

NOTES:
1. R1 = R4 = 1 kΩ ±5%, 1/8 W.
2. R2 = R3 = R5 = R6 = 100Ω ±5%, 1/2 W.
3. C1-C8 = 0.1 µF ±10%, 50 V.
4. C9 = C10 = 1 µF ±10%, 50 V.

FIGURE 1. EAP module function diagram, amplifier.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

Test condition	Parameter	Ref test table	Test type 1/-3/	25°C ±5°C 4/		Class I 4/				Class II 4/				Unit
						0°C ±5°C		60°C ±5°C		-55°C ±5°C		85°C ±5°C		
				Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
A1, A2	Continuous output current check, positive	II	S	60	72	60	72	60	72	60	72	60	72	mA
A3, A4	Continuous output current check, negative	II	S	-60	-72	-60	-72	-60	-72	-60	-72	-60	-72	mA
B1	Isolation													
	Initial	III	S	10	∞	10	∞	10	∞	10	∞	10	∞	MΩ
	End-of life	III	S	1	∞	1	∞	1	∞	1	∞	1	∞	MΩ
B2, B3	Isolation													
	Initial	III	X	10	∞	10	∞	10	∞	10	∞	10	∞	MΩ
	End-of life	III	X	1	∞	1	∞	1	∞	1	∞	1	∞	MΩ
C1, C2	Power supply current	IV	X	1	60	1	60	1	60	1	60	1	60	mA
D1, D2	Output offset voltage	V	X	-16.5	16.5	-16.5	16.5	-16.5	16.5	-16.5	16.5	-16.5	16.5	mV
E1, E2	Functional gain check	VI	X	0.95	1.01	0.95	1.01	0.95	1.01	0.95	1.01	0.95	1.01	V/V
F1, F2	Full power bandwidth check	VII	Q	4.77	∞	4.77	∞	4.77	∞	4.77	∞	4.77	∞	MHz
G1, G4	Output distortion	VIII	X	0.0	1.0	0.0	1.0	0.0	1.0	0.0	1.0	0.0	1	%
H1 - H4	Resistance													
	Initial	IX	S	90	115	85	118	85	118	85	118	85	118	Ω
	End-of life	IX	S	85	118	80	120	80	120	80	120	80	120	Ω
H5, H6	Resistance													
	Initial	IX	S	900	1150	850	1180	850	1180	850	1180	850	1180	Ω
	End-of life	IX	S	850	1180	800	1200	800	1200	800	1200	800	1200	Ω

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - continued.

Test condition	Parameter	Ref test table	Test type 1/-3/	25°C ±5°C 4/		Class I 4/				Class II 4/				Unit
						0°C ±5°C		60°C ±5°C		-55°C ±5°C		85°C ±5°C		
				Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
J1 - J4	Power supply filter capacitance													
	Initial	X	S	0.18	0.22	0.15	0.25	0.15	0.25	0.15	0.25	0.15	0.25	µF
	End-of-life	X	S	0.15	0.25	0.15	0.25	0.15	0.25	0.15	0.25	0.15	0.25	µF
J5, J6	Capacitance													
	Initial	X	X	0.90	1.10	0.85	1.15	0.85	1.15	0.85	1.15	0.85	1.15	µF
	End-of-life	X	X	0.85	1.15	0.8	1.2	0.8	1.2	0.8	1.2	0.8	1.2	µF
K1, K2	Oscillation (capacitance load)	XI	Q	0	600	0	600	0	600	0	600	0	600	mV_{p-p}
L	Continuity	XII	S	0	1	0	1	0	1	0	1	0	1	Ω
M1 - M4	Phase shift													
	Initial	XIII	S	-1	1	-1.5	1.5	-1.5	1.5	-2	2	-2	2	Degree
	End-of life	XIII	S	-1.5	1.5	-2	2	-2	2	-2.5	2.5	-2.5	2.5	Degree
N1, N2	Output latch													
	End-of-life	Figure 2	Q	-15	15	-15	15	-15	15	-15	15	-15	15	mV

1/ "X" parameters shall be 100 percent tested during module acceptance tests.
2/ "S" parameters shall be sample acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.
3/ "Q" parameters shall be tested during qualification testing only.
4/ Unless otherwise specified, limits are for initial and end-of-life.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:53Z
Check the source to verify that this is the current version before use.

4.4.2 Order of testing. Test conditions A through M shall be performed in any order with the following exceptions. If test condition A or B is part of a sequence of tests, the order of testing shall be as follows: A, B where applicable, followed by the remaining tests in the sequence.

4.5 Qualification testing. Initial qualification tests and periodic-check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through M in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25°C ±5°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions C through K and M shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2.

4.5.1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2.

4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be operated in the test circuit shown on figure 3. Following the vibration tests, the electrical tests of table I which are marked with an "X" in the test type column shall be performed using the initial limits at 25°C ±5°C ambient.

4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and prior to disconnecting the power, electrical tests N1 and N2 shall be performed in accordance with figure 2. While still at the maximum class temperature, electrical tests C through K and M shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements of table I. Following the return of the module to 25°C, electrical tests B through M shall be performed in the order specified in 4.4.2 using the 25°C ±5°C ambient end-of-life requirements of table I.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

6. NOTES

6.1 Definitions. Definitions are as specified in MIL-STD-1331.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements of table I, the module is considered to have completed its useful life (see 3.8).

6.3 Substitutability. Class II modules are substitutable for class I modules. When class II modules are used in a class I environment, the failure rate for class I shall be used for reliability prediction (see 3.3 and 3.4).

6.4 Module description. The following electrical parameters reflect the 0°C to 60°C and -55°C to 85°C end-of-life limits from table I.

	Class I	Class II	Unit
Maximum power dissipation ±16.5 V supply	990	990	mW


6.5 Module function. This module contains two independent high speed unity gain amplifiers as shown on figure 1.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N602)

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:53Z
Check the source to verify that this is the current version before use.

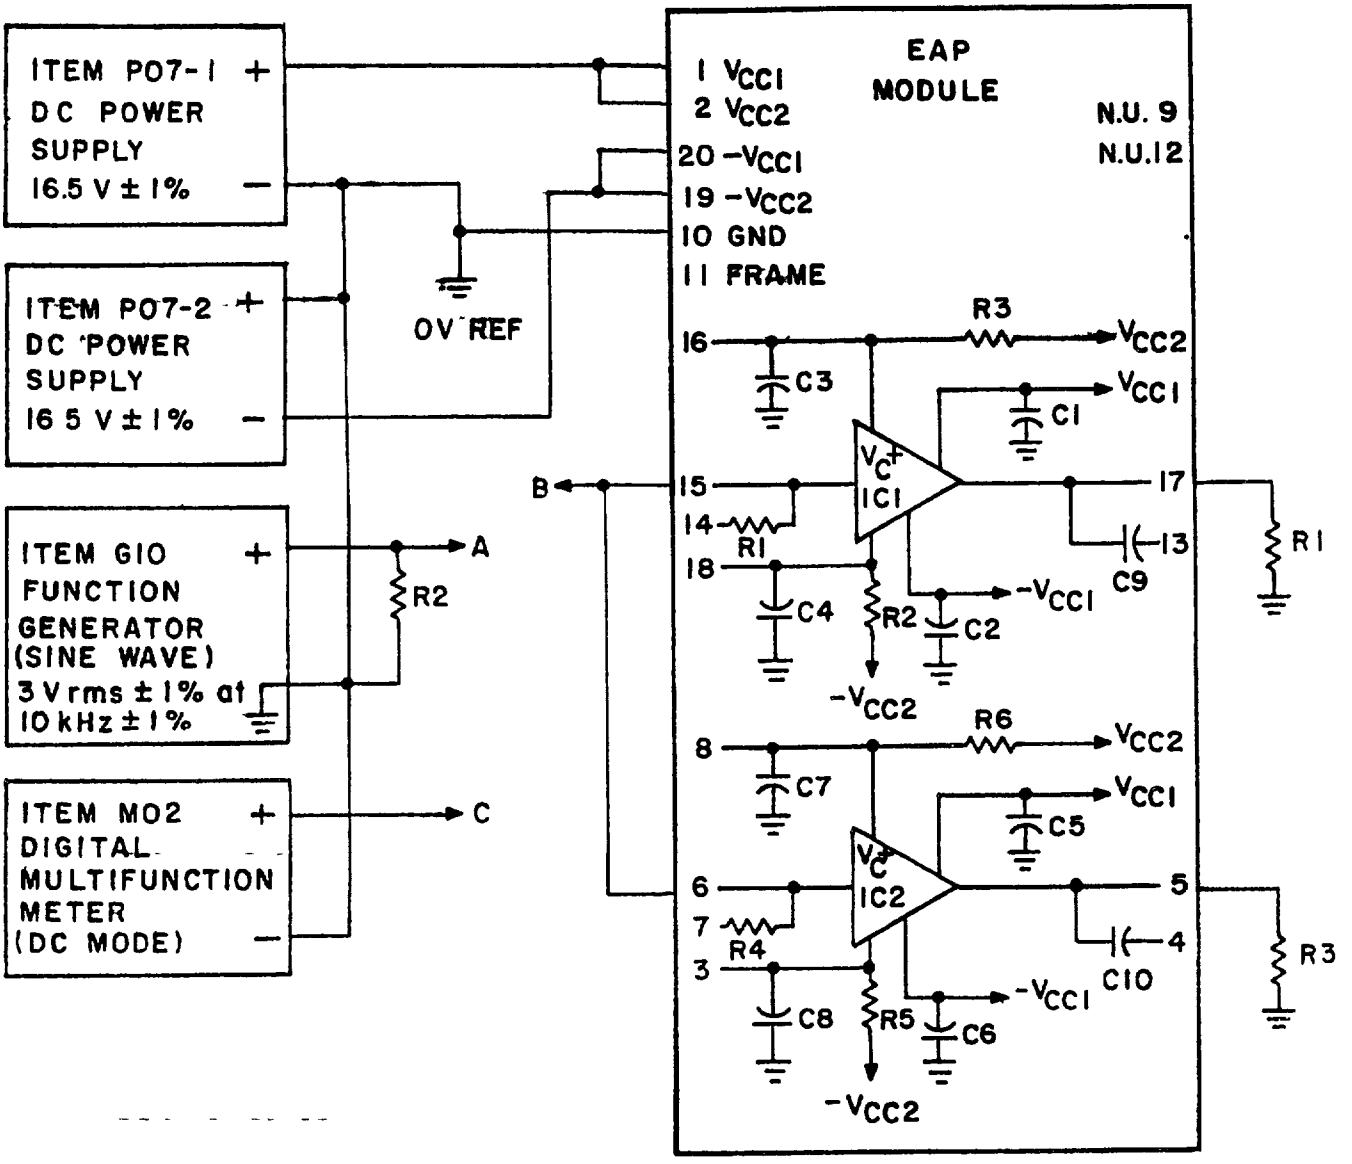

NOTES:
1. R1 = R3 = 1 kΩ ±5%, 1/4 W.
2. R2 = 50Ω ±5%, 1/4 W.
3. For life test connect point B to pin 10 and for operating temeprature and component temperature, connect point A to point B.
4. Following the life test period, prior to disconnecting the power, with point B connected to pin 10, connect point C to pin 17. The voltage shall meet the limits specified in table I for test condition N1.
5. For test condition N2, connect point C to pin 5.
6. Test condition N verifies that the amplifiers do not latch up.

FIGURE 2. Life, operating, and component temperature test circuit.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:53Z
Check the source to verify that this is the current version before use.

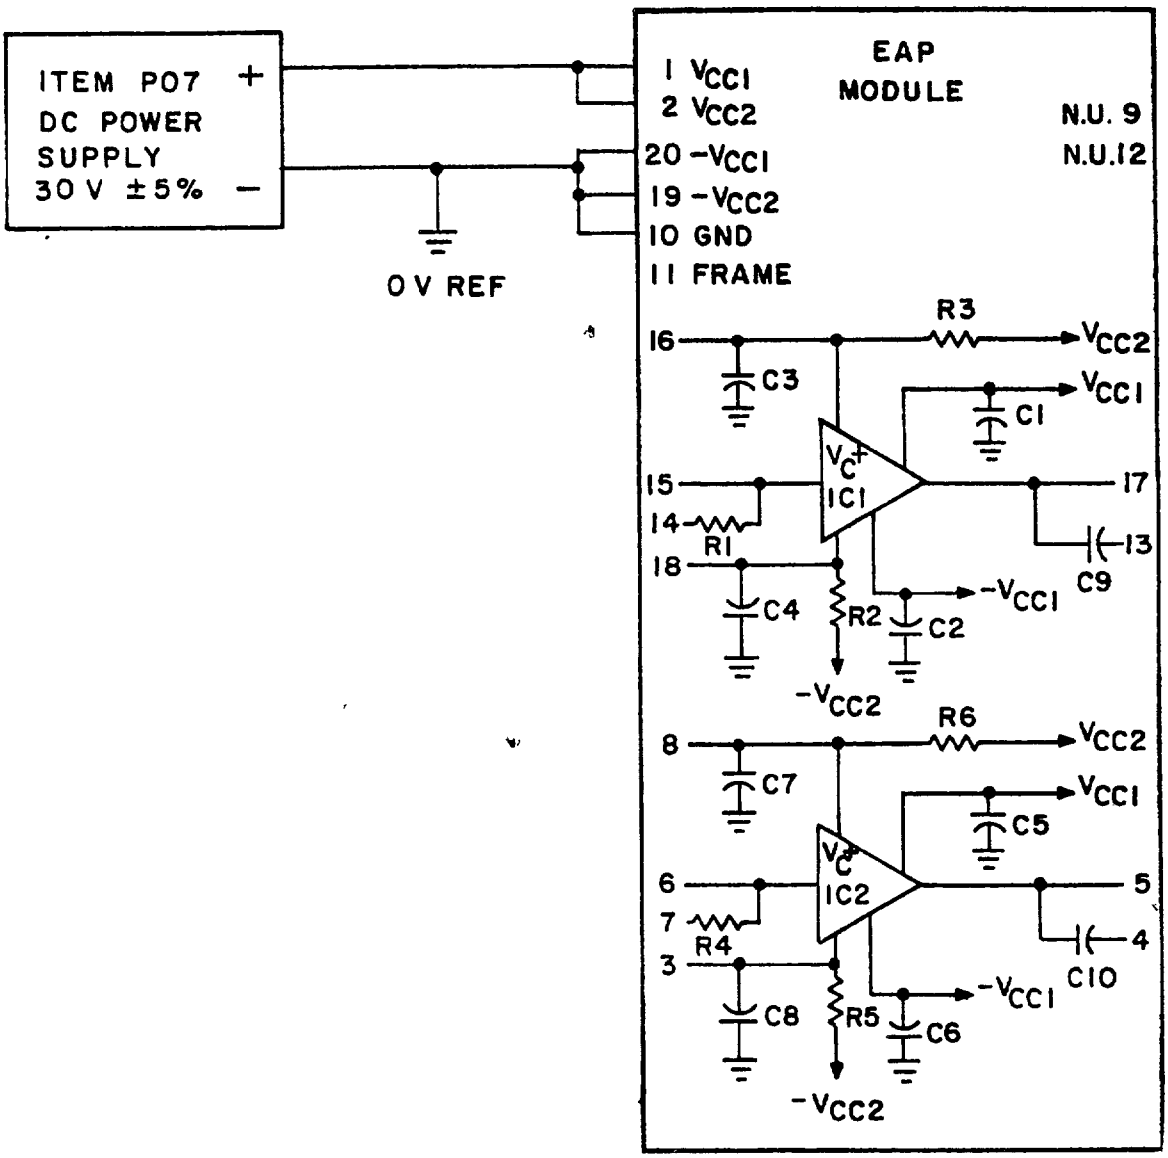


FIGURE 3. Vibration test circuit.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE II. Continuous output current check test. 1/

Test condition	Parameter	Connect			Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	C to pin	Min	Max		
A1	Continuous output current check, positive	15	10	17	5.20	6.25	V	4
A2	Continuous output current check, positive	6	10	5	5.20	6.25	"	"
A3	Continuous output current check, negative	10	15	17	-6.25	-5.20	"	"
A4	Continuous output current check, negative	10	6	5	-6.25	-5.20	"	"

1/ Current = $\frac{\text{Item M02 reading.}}{86.6}$

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

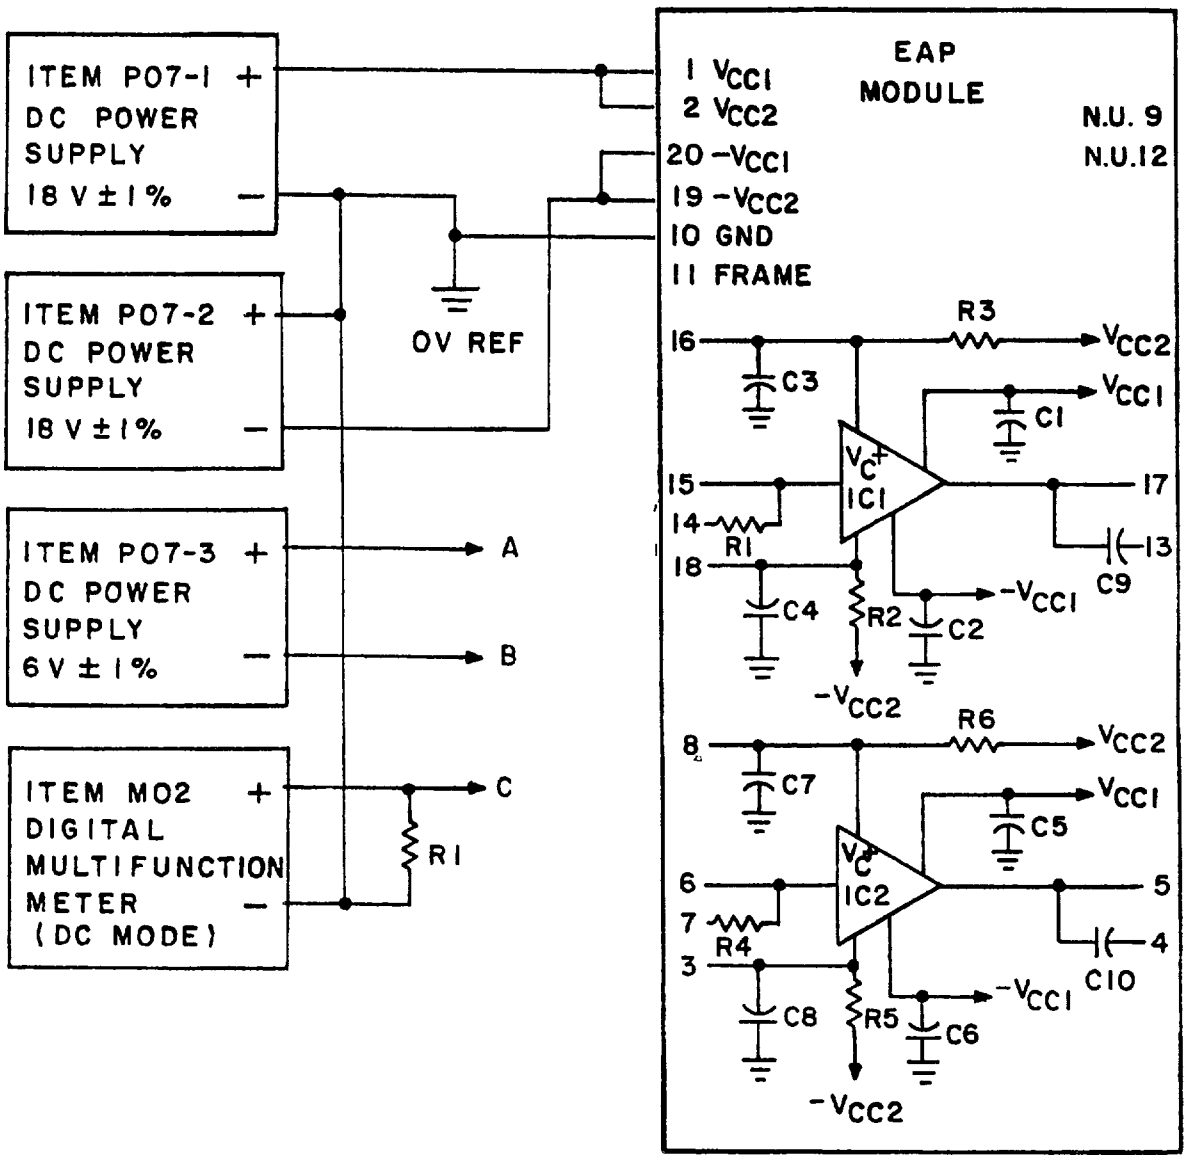

NOTES:
1. R1 = 86.6Ω ±1%, 1/2 W.
2. Measurements shall be taken after power has been applied for a minimum of one minute for each test condition.


FIGURE 4. Continuous output current check test circuit for table II.


Source: https://assist.dla.mil -- Downloaded: 20260-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE III. Isolation test.

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
B1	Isolation, frame to module pin	All others	11	10	∞	MΩ	5
B2	Isolation, used to unused pins	All others	9, 12	"	"	"	"
B3	Isolation, unused to unused pins	9	12	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:53Z
Check the source to verify that this is the current version before use.

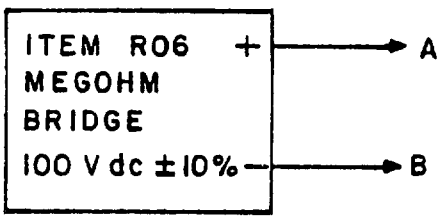

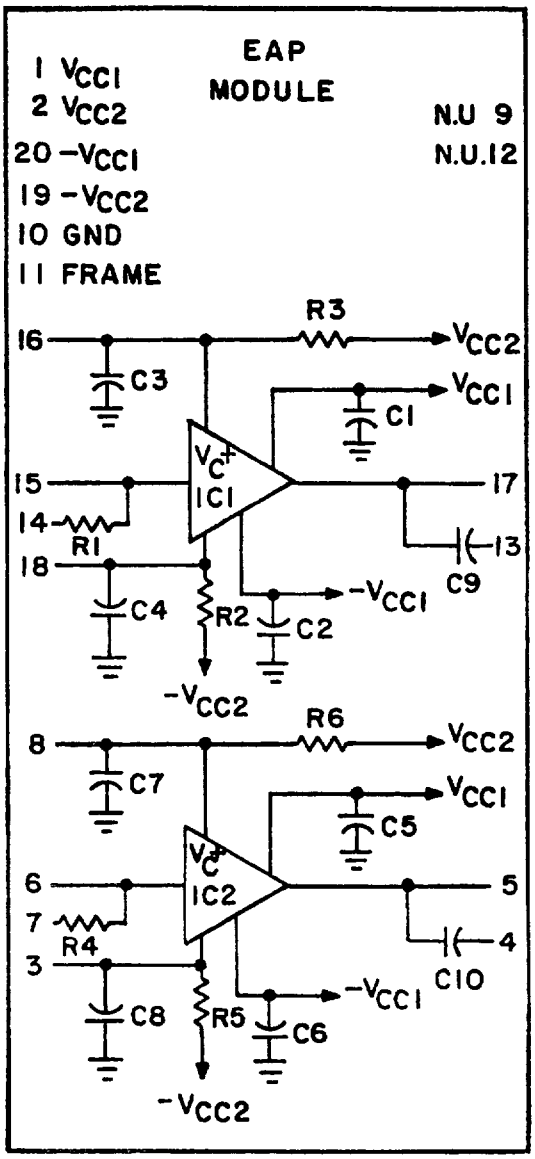

WARNING

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the function switch of the megohm bridge at "discharge" before connecting or disconnecting the test leads.


FIGURE 5. Isolation test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE IV. Power supply current test.

Test condition	Parameter	Initial limits 25°C ±5°C ambient		Unit	Test figure
		Min	Max		
C1	Power supply current, positive	1	60	mA	6
C2	Power supply current, negative	1	60	mA	6

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:53Z
Check the source to verify that this is the current version before use.

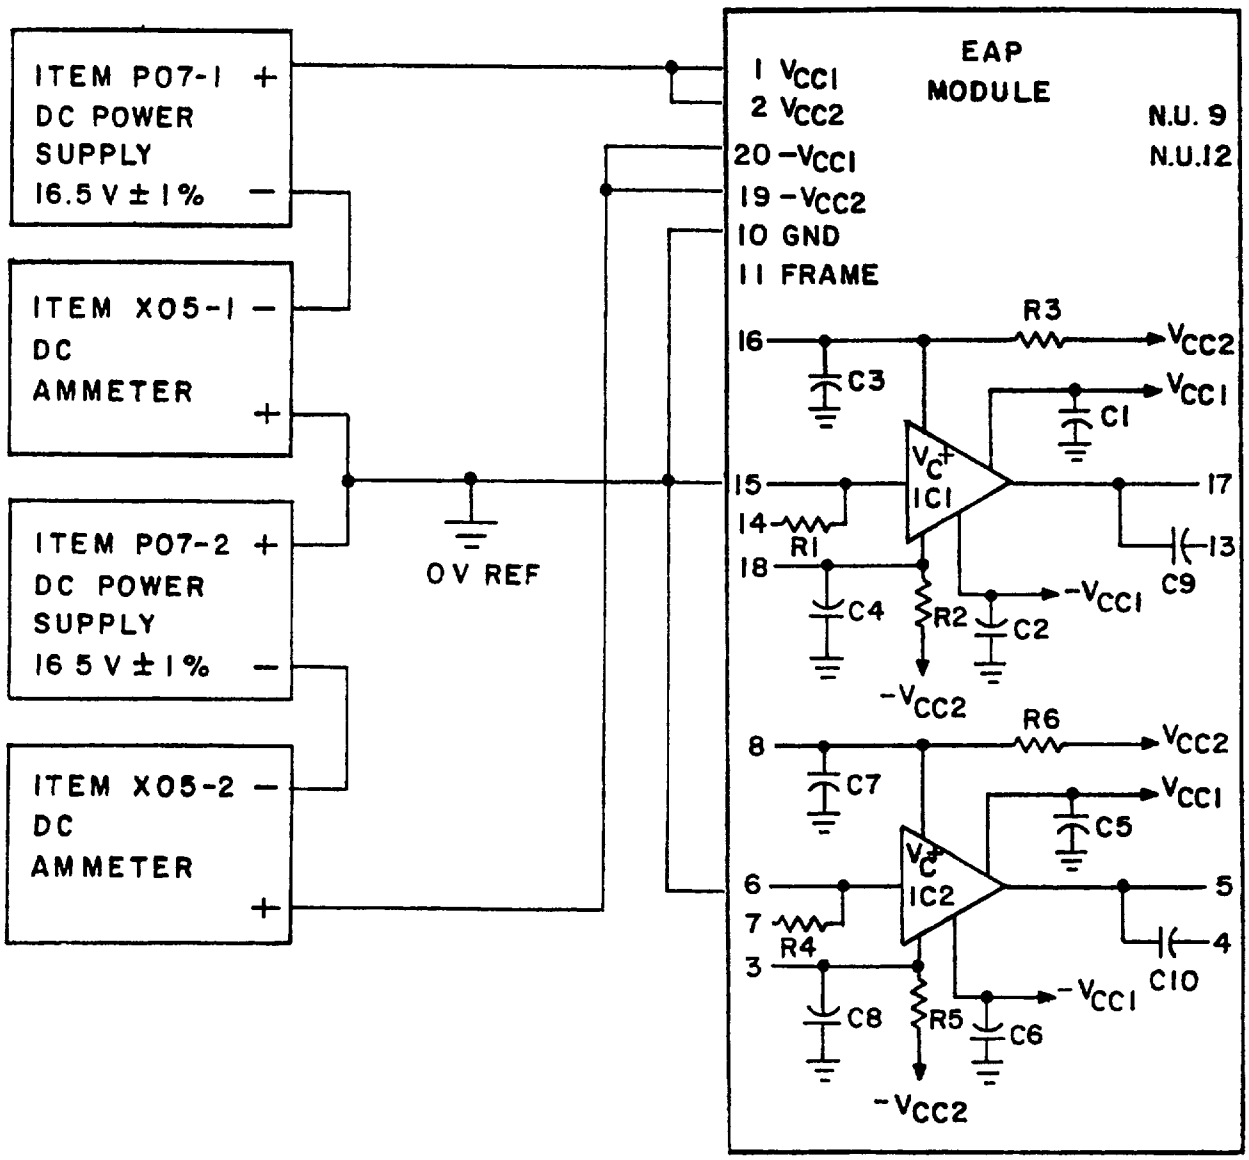

NOTES:
1. Read item X05-1 for test condition C1 and item X05-2 for test condition C2.
2. Since items X05-1 and X05-2 are not used simultaneously, only one item X05 is required.


FIGURE 6. Power supply current test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE V. Output offset voltage test.

Test condition	Parameter	Connect	Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	Min	Max		
D1	Output offset voltage	17	-16.5	16.5	mV	7
D2	Output offset voltage	5	-16.5	16.5	mV	7

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:53Z
Check the source to verify that this is the current version before use.

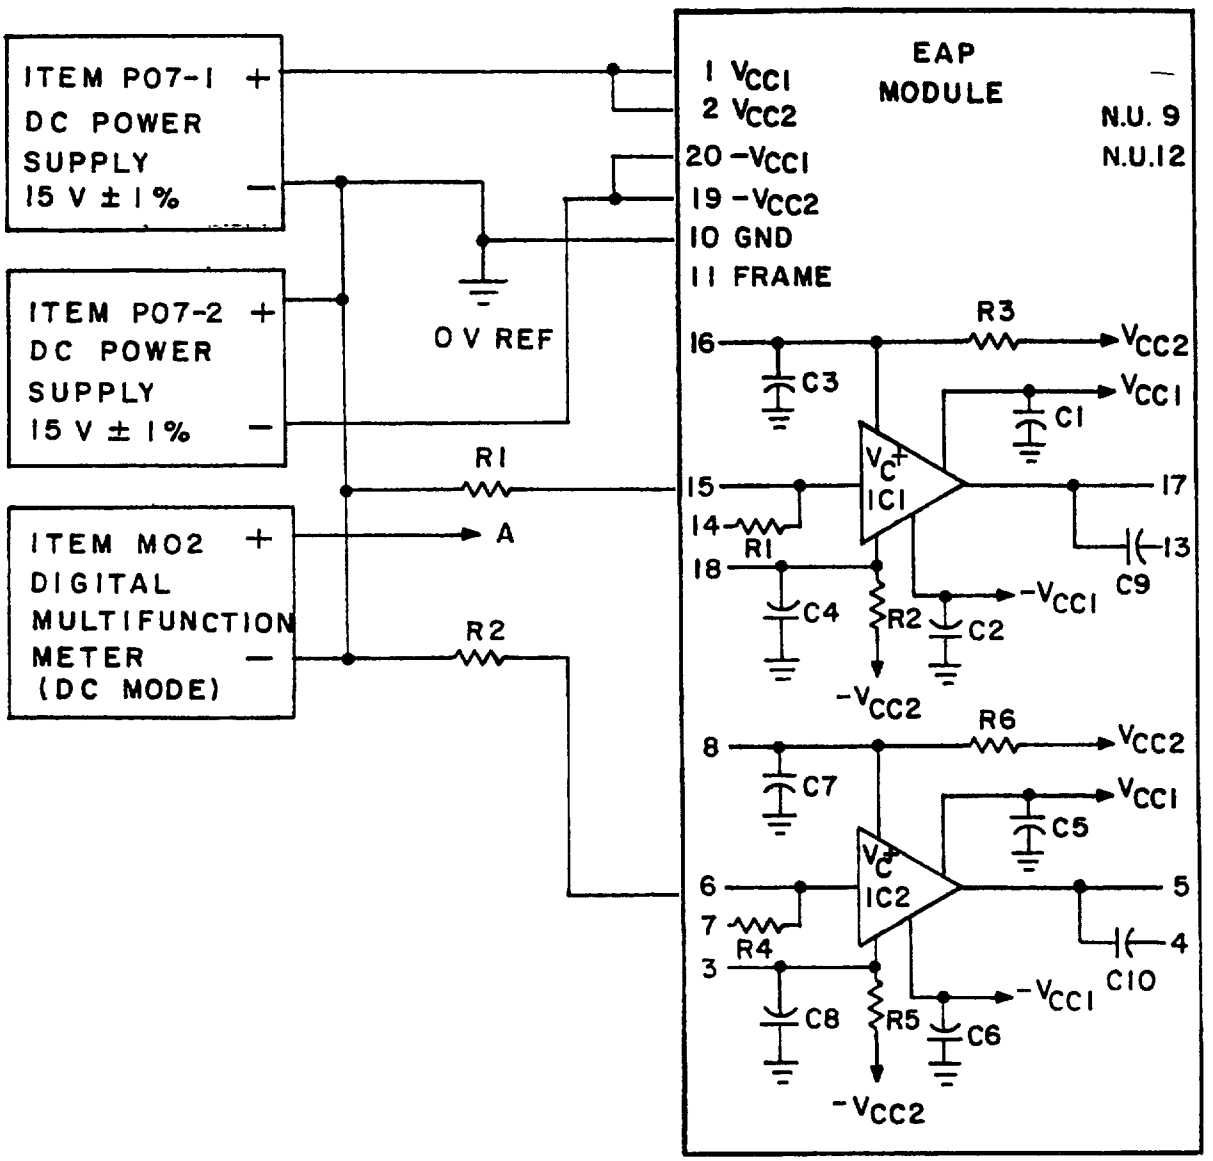

NOTE: R1 = R2 = 100 kΩ ±5%, 1/8 W.

FIGURE 7. Output offset voltage test circuit for table V.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE VI. Functional gain check test. 1/

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
E1	Functional gain check	15	17	2.85	3.03	V	8
E2	Functional gain check	6	5	2.85	3.03	V	8

1/ Gain = $\frac{\text{Reading on item M02}}{3.00}$

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

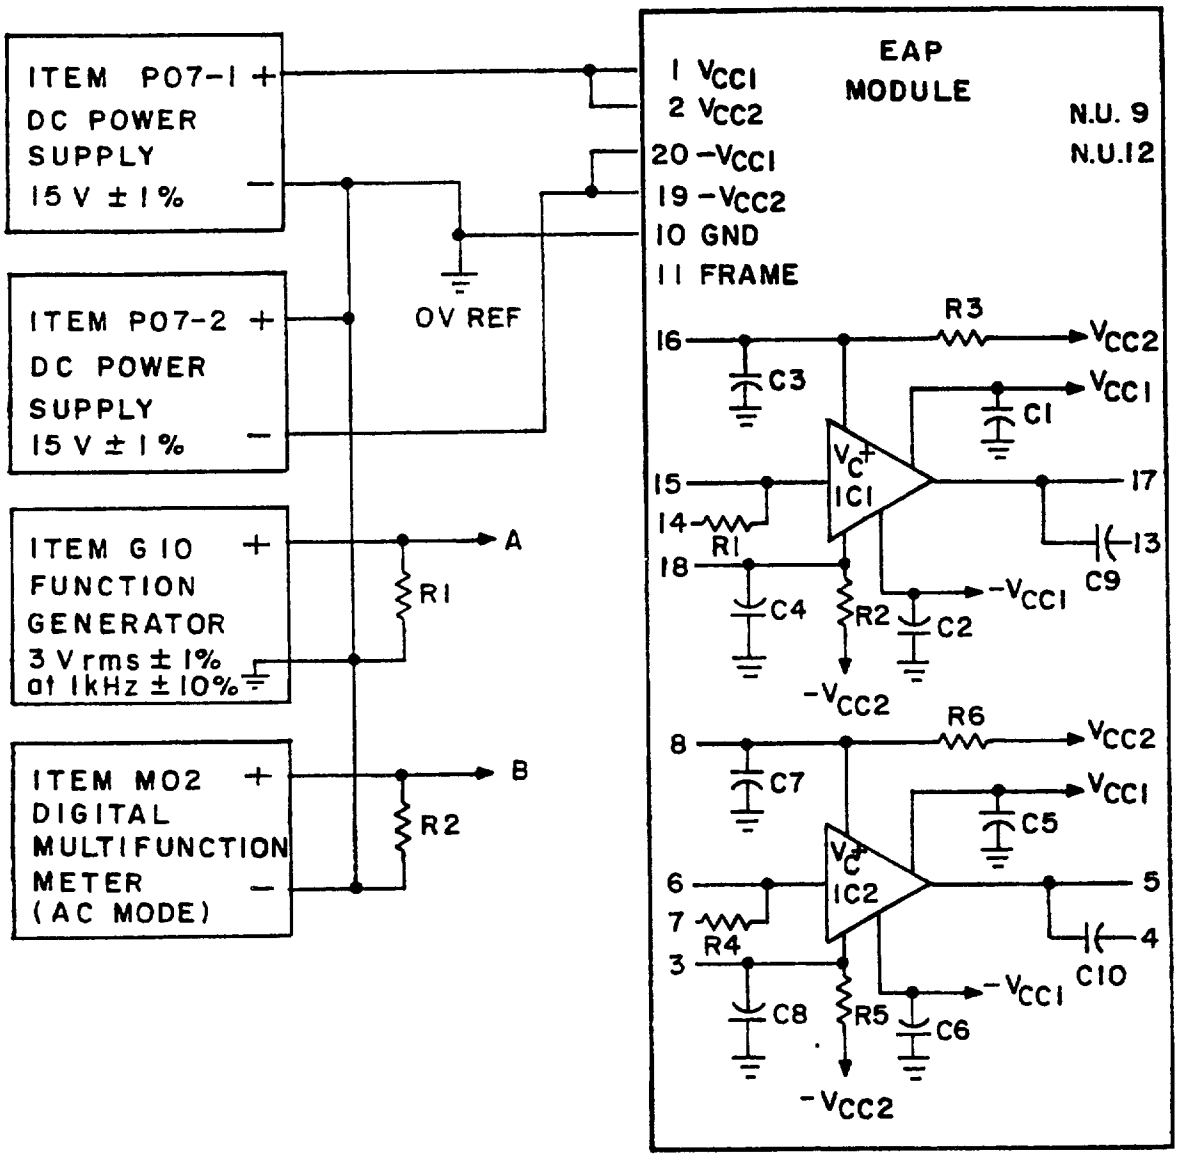

NOTES:
1. R1 = 50Ω ±5%, 1/4 W.
2. R2 = 1 kΩ ±5%, 1/8 W.

FIGURE 8. Functional gain check test circuit for table VI.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:53Z
Check the source to verify that this is the current version before use.


TABLE VII. Full power bandwidth check test. 1/

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
F1	Full power bandwidth check	15	17	0	60	ns	9, 10
F2	Full power bandwidth check	6	5	0	60	ns	9, 10

1/ Full power bandwidth = $\frac{\text{Slew rate}}{2\pi V_p} = \frac{1.8}{2\pi t_s}$

where V_p = maximum peak value of a sinusoidal output amplitude.


Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:53Z
Check the source to verify that this is the current version before use.

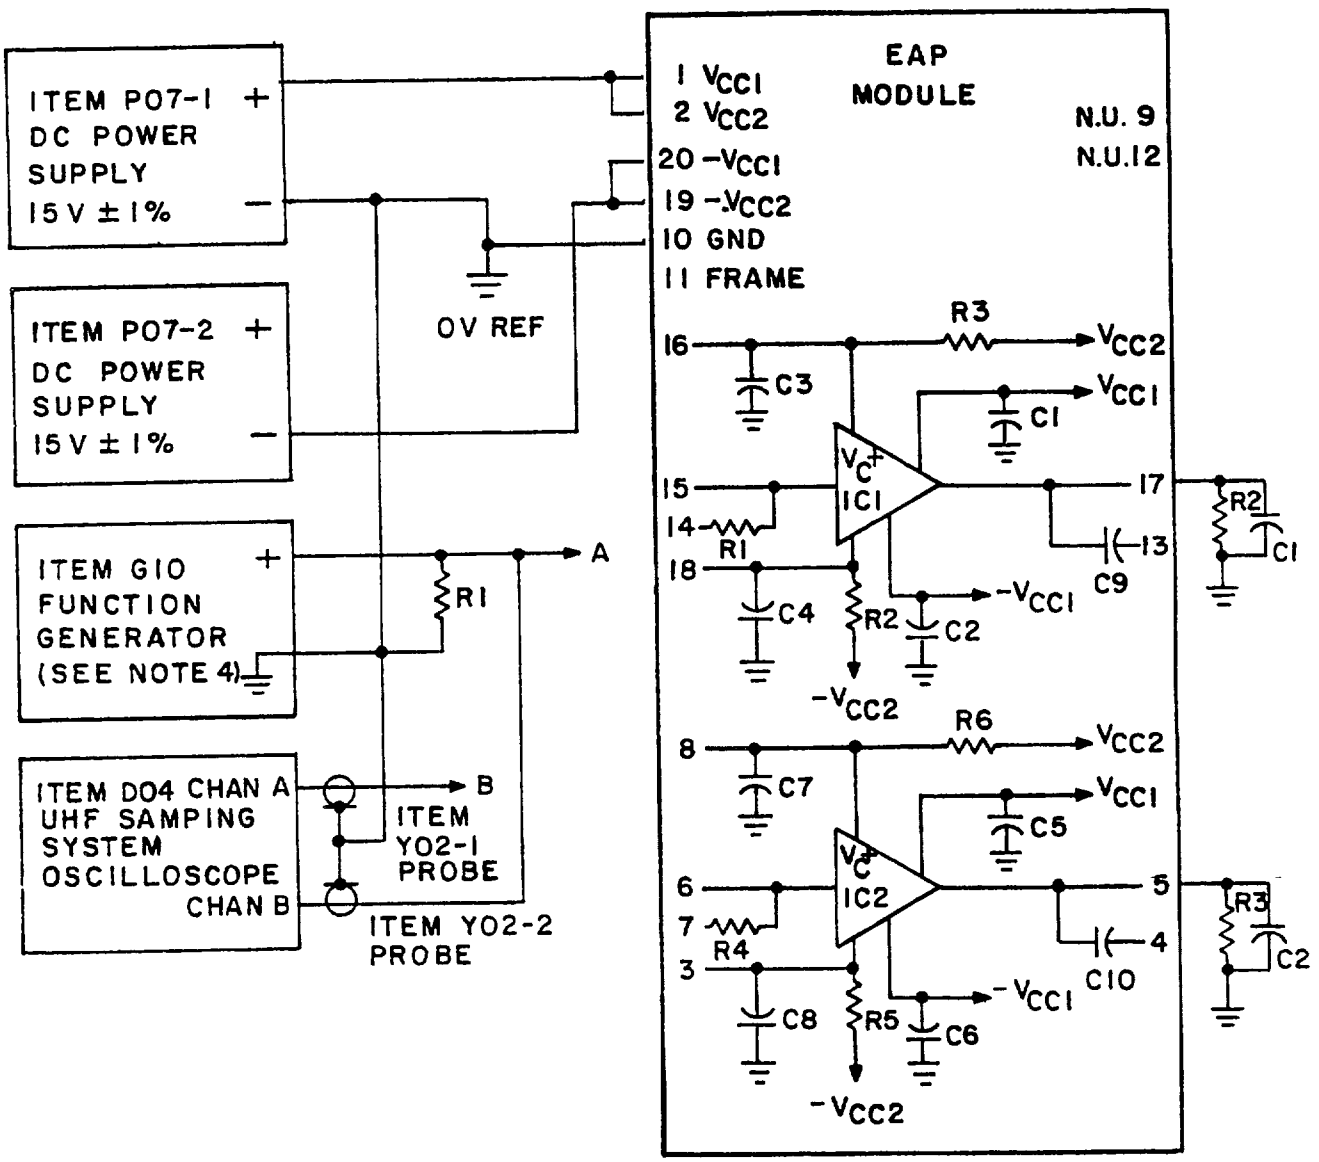

NOTES:
1. R1 = 600Ω ±5%, 1/2 W.
2. R2 = R3 = 1 kΩ ±1%, 1/2 W.
3. C1 = C2 = 200 pF ±10%, 50 V dc.
4. Set item G10 to give an output waveform as shown on figure 10.

FIGURE 9. Full power bandwidth check test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

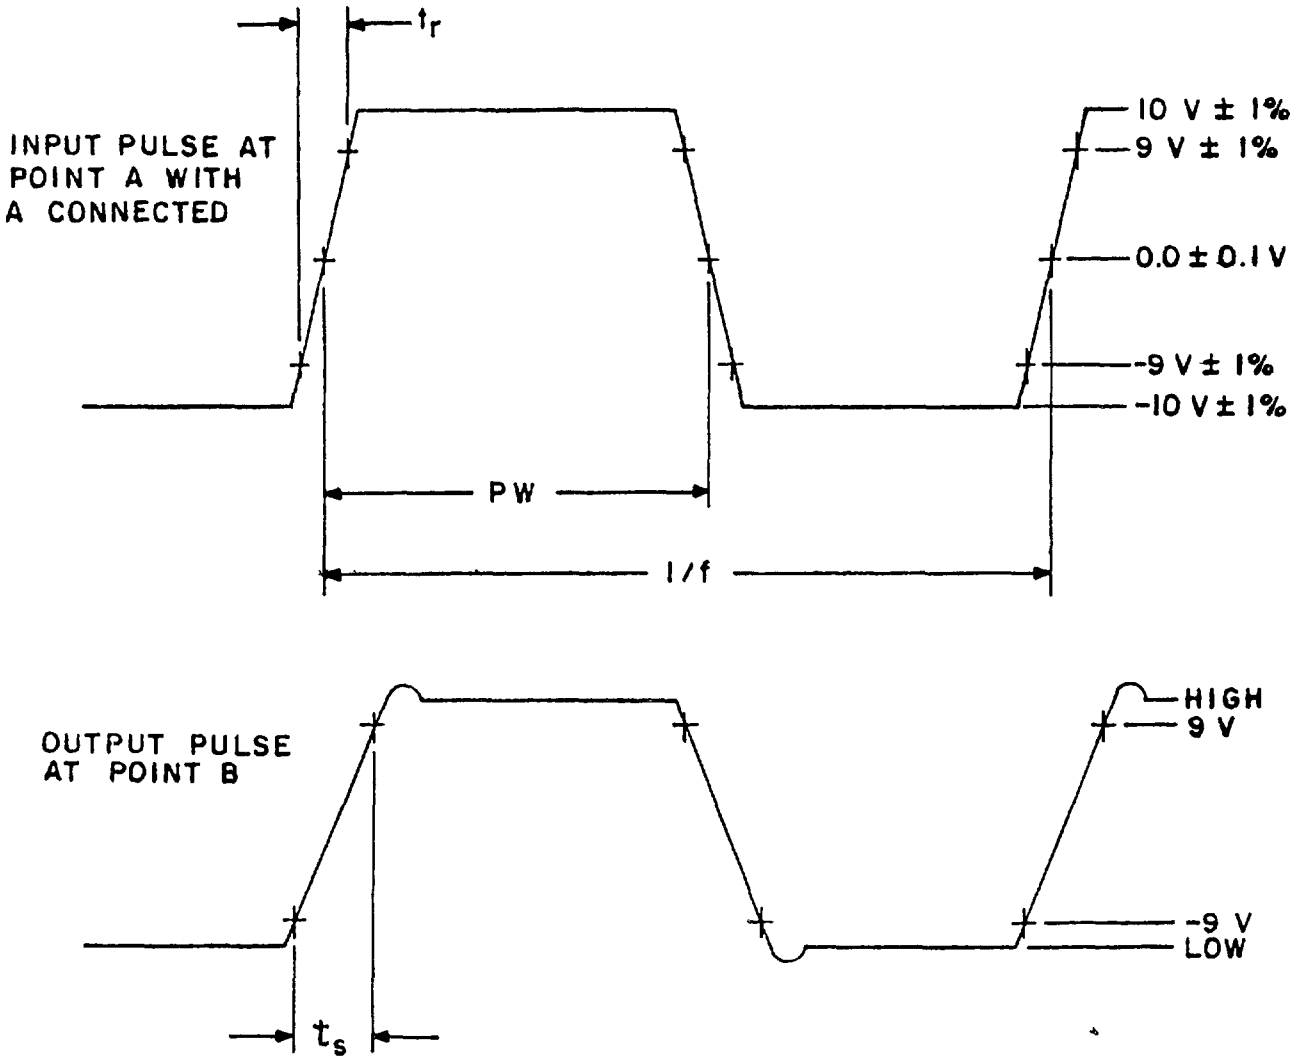

NOTES:
1. Input pulse parameters:
   t_r = ≤ 25 ns.
   f = 500 kHz ±20%.
   PW = 0.75 ±0.25 µs.
2. t_s = shall meet the limits in table VII.


FIGURE 10. Full power bandwidth check test circuit waveforms for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE VIII. Output distortion test.

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
G1	Output distortion (5.3 V rms)	15	17	0.0	1.0	%	11
G2	" (5.3 V rms)	6	5	"	"	"	"
G3	" (7.07 V rms)	15	17	"	"	"	"
G4	" (7.07 V rms)	6	5	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

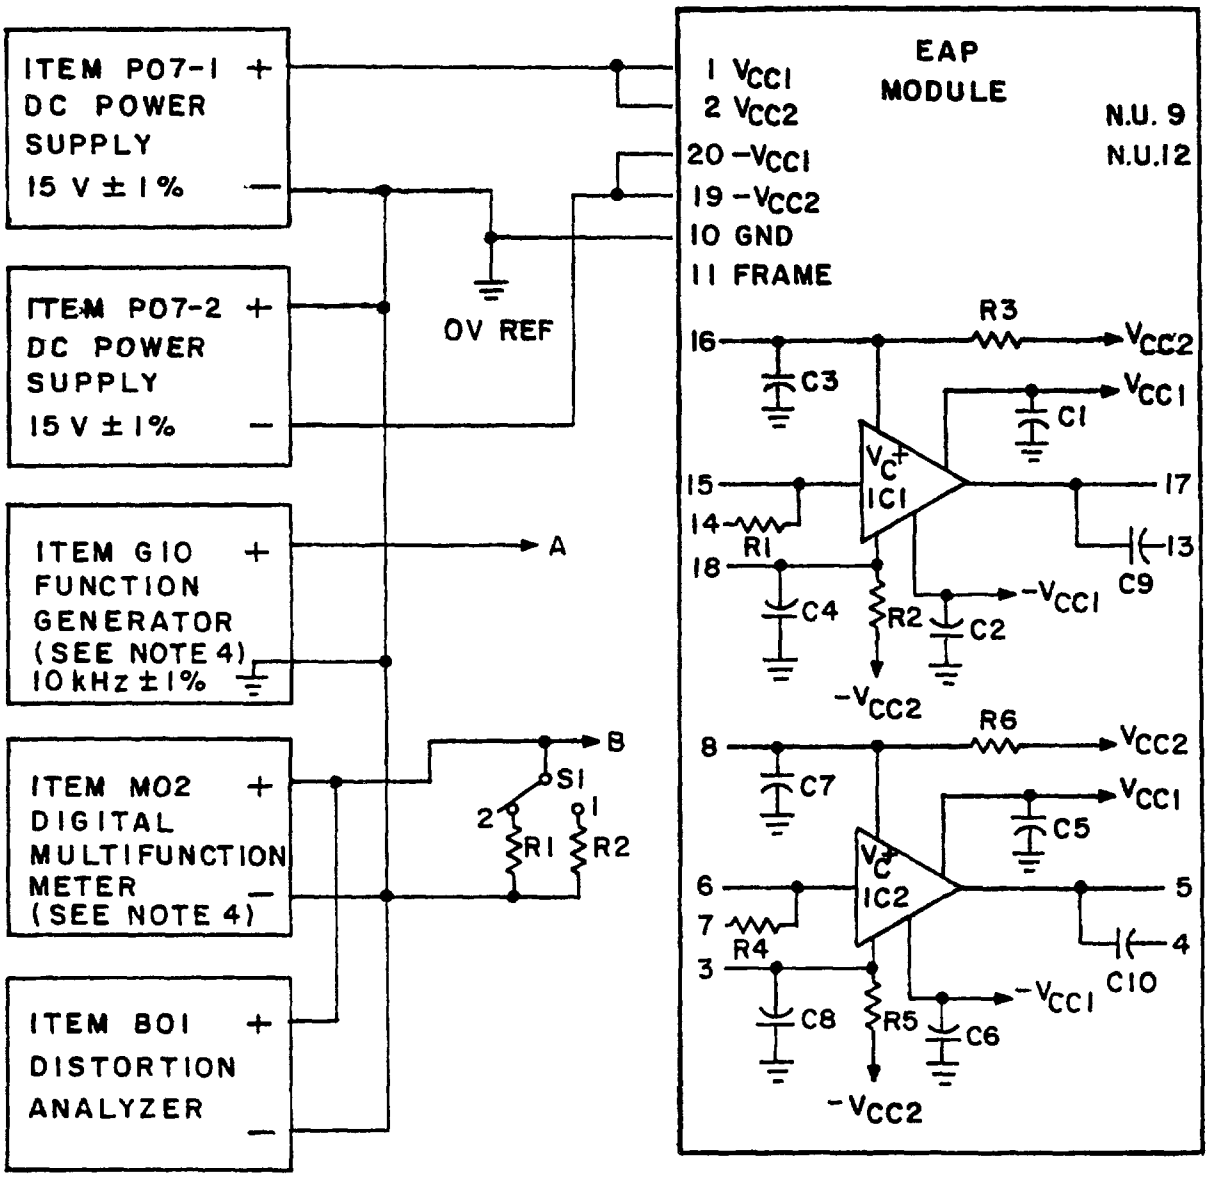

NOTES:
1. R1 = 100Ω ±1%, 1/2 W.
2. R2 = 1 kΩ ±1%, 1/4 W.
3. S1 = SPDT switch.
4. For test conditions G1 and G2, place switch (S1) in position 2 and adjust item G10 amplitude until item M02 reads 5.3 V rms ±1%. For test conditions G3 and G4 place switch (S1) in position 1 and adjust item G10 amplitude until item M02 reads 7.07 V rms ±1%. The reading on item B01 at that instant shall meet the limits specified in table VII.

FIGURE 11. Output distortion test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE IX. Resistance test.

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
H1	R3 Resistance	16	2	90	115	Ω	12
H2	R2 "	18	19	"	"	"	"
H3	R6 "	8	2	"	"	"	"
H4	R5 "	3	19	"	"	"	"
H5	R1 "	14	15	900	1150	"	"
H6	R4 "	7	6	900	1150	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

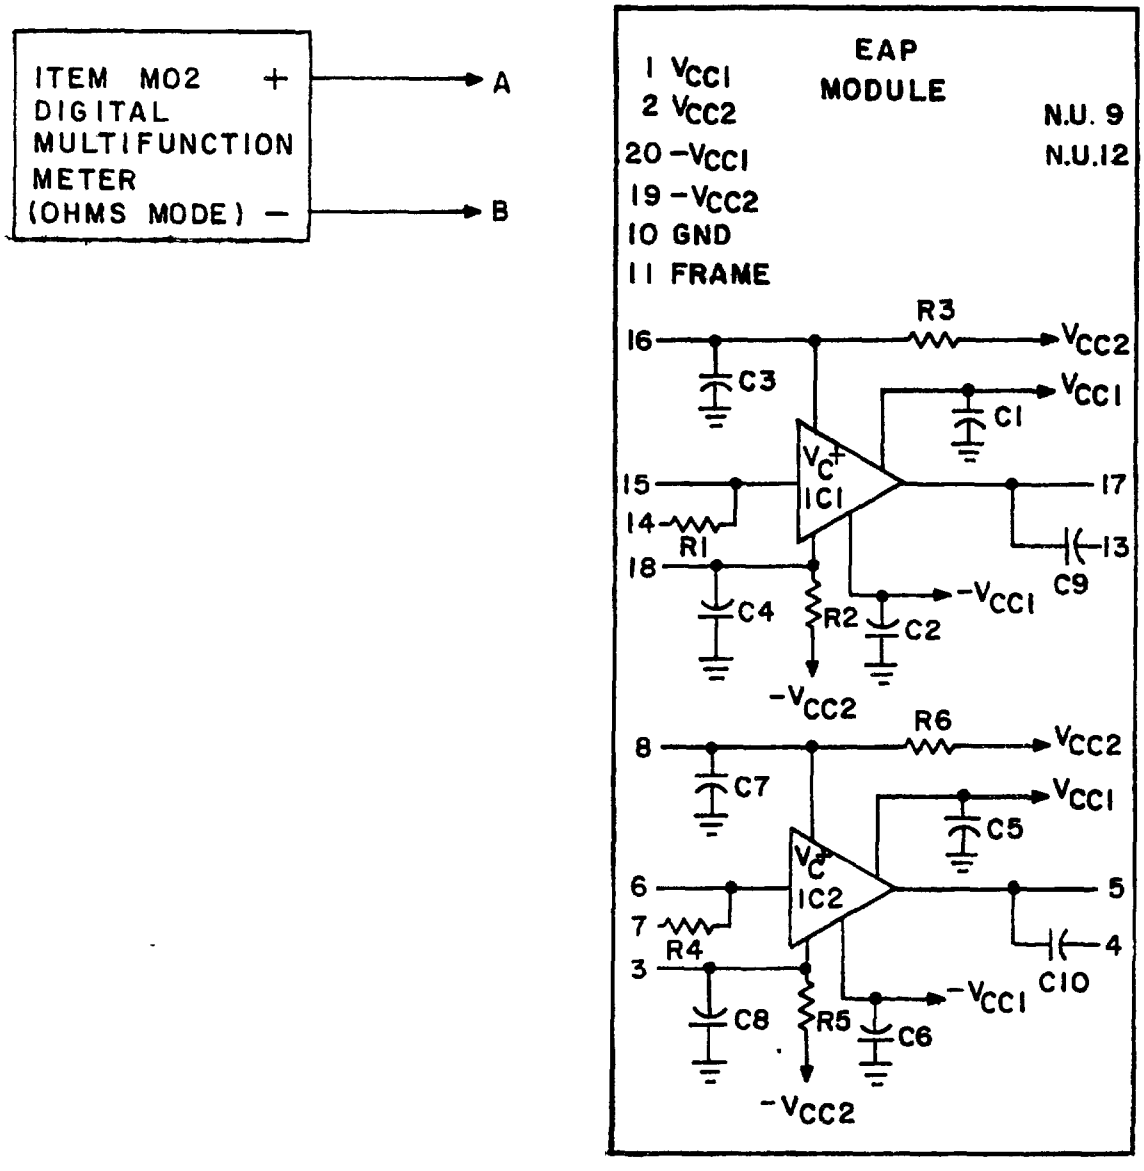



FIGURE 12. Resistance test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE X. Power supply filter capacitance and capacitance test.

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
J1	Power supply filter capacitance C3 + C7	16	10	0.18	0.22	µF	13
J2	Power supply filter capacitance C4 + C8	18	"	"	"	"	"
J3	Power supply filter capacitance C1 + C5	1	"	"	"	"	"
J4	Power suppy filter capacitance C2 + C6	20	"	"	"	"	"
J5	Capacitance C9	17	13	0.90	1.10	"	"
J6	Capacitance C10	5	4	0.90	1.10	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:53Z
Check the source to verify that this is the current version before use.

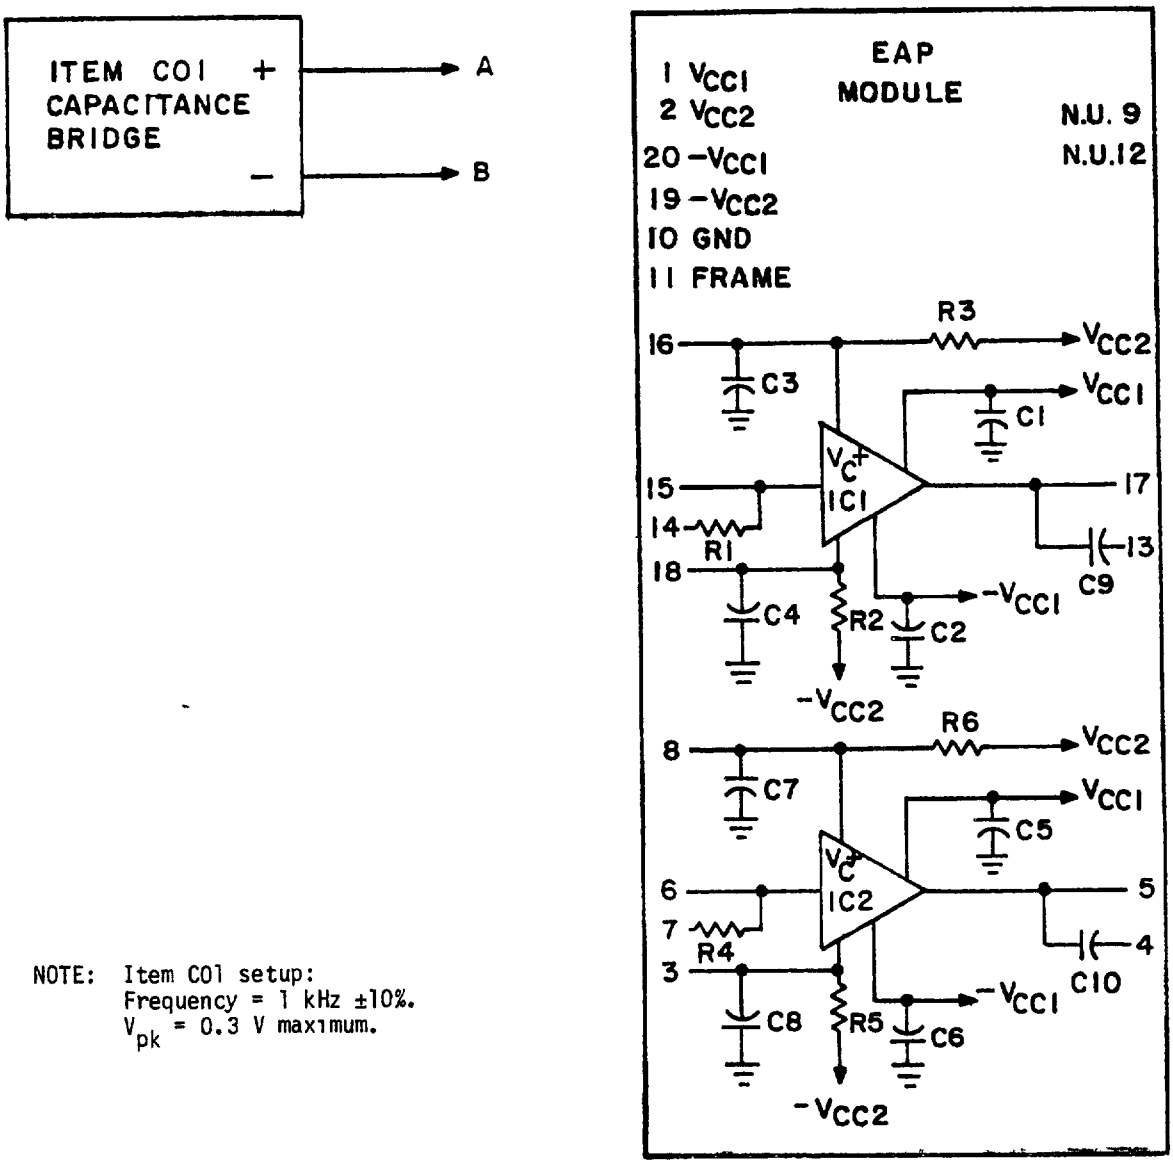

NOTE: Item C01 setup:
Frequency = 1 kHz ±10%.
V_{pk} = 0.3 V maximum.

FIGURE 13. Power supply filter capacitance and capacitance test circuit for table X.


Source: https://assist.dla.mil Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE XI. Oscillation test. 1/

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
K1	Oscillation (capacitance load)	15	17	0	600	mV_{p-p}	14
K2	Oscillation (capacitance load)	6	5	0	600	mV_{p-p}	14

1/ Oscillation is defined as any signal on the output at a frequency other than the 1 kHz being input (usually the oscillation will be much greater than 1 kHz).

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:53Z
Check the source to verify that this is the current version before use.

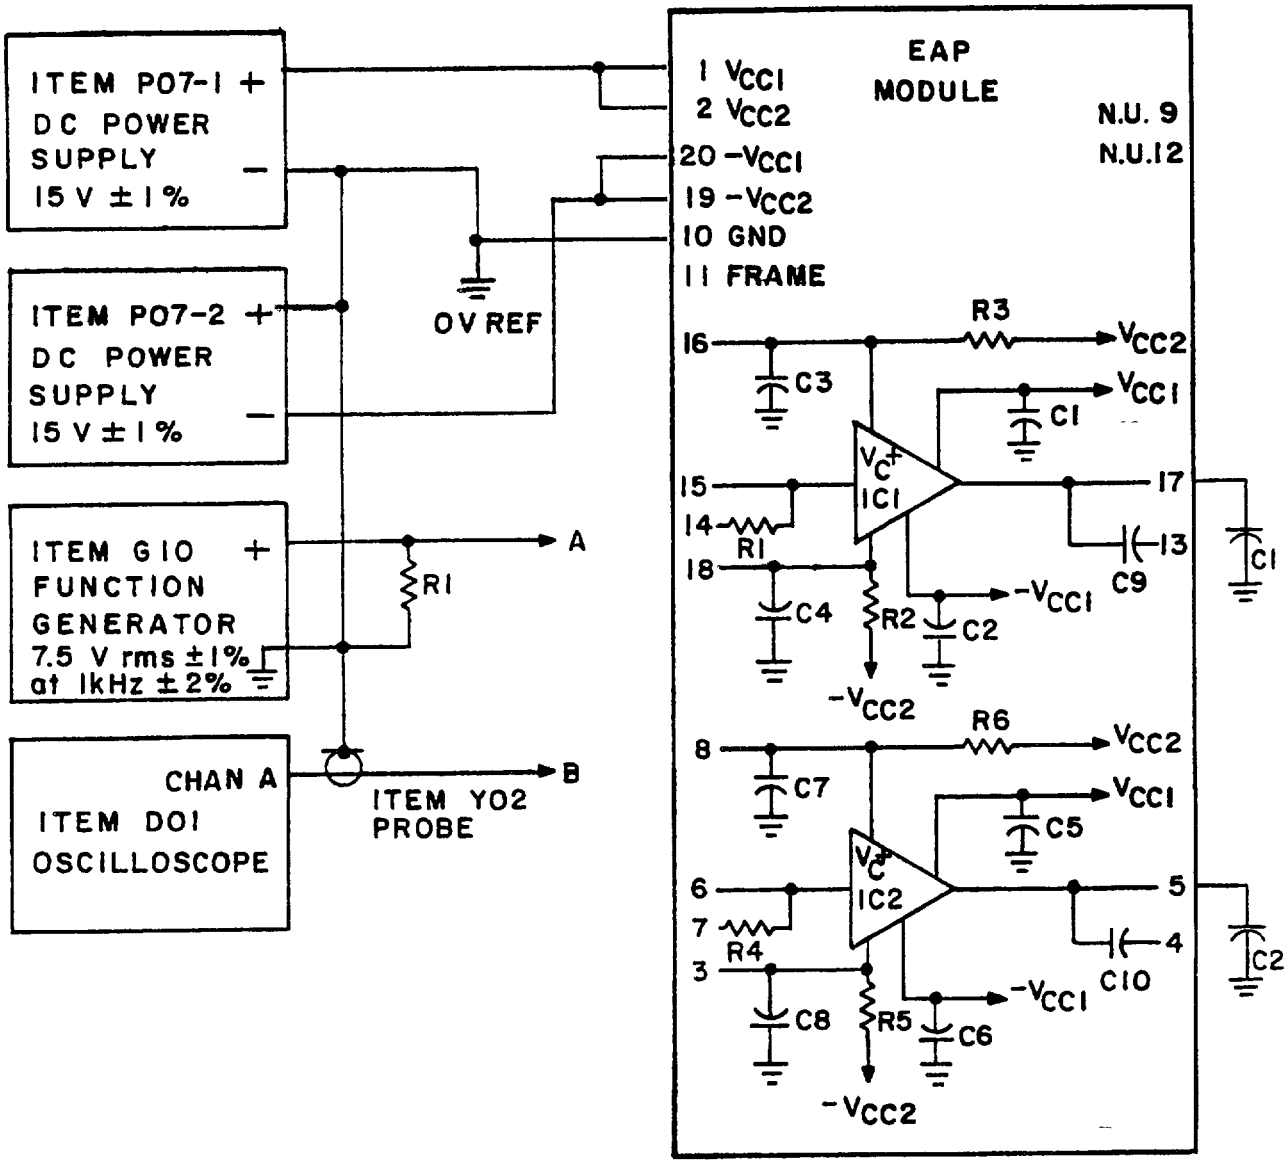

NOTES:
1. R1 = 600Ω ±5%, 1/4 W.
2. C1 = C2 = 0.01 µF ±5%, 50 V dc, glass dielectric.
3. Vary the item D01 horizontal sweep rate to check for oscillations. Any oscillations shall meet the limits of table XI.


FIGURE 14. Oscillation test circuit for table XI.


Source: https://assist.dla.mil - Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE XII. Continuity test.

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
L	Continuity	11	Frame	0	1	Ω	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

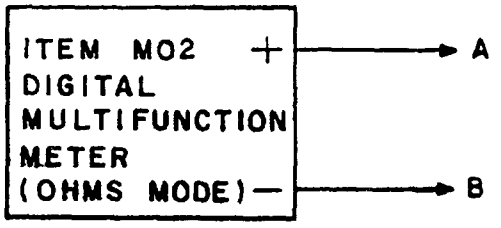

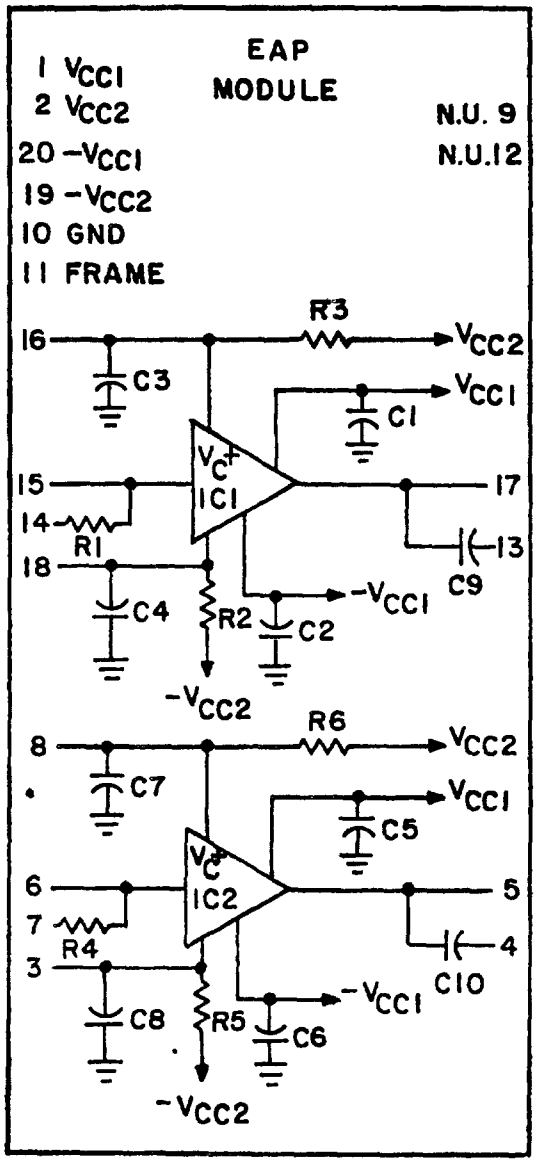

NOTE: Penetrate the anodized finish of the module frame with a sharply pointed probe connected to the negative terminal.


FIGURE 15. Continuity test circuit for table XII.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:53Z
Check the source to verify that this is the current version before use.

TABLE XIII. Phase shift test.

Test condition	Parameter	Connect		Initial limits 25°C ±5°C ambient		Unit	Test figure
				Min	Max		
M1	Phase shift (500 Hz)	15	17	-1	1	degree	16
M2	" (500 Hz)	6	5	"	"	"	"
M3	" (2000 Hz)	15	17	"	"	"	"
M4	" (2000 Hz)	6	5	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

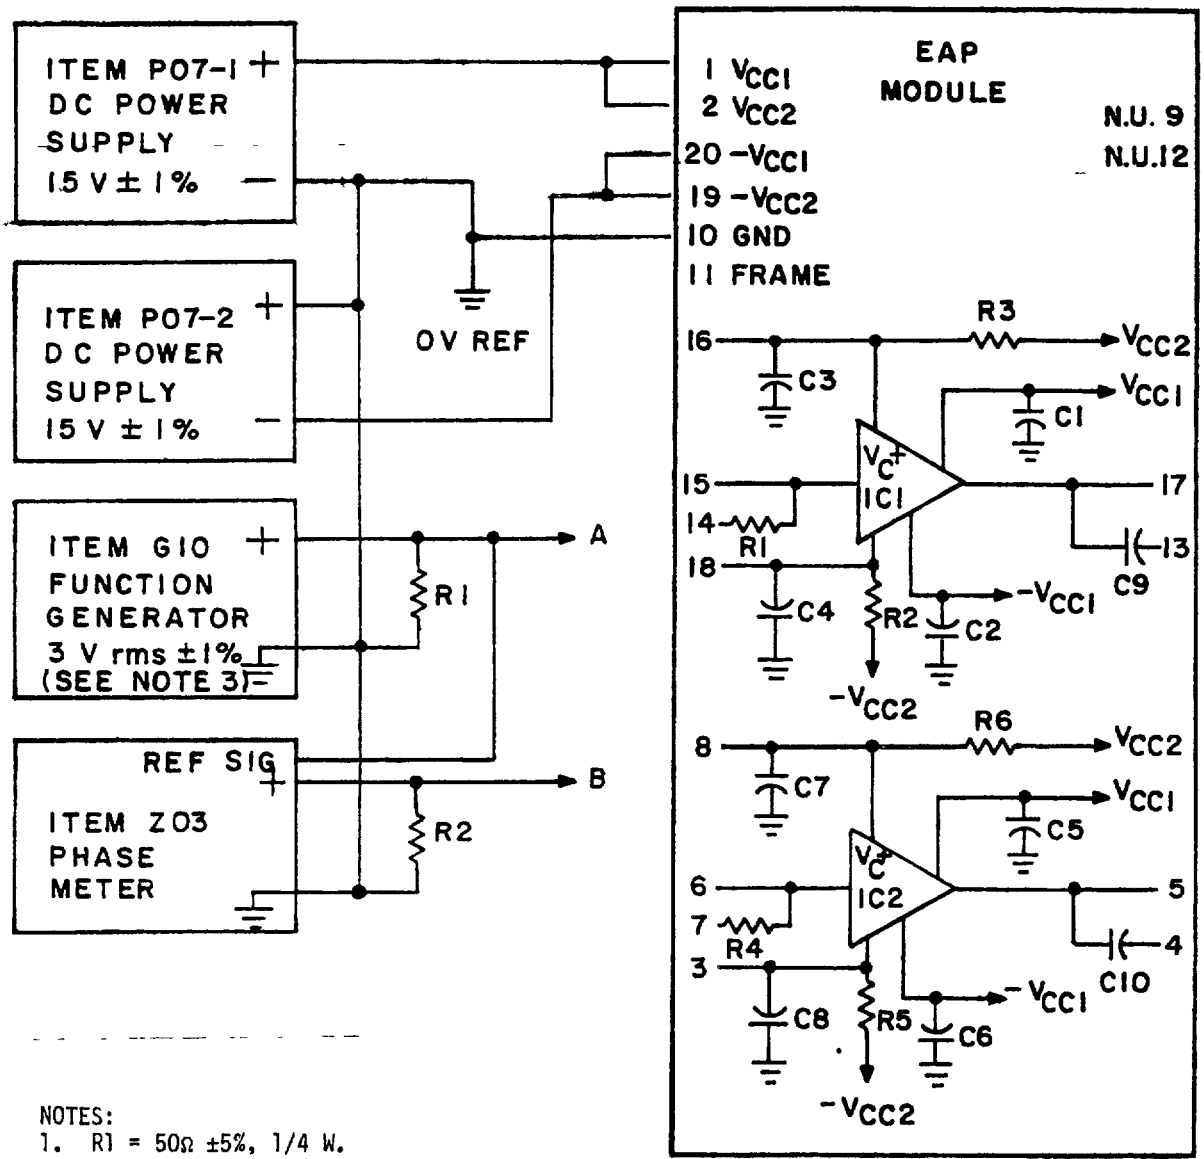

NOTES:
1. R1 = 50Ω ±5%, 1/4 W.
2. R2 = 1 kΩ ±1%, 1/8 W.
3. Set item G10 at the frequency of 500 Hz for test conditions M1 and M2 and 2 kHz for test conditions M3 and M4.

FIGURE 16. Phase shift test circuit for table XIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-M-28787/340(EC)	Modules, Standard Electronic, Amplifier, Analog, Key Code EAP

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2022640-20T17:53Z
Check the source to verify that this is the current version before use.