MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

RELAY, LATCHING, KEY CODE MFD

This amendment forms a part of MIL-M-28787/343(EC), dated 4 February 1983, and is approved for use withfn the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test condition J1-J16, Initial Max columns: Delete "50" (two places) and substitute "65" (two places).

PAGE 5

4.5.3, second sentence: Delete and substitute "The module shall be operated for 100 000 operations as shown on figure 3."

PAGE 8

FIGURE 3: Delete and substitute new figure 3 as printed on page 2 of this amendment.

PAGE 12

* FIGURE 5: Delete and substitute new figure 5 as printed on page 3 of this amendment.

PAGE 14

* FIGURE 6: Delete and substitute new figure 6 as printed on page 4 of this amendment.

PAGE 23

FIGURE 11: Delete and substitute new figure 11 as printed on page 5 of this amendment.

PAGE 24

TABLE X, Test conditions J1 through J16, Max column: Delete "50" and substitute "65".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:54Z
Check the source to verify that this is the current version before use.


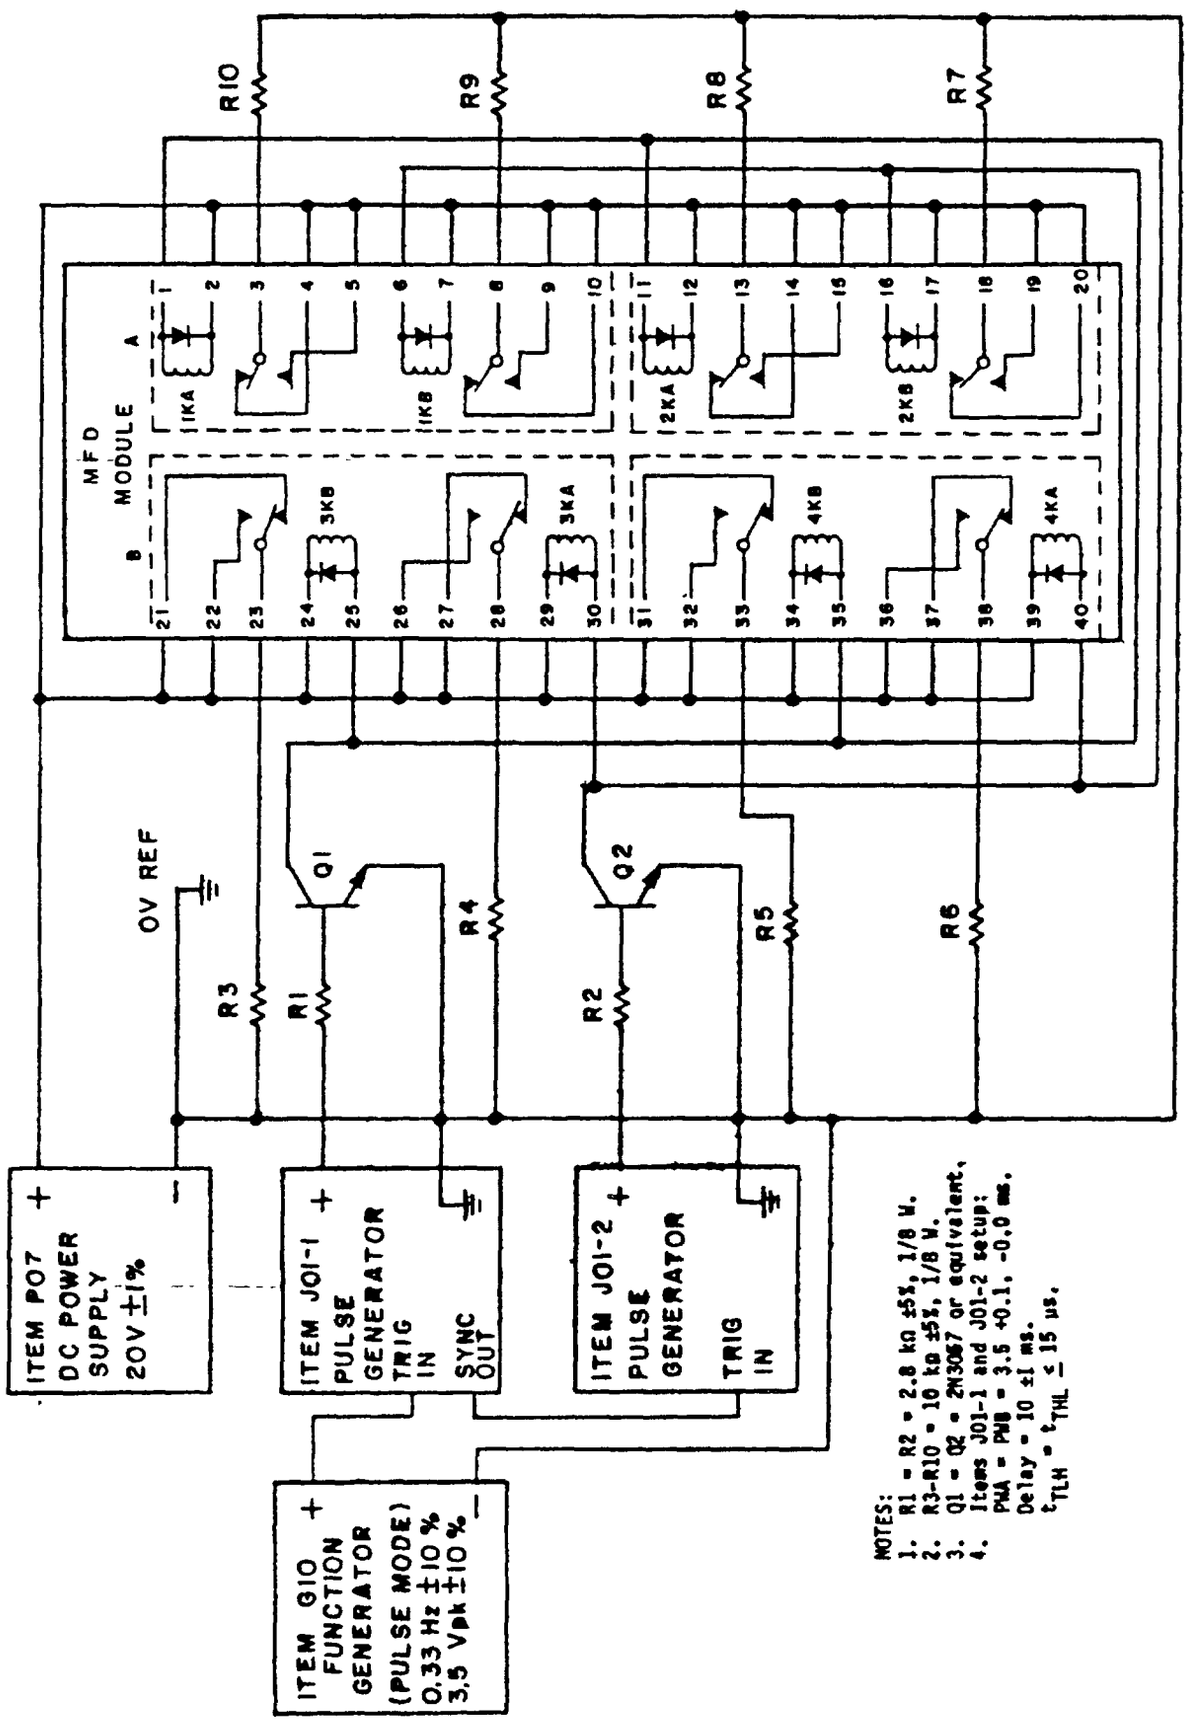


FIGURE 3. Component temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:54Z
Check the source to verify that this is the current version before use.

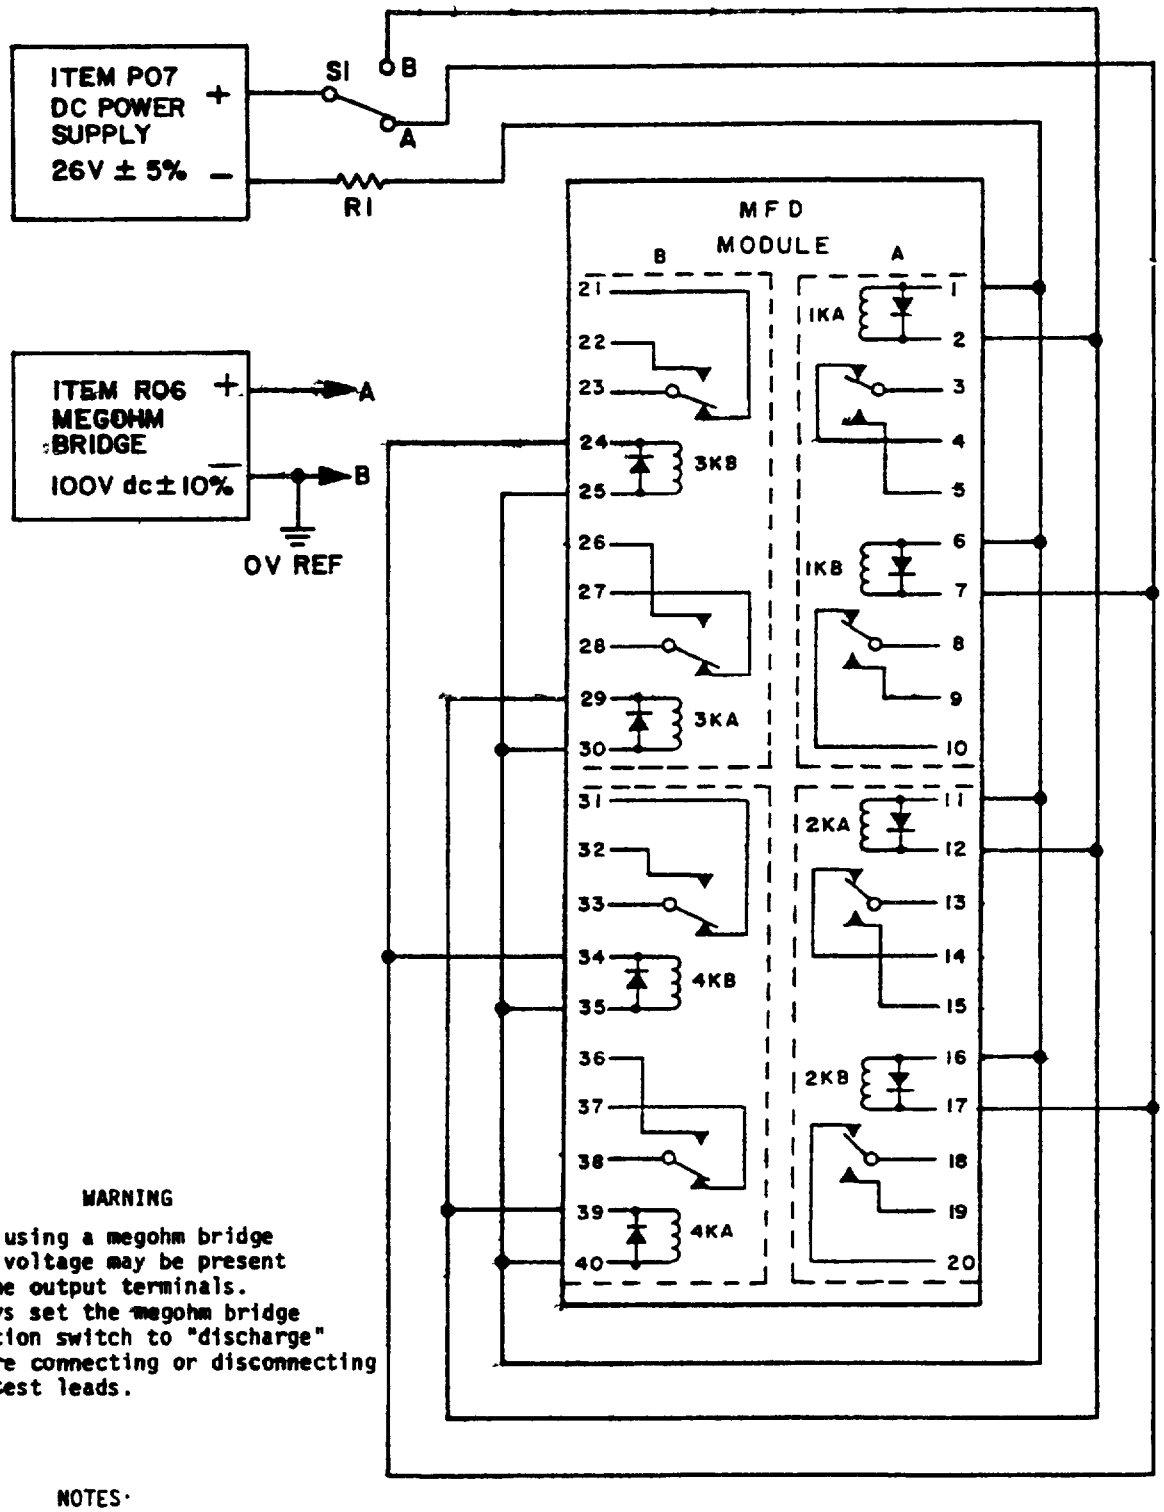

WARNING


When using a megohm bridge high voltage may be present at the output terminals. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

NOTES:

1. R1 = 100Ω ±5%, 1/10 W.
2. S1 = SPDT switch.
3. Place switch S1 in position A for test conditions B1 through B8 and in position B for test conditions B9 through B16.

FIGURE 5. Resistance (open contact) test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 20260-20T17:54Z
Check the source to verify that this is the current version before use.

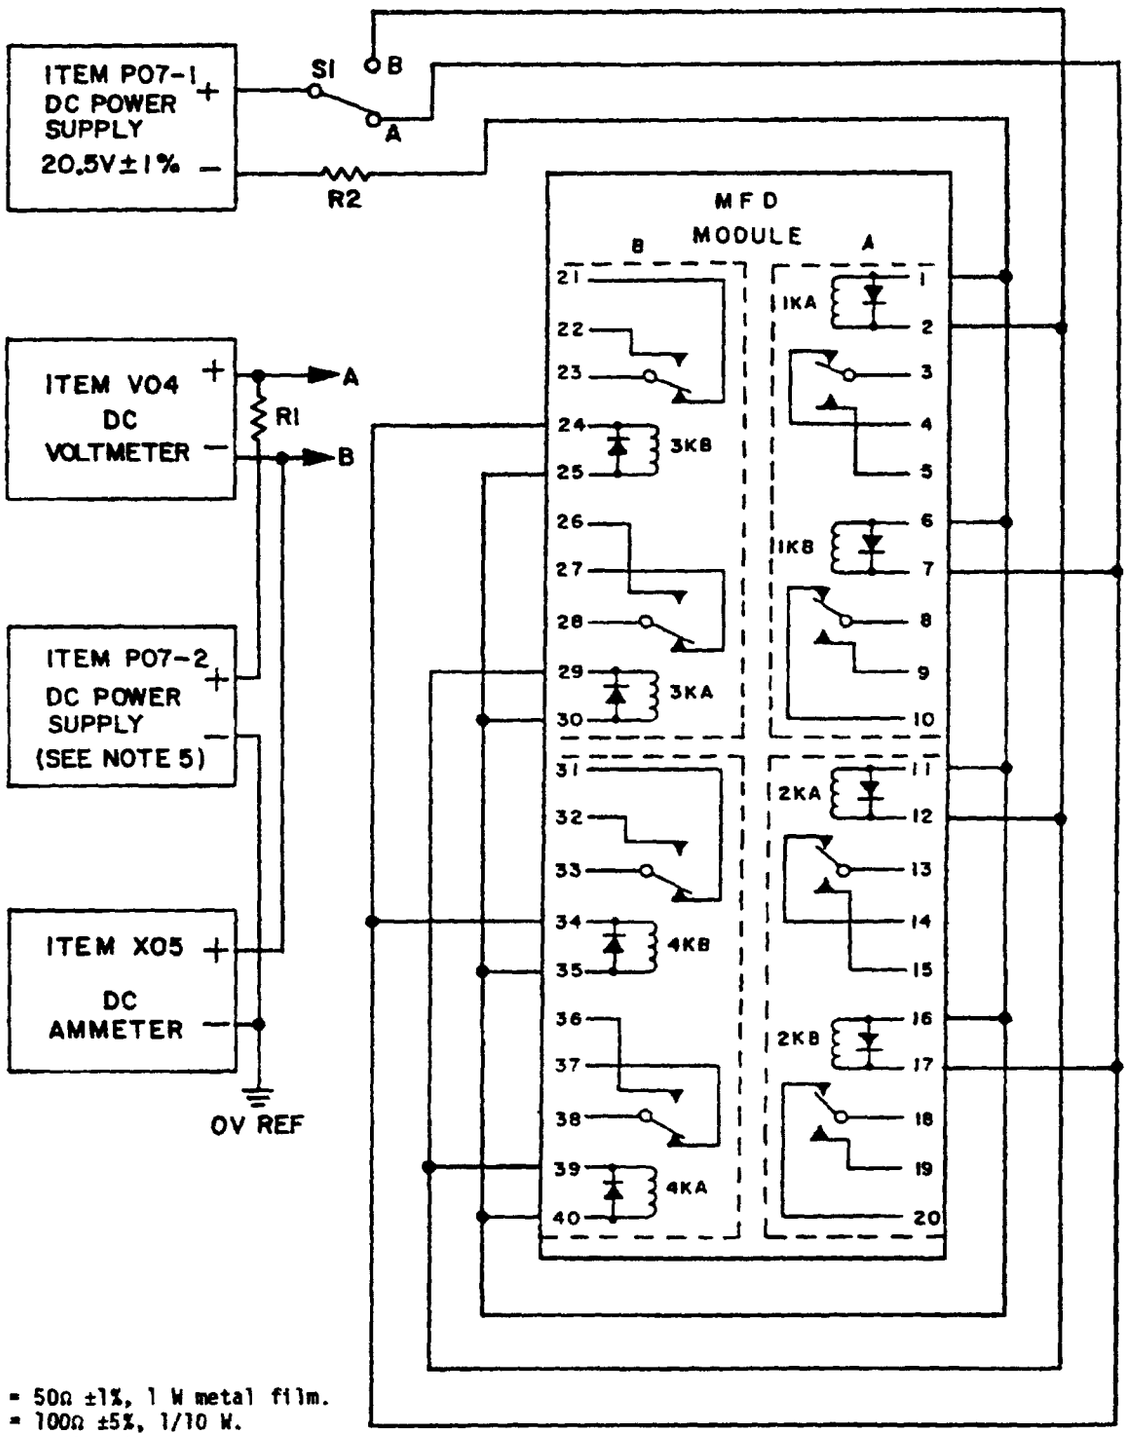

NOTES:

1. R1 = 50Ω ±1%, 1 W metal film.
2. R2 = 100Ω ±5%, 1/10 W.
3. S1 = SPDT switch.
4. Place switch S1 in position A for test conditions C1-C8 and in position B for test conditions C9-C16.
5. Adjust item P07-2 until item X05 reads 100 ±1 mA (approximately 5 V).
6. Voltage sensing leads from item V04 shall be connected directly to the module pins (within 0.5 inch (12.7 mm) maximum) to exclude the resistance of the current carrying leads from item P07-2.

FIGURE 6. Resistance (closed contact) check test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:54Z
Check the source to verify that this is the current version before use.

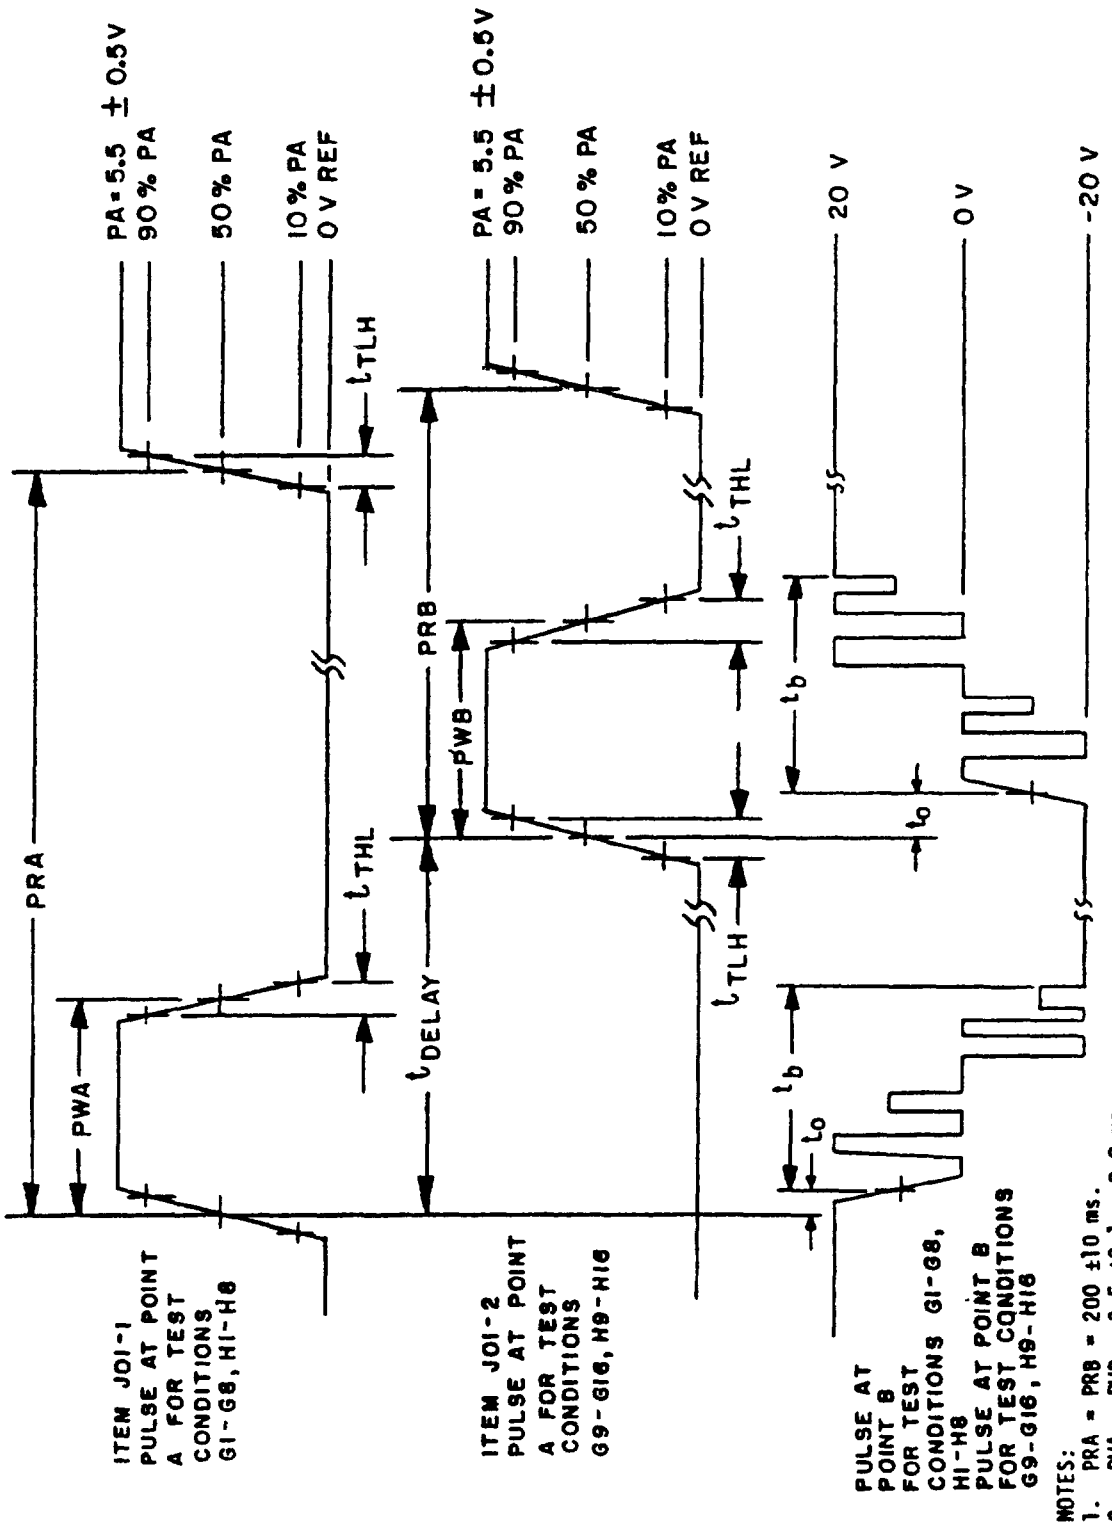


FIGURE 11. Operate time and contact bounce test circuit waveforms for tables XIII and IX.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:54Z
Check the source to verify that this is the current version before use.

MIL-M-28787/343(EC)
AMENDMENT 2

The margin of this amendment is marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment are made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N705)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:54Z
Check the source to verify that this is the current version before use.