INCH-POUND

MIL-DTL-83723/23D
23 May 2003
SUPERSEDING
MIL-C-83723/23C(USAF)
13 July 1976

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, CRIMP SOCKET CONTACTS), (SERIES II, CLASSES A, G, K, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-83723.

Inactive for new design, use MS3456 of MIL-DTL-5015

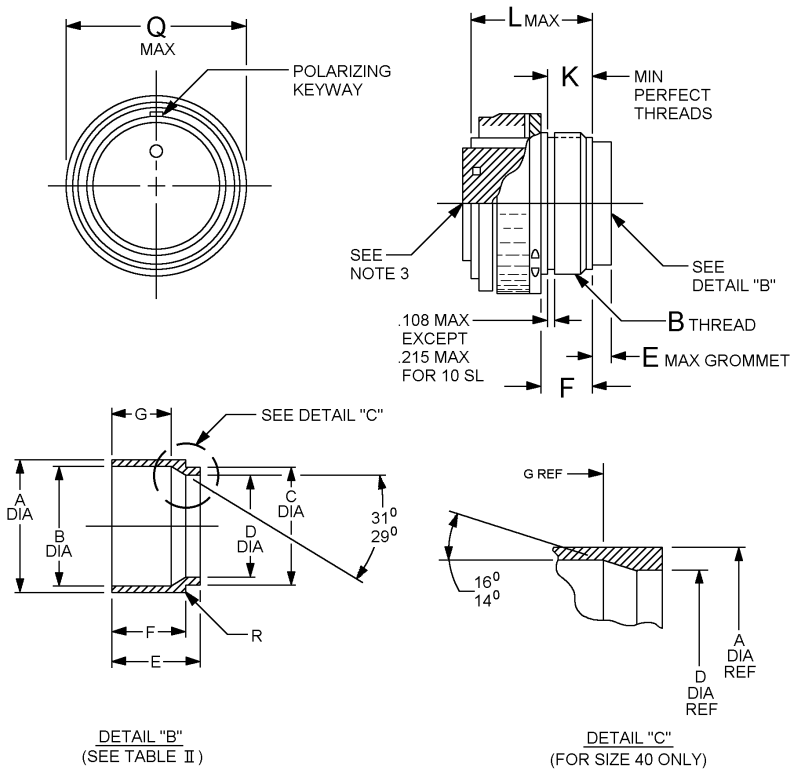

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Shell size	MIL-DTL-5015 Shell size	B thread	E max 1/	F	L max	Q max	K
08	8S	.4375-28 UNEF-2A	.400	.468 / .418	1.135	.760	
10	10S	.500-28 UNEF-2A	.400	.468 / .418	1.135	.880	
11	10SL	.5625-24 UNEF-2A	.400	.468 / .418	1.135	.880	
13	12S	.625-24 UNEF-2A	.400	.468 / .418	1.135	1.010	.375
12	12	.625-24 UNEF-2A	.317	.637 / .587	1.495	1.010	.375
15	14S	.750-20 UNEF-2A	400	.468 / .418	1.135	1.130	.375
14	14	.750-20 UNEF-2A	.317	.637 / .587	1.495	1.130	.375
17	16S	.875-20 UNEF-2A	.400	.468 / .418	1.135	1.250	.375
16	16	.875-20 UNEF-2A	.317	.637 / .587	1.495	1.250	.531
18	18	1.000-20 UNEF-2A	.380	.637 / .587	1.495	1.340	.531
20	20	1.125-18 UNEF-2A	.381	.621 / .571	1.495	1.469	.531
22	22	1.250-18 UNEF-2A	.381	.621 / .571	1.495	1.590	.531
24	24	1.375-18 UNEF-2A	.315	.637 / .587	1.556	1.719	.531
28	28	1.625-18 UNEF-2A	.315	.637 / .587	1.556	1.969	.531
32	32	1.875-16 UN-2A	.260	.665 / .614	1.620	2.219	.531
36	36	2.125-16 UN-2A	.260	.664 / .614	1.620	2.469	.531
40	40	2.375-16 UN-2A	.260	.669 / .619	1.620	2.728	.600

1/ When insulator arrangement sizes 18 thru 40 contain one or more size No. 0 contacts, E dimension will increase .150 max.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Shell size	A	B	C	D	E	F	G	R
	.281	.250	.245	.180	.427	.342	.286	
8S	.271	.237	.232	.167	.401	.326	.276	
	.340	.312	.298	.242	.420	.335	.272	
10S	.332	.299	.285	.229	.397	.322	.262	
	.409	.380	.378	.310	.430	.335	.237	
10SL	.401	.367	.365	.297	.407	.322	.227	
	.460	.432	.403	.355	.419	.340	.270	
12 & 12S	.452	.419	.390	.342	.396	.326	.260	
	.563	.518	.485	.448	.414	.339	.261	.040
14 & 14S	.550	.505	.472	.435	.391	.326	.251	.020
	.689	.644	.605	.574	.424	.339	.266	.040
16 & 16S	.676	.631	.592	.561	.401	.326	.256	.020
	.806	.760	.725	.690	.574	.449	.371	.060
18	.793	.747	.712	.677	.551	.436	.361	.040
	.941	.894	.863	.814	.573	.458	.385	.060
20	.928	.881	.850	.801	.550	.445	.375	.040
	1.059	.982	.973	.902	.551	.456	.389	.060
22	1.046	.969	.960	.889	.528	.443	.379	.040
	1.170	1.106	1.085	1.026	.547	.457	.385	.060
24	1.157	1.093	1.072	1.013	.524	.444	.375	.040
	1.401	1.330	1.245	1.185	.573	.458	.329	.060
28	1.388	1.317	1.232	1.172	.550	.445	.319	.040
	1.652	1.608	1.515	1.440	.544	.459	.316	.060
32	1.638	1.595	1.502	1.427	.521	.446	.306	.040
	1.860	1.796	1.751	1.653	.573	.453	.355	.060
36	1.847	1.783	1.739	1.640	.550	.450	.348	.040
	2.105	2.000		1.905	.823		.379	
40	2.092	1.989		1.892	.800		.279	

NOTES:
1. Dimensions are in inches.
2. All dimensions are after plating.
3. For details of the connector's front-end configuration, see procurement specification.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

This plug mates with MIL-C-83723/18, /20, /22 and MS3456 of MIL-DTL-5015.

For insert arrangements: See MIL-STD-1651.

Rear hardware in accordance with MIL-DTL-83723/27, /35, or /50 must be used for correct wire sealing.

Insert positions and alternate rotations, the letter N indicates normal (0 standard) insert position. Alternate positions are identified in MIL-STD-1651.

Part or Identifying Number (PIN) example:

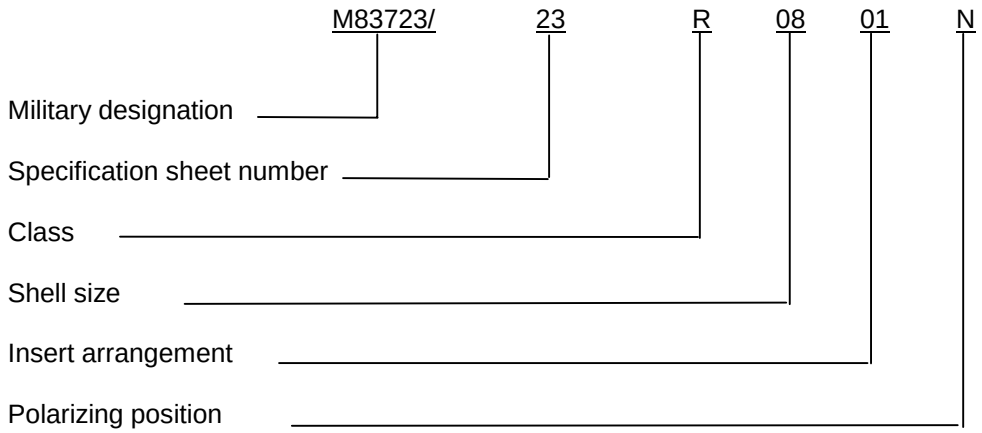

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-4415-001)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. **The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.**
2. **The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.**
3 **The preparing activity must provide a reply within 30 days from receipt of the form.**

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1.** DOCUMENT NUMBER **MIL-DTL-83723/23D**	**2.** DOCUMENT DATE *(YYYYMMDD)* **2003/05/23**

3. DOCUMENT TITLE
CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, CRIMP SOCKET CONTACTS), (SERIES II, CLASSES A, G, K, AND R)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible.*
Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include zip code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(if applicable)*	**7.** DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME Defense Logistics Agency Defense Supply Center, Columbus	b. TELEPHONE *(Include Area Code)* (1) Commercial **614-692-0565** (2) DSN **850-0565**
c. ADDRESS *(Include Zip Code)* DSCC-VAI 3990 E. Broad St. Columbus, Ohio 43213	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road,Suite 2533 Fort Belvoir, Virginia 22060-6621 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.