INCH-POUND

MIL-DTL-83723/27B
23 May 2003
SUPERSEDING
MIL-C-83723/27A(USAF)
9 November 1971

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, BACKSHELL, WITH HEAT-SHRINKABLE STRAIN-RELIEF BOOT (STRAIGHT AND RIGHT ANGLE), THREADED COUPLING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-83723.

Inactive for new design as of 14 September 1993

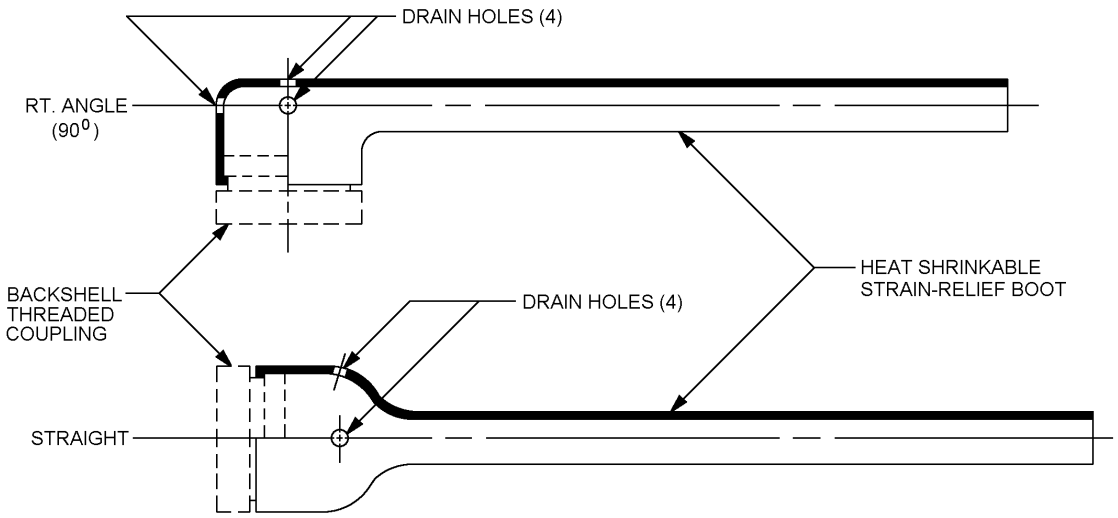


FIGURE 1. Completed assembly.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Shell size designator	Shell size	A dia max	B dia	C dia	D dia	E	F max
08	8S	.577	.447	.284	.250	.300	.830
10	10S	.640	.510	.344	.303	.300	.830
11	10SL	.702	.572	.413	.383	.300	.830
13	12S	.765	.635	.464	.408	.300	.830
12	12	.765	.635	.464	.408	.300	.830
16	14S	.890	.760	.567	.490	.300	.830
14	14	.890	.760	.567	.490	.300	.830
17	16S	1.015	.885	.893	.609	.300	.830
16	16	1.015	.885	.693	.609	.300	.996
18	18	1.140	1.010	.810	.730	.300	.996
20	20	1.265	1.135	.947	.870	.309	.996
22	22	1.390	1.260	1.078	.978	.309	.996
24	24	1.515	1.385	1.185	1.090	.246	.996
28	28	1.765	1.635	1.405	1.250	.246	1.076
32	32	2.015	1.885	1.167	1.520	.185	1.076
36	36	2.265	2.135	1.865	1.756	.185	1.076
40	40	2.515	2.392	2.203	1.880	.570	1.222

FIGURE 1. Completed assembly – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Shell size designator	shell size	G +.015 -.000	H (min.)	K (max.)	J (min.)	V threads
08	8S	.365	.479	.391	.430	7/16-28UNEF-2B
10	10S	.365	.539	.451	.430	½-28UNEF-2B
11	10SL	.365	.608	.520	.430	9/16-24 UNEF-2B
13	12S	.365	.659	.571	.430	5/8-24 UNEF-28
12	12	.365	.659	.571	.430	5/8-24 UNEF-2B
16	14S	.365	.782	.694	.430	¾-20 UNEF-2B
14	14	.365	.782	.694	.430	¾-20 UNEF-2B
17	16S	.365	.908	.820	.430	7/8-20 UNEF-2B
16	16	.521	.908	.820	.596	7/8-20 UNEF-2B
18	18	.521	1.025	.937	.596	1-20 UNEF-2B
20	20	.521	1.212	1.074	.596	1-1/8-18 UNEF-2B
22	22	.521	1.343	1.205	.596	1-1/4-18 UNEF-2B
24	24	.521	1.450	1.312	.596	1-3/8-18 UNEF-2B
28	28	.521	1.671	1.533	.596	1-5/8-18 UNEF-2B
32	32	.521	1.956	1.784	.596	1-7/8-16 UN-2B
36	36	.521	2.164	1.992	.596	2-1/8-16 UN-2B
40	40	.521	2.500	2.328	.596	2-3/8-16 UN-2B

NOTES:
1. Dimensions in inches. Unless otherwise specified tolerances shall be .XX ± .010 and .XXX ± .005, angular X°X′ ± 0°30′.
2. Dimensions apply after plating.

FIGURE 1. Completed assembly – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

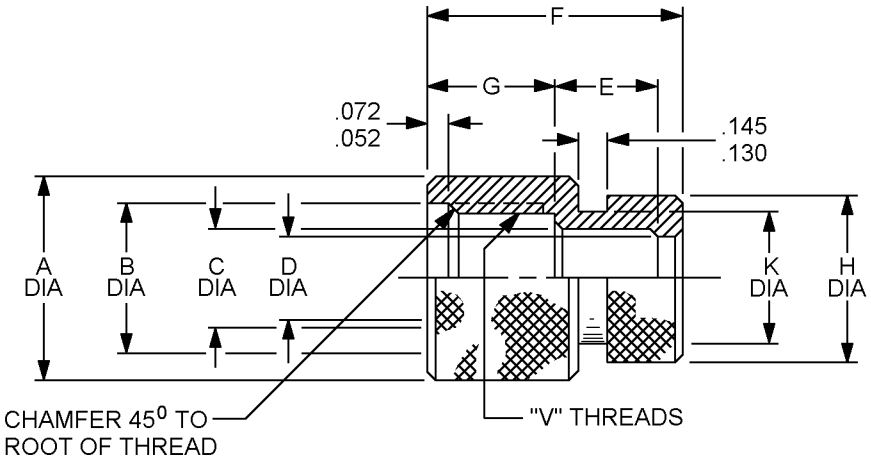


FIGURE 2. Backshell, threaded coupling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

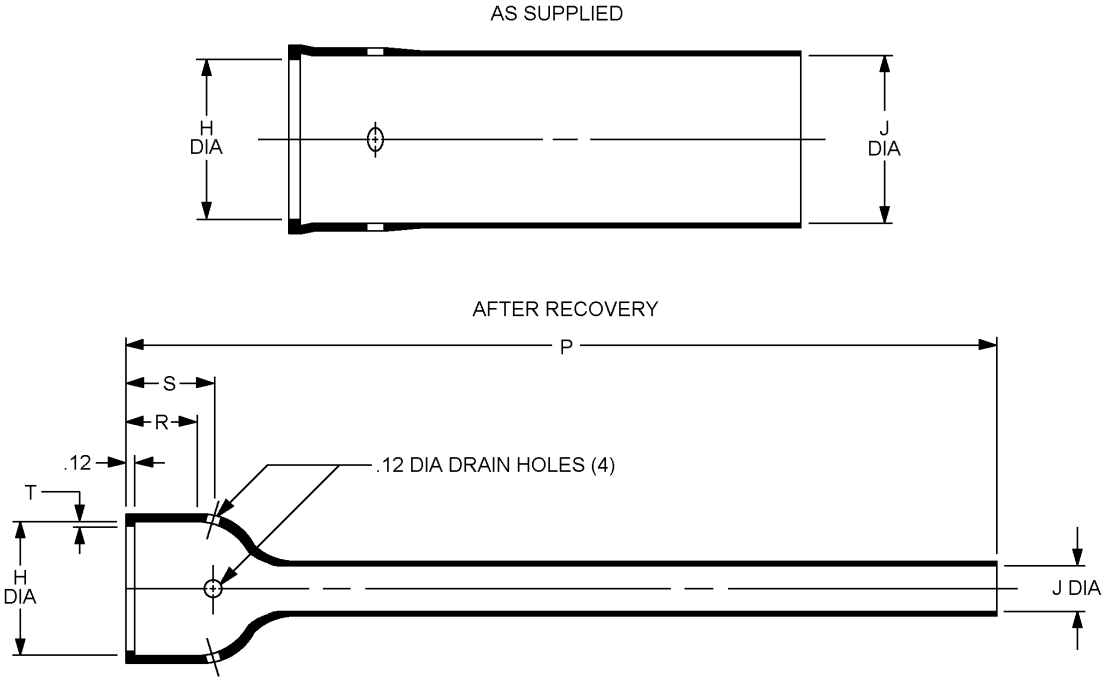


FIGURE 3. Heat-shrinkable strain-relief boot, straight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Shell size designator	Shell size	H Dia		J Dia.	
		As supplied min	Recovered max	As supplied min 1/	Recovered max
				A	B
08	8S	.88	.45	.88	.55
10	10S	.88	.45	.88	.55
11	10SL	1.01	.59	1.01	.63
13	12S	1.01	.59	1.01	.63
12	12	1.01	.59	1.01	.63
15	14S	1.16	.74	1.16	.72
14	14	1.16	.74	1.16	.72
17	16S	1.34	.90	1.34	.84
16	16	1.34	.90	1.34	.84
18	18	1.34	.90	1.34	.84
20	20	1.47	1.16	1.47	.91
22	22	1.72	1.34	1.72	1.07
24	24	1.72	1.34	1.72	1.07
28	28	1.97	1.62	1.97	1.23
32	32	2.47	1.85	2.47	1.54
36	36	2.47	1.85	2.47	1.54
40	40	2.73	2.35	2.73	1.70

FIGURE 3. Heat-shrinkable strain-relief boot, straight – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Shell size designator	Shell size	P recovered	R recovered	S recovered	T recovered
08	8S	.25	.46	.55	.040
10	10S	.26	.46	.55	.040
11	10SL	.29	.48	.59	.040
13	12S	.29	.48	.59	.040
12	12	.29	.48	.59	.040
15	14S	.33	.48	.60	.040
14	14	.33	.48	.60	.040
17	16S	.38	.48	.62	.040
16	16	.38	.48	.62	.040
18	18	.38	.48	.62	.040
20	20	.41	.55	.70	.063
22	22	.48	.60	.78	.065
24	24	.48	.60	.78	.065
28	28	.56	.60	.82	.065
32	32	.59	.63	.92	.080
36	36	.69	.63	.92	.080
40	40	.77	.63	.93	.080

NOTES:
1. Material:
   a. Polyolefin.
   b. Fluoroelastomer.
2. Boots will shrink to recovered dimensions upon application of heat in excess of 175°C.

FIGURE 3. Heat-shrinkable strain-relief boot, straight – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

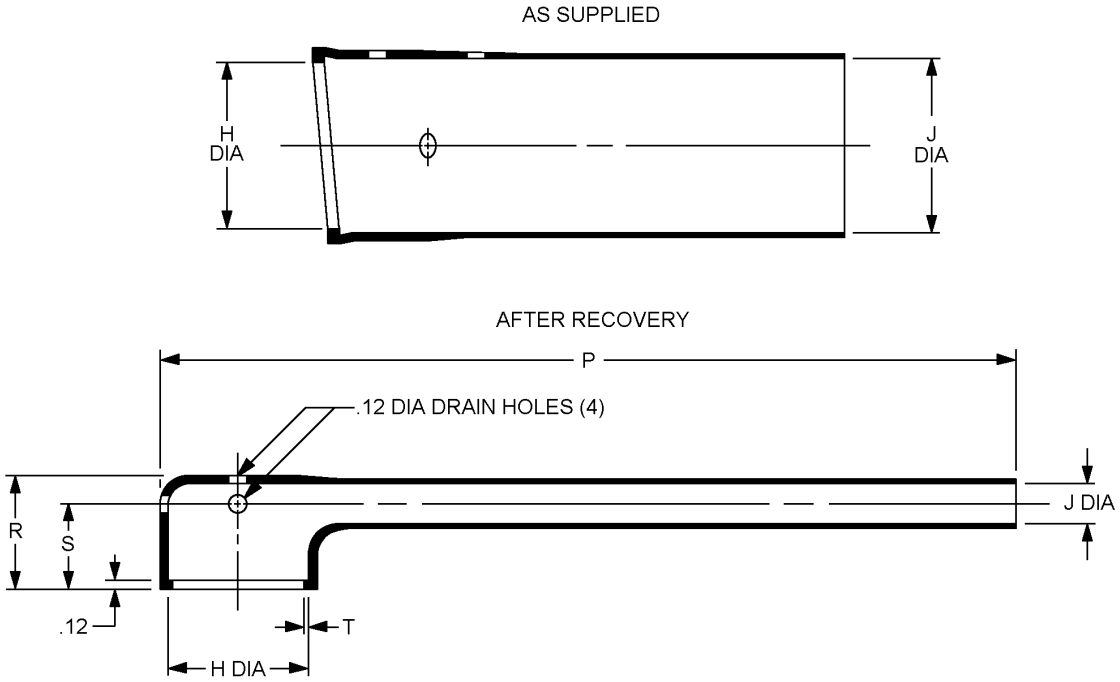


FIGURE 4. Heat-shrinkable strain-relief boot, right angle (90°).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Shell size designator	Shell size	H Dia		J Dia.	
		As supplied min	Recovered max	As supplied min 2/	Recovered max
				A	B
08	8S	.88	.45	.88	.55
10	10S	.88	.45	.88	.55
11	10SL	1.01	.59	1.01	.63
13	12S	1.01	.59	1.01	.63
12	12	1.01	.59	1.01	.63
15	14S	1.16	.74	1.16	.72
14	14	1.16	.74	1.16	.72
17	16S	1.34	.90	1.34	.84
16	16	1.34	.90	1.34	.84
18	18	1.34	.90	1.34	.84
20	20	1.47	1.16	1.47	.91
22	22	1.72	1.34	1.72	1.07
24	24	1.72	1.34	1.72	1.07
28	28	1.97	1.62	1.97	1.23
32	32	2.47	1.85	2.47	1.54
36	36	2.47	1.85	2.47	1.54
40	40	2.73	2.35	2.73	1.70

FIGURE 4. Heat-shrinkable strain-relief boot, right angle (90°) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Shell size designator	Shell size	P Recovered	R Recovered	S Recovered	T Recovered
08	8S	.25	.46	.55	.040
10	10S	.26	.46	.55	.040
11	10SL	.29	.48	.59	.040
13	12S	.29	.48	.59	.040
12	12	.29	.48	.59	.040
15	14S	.33	.48	.60	.040
14	14	.33	.48	.60	.040
17	16S	.38	.48	.62	.040
16	16	.38	.48	.62	.040
18	18	.38	.48	.62	.040
20	20	.41	.55	.70	.063
22	22	.48	.60	.78	.065
24	24	.48	.60	.78	.065
28	28	.56	.60	.82	.065
32	32	.59	.63	.92	.080
36	36	.69	.63	.92	.080
40	40	.77	.63	.93	.080

NOTES:
1. Boots will shrink to recovered dimensions upon application of heat in excess of 175°C.
2. Material:
   a. Polyolefin
   b. Fluoroelastomer

FIGURE 4. Heat-shrinkable strain-relief boot, right angle (90°) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

TABLE I. Material requirements. 1/

Material property	Unit	Requirement type A	Requirement type B	Method of test
Physical Dimensions Dimension recovery	Inches	In accordance with tables II and III	In accordance with tables II and III	ASTM D876
Elastic Memory	Percent	275 min. expansion 93 min. retraction	200 min. expansion 90 min. expansion	See requirements
Tensile strength	PSI	1200 minimum	1800 minimum	ASTM D412, Die D
Ultimate elongation	Percent	250 minimum	300 minimum	
Specific gravity		1.40 maximum	1.95 maximum	ASTM D792
Low-temperature flexibility at -55°C (-67°F)		No cracking	No cracking	See requirements
Heat shock (4 hours) Type A: 225°(437°F) Type B: 300°C (572°F)		No dripping, flowing or cracking	Not dripping, flowing or cracking	See requirements
Heat aging (168 hours) Type A: 175°C Type B: 250°C Followed by tests for: Tensile strength Elongation				See requirements
	PSI Percent	1000 minimum 200 minimum	1200 minimum 250 minimum	ASTM D412, Die D
Hardness	Shore D	38 ± 5	85 ± 5	ASTM D2240
Stiffness	PSI	10000 maximum	7500 maximum	ASTM D747

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

TABLE I. Material requirements – Continued. 1/

Material property	Unit	Requirement type A	Requirement type B	Method of test
Chemical Flammability		Nonburning	Nonburning	ASTM D635
Fungus resistance		Rating of 1 or less	Rating of 1 or less	ASTM D876
Corrosion 16 hrs. at 17°C Copper mirror		Noncorrosive	Noncorrosive	ASTM D2671 appendix A.1.5.1
Fluid resistance 24 hrs at 25° Hydraulic fluid JP-4 fuel Lubricating Oil 5% aqueous sodium chloride Deicing fluid				See requirements
Followed by tests for: Tensile strength	psi	750 minimum	1600 minimum	
Elongation	Percent	200 minimum	200 minimum	
Water absorption	Percent	0.5 maximum	0.5 maximum	ASTM D876 procedure A
Electrical Dielectric strength	Volts/mil	200 minimum	200 minimum	ASTM D876
Volume resistivity	Ohms-cm	10^{12} minimum	10^{10} minimum	ASTM D257

1/ Material: Material shall be modified crosslinked polyolefin (type A: 150°C) or fluoroelastomer (type B: 200°C) and shall have the characteristics shown in table I above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction: See figures 1 through 4 and table I.


Material: Aluminum alloy.

Finish: Class R, 200° conductive finish.

Remove all burrs and sharp edges.

Marking: Package to be marked with military Part or Identifying Number (PIN) and manufacturers identification.

The PIN shall be as follows:

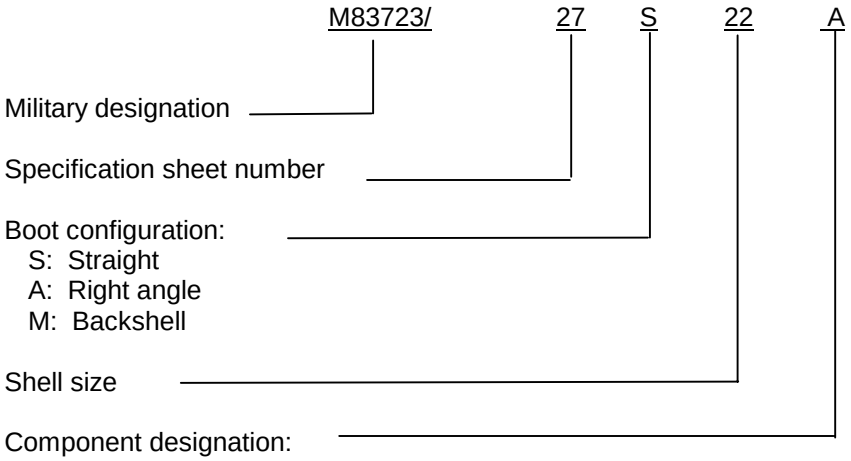

M83723/27M22(M – Metal backshell for 22 shell size
M82723/27A17(B – Right angle fluoroelastomer boot to fit 16S size backshell

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Elastic memory

A 6 x 1/8 inch specimen cut from a molded slab shall be marked with two parallel gage lines 1 inch apart in the central portion of the specimen. A 2 inch portion of the specimen including both gage lines then shall be heated for 5 minutes in a 200 ± 5°C (392 ± 9°) oven or equivalent, removed from the oven, and stretched within 10 seconds until the gage lines are 4 inches apart. The extended specimen then shall be cooled at room temperature and released from tension. After 24 hours at room temperature, the distance between the gage lines shall be measured and recorded as the extended length. The portion of the specimen including both gage lines then shall be reheated for 5 minutes in a 200± 5° (392 ± 9°F) oven or equivalent, removed from the oven, and allowed to retract. The specimen shall again be cooled to room temperature and the distance between the gage lines then shall be measured and recorded as the retracted length. Expansion and retraction shall be calculated as follows:

$$\text{Expansion} = (\text{extended length} - 1) \times 100 \text{ percent}$$

$$\text{Retraction} = \frac{\text{extended length} - \text{retracted length} - \text{retracted length}}{\text{extended length} - 1} \times 100 \text{ percent}$$

Low-temperature flexibility

A 6 X ¼ inch specimen out from a molded slab shall be mounted in a loop position between movable, parallel jaws 2 ½ inches apart. Each end of the specimen shall be firmly fastened by at least ¾ of an inch extending into a set of jaws. The specimen ant the test fixture shall be conditioned for 4 hours at –55 ± 2°C (-67 ± 4°F). While at this temperature, the jaws shall be moved rapidly from 2 ½ inch to a 1 inch separation.

Heat shock

A 6-inch by ½ inch specimen cut from a molded slab shall be conditioned in an oven at temperature. After this conditioning, the specimen shall be visually examined for evidence of dripping, flowing, or cracking.

Heat aging

Three specimens, prepared and measured in accordance with ASTM D412, shall be conditioned at temperature for 168 hours in an oven with an air velocity of from 100 to 200 feet per minute past the specimens. After conditioning, the specimens shall be removed from the oven, cooled to from temperature, and tested for tensile strength elongation.

Fluid resistance

Specimens 6 x 0.25 x 0.075 shall be cut from molded slabs. Three (3) specimens shall be immersed in each of the fluids specified. The volume of fluid shall be not less than 20 times that of the specimens. After immersion, the specimens shall be lightly wiped and air dried for 30 to 60 minutes at standard conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Fluid	Specification
Hydraulic fluid, petroleum base	MIL-PRF-5606
JP- 4 fuel	MIL-DTL-5624
Lubricating oil	MIL-PRF-7808
Lubricating oil	MIL-PRF-23699
Deicing fluid	SAE-AMS1424

PERFORMANCE:

Temperature life

Three straight and three 90° angle boots of each material (type A and type B) shall be installed on a connector and exposed to rated temperature (type A: 150°C) (type B: 200°C) for 1000 hours. At the end of this time, they shall be cooled to room temperature and the pull-off tests shown on figure 5 shall be performed. The minimum force required to pull boot from connector at any angle shall be 25 pounds.

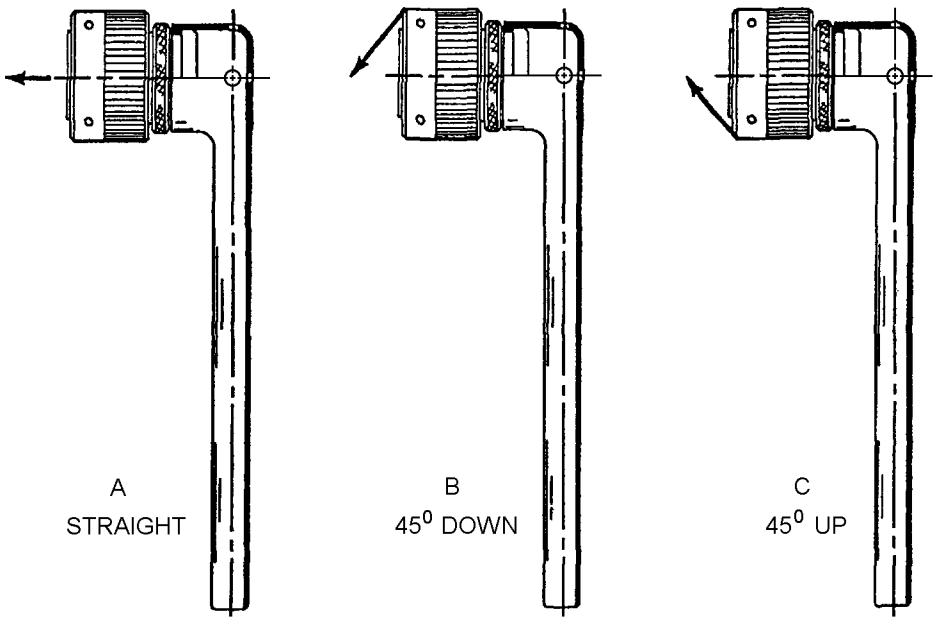


FIGURE 5. Pull-off test method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE:

Preproduction tests

Preproduction tests shall consist of the entire list of material requirements in table I and the performance test for temperature life on figure 5.

Acceptance test

Acceptance tests shall consist of dimensional recovery, tensile strength, elongation, stiffness, heat shock and hardness.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activity:
Air Force - 99

Preparing activity:
DLA - CC

(Project 5935-4415-002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. **The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.**
2. **The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.**
3 **The preparing activity must provide a reply within 30 days from receipt of the form.**

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1.** DOCUMENT NUMBER **MIL-DTL-83723/27B**	**2.** DOCUMENT DATE *(YYYYMMDD)* **2003/05/23**

3. DOCUMENT TITLE
CONNECTORS, ELECTRICAL, BACKSHELL, WITH HEAT-SHRINKABLE STRAIN-RELIEF BOOT (STRAIGHT AND RIGHT ANGLE), THREADED COUPLING

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include zip code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(if applicable)*	**7.** DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME Defense Logistics Agency Defense Supply Center, Columbus	b. TELEPHONE *(Include Area Code)* (1) Commercial **614-692-0565** (2) DSN **850-0565**
c. ADDRESS *(Include Zip Code)* DSCC-VAI 3990 E. Broad St. Columbus, Ohio 43213	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road,Suite 2533 Fort Belvoir, Virginia 22060-6621 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.