INCH-POUND

MIL-DTL-83723/61E
20 September 2002
SUPERSEDING
MIL-C-83723/61D
17 December 1991

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), DUMMY CONNECTOR, RECEPTACLES (FOR MIL-C-26500 AND MIL-DTL-83723, SERIES III, CLASSES A, R, & W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-83723.

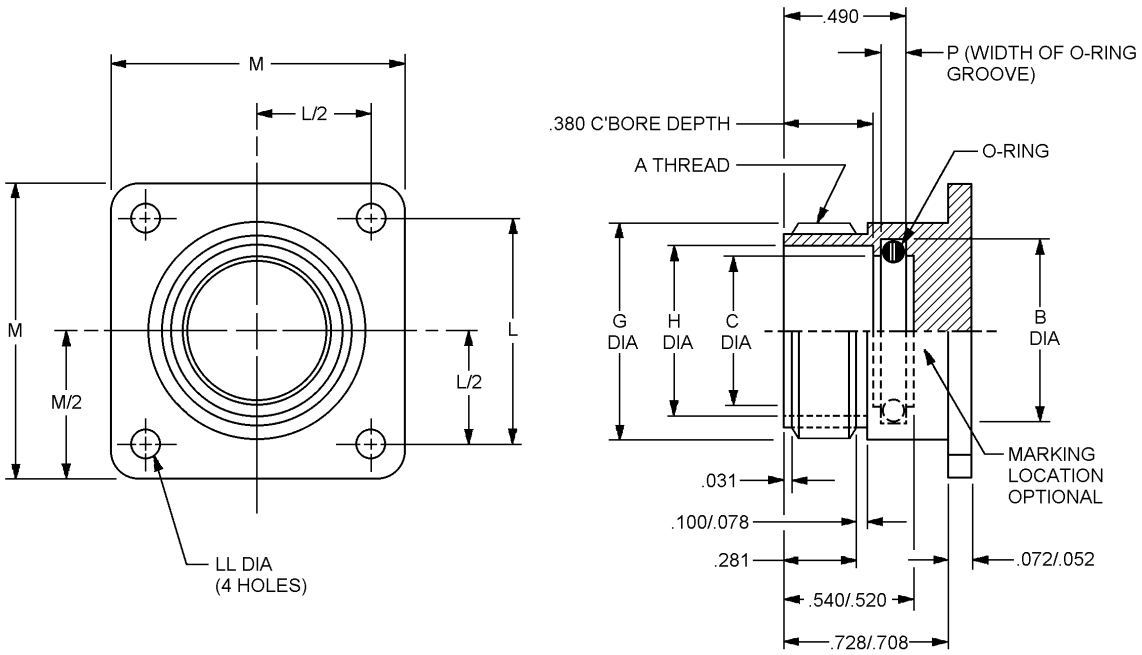


FIGURE 1. Dummy, receptacles, threaded coupling M83723/61-1.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.078	1.98	.520	13.21
.009	0.23	.100	2.54	.540	13.72
.031	0.79	.281	7.14	.708	17.98
.052	1.32	.380	9.65	.728	16.49
.072	1.83	.490	12.45		

Shell size	A UNEF-2A coupling thread	B dia ± .005	C dia + .005 - .000	G dia (max.)	H dia +.005 -.000	L ℄ - ℄ mtg. hole	LL dia mtg. hole +.000 -.009	M Length side	P + .000 - .005
8	.5625-24 (14.29)	.505 (12.83)	.428 (10.87)	.561 (14.25)	.475 (12.07)	.594 (15.09)	.125 (3.18)	.812 (20.62)	.076 (1.93)
10	.6875-24 (17.46)	.636 (16.15)	.530 (13.46)	.696 (17.68)	.576 (14.63)	.719 (18.26)	.125 (3.18)	.937 (23.80)	.089 (2.26)
12	.875-20 (22.23)	.806 (20.47)	.700 (17.78)	.875 (22.23)	.746 (18.95)	.812 (20.62)	.125 (3.18)	1.031 (26.19)	.089 (2.26)
14	.9375-20 (23.81)	.875 (22.23)	.769 (20.22)	.935 (23.75)	.815 (20.70)	.906 (23.01)	.125 (3.18)	1.125 (28.58)	.089 (2.26)
16	1.0625-18 (26.99)	1.002 (25.45)	.896 (22.76)	1.062 (26.97)	.942 (23.93)	.969 (24.61)	.125 (3.18)	1.250 (31.75)	.089 (2.26)
18	1.1875-18 (30.16)	1.108 (28.14)	1.002 (25.45)	1.187 (30.15)	1.048 (26.62)	1.062 (26.97)	.125 (3.18)	1.343 (34.11)	.089 (2.26)
20	1.3125-18 (33.34)	1.233 (31.32)	1.127 (28.63)	1.312 (33.32)	1.171 (29.74)	1.156 (29.36)	.125 (3.18)	1.437 (36.50	.089 (2.26)
22	1.4375-18 (36.51)	1.358 (34.49)	1.252 (31.80)	1.437 (36.50)	1.297 (32.94)	1.250 (31.75)	.125 (3.18)	1.562 (39.67)	.089 (2.26)
24	1.5625-18 (39.67)	1.483 (37.67)	1.377 (34.98)	1.562 (39.67)	1.420 (36.07)	1.375 (34.93)	.154 (3.91)	1.703 (43.26)	.089 (2.26)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance shall be ± .005.
5. These parts are intended for use as dummy storage receptacles for MIL-DTL-83723 series III and MIL-C-26500 threaded coupling connector plugs.

FIGURE 1. Dummy, receptacles, threaded coupling M83723/61-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

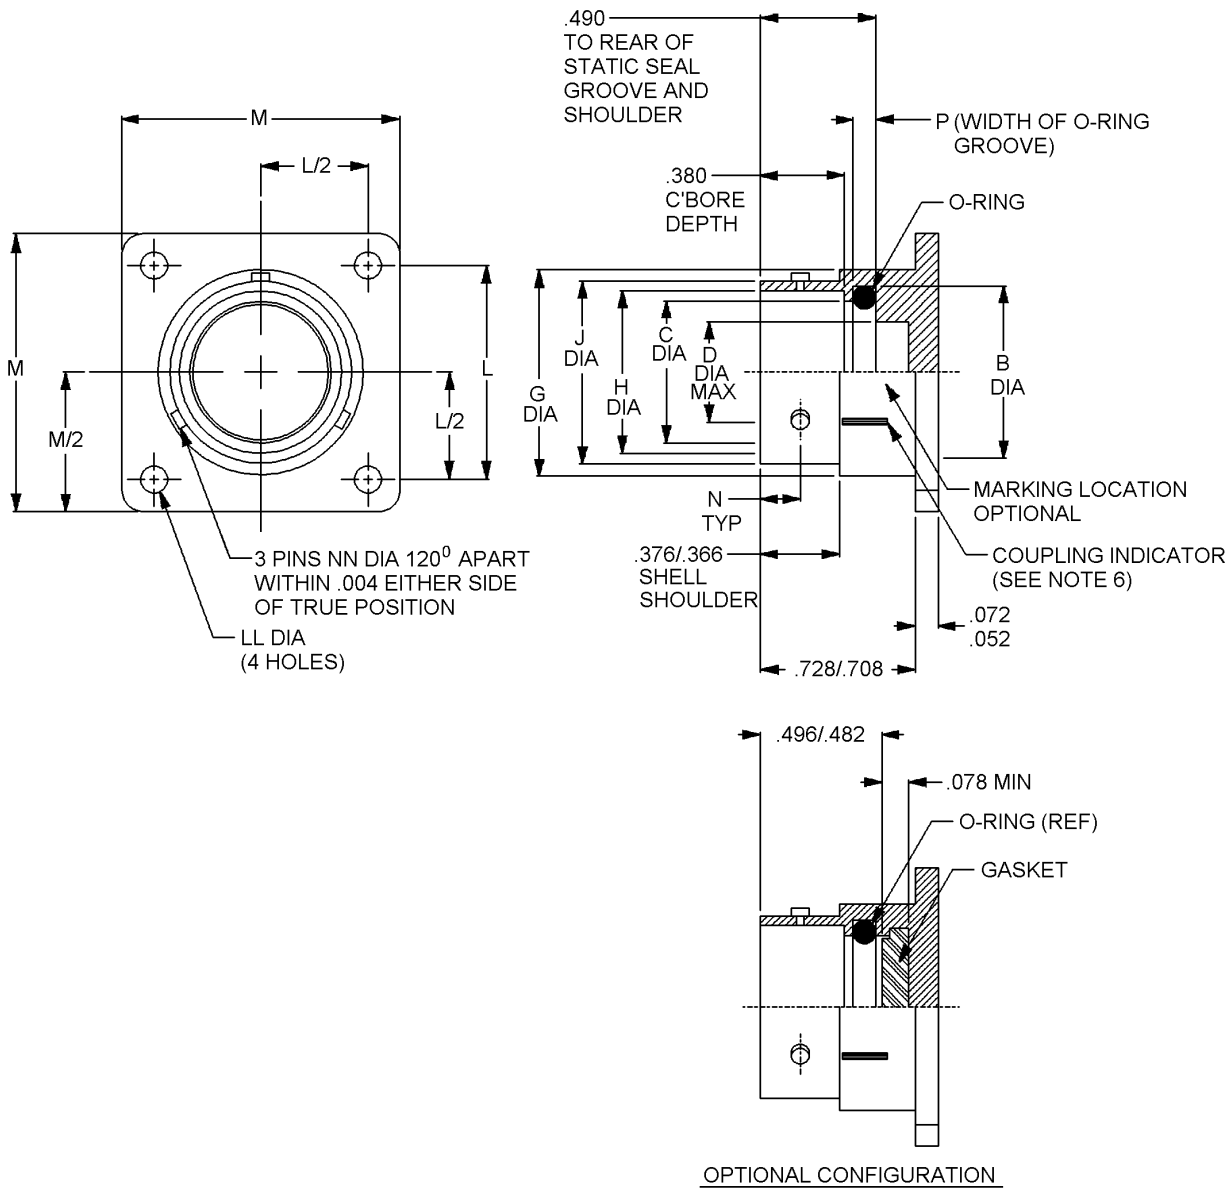


FIGURE 2. Dummy, receptacles, bayonet coupling M83723/61-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	.08	.072	1.83	.482	12.24	.708	17.98
.004	.10	.078	1.98	.490	12.45	.728	18.49
.005	.13	.366	9.30	.496	12.60		
.009	.23	.376	9.55	.540	13.72		
.052	1.32	.380	9.65	.560	14.22		

Shell size	B dia ± .005	C dia +.005 -.000	D dia (max)	G dia (max)	H dia +.005 -.000	J dia +.000 -.005	L ℄ - ℄ mounting hole
8	.508 (12.83)	.428 (10.87)	.352 (8.94)	.561 (14.25)	.475 (12.07)	.536 (13.61)	.594 (15.09)
10	.636 (16.15)	.530 (13.46)	.428 (10.87)	.696 (17.68)	.576 (14.63)	.659 (16.74)	.719 (18.26)
12	.806 (20.47)	.700 (17.78)	.598 (15.19)	.875 (22.23)	.746 (18.95)	.829 (21.06)	.812 (20.62)
14	.875 (22.23)	.769 (20.22)	.667 (16.94)	.935 (23.75)	.815 (20.70)	.898 (22.81)	.906 (23.01)
16	1.002 (25.45)	.869 (22.76)	.794 (20.17)	1.062 (26.97)	.942 (23.93)	1.025 (26.04)	.969 (24.61)
18	1.108 (28.14)	1.002 (25.45)	.900 (22.86)	1.187 (30.15)	1.048 (26.62)	1.131 (28.73)	1.062 (26.97)
20	1.233 (31.32)	1.127 (28.63)	1.025 (26.03)	1.312 (33.32)	1.171 (29.74)	1.256 (31.90)	1.156 (29.36)
22	1.358 (34.49)	1.252 (31.80)	1.150 (29.21)	1.437 (36.50)	1.297 (32.94)	1.381 (35.08)	1.250 (31.75)
24	1.483 (37.67)	1.377 (34.98)	1.275 (32.38)	1.562 (39.67)	1.420 (36.07)	1.506 (38.25)	1.375 (34.93)

FIGURE 2. Dummy, receptacles, bayonet coupling M83723/61-2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Shell size	LL dia. Mounting hole +.000 / -.009	M length side	N +.000 -.004	NN dia +.000 -.003	P +.000 -.005
8	.125 (3.18)	.812 (20.62)	.101 (2.57)	.078 (1.98)	.076 (1.93)
10	.125 (3.18)	.937 (23.80)	.094 (2.39)	.093 (2.36)	.089 (2.26)
12	.125 (3.18)	1.031 (26.19)	.094 (2.39)	.093 (2.36)	.089 (2.26)
14	.125 (3.18)	1.125 (28.58)	.094 (2.39)	.093 (2.36)	.089 (2.26)
16	.125 (3.18)	1.250 (31.75)	.094 (2.39)	.093 (2.36)	.089 (2.26)
18	.125 (3.18)	1.343 (34.11)	.094 (2.39)	.093 (2.36)	.089 (2.26)
20	.125 (3.18)	1.437 (36.50)	.094 (2.39)	.093 (2.36)	.089 (2.26)
22	.125 (3.18)	1.562 (39.67)	.094 (2.39)	.093 (2.36)	.089 (2.26)
24	.154 (3.91)	1.703 (43.26)	.094 (2.39)	.093 (2.36)	.089 (2.26)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance shall be ± .005.
5. These parts are intended for use as dummy storage receptacles for MIL-DTL-83723 series III and MIL-C-26500 bayonet coupled connector plugs.
6. Coupling assurance indicator shall be provided in accordance with MIL-DTL-83723.

FIGURE 2. Dummy, receptacles, bayonet coupling M83723/61-2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Material:

Dummy connector: Aluminum alloy.

Gasket shall be bonded to or mechanically retained in receptacle.
All diameters shall be concentric with each other within .015 T.I.R.
All diameters in the same plane shall be concentric with each other within .004 T.I.R.

Qualification:

Examination of product.
Coupling torque.
Humidity.
Salt spray (corrosion).
Air leakage: In accordance with MIL-STD-1344, method 1008, with the following conditions:
Use connector without contacts or insert installed.
Pressure differential: 10 psi.
Air leakage rate shall not exceed 1 atmospheric cubic inch per hour (4.55 X $3cm^3/s$).

Marking:

Part or Identifying Number (PIN): M83723/61 - (dash number from figure 1 or 2), shell size and the applicable code for finish.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Supersession data: See table I.

TABLE I. Supersession data.

Superseding PIN M83723/61-1	Superseded PIN MS27296 -
8AR	7
10AR	1
12AR	2
14AR	3
16AR	4
18AR	5
20AR	8
22AR	6
24AR	9
Superseding PIN M83723/61-2	**Superseded PIN MS27297**
8AR	7
10AR	1
12AR	2
14AR	3
16AR	4
18AR	5
20AR	8
22AR	6
24AR	9

PIN example:

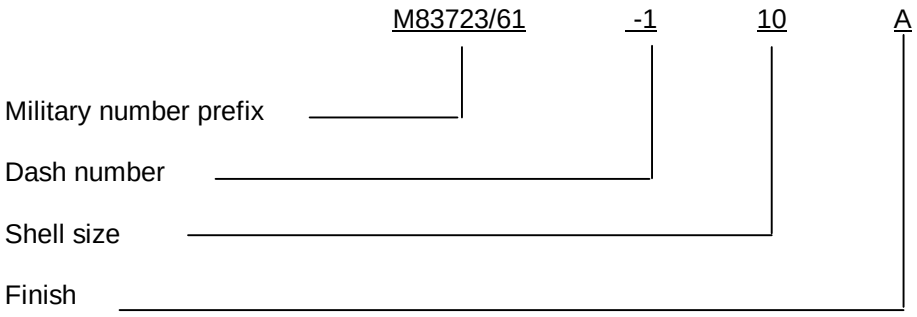

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 11
DLA – CC

Review activities:
Army – AR, MI
Navy – EC
Air Force – 19, 99

Preparing activity:
DLA – CC

(Project 5935-4563-001)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.