MILITARY SPECIFICATION

ANTENNA: AS-()/GRC; MICROWAVE

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the performance, design, and test requirements for the AS-()/GRC microwave antenna.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-P-116	Preservation; Methods of
MIL-T-704	Treatment and Painting of Materiel
MIL-E-4158	Electronic Equipment, Ground; General Requirements for

---

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commandant of the Marine Corps, Headquarters Marine Corps, Code LMA-1, Washington, DC 20380 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5985

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

MIL-P-11268	Parts, Materials and Processes Used in Electronic Communications Equipment
MIL-E-17555	Electronic and Electrical Equipment, Accessories, and Provisioned Items (Repair Parts): Packaging of
MIL-H-46855	Human Engineering Requirements for Military Systems, Equipment and Facilities

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection of Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-889	Dissimilar Metals
MIL-STD-1472	Human Engineering Design Criteria For Military Systems, Equipment, and Facilities.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be in the issue of the nongovernment documents which is current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D3951-82 Packaging, Commercial

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. Prior to submission of any complete production items for acceptance, the contractor shall furnish three first articles for determination of conformance to this specification. Examination and tests shall be those specified herein. The first article shall be manufactured using the same procedures and tooling proposed for production. Approval of the first article by the acquiring activity shall not relieve the contractor of the obligation to supply equipment conforming to this specification. Changes or deviations in production units from the approved first article baseline shall require written authorization by the acquiring activity.

3.2 Materials, processes, and parts. The materials, processes, and parts shall be in accordance with the requirements specified in MIL-P-11268, MIL-E-4158, and MIL-STD-454. When the requirements of MIL-E-4158 and MIL-STD-454 conflict, the requirements of MIL-STD-454 shall govern.

3.3 Design and construction. The antenna shall be designed as a tactical, transportable, and rapidly deployable antenna for troposcatter, obstacle gain refraction, and line-of-sight communications in the 4.4 gigahertz (GHz) to 5.0 GHz frequency range. It shall include a reflector, supported by a collapsible support structure. The support structure shall be equipped with a steerable elevation-over-azimuth reflector mount, elevation and azimuth indicator scales, scales, and a reflector mount level. The indicator scales and level shall be graduated in degrees. The support structure shall be equipped with a device for azimuth positioning of the antenna. The antenna shall include a transit frame which will accept the collapsed antenna and all related installation accessories. Design of the antenna shall include redesign of the M-101 trailer to accept two transit frames with antennas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

3.3.1 Reflector design and size. The reflector shall be of parabolic shape with a closed surface. The parabolic curve and feed system shall produce the gain and efficiency as specified in 3.3.3, 3.3.4, and 3.3.5. The size of the reflector shall be 8.0 feet (nominal) in diameter and its design shall include a center-feed horn antenna system that permits the connecting of two waveguides. The horn antenna feed system shall radiate a linear polarized signal and shall be capable of rotational adjustment to select a vertical or horizontal polarized signal and compensate for lateral slope of the antenna site. The horn antenna port shall be covered with a material that is capable of preventing foreign matter from entering the waveguide. The antenna feed system shall be equipped with a deicing system capable of preventing ice buildup under adverse low temperature conditions specified herein (see 4.7.7). The antenna reflector, feed system, and waveguide shall be capable of handling radio frequency power levels of 10,000 watts (W), continuous wave operation.

3.3.2 Polarization discrimination. The antenna shall exhibit crosspolarization discrimination of at least 30 decibels (dB) between any two received signals that are within the main lobe of the antenna and have equal frequencies.

3.3.3 Minor lobes. The ratio of the major lobe to any minor lobe shall be at least 20 dB within ±14 degrees of center, 27.5 dB between ±14 degrees and ±22 degrees, and 30.5 dB between ±22 degrees and ±180 degrees.

3.3.4 Radiation pattern and gain. The gain of the antenna shall be not less than 38.0 dB at 4.4 Ghz, and 39.0 dB at 5.0 Ghz. The beam width shall not be less than 3 degrees nor more than 4 degrees between half power points.

3.3.5 Voltage standing wave ratio (VSWR). The VSWR shall not exceed 1.3:1 over the frequency range of 4.4 to 5.0 GHz referenced to the feedhorn input when the feedhorn is mounted in the reflector under free space conditions and fed with a flexible waveguide system.

3.3.6 Tilt. It shall be possible to vary the elevation adjustment (tilt) of the dish through a range of +10, -5 degrees relative to the horizon, the adjustment procedure shall not require the operator to leave the ground.

3.3.7 Azimuth. It shall be possible to vary the azimuth adjustment of the dish through a range of ±15 degrees.

3.3.8 Waveguide. A flexible waveguide shall be designed to satisfy the requirements of the standard configuration and adaptable to an optional configuration. Selection or fabrication of waveguides shall be in accordance with MIL-STD-454, requirement 53. The standard configuration shall accommodate installation sites that require up to 75 feet of linear separation between the radio shelter and the antenna. The optional configuration shall employ the waveguide and a horn antenna, with the horn antenna mounted atop a 75-foot antenna mast.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

3.3.9 Messenger cable. A messenger cable assembly capable of supporting two waveguide assemblies spanning the distance stated in 3.3.8, under all environmental conditions specified herein, shall be provided.

3.3.10 Radio frequency (RF) energy hazards. The antenna support structure shall position the reflector a sufficient height above the ground that attendant personnel will not be exposed to unsafe levels of RF energy while standing erect adjacent to the support structure.

3.3.11 Grounding, bonding, and shielding. The antenna design shall employ grounding, bonding, and shielding techniques in accordance with MIL-STD-454, Requirement 74.

3.3.12 Installation accessories. The antenna shall include all tools, ground anchors, and guy assemblies required to assemble and secure the antenna under the conditions defined herein.

3.3.13 Installation time. The antenna design shall permit installation by two trained persons wearing cold weather clothing in 20 minutes or less under wind conditions of up to 23 miles per hour (MPH). Disassembly shall be the reverse procedure of installation and shall be achievable in 20 minutes or less under wind conditions of up to 23 MPH. Anchor and guy line installation and recovery time is excluded from the 20-minute requirement.

3.3.14 Interchangeability. Like units, assemblies, subassemblies, and replaceable parts shall conform to MIL-STD-454, Requirement 7.

3.3.15 Substitutability. Parts substitution shall comply with MIL-STD-454, Requirement 72.

3.4. Maintainability. The antenna shall be constructed to provide ease of maintenance, accessibility, and replacement of parts as primary design considerations.

3.4.1 Intermediate level. Corrective maintenance is limited to replacement of reflector, electrical, and support structure assemblies or pieces. Common hand tools shall be used. The maximum repair time shall be 30 minutes at the 90th percentile.

3.4.2 Depot level. Repairs are to be made to the part level of the reflector and support structure. Depot level welding, milling, and sheet metal tools and equipment shall be employed. Maximum time to repair shall be 6 hours at the 85th percentile.

3.5 Human factors. Human factors design of the antenna shall be in accordance with MIL-STD-1472 and shall be guided by MIL-H-46855.

3.6 Safety information. Safety information related to personnel hazards shall be in accordance with MIL-STD-454, Requirement 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

3.7 Environmental requirements. The antenna is intended for use as a transportable antenna to support tactical and strategic communications; the antenna design and construction shall be guided by the requirement for the antenna to endure an operational environment reflected by the following.

3.7.1 Wind load and velocity. The antenna shall be able to operate in winds of up to 23 MPH without requiring ground anchors. The antenna shall be capable of operating in winds of 83 MPH sustained, no ice, in any direction with a maximum allowable antenna beam deflection of 1/2 of the 3 dB antenna beam width. The antenna shall suffer no permanent degradation of performance or structure when exposed to winds of 120 MPH in any direction (see 4.7.1).

3.7.2 Ice load (nonoperating). The antenna assembly shall suffer no permanent deformation or damage when exposed to ice conditions described in MIL-STD-810 (see 4.7.2).

3.7.3 Vibration. The antenna shall show no evidence of structural failure such as cracked welds, deformation or other defeats that will hinder its operation after experiencing vibration as described in MIL-STD-810 (see 4.7.6). Following the vibration exposure, the antenna shall meet the specified VSWR, tilt, and azimuth requirements (see 3.3.5, 3.3.6 and 3.3.7).

3.7.4 High and low temperatures. The antenna shall display no evidence of physical or performance degradation when exposed to the ambient air temperature of -40°C to 68°C during operation, storage, and transit (see 4.7.7).

3.7.5 Humidity. The antenna shall display no evidence of performance or physical degradation when exposed to the humidity conditions described in MIL-STD-810 (see 4.7.9). During and following the humidity exposure, the antenna shall meet the specified VSWR, tilt, and azimuth requirements (see 3.3.5, 3.3.6, and 3.3.7).

3.7.6 Dust. The antenna shall display no evidence of moving parts sticking or binding, or performance degradation, when exposed to the dust conditions described in MIL-STD-810 (see 4.7.8). During and following the dust exposure, the antenna shall meet the specified VSWR, tilt, and azimuth requirements (see 3.3.5, 3.3.6, and 3.3.7).

3.7.7 Salt fog. The antenna shall show no evidence of flaking paint, pitting, rusting, or corrosion when exposed to salt fog conditions described in MIL-STD-810 (see 4.7.10). Following the salt fog exposure, the antenna shall be demounted following normal disassembly procedures, and shall meet specified VSWR, tilt, and azimuth requirements (see 3.3.5, 3.3.6, and 3.3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

3.7.8 Shock (drop). The antenna shall display no evidence of cracked welds or defects that will hinder its operation or prevent it from meeting the specified VSWR, tilt, and azimuth requirements (see 3.3.5, 3.3.6, and 3.3.7) after experiencing the drop shock test specified in 4.7.11.

3.7.9 Fungus. The antenna shall meet the VSWR, tilt, and azimuth requirements (see 3.3.5, 3.3.6, and 3.3.7) while operating in a fungus environment as described in MIL-STD-810 (see 4.7.12).

3.8 Dimensions. The antenna dimensions, when disassembled and secured in the transit frame, shall be such that two antennas in transit frames and secured on the M-101 trailer shall be capable of mobile loading aboard C-130 aircraft.

3.9 Weight. The weight of any removable item of the antenna shall not exceed the limits specified in MIL-STD-1472. The total weight of the antenna, all support items, and transit frame shall not exceed the following:

a. When modification of the M-101 includes removing and discarding the trailer bed	950 pounds
b. When modification of the M-101 includes retaining the trailer bed	750 pounds

3.10 Finish. The antenna, including the transit frame and installation accessories, shall be finished in accordance with MIL-T-704, type F or type G as appropriate, color green 383. The corrosion resistance treatment of metal parts shall be in accordance with MIL-STD-454, Requirement 15. Protection of dissimilar metal combinations shall be in accordance with MIL-STD-889.

3.11 Marking. Identification and information markings shall be in accordance with MIL-STD-454, Requirement 67.

3.12 Workmanship. The antenna workmanship requirements shall be in accordance with MIL-STD-454, Requirement 9.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Packaging (see 4.5).

4.3 First article inspection. This inspection shall be performed by the contractor to initially verify the design and manufacturing process. It shall consist of Group A and B inspections specified in Tables I and II.

4.4 Quality conformance inspection. The contractor shall continuously monitor the production process by performing the mechanical/visual inspections specified in Table I for each item used in the manufacture of the antenna, its mast, and all accessories. The electrical/other inspections specified in Table I and the tests specified in Table II shall be conducted by the contractor in accordance with a sampling plan determined from MIL-STD-105. The contractor shall submit a production sampling plan to the Government for approval prior to the start of the production process.

4.4.1 Noncompliance. If a sample fails to pass Group A or Group B inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity, has been taken. After the corrective action has been taken, Group A and Group B inspections shall be repeated on additional sample units (all test and examinations, or the test which the original sample failed, at the option of the qualifying activity). Final acceptance and shipment shall be withheld until the Group A and B or other inspections have shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection

Inspection	Requirement Paragraph	Test Paragraph	No. of First Article Samples
Mechanical-Visual			
Finish	3.10	4.6	1, 2, and 3
Reflector Assembly	3.3.1	4.6	1, 2, and 3
Workmanship	3.12	4.6	1, 2, and 3
Horn Antenna Assembly (including deicing assy)	3.3.1	4.6	1, 2, and 3
Support Assembly	3.3/3.7	4.6	1, 2, and 3
Waveguide	3.3.8	4.6	1, 2, and 3
Messenger Cable	3.3.9	4.6	1, 2, and 3
Transit Frame	3.3	4.6	1, 2, and 3
Installation Accessories	3.3.12	4.6	1, 2, and 3
Electrical/Other			
Minor Lobes	3.3.3	4.7.3	1, 2, and 3
Radiation Pattern and Gain	3.3.4	4.7.4	1, 2, and 3
VSWR	3.3.5	4.7.5	1, 2, and 3
Tilt	3.3.6	4.7.14	1, 2, and 3
Azimuth	3.3.7	4.7.14	1, 2, and 3
Polarization Discrimination	3.3.2	4.7.15	1, 2, and 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

TABLE II. Group B inspection.

Inspection	Requirement Paragraph	Test Paragraph	Unit No. of First Article Samples
Wind Load and Velocity	3.7.1	4.7.1	1
Ice Load	3.7.2	4.7.2	3
Vibration	3.7.3	4.7.6	1
High and Low Temperature	3.7.4	4.7.7	3
Dust	3.7.6	4.7.8	2
Humidity	3.7.5	4.7.9	1
Salt Fog	3.7.7	4.7.10	2
Shock (Drop)	3.7.8	4.7.11	2
Fungus	3.7.9	4.7.12	3
Installation	3.3.13 3.3.6 3.3.7	4.7.13	3

4.4.1.1 Disposition of Group B sample units. Unless otherwise specified, sample units which have been subjected to and passed Group B inspection may be accepted on the contract or order as production, items provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.5 Inspection of packaging. Except when commercial packaging is specified, the sampling and inspection of the preservation and interior package marking shall be in accordance with Groups A and B quality conformance inspection requirements of MIL-P-116.

4.6 Visual and mechanical inspection. The antenna shall be examined in accordance with Government approved inspection procedures to assure compliance with section 3 requirements. Defects shall be classified in accordance with MIL-STD-252.

4.7 Tests

4.7.1 Wind load and velocity. The antenna shall be subjected to wind load testing in a wind tunnel. The testing shall verify that the requirements specified in 3.7.1 have been met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

4.7.2 Iceload test. The antenna shall be subjected to icing/freezing rain test in accordance with Method 521 of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of VSWR, tilt, and azimuth (see 3.3.5, 3.3.6, and 3.3.7). Ice removal procedures shall not be allowed prior to functional tests.

4.7.3 Minor lobes test. Minor lobes of the antenna pattern shall be determined and recorded for frequencies of 4.4, 4.6, 4.8, and 5.0 GHz using the test setup shown in Figure 1, or a suitable substitute (see 3.3.3).

4.7.4 Radiation pattern and gain. The radiation pattern and gain of the antenna shall be determined for frequencies of 4.4, 4.6, 4.8, and 5.0 GHz, using the test setup shown in Figure 1 or a suitable substitute (see 3.3.4).

4.7.5 VSWR test. The VSWR of the antenna shall be measured at the input to the waveguide specified in 3.3.8, using the test setup shown in figure 2, or a suitable substitute (see 3.3.5).

4.7.6 Vibration. The antenna shall be subjected to vibration test in accordance with Method 514, Categories 1 and 8 of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of VSWR, tilt, and azimuth (see 3.3.5, 3.3.6, and 3.3.7).

4.7.7 Temperature test. The antenna shall be subjected to high temperature test in accordance with Method 501, Procedure II of MIL-STD-810 and low temperature test in accordance with Method 502, Procedures II and III of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of VSWR, tilt, and azimuth (see 3.3.5, 3.3.6, and 3.3.7).

4.7.8 Sand and dust test. The antenna shall be subjected to sand and dust test in accordance with Method 510.2 of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of VSWR, tilt, and azimuth (see 3.3.5, 3.3.6, and 3.3.7).

4.7.9 Humidity test. The antenna shall be subjected to humidity test in accordance with Method 507.2, Procedure II of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of VSWR, tilt, and azimuth (see 3.3.5, 3.3.6, and 3.3.7).

4.7.10 Salt fog test. The antenna shall be subjected to salt fog test in accordance with Method 509.2, Procedure I of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of VSWR, tilt, and azimuth (see 3.3.5, 3.3.6, and 3.3.7).

4.7.11 Shock test. The antenna, collapsed and in its transit frame, shall be subjected to shock test in accordance with Method 516, Procedure II of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of VSWR, tilt, and azimuth (see 3.3.5, 3.3.6, and 3.3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

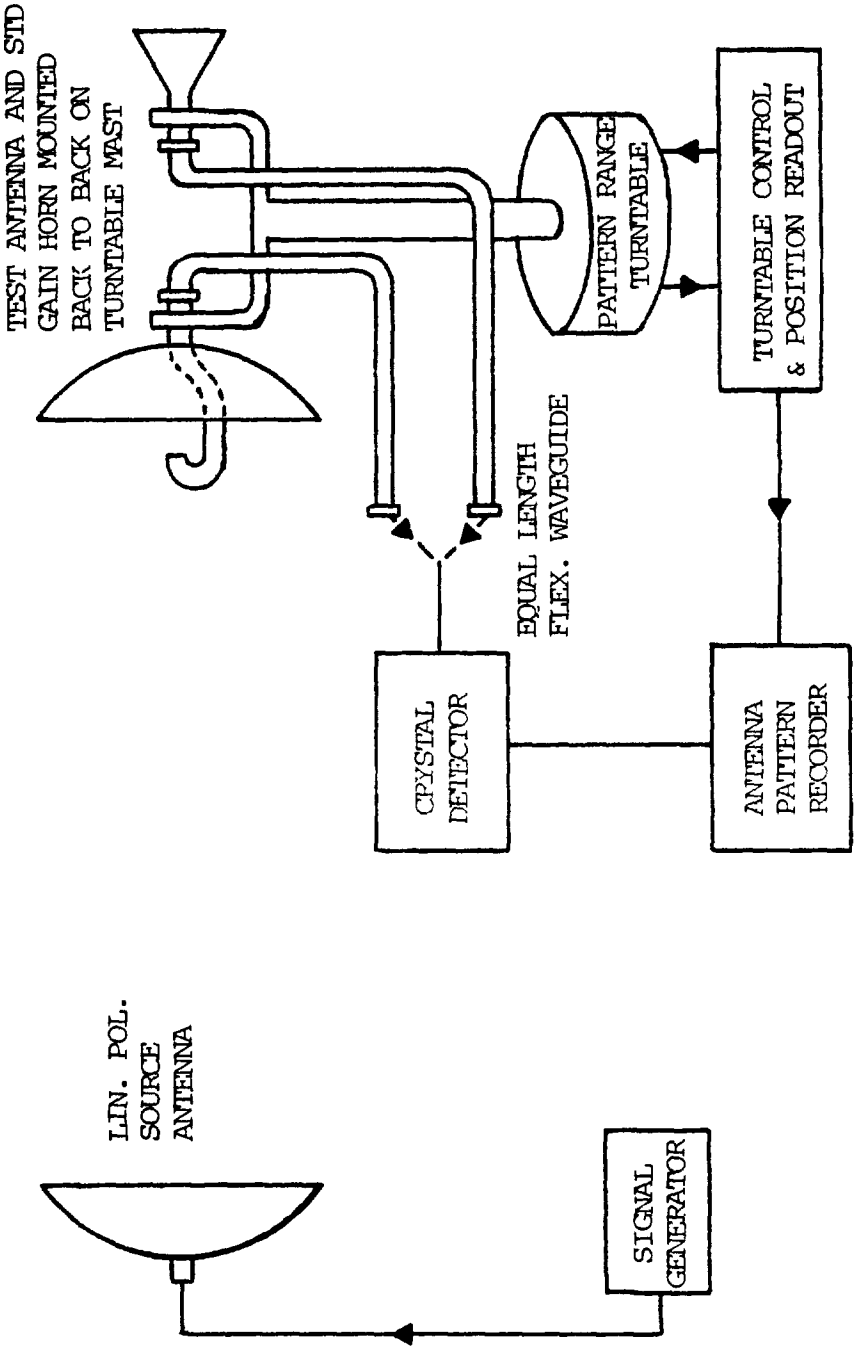


FIGURE 1. Block diagram for radiation pattern and gain tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

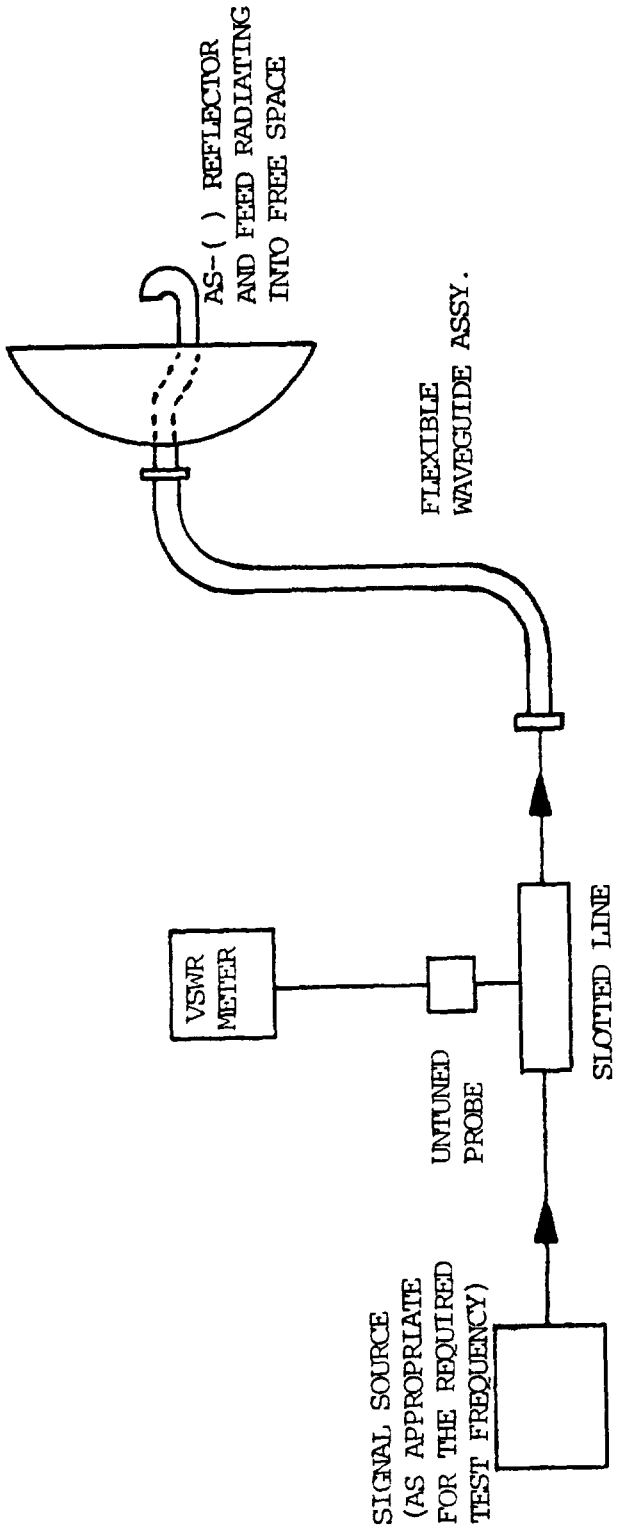


FIGURE 2. Block diagram for VSWR test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

4.7.12 Fungus test. The antenna shall be subjected to fungus test in accordance with Method 508.3 of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of VSWR, tilt, and azimuth (See 3.3.5, 3.3.6, and 3.3.7).

4.7.13 Installation. The antenna installation procedure shall be demonstrated, including the operations specified in 3.3.6 and 3.3.7, under the conditions described in 3.3.13.

4.7.14 Tilt and azimuth testing. The antenna shall be subjected to tests which will verify that it meets the requirements specified in 3.3.6 and 3.3.7.

4.7.15 Polarization discrimination tests. Tests shall be performed which will demonstrate the antennas' ability to meet the requirements of 3.3.2.

5. PACKAGING

5.1 Preservation, packaging, and packing. Appropriate level of packaging shall be specified (see 6.2). Military levels shall be in accordance with MIL-E-17555 and commercial packaging shall be in accordance with ASTM D3951-82.

5.2 Marking. Military packaging shall be marked in accordance with MIL-STD-129. Commercial packaging shall be marked in accordance with ASTM D3951-82.

6. NOTES

6.1 Intended use. The antenna will be used as a rapidly deployable antenna with the AN/GRC-201, AN/TRC-97, and AN/TRC-170 radios in line-of-sight, obstacle gain refraction, and troposcatter communications operations.

6.2 Ordering data

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Tilt, number, and date of this specification.

b. Levels of preservation, packaging, and packaging required (see 5.1).

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.410.6 (DD Form 1423) are invoked and

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs.

Paragraph No.	Data Requirements
4.3	First Article Inspection Procedure
4.4	Production Sampling Plan

(Data item description related to this specification, and identified in section 6 will be approved and listed as such in DOD 5000.19L, Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.).

6.3 First article. The first articles shall be examined and tested for approval at the contractor's plant or at an independent commercial testing laboratory acceptable to the acquiring activity. First article tests shall be witnessed by a Government representative of the acquiring activity. Approval of the first articles shall be by the acquisition contracting officer.

Preparing activity:
Navy - MC
Project No. 5985-N544

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-29423(MC)	ANTENNA: AS-()/GRC; MICROWAVE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

(FOLD DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:09Z
Check the source to verify that this is the current version before use.