MILITARY SPECIFICATION

BELT: FOR COAT, MAN'S ALL-WEATHER

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirement for belts for the all-weather coat for men.

1.2 Classification. The belts shall be one type and color in the following sizes as specified (see 6.2).

Schedule of sizes

32
34
36
38
40
42
44
46

NOTE: Belt sizes correspond to sizes of coats with which the belts are worn.

1.3 Individual orders. When belts are custom tailored to an individual order this specification shall govern, except that the detailed requirements of Section 3, Table I, may be modified to the extent necessary for good custom tailoring practice.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| V-B-871 | - Button, Sewing Hole, and Button, Staple, (Plastic) |
| UU-P-268 | - Paper, Kraft, Wrapping |
| DDD-L-20 | - Label; for Clothing, Equipage, and Tentage (General Use) |
| PPP-F-320 | - Fiberboard: Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes |

MILITARY

| | |
|---|---|
| MIL-B-1860 | - Buckle, Slide, Plastic |
| MIL-B-17757 | - Box, Shipping, Fiberboard (Modular Sizes) |
| MIL-C-29363 | - Cloth, Poplin, Polyester and Cotton (Water Repellent) |
| MIL-C-29365 | - Cloth, Nonwoven: Interlining, Fusible, Nylon and Polyester, Polyamid |
| MIL-T-43548 | - Thread, Polyester, Cotton-Covered and Rayon-Covered |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-191 | - Textile Test Methods |
| FED-STD-751 | - Stitches, Seams, and Stitching |

MILITARY

| | |
|---|---|
| MIL-STD-129 | - Marking for Shipment and Storage |
| MIL-STD-1494 | - Provisions for Evaluating Quality of Raincoats |

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington D. C. 20402.)

Department of Defense (DOD) Standard Shades for Buttons 1966

Department of Defense (DOD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

(Copies may be obtained from the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N. W., Washington, D. C. 20026).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.4 and 6.4).

3.3 Materials.

3.3.1 Basic fabric. The fabric shall be 65 percent polyester/35 percent cotton poplin cloth, with a double water repellent finish (see 6.3), conforming to MIL-C-29363. The color shall be pewter shade 2246.

3.3.2 Interlining. The interlining for the belt shall be fusible cloth conforming to class 3 of MIL-C-29365.

3.3.3 Buckles. The plastic buckle for the belt shall be a 2-1/4-inch general purpose buckle conforming to class 2 of MIL-B-1860. The color shall be green AF cable No. 62017. (See DOD Standard Shades for Buttons 1966).

3.3.4 Buttons. The button shall be style 24, size 22 conforming to type II, Class D of V-B-871. The buttons shall have a glossy finish and shall be green



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

shade AF Cable No. 62017. (See DOD Standard Shades for Buttons 1966).

3.5 Thread. The thread shall be dyed shade taupe A, Cable No. 66030 and shall conform to MIL-T-43548 as follows: (See DOD Standard Color Card for Sewing Threads, 1968).

| USE | Ticket No. | Ply |
|---|---|---|
| Seaming, stitching, buttonholes, | 50 | 2 or 3 |
| buttons and bartacks | 70 | 2 |
| Button sewing | 30 | 2 or 3 |

3.3.5.1 Colorfastness. The dyed thread shall show fastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in MIL-T-43548. When no standard sample is available, the dyed thread shall show "good" fastness to wet-dry cleaning and light when tested as specified in MIL-T-43548.

3.3.6 Label. Combination identification, instruction and size marking shall be applied to each belt by heat transfer (decalcomania), direct printing or stamping conforming to type III or type IV, class 14 of DDD-L-20. The belts are intended to to be dry cleaned and the marking shall show fastness to dry cleaning.

3.4 Design. The belts shall be the U. S. Marine Corps design shown on Figure 1, having one end pointed on a 45 degree angle and the other end square to attach to the buckle with a keeper and belt fastener on the under side to secure belt to coat.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, and directional lines for cutting, and are marked for proper placement and assembly.

3.5.1 Pattern parts. Belts shall be cut from the material specified herein in accordance with the patterns parts indicated below:

| Item | Pattern Nomenclature | No of cut parts |
|---|---|---|
| | Material: Basic fabric | |
| 1. | Belt | 1 |
| | Material: Interlining | |
| 2. | Belt | 1 |
| | Marker | |
| 3. | Belt Fastener | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Manufacturing requirements. The belt shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The manufacturer will not be required to follow the exact sequence of operations as listed. The thread and the fabric shall not be lubricated by any means prior to or during the seaming.

3.6.2 Stitches, seams, and stitching. The stitch, seam, and stitching type specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. If two or more methods or seam or stitch types are given for the same part of an operation, any one of them may be used. Seams shall be sewn so that no raw edges, run offs, twists, pleats, puckers, or open seams will be result. All seams shall start and finish evenly. Thread tension shall be maintained so that the stitching will not be tight or loose. Unless otherwise specified herein, edge stitching shall be 1/16 inch from edge and 1/4-inch gage.

3.6.2.1 Tacking and backstitching. The ends of all seams and stitchings not caught by other seams and stitching shall be backtacked not less than 1/2 inch. Thread breaks of stitch type 301 shall be secured by stitching back of the break not less than 1/2 inch.

3.6.3 Fusing operations. The fusing operations for fusing the fusible interlining specified in 3.3.2 to the basic fabric specified in 3.3.1 should be performed on a fusing press. Specific settings (see 6.6) for the particular fusible style and press to be used should be obtained from the supplier of the fusible material so that the optimum results can be obtained.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

| NO | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH/ IN | NDL | BOB/ LPR |
|---|---|---|---|---|---|---|
| 1. | Cutting. | | | | | |
| | a. Cut the belt in strict accordance with patterns furnished by the Government. | | | | | |
| | b. Cut the material in the direction indicated by the pattern. | | | | | |
| | c. Cut the stripping for the belt keeper and belt fastener in the direction of the warp of sufficient width so that the finished loops will be 1/2 ± 1/16 inch wide. | | | | | |
| | d. Cut the interlining part in accordance with the pattern. | | | | | |
| 2. | Replacement of damaged parts. | | | | | |
| | a. Remove any parts containing material defects or workmanship damages that are classified as defects in MIL-STD-1494 from production during the spreading, cutting, and manufacturing process and replace with nondefective and properly matched parts. | | | | | |
| | b. Replace at time of cutting any parts of belt containing holes or serious weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slub, etc. affecting appearance. | | | | | |
| | c. Replace any parts damaged during the manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material affecting appearance. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

## TABLE 1 MANUFACTURING REQUIREMENTS

| NO | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH/ IN | NDL | BOB/ LPR |
|---|---|---|---|---|---|---|
| 3. | Make belt keeper and fastener. | | | | | |
| | Finished appearance. The finished strips shall be uniform in width, 1/2 ± 1/16 inch wide. | | | | | |
| | a. Make belt keeper, and belt fastener from basic material. | | | | | |
| | b. Turn the edges of the strip to the center. Stitch the abutted edges with a row of stitching extending across and covering the edges of the material 3/16 to 5/16 inch gage. | 406 | EFh-1 | 10-12 | 50 | 50 |
| | -or- | | | | | |
| | c. Fold the strip with the raw edges turned in. Topstitch the strip 1/16 inch from each edge. | 301 | Efp-2 | 10-12 | 50 | 50 |
| | -or- | | | | | |
| | d. Fold the raw edges to center with the raw edges abutted and blindstitch edges together. Stitching shall not be visible on the outside. | 103 | SSb-1 | 6-8 | 50 | 50 |
| | NOTE: When method b or d is used, the strip shall be topstitched 1/16 inch from each edge. | 301 | EFp-2 | 10-12 | 50 | 50 |
| | e. Cut the keeper 5-1/2 inches long. Fold in half end to end and join the ends together 1/4 to 3/8 inch from end. The finished keeper shall finish 2-1/2 ± 1/8 inches. | | | | | |
| | f. Cut the fastener 9 1/2 inches long. Fold one end of fastener 1-1/2 inches and stitch together 1/16 to 1/8 inch on both sides and folded edge. | 301 | SFa-2 | 10-12 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

| NO | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH/ IN | NDL | BOB/ LPR |
|---|---|---|---|---|---|---|
| | NOTE: A Sonic Machine may be used to cut the strips to the proper length. | | | | | |
| | g. Make a horizontal straight type buttonhole on the fastener, cut 5/8 inch long, through the center of the turned under portion, securely tacking each end of buttonhole. | But-ton-hole | | 42-48 per button-hole (minimum) including tack | 50 | 50 |
| 4. | Make belt. | | | | | |
| | Finished appearance. The belt shall finish smooth and flat, without pleats, puckers or raw edges. The gage of stitching shall be uniform in width. The belt shall finish 2-1/8 ± 1/8 inches wide. The belt fastener shall finish on the underside of the belt. | | | | | |
| | a. The belt shall be made of one ply of basic material interlined with fusible material. | | | | | |
| | b. Position the belt interlining to the inside of belt and fuse (see 3.6.3). | | | | | |
| | c. Mark on the outside of the belt the location for sewing belt fastener and button in accordance with pattern marker. | | | | | |
| | d. Turn under the raw end of the fastener 3/8 to 1/2 inch and bartack the fastener to belt 1/8 to 3/16 inch from folded edge. The bartack shall be across the width of the fastener. The fastener, when buttoned, shall be smooth and flat without twist or bulging. | Bar-tack | | 28 stitches per bartack | 50 | 50 |
| | e. Sew a 22-line button on the mark to properly engage the buttonhole for the belt fastener. | 101 or 301 | | 14-16 per button | 30 | 30 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

| NO | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH/ IN | NDL | BOB/ LPR |
|---|---|---|---|---|---|---|
| | f. Fold belt in half lengthwise with the belt fastener enclosed within the fold. Stitch the entire length of belt 1/4 inch from raw edge. | 301 | SSa-1 | 10-12 | 50 | 50 |
| | g. Close the pointed end with 1/4-inch seam along the slanted edge. | 301 | SSa-1 | 10-12 | 50 | 50 |
| | h. Trim the pointed end of belt for proper turning. Turn the belt on the right side through the open end, working out the point and seam to the edge. | | | | | |
| | i. Edgestitch both sides and pointed end of belt with a double row of stitching 1/16 inch from seamed and folded edge and 1/4-inch gage. | 301 | SSe-3(b) | 10-12 | 50 | 50 |
| | j. Press belt smooth and flat with a heated pressing iron or pressing machine. | | | | | |
| | k. Position the belt keeper on the belt 6 inches from the unfinished end. Tack or bartack the keeper to the belt, on each side of seam allowance of keeper, on the under side of belt. Stitch through all plies. | Bar-tack | | 28 per bartack | 50 | 50 |
| | l. Fold unfinished end of belt over the buckle bar 2-3/4 $\pm$ 1/4 inches. | | | | | |
| | m. Turn under raw edge and double stitch to belt 1/16 inch from folded edge and 1/4-inch gage. | 301 | EFb-2 | 12-16 | 50 | 50 |
| 5. | Mark belt. | | | | | |
| | a. Print the combination label (see 3.3.6) on the underside of each belt at the center back. | | | | | |
| 6. | Clean belt. | | | | | |
| | a. Trim all ends of stitching and remove from belt. Remove all spots and stains from the belt without injury to the fabric. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished measurements of the belt shall conform to the following.

| Measurements in Inches | |
|---|---|
| Size | Belt Length |
| 32 | 40 |
| 34 | 42 |
| 36 | 44 |
| 38 | 46 |
| 40 | 48 |
| 42 | 50 |
| 44 | 52 |
| 46 | 54 |
| Tolerance ± | 3/4 |

Belt length measurement shall be taken along the center from end to end.

3.8 Workmanship. The finished belt shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspections requirements specified herein are classified as follows:

1. First article inspection (see 4.4).

2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified all inspections shall be in accordance with the test conditions specified in MIL-STD-1494.

4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated belt for all provisions of this specification.

4.5 Quality conformance inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

4.5.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. The method of testing shall be as specified in FED-STD-191, wherever applicable. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

| Lot size (lot unit) | Sample size (sample unit) |
|---|---|
| 800 or less | 2 |
| 801 to 22,000 inclusive | 3 |
| 22,001 and over | 5 |

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations for subassemblies.

4.5.2.1 Bond strength of fusible interlining. The strength of the bond of the fusible interlining to the basic material shall be tested once each 4 hours as follows at each fusing press to determine that adequate fusing is being obtained. Prepare a test sample by fusing the fusible interlining specified in 3.3.2 to the basic fabric specified in 3.3.1 under the same fusing conditions to be used in the manufacture of the belt. Determine the bond strength of the test sample with a commercial spring scale (see 6.7). If the bond strength of any test sample is less than 22 ounces per inch of width, the fusing conditions shall be corrected and the bond strength test shall be repeated. Those units represented by this test shall be fused again and retested. If they fail, they shall be rejected.

4.5.3 Examination of the end item. Prior to the formation of a lot and as a final step in the contractor's production control plan, each belt shall be examined for those defects identified by an asterisk (*) and listed as selected defects in MIL-STD-1494. Any belt containing a selected defect shall not be included in the end item lot.

4.5.3.1 Finished measurement examination. The provisions for the finished measurement examination of the finished belt shall be specified in MIL-STD-1494 and as outlined in 3.7.

4.5.4 Examination of packaging. Shipping containers that are fully prepared for delivery except for closure shall be subjected to the examination of preparation for delivery described in MIL-STD-1494. The occurrence of defects during this examination shall not exceed the applicable point value or defect limit specified in MIL-STD-1494.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

commercial as specified (see 6.2).

5.1.1 Level A. Each belt shall be folded in half and then folded in half again with the size visible. The folded belts shall be stacked in bundles and tied approximately 1 inch from each end with strong twine or cotton tape. Each bundle shall contain 10 belts of one size only.

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from supply source to the first receiving activity. The contractor may use his standard practice provided it meets the requirements specified for commercial packing.

5.2 Packing. Packing shall be level A or commercial as specified (see 6.2).

5.2.1 Level A. One hundred fifty belts of one size only, packaged as specified, shall be packed in a fiberboard shipping container that is assembled, closed, and reinforced in accordance with grade V2s, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed in such a manner that bundles of belts cannot move within the box. The top and the bottom of the contents of the shipping container shall be completely covered with a sheet of 30-pound (minimum) basis weight paper conforming to grade B of UU-P-268. Towards the end of the contract or if the quantity of the belts of the same size is less than the quantity of the belts required per shipping container, mixed sizes may be packed within the same shipping container.

5.2.2 Optional shipping container. If specified by the procuring activity (see 6.2), a weather resistant shipping container shall be fabricated in accordance with grade V3c or V3s of MIL-B-17757 and closed in accordance with the appendix of the container specification. If specified by the procuring activity (see 6.2) the material for the shipping container shall conform to grade V4s of PPP-F-320.

5.2.3 Commercial. Belts shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rule and U. S. Postal Service Manual or regulation of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Mixed sizes. Each shipping container that is packed with mixed sizes (see 5.2.1 and 5.2.2) shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 inches by 4 inches. The words "MIXED SIZES" shall be plainly stamped or printed on the label. The quantity and sizes of the belts contained in the shipping container shall be legibly stamped or printed under the words "MIXED SIZES" on the label.

6. NOTES

6.1 Intended use. The belt covered by this specification is intended to be worn by male personnel of the U. S. Marine Corps.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.
(b) Size required (see 1.2)
(c) When first article is not required (see 3.2, 4.4, and 6.4).
(d) Selection of applicable levels of preservation, packaging and packing (see 5.1 and 5.2).
(e) When optional weather resistant shipping container is required (see 5.2.2).
(f) When material for optional shipping container shall conform to grade V4s of PPP-F-320 (see 5.2.2).

6.2.2 Contract data requirements. Data conforming to Data Item Description DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903, and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on DD Form 1423 included in the contract.

6.3 Standard sample. The standard sample and color sample may be obtained from the procuring activity or as directed by the contracting officer.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figure 1 shows general design of the belt and is furnished for information only. In the event of conflict between the figure and the text of this specification, the text of this specification shall govern.

6.6 Fusing conditions. Specific machine setting should be obtained from the supplier of the particular fusible material for optimum results. The following fusing conditions include the recommendations of several suppliers of fusible material and are furnished for guidance only.

(a) Temperature between pressing surfaces of 300°F minimum and 320°F maximum, at the fuseline (not the temperature at the clock).

(b) Pressure between pressing surfaces of 6 pounds force per square inch ($lb_f/in^2$) minimum and 7 $lb_f/in^2$ maximum.

(c) Pressing time of 12 seconds minimum and 14 seconds maximum.

(d) Heat-dry.

6.7 Peel strength test. The procedure for the peel strength testing with a spring scale should be obtained from the supplier of the fusible material, and shall be accomplished 2 hours after fusing.

Preparing activity
Navy-MC

Project No. 8405-N944



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

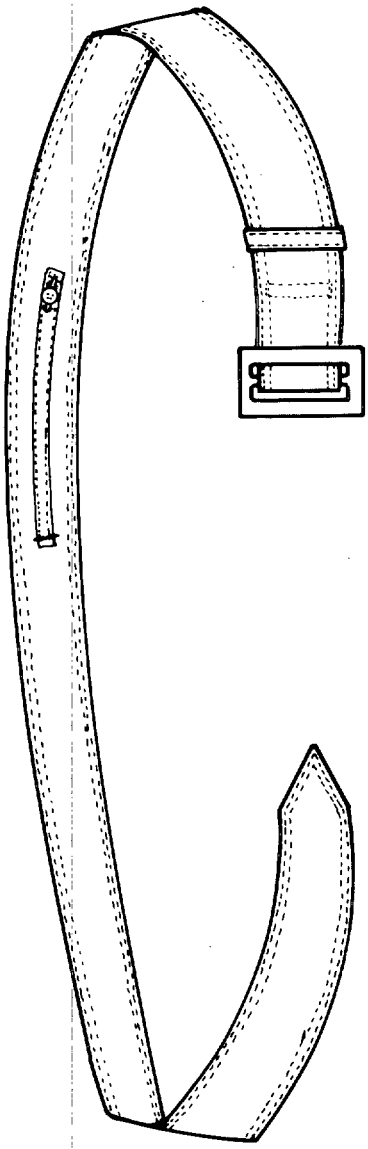


FIG. 1, BELT; ALL WEATHER COAT



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-B-29407(MC) Belt: For Coat, Man;s All Weather

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

**DD FORM 1 JAN 72 1426** REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.