INCH-POUND

MIL-B-29407A
6 SEPTEMBER 1990
SUPERSEDING
MIL-B-29407(MC)
8 September 1983

MILITARY SPECIFICATION

BELT: ALL WEATHER, COAT, MEN'S

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirement for belts for the all-weather coat for men.

1.2 Classification. The belts shall be one type in the following classes and sizes as specified (see 6.2).

Classes

Class 1 - Marine Corps pewter 2246
Class 2 - Army black 385

Schedule of sizes

30
32
34
36
38
40
42
44
46
48

NOTE: Belt sizes correspond to sizes of coats with which the belts are worn.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
A-A-50199	- Thread, Polyester, Cotton-Covered and Polyester-Covered
V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-1860	- Buckle, Slide, Plastic
MIL-T-3530	- Thread and Twine, Mildew Resistant or Water Repellent Treated
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Box, Shipping Fiberboard (Modular Sizes).
MIL-C-29363	- Cloth, Poplin, Polyester and Cotton (Water Repellent)
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification for

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-147	- Palletized Unit Load
MIL-STD-731	- Quality of Wood Members for Containers and Pallets
MIL-STD-1494	- Provisions for Evaluating Quality of Raincoats

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Department of Defense (DOD) Standard Shades for Buttons 1966

Department of Defense Standard Color Card
for Sewing Threads

(Applications for copies should be addressed to the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016).

2.2 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

American Society for Testing and Materials (ASTM)
D-3951 - Standard Practices for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from teh organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein. The text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the standard sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.3.

3.3 Materials.

3.3.1 Basic fabric. The fabric shall be 65 percent polyester/35 percent cotton poplin cloth, with a double water repellent finish (see 6.3), conforming to MIL-C-29363. The color shall be pewter shade 2246 or Army black shade 385 (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

3.3.2 Interlining. The interlining for the belt shall be a nonwoven fusible cloth of 85% polyester, 15% polyamide or 100% polyester, 1.75 to 2.0 ounces per square yard, polyamide paste dot. The color shall be charcoal for class 1 and charcoal or black for class 2. The fusible cloth shall be Pellon Style 8335 or 8416 or Handler Textiles 71915 or equal to or better.

3.3.3 Buckles. The plastic buckle for the belt shall be a 2-1/4-inch general purpose buckle conforming to class 2 of MIL-B-1860. The color shall be green AF cable No. 62017 for class 1 and black shade CT62001 for class 2. (See DoD Standard Shades for Buttons 1966).

3.3.4 Buttons. The button shall be style 20 or 21, size 24 conforming to type II, Class D of V-B-871. The buttons shall have a glossy finish and shall be green shade AF Cable No. 62017 for class 1 and black shade CT62001 for class 2. (See DoD Standard Shades for Buttons 1966).

3.3.5 Thread. The polyester/cotton covered thread shall be dyed shade taupe A, Cable No. 66030 for class 1 and shade black AA Cable No. 66043 for class 2 and shall conform to type I of A-A-50199 as follows: The thread shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530. (See DoD Standard Color Card for Sewing Threads, 1968).

USE	Ticket No.	Ply
Seaming, stitching, buttonholes,	50	2
and bartacks	70	2
Button sewing	30	2 or 3

3.3.5.1 Colorfastness. The dyed thread shall show fastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in A-A-50199. When no standard sample is available, the dyed thread shall show "good" fastness to wet-dry cleaning and light when tested as specified in A-A-50199.

3.3.6 Label. Combination identification, instruction and size marking shall be applied to each belt by heat transfer (decalcomania), direct printing or stamping conforming to type III or type IV, class 14 of DDD-L-20. The belts are intended to be dry cleaned and the marking shall show fastness to dry cleaning.

3.4 Design. The belts shall be U.S. Marine Corps design shown on Figure 1, having one end pointed on a 45-degree angle and the other end square to attach to the buckle with a keeper and belt fastener on the under side to secure belt to coat.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size and directional lines for cutting and are marked for proper assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

3.5.1 Pattern parts. Belts shall be cut from the material specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature	No of cut parts
	Material: Basic fabric	
1.	Belt	1
	Material: Interlining	
2.	Belt	1
	Marker	
3.	Belt Fastener	

3.6 Construction.

3.6.1 Manufacturing requirements. The belt shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The manufacturer will be not required to follow the exact sequence of operations as listed. The thread and the fabric shall not be lubricated by any means prior to or during the seaming.

3.6.2 Stitches, seams, and stitching. The stitch, seam, and stitching type specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. If two or more methods or seam or stitch types are given for the same part of an operation, any one of them may be used. Seams shall be sewn so that no raw edges, run offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that the stitching will not be tight or loose. Unless otherwise specified herein, edge stitching shall be 1/16 inch from edge and 1/4-inch gage. The ends of all seams and stitching not caught by other seams and stitching shall be backtacked not less than 1/2 inch. Thread breaks of stitch type 301 shall be secured by stitching back of the break not less than 1/2 inch.

3.6.3 Fusing operations. The fusing operations for fusing the fusible interlining specified in 3.3.2 to the basic fabric specified in 3.3.1 should be performed on a fusing press. Specific settings (see 6.6) for the particular fusible style and press to be used should be obtained from the supplier of the fusible material so that the optimum results can be obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the belt in strict accordance with patterns furnished by the Government. b. Cut the material in the direction indicated by the pattern. c. Cut the stripping 2 inches wide for the belt keeper and belt fastener in the direction of the warp so that the finished loops will be 1/2 + 1/16 inch wide. d. Cut the interlining part in accordance with the pattern.					
2.	Replacement of damaged parts. a. Remove any parts containing materials defects or workmanship damages that are classified as defects in MIL-STD-1494 from production during the spreading, cutting, and manufacturing process and replace with nondefective and properly matched parts. b. Replace at time of cutting any parts of belt containing holes or serious weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc., affecting appearance. c. Replace any parts damaged during the manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material affecting appearance.					
3.	Make belt keeper and fastener. Finished appearance. The finished strips shall be uniform in width, 1/2 ± 1/16 inch wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3.	Make belt keeper and fastener. (cont'd)					
	a. Make belt keeper and belt fastener from one ply of basic material.					
	b. Fold the raw edges to the center with raw edges abutted. Fold over on itself forming the 1/2 inch finished dimension and topstitch 1/16 inch from each edge.	301	EFp-1	10-12	50	50
	c. Cut the keeper 5 1/2 inches long. Fold in half end to end and join the ends together 1/4 to 3/8 inch from end. The finished keeper shall finish 2 1/2 ± 1/8 inches.	301	SSa-1	10-12	50	50
	d. Cut the fastener 9 1/2 inches long. Fold under one end of fastener 1 1/2 inches and stitch together 1/16 to 1/8 inch on both sides and across folded edge.	301	SFa-2	10-12	50	50
	NOTE: A Sonic Machine may be used to cut the strips to the proper length.					
	e. Make a horizontal straight type buttonhole on the fastener, cut 5/8 inch long, through the center of the turned under portion, securely tacking each end of buttonhole.	Buttonhole		42-48 per buttonhole (minimum) including tack	50	50
4.	Make belt.					
	Finished appearance. The belt shall finish smooth and flat, without pleats, puckers or raw edges. The gage of stitching shall be uniform in width. The belt shall finish 2 1/8 ± 1/8 inches wide. The belt fastener shall finish on the underside of the belt.					
	a. The belt shall be made of one ply of basic material interlined with fusible material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4.	Make belt. (cont'd)					
	b. Position the belt interlining to the inside of belt and fuse (see 3.6.3).					
	c. Mark on the outside of the belt the location for sewing belt fastener and button in accordance with pattern marker.					
	d. Turn under the raw edge of the fastener 3/8 to 1/2 inch and bartack the fastener to belt 1/8 to 3/16 inch from folded edge. The bartack shall be across the width of the fastener. The fastener, when buttoned, shall be smooth and flat without twist or bulging.	Bar-tack		28 stitches per bartack	50	50
	e. Sew a 24-line button on the mark to properly engage the buttonhole for the belt fastener.	101 or 301		14-16 per button	30	30
	f. Fold the belt in half lengthwise with the belt fastener enclosed within the fold. Stitch the entire length of belt 1/4 inch from raw edge.	301	SSa-1		50	50
	g. Close the pointed end with 1/4 inch seam along the slanted edge.	301	SSa-1		50	50
	h. Trim the pointed end of belt for proper turning. Turn the belt on the right side through the open end, working out the point and seam to the edge.					
	i. Edgestitch both sides and pointed end of belt with a double row of stitching 1/16 inch from seamed and folded edge and 1/4 inch gage.	301	SSe-3(b)	10-12	50	50
	j. Press belt smooth and flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4.	Make belt. (cont'd)					
	k. Position the belt keeper on the belt 6 inches from the unfinished end. Tack or bartack the keeper to the belt, on each side of seam allowance of keeper, on the under side of belt. Stitch through all plies.	Bar-tack		28 per bartack	50	50
	l. Fold unfinished end of belt over the buckle bar 2 3/4 ± 1/4 inches.					
	m. Turn under raw edge and double stitch to belt 1/16 inch from folded edge and 1/4 inch gage.	301	Efb-2	12-16	50	50
	-or-					
	Alternate Method: The raw edge of belt may be overedge stitched and double stitched to belt 1/8 and 3/8 inch respectively from overedge stitched end.					
	NOTE: A Sonic Machine may be used to cut the belts to the proper lengths.					
5.	Mark belt.					
	a. Print the combination label (see 3.3.6) on the underside of each belt at the center back.					
6.	Clean belt.					
	a. Trim all ends of stitching and remove from belt. Remove all spots and stains from the belt without injury to the fabric.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished measurements of the belt shall conform to the following.

Measurements in Inches	
Size	Belt Length
30	38
32	40
34	42
36	44
38	46
40	48
42	50
44	52
46	54
48	56
Tolerance ±	3/4

Belt length measurement shall be taken along the center from end to end.

3.8 Workmanship. The finished belt shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptble practice to ascertain conformance to erquiements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manfacturing process necessary to ensure compliance with all dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 First article inspection. When first article is required (see 3.2 and 6.2), it shall be examined for the defects specified in MIL-STD-1494.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-1494.

4.4.1 Component and material testing. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. The method of testing shall be as specified in FED-STD-191, wherever applicable. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Lot Size (lot unit)	Sample Size (sample unit)
800 or less	2
801 to 22 000 inclusive	3
22,001 and over	5

4.4.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations for subassemblies.

4.4.2.1 Bond strength of fusible interlining. The strength of the bond of the fusible interlining to the basic material shall be tested once each 4 hours as follows at each fusing press to determine that adequate fusing is being obtained. Prepare a test sample by fusing the fusible interlining specified in 3.3.2 to the basic fabric specified in 3.3.1 under the same fusing conditions to be used in the manufacture of the belt. Determine the bond strength of the test sample with a commercial spring scale (see 6.7). If the bond strength of any test sample is less that 22 ounces per inch of width, the fusing conditions shall be corrected and the bond strength test shall be repeated. Those units represented by this test shall fused again and retested. If they fail, they shall be rejected.

4.4.3 End item visual examination. The end items shall be examined for visual defects in accordance with the provisions of MIL-STD-1494.

4.4.4 End item dimensional examination. The end items shall be examined for dimensional defecs in accordance with provisions of MIL-STD-1494.

4.4.5 Packaging examination. The fully packaged end items shall be examined in accordance with the provisions of MIL-STD-1494.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified.
	Container pattern not as specified.
	Interlocking of loads not as specified.
	Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each belt shall be folded in half and then folded in half again with the size visible. The folded belts shall be stacked in bundles and tied approximately 1 inch from each end with strong twine or cotton tape. Each bundle shall contain 10 belts of one size only.

5.1.2 Commercial. Each belt shall be packaged in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level B or commercial as specified (see 6.2).

5.2.1 Level B. One hundred fifty belts of one size only, packaged as specified shall be packed in a fiberboard shipping container that is assembled, closed, and reinforced in accordance with type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level B packages shall be packed in such a manner that bundles of belts cannot move within the box. The top and the bottom of the contents of the shipping container shall be completely covered with a sheet of 30-pound (minimum) basis weight paper conforming to grade B of A-A-203.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

5.2.2 Commercial. Belts, packaged as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4 Palletization. When specified (see 6.2), belts, packed as specified in 5.2.1 and 5.2.2 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups, I, II, III or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C or D or film bonding means F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does does conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The belt covered by this specification is intended to be worn by male personnel of the U.S. Marine Corps and the U.S. Army.

6 . 2 Acquisition requirements.

a. Title, number and date of this specification.
b. Size and class required (see 1.2).
c. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.2, 4.4 and 6.4).
e. Levels of packaging and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.4)
g. When palletization is required (see 5.4).

6.3 Standard sample. The standard sample and color sample may be obtained from the procuring activity or as directed by the contracting officer.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first articles, preproduction samples, first production or sample(s) taken from the first lot depending on the contractor's history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

6.5 Figures. Figure 1 shows general design of the belt and is furnished for information only. In the event of conflict between the figure and the text of this specification, the text of this specification shall govern.

6.6 Fusing conditions. Specific machine setting should be obtained from the supplier of the particular fusible material for optimum results. The following fusing conditions include the recommendations of several suppliers of fusible material and are furnished for guidance only.

(a) Temperature between pressing surfaces of 280°F minimum and 310°F maximum, at the fuseline (not the temperature at the clock).

(b) Pressure between pressing surfaces of 4 pounds force per square inch ($1b_f/in^2$) minimum and 5 lb_f/in^2 maximum.

(c) Pressing time of 10 seconds minimum and 12 seconds maximum.

(d) Heat-dry.

6.7 Peel strength test. The procedure for the peel strength testing with a spring scale should be obtained from the supplier of the fusible material, and shall be accomplished 2 hours after fusing.

6.8 Subject term (key word) listing.

Polyester-cotton
Water repellent

6.9 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing Activity
Navy - MC
Project No. 8410-N122

Custodian:
Army-GL

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

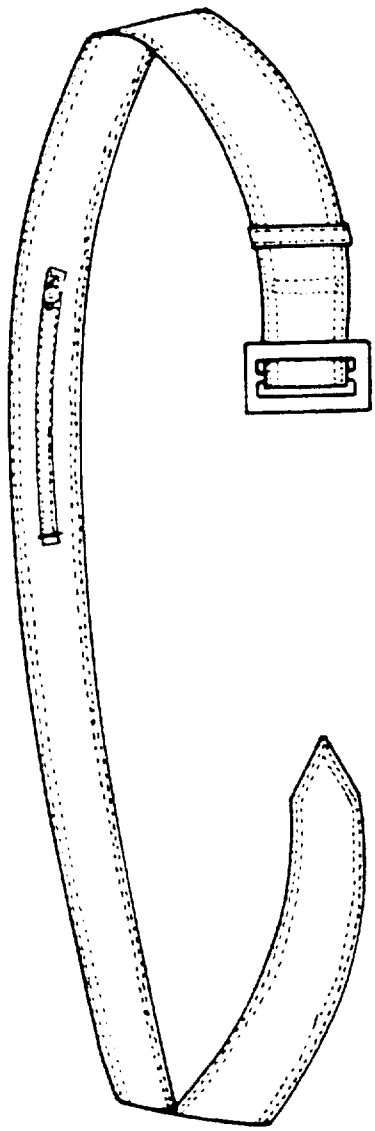


FIG. 1, BELT; ALL WEATHER COAT

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-B-29407A(MC)	6 September 1990

DOCUMENT TITLE

BELT: ALL WEATHER, COAT, MEN'S

NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

REASON FOR RECOMMENDATION

SUBMITTER		
NAME (Last, First, Middle Initial)	b. ORGANIZATION	
ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

PREPARING ACTIVITY		
NAME c~~m~~anding General, Marine Corps Research, lopment, and Acquisition Command (PSE-C)	b. TELEPHONE (Include Area Code) (1) Commercial (202) 696-1186/87/88	(2) AUTOVON 226-1186/87/88
ADDRESS (Include Zip Code) ashington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:57Z
Check the source to verify that this is the current version before use.