INCH-POUND

MIL-C-29427A
AMENDMENT-1
DEC 24 1991

MILITARY SPECIFICATION

COATS, WOMEN'S

This amendment forms a part of Military Specification MIL-C-29427A(MC), dated 9 October 1990, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 21

Table I Manufacturing Requirements

Oper 18.c, Add as first sentence "The notch for placement of inside pocket shall be in line with 3rd buttonhole from the top."

PAGE 28

Delete operation 31 in entirety and add:

"SET SWORD SLIT TAB AND MAKE OPENING (CLASS 2 AND 3 ONLY)

Finished appearance. Sword slit and tab shall finish without distortion of the coat. All stitching shall be uniform and securely caught in the fabric. The sword slit shall be properly position.

a. Mark location for sword slit on left front between the side seam and the breast dart seam in horizontal alignment with the lower front button and buttonhole, for a distance of 2 inches. Mark sword slit tab 1 3/4 inches from the bottom finished edge for seaming on the coat.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T23:05Z
Check the source to verify that this is the current version before use.

b. Position sword slit tab on outside of front with marked lines on tab and front matching. Seam tab to front at marked lines without catching lining.

301	SSa-1	12-16	40/3 or A	40/3 or A

c. Position welt piece for lower edge of sword slit opening on outside of front with raw edge placed under sword slit tab and abutting tab seam line.

d. Seam welt piece to front 1/8 to 3/16 inch from raw edge through the front without catching the lining.

301	LSbj-1	12-16	40/3 or A	40/3 or A

e. Cut the opening for the sword slit midway between the seam lines joining the tab and welt piece to the front, tongue notching each end of the opening. The notches shall be cut to a sufficient depth for proper turning of the tab and welt piece but shall not show on the outside of the finished coat.

f. Turn welt piece through opening to inside of coat forming a 1/8 to 3/16 inch wide welt at lower edge of opening. Raise stitch lower edge of opening through the front welt seam and welt 1/16 inch below the seam line joining welt to front.

301	SSbe-2	12-16	40/3 or A	40/3 or A

g. Turn down sword slit tab and raise stitch the front 1/16 inch above the joining seam line through the tab seam allowance. Do not catch lining during the raise stitching.

301	LSq-2	12-16	40/3 or A	40/3 or A

h. The ends of the sword slit opening shall be bartacked."

PAGE 43

Operation 68, after Finished appearance paragraph, delete remainder of operation and add:

"a. Properly position left front lining and baste to front to hold in position for cutting of opening for sword slit tab. Cut opening for sword slit tab in lining to correspond with opening in front.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:05Z
Check the source to verify that this is the current version before use.

b. Turn under raw edges of lining at cut opening and fell the folded edge to the front welt and top of sword slit tab.

Hand	6-8 stitches	C (silk)

c. Cut a two inch long opening in the 3X3 inch sword slit patch, made of undercollar cloth 1 1/4 inches from top edge. The opening shall be 1 inch on each side of vertical center of patch.

d. Position patch on top of lining with opening in patch aligned with opening in lining. Fell patch to lining on all edges and fell raw edges of patch at opening to forepart.

Hand	8-10

e. Pull tab through opening to inside of coat, and mark patch for location of one 22 line sewing hole button to properly engage with buttonhole tab. Sew on button.

Hand	8 per button double thread".

Add New Figures 5, 6, and 7

Custodian
Navy - MC

Preparing Activity
DLA - CT

Project No 8410-N792

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:05Z
Check the source to verify that this is the current version before use.

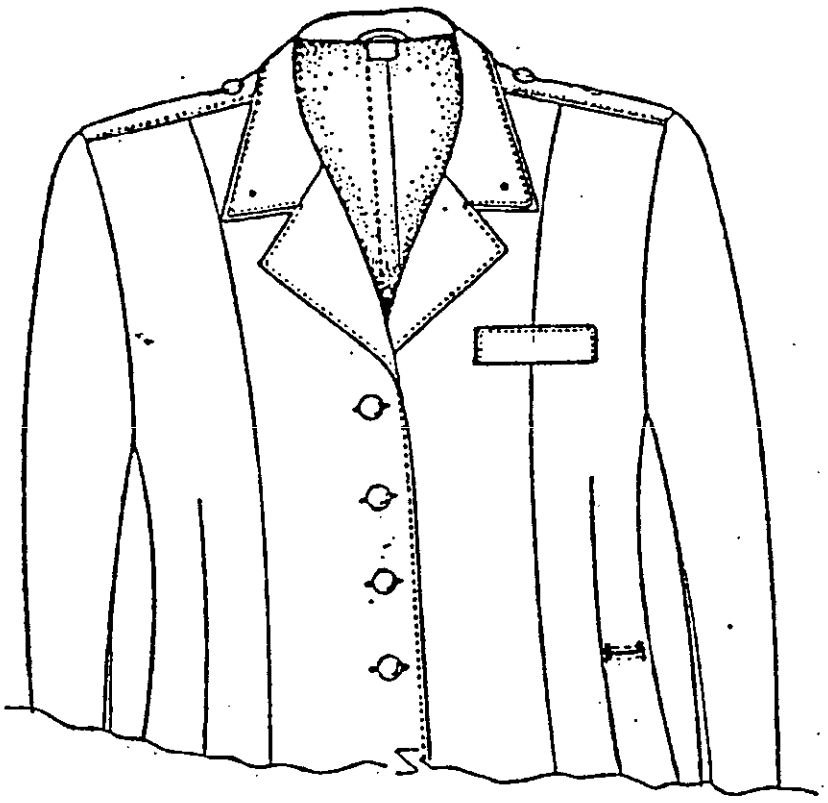


Figure 5. Outside view of sword slit

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:05Z
Check the source to verify that this is the current version before use.


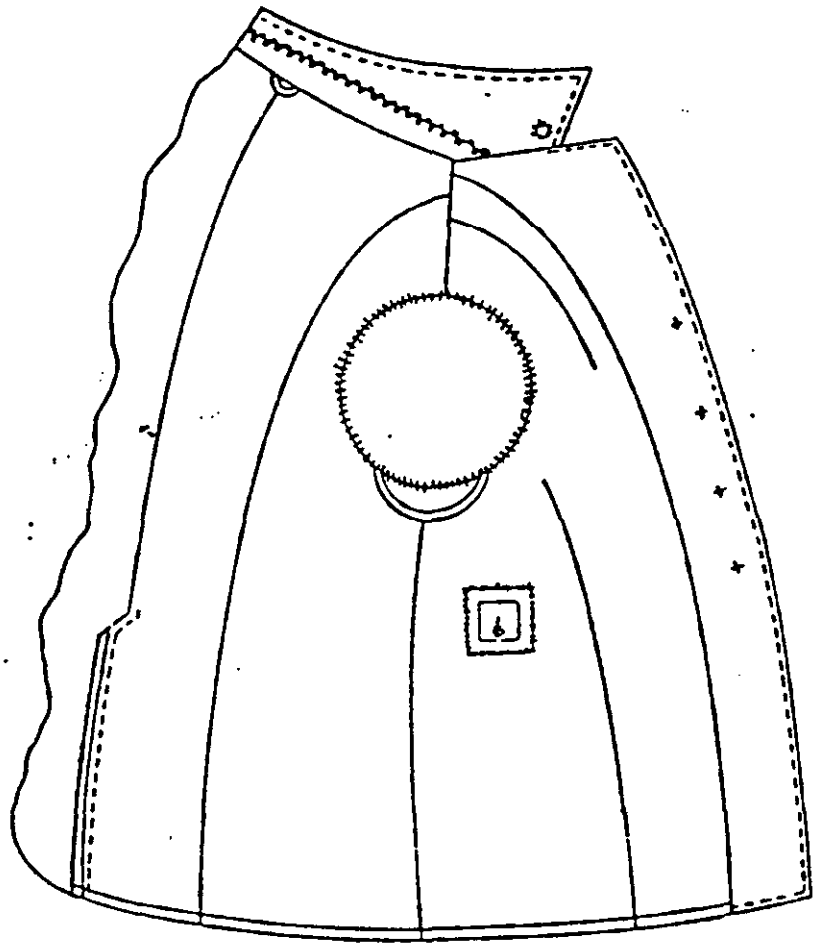


Figure 6. Inside view of sword slit

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:05Z
Check the source to verify that this is the current version before use.

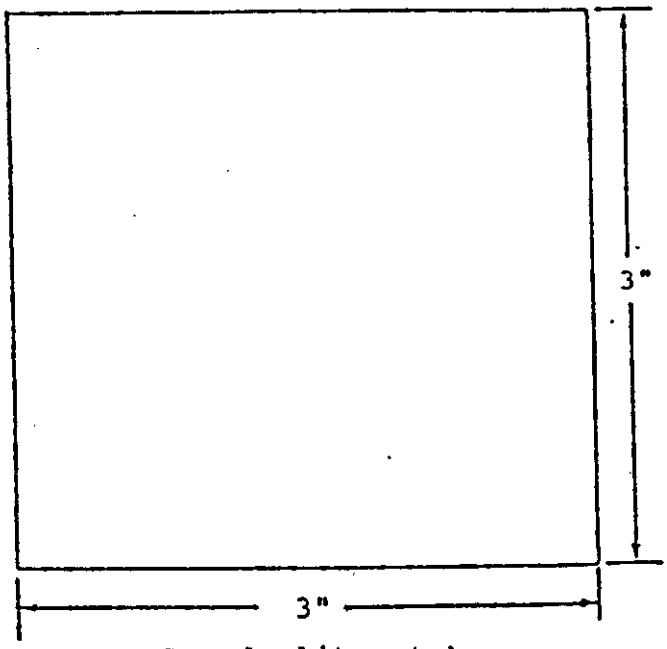

Sword slit patch

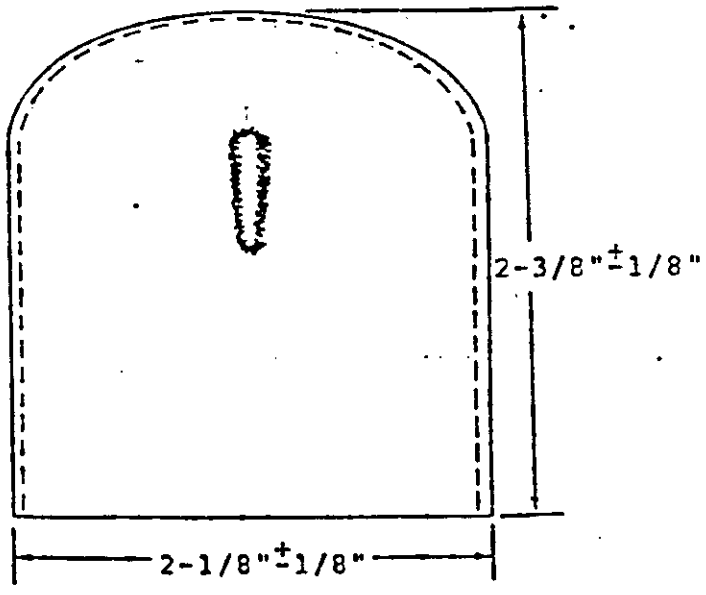


Figure 7. Sword slit tab

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:05Z
Check the source to verify that this is the current version before use.