INCH-POUND
MIL-DTL-29427C
18 July 2025
SUPERSEDING
MIL-C-29427B
21 November 1994
and
MIL-C-29480 (MC)
28 July 1995

DETAIL SPECIFICATION

COATS, WOMEN'S SERVICE

This specification is approved for use by the United States Marine Corps (USMC), Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a USMC women's service coat.

1.2 Classification. The coats are of one type in the following class and sizes, as specified (see 6.2).

1.2.1 Classes. The coats are available in the following class.

Class 1 Polyester/Wool, Gabardine, Green 2212

1.2.2 Sizes. The coats are available in sizes 0X, 2, 4, 6, 8, 10, 12, 12, 14, 16 and 18 in lengths Extra-Short, Short, Regular, Long and Extra-Long.

1.3 Individual order. When coats are custom tailored to an individual order, this specification will govern, except the cut pieces may be modified to the extent necessary for good custom tailoring practice and the finished dimensional requirements will be determined based on modifications to the patterns.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

Comments, suggestions, or questions on this document should be sent to trpsptctstandardiz@dla.mil. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

COMMERCIAL ITEM DESCRIPTIONS

A-A-50067	-	Cloth, Flannel, Wool
A-A-50198	-	Thread, Gimp, Cotton, Buttonhole
A-A-50199	-	Thread, Polyester Core, Cotton or Polyester-Covered
A-A-52071	-	Tape, Textile, Cotton, General Purpose
A-A-52105	-	Cloth, Interfacing, Cotton, or Synthetic Warp, and Spun Hair-Wool, Rayon or Synthetic Filling
A-A-59826	-	Thread, Nylon
A-A-59994	-	Button, Sewing Hole, and Button, Staple, (Plastic)

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-371	-	Braid, Textile, Tubular
MIL-DTL-495	-	Finish, Chemical, Black, For Copper Alloys
MIL-B-3461	-	Button, Insignia, Metal, Uniform and Cap
MIL-DTL-10176	-	Cloth, Gabardine: Wool, Polyester and Wool
MIL-DTL-15064	-	Pads, Shoulder and Sleeve-Head
MIL-C-15065	-	Coat Fronts
MIL-B-20289	-	Button, Insignia, Plastic
MIL-DTL-32075	-	Label: For Clothing, Equipage, and Tentage, (General Use)
MIL-C-44296	-	Cloth, Fusibles

(Copies of these documents are available online at https://quicksearch.dla.mil/.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC EP1	-	Gray Scale for Color Change
AATCC EP2	-	Gray Scale for Staining
AATCC TM8		Colorfastness to Crocking: Crockmeter
AATCC TM15	-	Colorfastness to Perspiration
AATCC TM20A		Test Method for Fiber Analysis: Quantitative
AATCC TM132	-	Colorfastness to Drycleaning
AATCC TM133	-	Colorfastness to Heat: Hot Pressing
AATCC TM158	-	Dimensional Changes on Drycleaning, Perchloroethylene

(Copies of these documents are available online at www.aatcc.org.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

ASTM INTERNATIONAL

ASTM D3775	-	Standard Test Method for End (Warp) and Pick (Filling) Count of Woven Fabrics
ASTM D3776/D3776M-20	-	Fabric, Mass Per Unit Area (Weight) of Fabric
ASTM D5034	-	Fabrics, Textile (Grab Test), Breaking Strength and Elongation of Textile Fabrics (Grab Test)
ASTM D6193	-	Standard Practice for Stitches and Seams

(Copies of this document are available online at www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Inspections.

3.1.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.

3.1.2 Conformance inspection. When specified (see 6.2), a sample shall be subjected to a conformance inspection in accordance with 4.3.

3.2 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.3. Design. The coat is in the United States Marine Corps design described in table I and as shown on figures 1 through 7. Figures are for information only. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

TABLE I. Coat design.

Design Feature	Detail
Body	Fitted
	Six-panel front and four-panel back
	Fully lined
	Notched lapel
	Darts in front side panels for fullness of bust
Front closure	Single-breasted
	Four insignia buttons (buttonholes positioned on the right front and buttons sewn on the left front)
Collar	Rolled collar
	Eyelet at each end of collar for branch of service insignia
Sleeves	Long sleeves
	Ornamental sleeve cuffs
	Fully lined
Shoulder straps	Shoulder straps that button with insignia buttons
Pocket	Inside pocket
Vent	Center back vent

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

3.4 Materials.

3.4.1 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.4.2 Basic material. The basic material shall be cloth, polyester/wool gabardine, green, shade 2212 (see 6.3), conforming to type II, class 12 of MIL-DTL-10176 when tested as specified in 4.4.1.

3.4.3 Lining. The material for lining fronts, sleeves, vent, and the inside pocket, shall conform to the requirements of table II when tested as specified in 4.4.1.

TABLE II. Lining requirements.

Characteristic	Twill Requirement	Satin Requirement
Shade:	Good match to the basic material shade (see 6.4)	
Fiber identification	Acetate	
Weave	Twill or satin	
Yarns per inch (minimum)		
Warp	120	288
Filling	68	68
Weight, ounces per square yard (minimum)	3.8	4.9
Breaking strength, pounds (minimum)		
Dry: warp	74	83
Dry: filling	49	117
Wet: warp	54	54
Wet: filling	34	77
Colorfastness to perspiration, rating (minimum)		
Color change	5	5
Staining on cotton	3.5	5
Staining on wool	4.5	5
Colorfastness to drycleaning, rating (minimum)		
Color change	4.5	4.5
Staining on cotton	4.5	4.5
Staining on wool	4.5	4.5
Colorfastness to crocking, rating (minimum)	4.5	4.5
Dimensional stability to drycleaning, percent (maximum)		
Individual sample unit	±3.5	±3.5
Lot average	±3.0	±3.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

3.4.3.1 Bias binding. The binding for the armhole shield shall be bias cut out of the lining material specified in 3.4.3. The binding shall be 5/8 to 7/8 inch wide.

3.4.4 Fusible interlining. Fusible interlining shall be used for the facings, collar, and shoulder straps. The fusible interlining shall be non-woven fusible interlining, 20 percent nylon and 80 percent polyester, polyamide paste dot conforming to MIL-C-44296, type V or VI, class 1, style B when tested as specified in 4.4.1. The fusible interlinings shall be applied in accordance with the fusible manufacturer's recommended time, temperature, and pressure settings.

3.4.5 Flannel cloth. The under-collar cloth shall be wool flannel conforming to A-A-50067. As an alternate, material that meets the requirements of table III, when tested in accordance with 4.4.1, may be used. The color of the cloth shall be a green shade closely matching the basic material (see 6). The acidity (pH) requirement and colorfastness to perspiration and crocking requirements shall not apply.

TABLE III. Alternate flannel fabric properties.

Characteristic	Requirement
Fiber content	100 percent polyester
Construction	Needle punched non-woven material
Weight (ounces per square yard)	8.0 to 10.0
Thickness (inch at 0/6 pounds per square inch)	0.070 and 0.095

3.4.6 Shoulder pads. The shoulder pads shall conform to type III, class 1 of MIL-DTL-15064 when tested as specified in 4.4.1.

3.4.7 Sleeve head pads. The sleeve head pads shall conform to type IV of MIL-DTL-15064 when tested as specified in 4.4.1. As an alternative, the sleeve head may be provided on a continuous roll and cut to the required length as long as the finished coat meets appearance requirements.

3.4.8 Coat fronts. The coat fronts shall conform to type IX of MIL-C-15065, except the cotton warp, hair-wool filling cloth and stays should be dyed black. The dyed cotton warp, hair-wool filling cloth shall show fastness to dry cleaning, perspiration, and steam pressing equal to or better than the standard sample. As an alternative, the coat front and center back vent may be fused using a woven cloth fusible.

3.4.9 Tape. The tape shall be cotton conforming to A-A-52071 as specified in 3.4.9.1 and 3.4.9.2. The requirement for non-fibrous material shall not apply. Fusible tapes may be used where appropriate and where the use of these tapes does not affect the finished quality or appearance.

3.4.9.1 Stay tape. The stay tape shall conform to type II, class 2 of A-A-52071, 3/8 inch wide for the front edges of coats and 1/4 inch wide for the armholes, back vent, and waist seam.

3.4.9.2 Bridle tape. The bridle tape for the break line of the lapel shall be 5/8 inch wide, conforming to type I, class 1 of A-A-52071.

3.4.10 Hanger loop. The hanger loop shall be made from cotton, tubular, flat braid, conforming to MIL-DTL-371, type IX, class 1 when tested as specified in 4.4.1. The shade shall be black or a good match to the basic material.

3.4.11 Thread. The thread shall conform to the documents cited in table IV. All threads, except those used for basting, shall be a good match to the basic material. Basting thread may be white or clear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE IV. Thread.

Use (Seam Type)	Description	Document	Ticket No. (Tex)	Ply
Seaming (301)	Cotton-covered polyester core	A-A-50199, type I	50 (36-45) for needle and bobbin	2
Seaming (401)	Cotton-covered polyester core	A-A-50199, type I	50 (36-45) for needle	2
			70 (31-35) for looper	
Overedging (504 and 505)	Cotton-covered polyester core	A-A-50199, type I	70 (31-35) for needle and looper	2
Raise, edge, and topstitching	Cotton-covered polyester core	A-A-50199, type I	50 (36-45) for needle and bobbin	2
Machine tacking armholes	Cotton-covered polyester core	A-A-50199, type I	30 (61-70)	2 or 3
Buttons	Cotton-covered polyester core	A-A-50199, type I	30 (61-70)	2 or 3
Tacking (103 or Hand)	Cotton-covered polyester core	A-A-50199, type I	50 (36-45)	2
			70 (31-35)	
Buttonholes	Nylon, twisted, soft finish	A-A-59826, type I, class A	Government letter Size B (45-46)	2 or 3
			Government letter Size F (90-101)	3 or 4
Eyelets	Nylon, twisted, soft finish	A-A-59826, type I, class A	Government letter Size B (45-46)	2 or 3
Felling	Nylon, tailoring, twisted multiple cord, soft finish	A-A-59826, type VI	Government letter Size O (24)	2 or 3
Padding lapels	Nylon	A-A-59826, type III	00 (16)	
Buttonhole reinforcement	Cotton gimp	A-A-50198, soft or glazed finish	8 (210)	
Basting	Commercial grade cotton, cotton-covered polyester core, nylon, or monofilament synthetic (see 3.4.11.1)			

3.4.11.1 Synthetic thread. A monofilament synthetic thread may be used for those basting operations where the thread is required to be removed, provided the garment is subsequently given a treatment of a dry-cleaning agent in which the synthetic thread is soluble. When this thread is used, any residue remaining on the garment after the dry-cleaning process shall be brushed off or removed.

3.4.12 Buttons.

3.4.12.1 Insignia buttons. The insignia buttons shall conform to type I, 40-ligne, and type II, 27-ligne, black finish, conforming to MIL-B-20289. As an alternate, insignia buttons conforming to type II, style 3, class B of MIL-B-3461 may be used. A dull black epoxy finish in lieu of dull black enamel finish is acceptable with prior approval from the contracting agency.

3.4.12.2 Sewing hole buttons. The sewing hole buttons shall be melamine formaldehyde composition, glossy finish, conforming to type I, style 15, class 1, 18-line of A-A-59994. The color shall be black or a good match to the basic material.

3.4.13 Labels. Each coat shall have a combination identification/instruction label, a size label, and a barcode label/tag conforming to the requirements below. When specified, each coat shall have a DLA troop support exclusive label (see 6.2). The order of information on the labels may be modified to facilitate production of the labels. The coat is intended to be dry cleaned and the labels shall show fastness to dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

3.4.13.1 Identification/instruction label. The identification/instruction label shall conform to type VI, class 15, of MIL-DTL-32075 including the colorfastness to dry cleaning requirements, when tested as specified in 4.4.1. The color of the label shall be white, and the label shall measure not less than 2-1/2 inches wide by 1-1/2 inches long. The content shall be as follows, with information inserted in place of the descriptors, as applicable:

Nomenclature:

Contract number:

Name of contractor:

Wool Products Act information

DRY CLEAN ONLY

3.4.13.2 Size label. The size label shall be type VI, class 2 of MIL-DTL-32075 and shall measure not less than 1-1/2 inches by 1 inch. The label shall consist of the size and length designation specified in 1.2.2 followed using the letters XS, S, R, L, or XL (for Extra-Short, Short, Regular, Long, or Extra Long), with the stock number positioned below the size and length designation.

10R

(stock number)

3.4.13.3 DLA troop support exclusive label. If used, the exclusive label shall be approximately 2 inches by 2 inches. The proposed finished label design shall be submitted to the contracting officer for approval. The content shall be as follows, with information inserted in place of the descriptors, as applicable:

DLA logo

“Made exclusively for Defense Logistics Agency by”

Name of contractor:

3.5 Patterns. Standard patterns will be furnished by the Government as specified (see 6.2). Government patterns show size, seam allowances, and directional lines for cutting and are marked or notched for proper placement and assembly of component parts. The directional lines indicate the warp direction of the cloth unless otherwise indicated on the patterns. The list of pattern parts in 3.5.1

3.5.1 List of pattern parts. Coats shall be cut from the materials specified herein in accordance with the number of pattern parts indicated in table V.

TABLE V. List of pattern parts.

Material	Item	Number of Cut Parts
Basic material (see 3.4.2)	Front	2
	Side front	2
	Center back	2
	Side back	2
	Front facing (right)	1
	Front facing (left)	1
Basic material (see 3.4.2)	Top sleeve	2
	Under sleeve	2
	Top collar	1
	Armhole shield	2
	Shoulder straps	2
	Cuff	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE V. List of pattern parts. Continued

Material	Item	Number of Cut Parts
Lining (see 3.4.3) 1/	Front	2
	Right center back	1
	Left center back	1
	Side back	2
	Top sleeve	2
	Under sleeve	2
	Inside pocket	2
Fusible interlining (see 3.4.4)	Front	2
	Side front	2
	Front facing right	1
	Front facing left	1
	Collar interfacing	1
	Shoulder strap	2
	Cuff	2
Cloth, wool, flannel	Under collar	1
Shapers	Working lapel shaper	0
	Finished collar and lapel shaper	0
	Under collar shaper	0
	Left vent shaper	0
Markers	Sleeve cuff marker	0
	Collar stand marker	0
	Right front marker	0
	Left vent marker	0
Canvas	Front canvas	2
	Side front canvas	2
	Chest piece	2
	Chest piece reinforcement	2
	Chest piece gusset	2
Felt	Chest piece felt	2
Haircloth	Shoulder piece haircloth	2

FOOTNOTES:
1/ For each coat, full lined design pattern pieces shall be used. No mixing is permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

3.6. Finished dimensions. The finished coat shall conform to the measurements shown in table VI and table VII, as defined in table VIII. All measurements and tolerances are expressed in inches.

TABLE VI. Coat measurements.

	Tol.	X0	2	4	6	8	10	12	14	16	18
A: Half Bust	±3/4	16-3/4	17-1/4	17-3/4	18-1/4	19	19-3/4	20-1/2	21-1/2	22-1/2	23-1/2
B: Back Length											
X-Short	+3/4, -3/8	22-3/4	22-7/8	23-1/8	23-3/8	23-1/2	23-5/8	23-7/8	24	24-1/4	24-3/8
Short	+3/4, -3/8	24	24-1/8	24-3/8	24-5/8	24-3/4	24-7/8	25-1/8	25-1/4	25-1/2	25-5/8
Regular	+3/4, -3/8	25-1/4	25-3/8	25-5/8	25-7/8	26	26-1/8	26-3/8	26-1/2	26-3/4	26-7/8
Long	+3/4, -3/8	26-1/2	26-5/8	26-7/8	27-1/8	27-1/4	27-3/8	27-5/8	27-3/4	28	28-1/8
X-Long	+3/4, -3/8	27-3/4	27-7/8	28-1/8	28-3/8	28-1/2	28-5/8	28-7/8	29	29-1/4	29-3/8

C: Sleeve Length (all sizes)		
	Tol.	
X-Short	±3/8	15-3/4
Short	±3/8	16-3/4
Regular	±3/8	17-3/4
Long	±3/8	18-3/4
X-Long	±3/8	20-3/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.



TABLE VII. Required measurements. [1/]

Finished coat part	Finished Dimensions	Tolerance
Collar stand width, at the center	1-1/2	±1/8
Collar eyelet opening	1/8	±0
Under collar stand width, at the center	1-1/4	±1/8
Shoulder strap width, at buttonhole eyelet end	1-1/2	±1/8
Shoulder strap width, at armhole seam	2-1/4	±1/8
Buttonhole opening length, at shoulder strap	3/4	±0
Buttonhole opening length, at front	1-1/4	±0
Front buttonhole distance from coat edge to inside edge of eyelet	5/8	±0
Sleeve cuff length, at front and back creased edges	2-3/4	±1/4
Sleeve cuff length, at point	4-3/4	±1/4
Hanger loop opening	1-1/2	±1/8
Lining back pleat width	3/8	-0, +1/8
Inside pocket width	5	±1/8
Inside pocket length	6-1/2	±1/8
Inside pocket opening	4-1/2	±1/8
Hem, coat bottom	1-1/4	±0
Hem, sleeve	1-1/2	±0
FOOTNOTES: [1/] All coat sizes and lengths.		

THIS SPACE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE VIII. Coat methods of measurement.

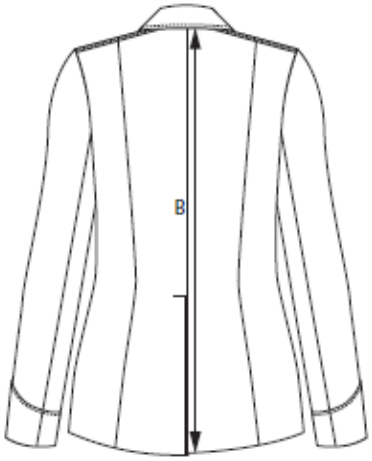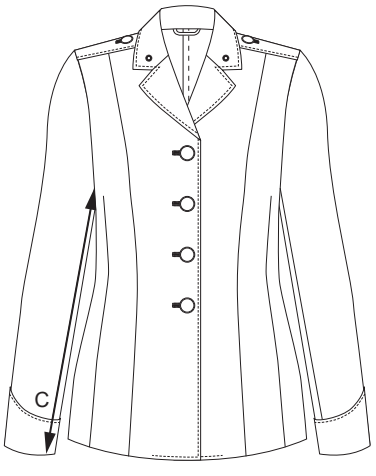Measurement	Description	Guidance
A: Bust	Measurement taken with the coat buttoned from folded edge to folded edge 1 inch below the base of the armhole.	
B: Back length	Measurement taken along the center back seam from the lower edge of the under collar to the bottom edge of the coat.	
C: Sleeve length	Measurement taken along the forearm seam from base to armhole to the bottom edge of the cuff.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

3.7. Construction. The coat shall be manufactured in accordance with the operations and the stitch type, seam type, and stitches per inch specified.

3.7.1 Cutting. Cut coats in strict accordance with the patterns furnished by the Government. All materials shall be cut in the direction indicated by the directional lines on the patterns. Cut all polyester/wool parts of the coat from the same lot of basic material, except the armhole shields may be cut from ends. When armhole shields are cut from ends, the shields should match each other. The lining fronts, lining side backs, and center back lining parts of the coat and facing for inside pocket shall be cut from the same lot of lining material. All other lining parts may be cut from ends. When pairs of sleeve linings are cut from ends, the shade of the lining parts shall match each other. The bias binding shall be cut 5/8 to 7/8 inch wide. Cut fusible interlining stays for the armhole, back neckline, and shoulder seams on the bias, 3/4 inch wide, 4 ±1/4 inches long. Cut the interlining cloth for collar on the bias in accordance with the pattern furnished. The use of drill holes is prohibited.

3.7.2 Stitches, seams, and stitching. The stitch and seam types specified in table IX shall conform to ASTM D6193. The number of stitches per inch as specified in table IX indicates the minimum and maximum number permitted. All overedge stitching shall be done on serging machines with a knife attachment properly set to trim the raveled edge without cutting the material. All stitching shall be uniformly gauged throughout the coat. Thread tension shall be maintained so there is no tight or loose stitching. All seams shall start and finish evenly. When more than one stitch type is specified for an operation, any of them may be used.

TABLE IX. Stitches, seams, and stitching.

Operation(s)	Stitch Type	Seam Type	Stiches per inch
Seaming (unless otherwise specified below)	301	SSa-1	10-14
	401	SSa-1	10-14
Seaming - Shoulder straps	301	SSe-2	10-14
Seaming - Joining cuffs to sleeves	301	LSd-1	10-14
Seaming - pleat in back lining and darts in front lining	301	OSf-1	10-14
Seaming - joining backs, fronts, and side fronts. Tape armholes. Seam reinforcement stay to armhole and shoulder.	301	SSaa-1	10-14
Undercollar - pad the interlining to the undercollar	103	SSm-1	4-6
Assembly - joining the top collar to the under collar	301	LSa-1	10-14
Joining facings and fronts with tape	301	SSa-1	10-14
Edgestitch - Shoulder straps, coat front edges, lapel front and top edges, left edge of center back vent.	301	SSe-2	10-14
Edgestitch – finished seam for collar, collar edges	301	SSb-1	10-14
Armhole shields - bias binding	301	BSb-1	10-14
Buttonholes - Shoulder Strap	-	-	40 per buttonhole (minimum) (not incl. tack)
Buttonholes - Coat Front	-	-	50 per buttonhole (minimum) (not incl. tack)
Buttons	Hand	-	4-6 per button (double thread)
	301	-	21 per button
	101	-	21 per button
Eyelets - Collar	-	-	20 per eyelet (minimum)
Felling - sleeve lining at armhole	Hand	-	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE IX. Stitches, seams, and stitching – Continued.

Operation(s)	Stitch Type	Seam Type	Stiches per inch
Felling - collar to coat	Hand	-	8-10
	Machine (hand type felling)	LSa-1	
	306	LSa-1	
Felling - joining back lining and facing-lining assembly at shoulders	Hand		8-10
	301	SSa-1	10-14
	401	SSa-1	10-14
Felling - sleeve lining at armhole (alternate) - (A Strobel or Durkoff sleeve felling machine is authorized)	Machine (hand type felling)	-	8-10
Felling - sleeve lining at armhole (alternate) - Sleeve Lining Machine (feed off the arm machine with a lower and upper feed)	301	SSa-1	10-14
	306	SSa-1	
	301	SSc-1	
Felling - Stay tape to coat front interlining	103	SSm-1	4-6
Felling - bottoms	Hand	-	8-10
	103	EF1-1	
	306	EF1-1	
Felling - folded edge of sleeve lining to cuff turnup	Hand	-	8-10
	103	SSm-1	
Taping armholes	301	SSaa-1	10-14
	401	SSaa-1	10-14
Tacking - Facings at back edge to interlining (shall be through seam allowance of facing and linings)	103	SSa-1	4-6
	314	SSm-1	
	Hand	-	
Tacking - top collar to fronts at gorge	Hand	-	4-6
	301	SSa-1	10-14
Tacking - neck edge of coat to the undercollar lining	Hand	-	4-6
	103	SSm-1	
Tacking - Underarm shield to lining	Hand	-	4 per tack (minimum)
Tacking (or seam) lining to the sleeve back arm and forearm seam allowance	Hand	SSa-1	4-6
	301	SSa-1	4-6
Tacking - cuff to sleeve	103	SSm-1	4-6
Padding Lapels	103	SSm-7	4-6
	314	SSm-8	4-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE IX. Stitches, seams, and stitching – Continued.

Operation(s)	Stitch Type	Seam Type	Stiches per inch
Basting (unless otherwise specified below)	Hand	SSm-1	4-6
	101	SSm-1	4-6
Basting - interlining fronts, facing-lining assemblies to fronts, top collar and under collar, and lining at shoulders and neckline	101	Hopper	Variable
Bar tacks - End of buttonholes	-	-	20 per bartack (minimum)

3.7.3 Thread breaks and ends of seams. The ends of all seams and stitching produced with 301 stitch types, when not caught in other seams or stitching, shall be backstitched not less than 1/4 inch. When chain stitching is performed the looper thread (under thread) shall be on the inside of the coat. Ends of all chain stitching shall be caught in other seams or stitching. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches may be repaired by using 301 stitch type. Thread ends of darts shall be trimmed to a length of 1/2 inch. When an automatic dart machine is used, the ends shall be backstitched not less than three stitches.

3.7.4 Shade marking. The component parts of the coat shall be cut from one piece of basic material and lining material, including pairs of sleeve linings when cut from ends, and the two parts of the under collar cut from under collar cloth shall be shade marked to ensure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.

b. Sew-on shade tickets.

c. Adhesive type tickets which show discoloration or the use of an adhesive mass which adheres to the material upon removal of the tickets.

3.7.5 Replacement of damaged parts. Replace, at the time of cutting, any parts of the coat containing holes or serious weakening defects such as smashes, multiple floats, loose weakening slubs, other material defects listed 4.4.3.2 expected to develop into holes, shade bars, and dye streaks, or unsightly slubs affecting appearance. Replace any parts damaged during the manufacturing process which may develop into a hole by needle chews, scissor or knife cuts, tears, holes, mends, or burns in the material affecting appearance.

3.7.6 Pressing. The coat shall be well pressed throughout with a heated iron or pressing machine of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing practices. The coat shall be pressed smooth and flat, removing all fullness. There shall not be any wrinkles, creases, impressions, or pressing marks throughout the coat and the coat lining.

3.8 Construction requirements. End item construction and appearance shall conform to the requirements specified below.

3.8.1 Coat front. Bust lines on both sides shall be alike. The contour of the waist and hip line shall be maintained in the seaming. The facings shall be tacked at the back edge to the coat front interlining with blind stitching, starting approximately 2 inches from the bottom edge of the coat and tacking to approximately 2-1/2 inches from the shoulder edge of the interlining. Tacking shall be through the seam allowance of the facing and linings. Interlining fullness shall be properly distributed over the breast area. All shell seams and waist darts shall be pressed open and flat. The front edges of the coat shall have 1/8-inch edge stitching.

3.8.1.1 Outer shell seam allowances. The front, side front, and side back seams shall have a 3/8-inch seam allowance. The side front to side back joining seam shall have a 3/4-inch seam allowance. The center back seam shall have a 5/8-inch seam allowance from the top edge of the backs to approximately 3/4 inch below top end of the vent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

3.8.2 Waist darts. The waist darts shall have a 3/8-inch seam, tapering to a point at the upper end, and securely back tacked.

3.8.3 Lining. The coat shall be fully lined. The front lining shall have stitched darts. The darts shall be tapered from 3/8 inch to a point at the upper ends and secured with a back tack. The back lining shall have a center pleat measuring 3/8 to 1/2 inch wide. The pleat shall be tacked lengthwise in line with the notches for 1 to 1-1/2 inches from the top end. The facing-lining joining seams, side seams, and left and right back seams shall be pressed with the raw edges of the seam allowance toward the back. The darts shall be pressed with the edge towards the back.

3.8.3.1 Lining seam allowances. The lining shall be carefully and properly aligned and seamed to the facing with a 3/8-inch seam allowance. The back lining pieces, left and right side back linings, and sleeve linings shall be joined with a 3/8-inch seam allowance. The back and front linings shall be joined together with a 3/4-inch seam allowance.

3.8.3.2 Sleeve lining. The coat shall have a two-piece sleeve lining joined at the forearm and back arm. The back arm crease shall be on the back arm seam. The sleeve lining shall be seamed or tacked to the sleeve back arm and forearm seam allowance, starting approximately 5 inches above the finished bottom edge of the sleeve, continuing to approximately midway up the sleeve (see figure 3 and figure 4). The sleeve lining shall finish 1 to 1-1/4 inches above the finished end of the cuff. The sleeve lining may be felled to the bottom of the sleeve without basting.

3.8.4 Labels. The identification/instruction label and the manufacturer's label shall be stitched down on all sides with a single row of stitching 1/16 inch from the edge of the label. The DLA troop support exclusive label shall be stitched down on all sides with a single row of stitching 1/16 inch from the edge of the label. The ends of the label stitching shall overlap not less than three stitches. The manufacturer's label shall be sewn to the right front lining, horizontally with the edge of the label 1/8 inch from the inside pocket opening. When specified, the exclusive label shall be sewn in place of the manufacturer's label. The identification/instruction label shall be sewn to the pocket facing, 1/4 inch from the edge of the outer shell facing. The top of the size label shall be sewn into the collar seam at the inside center back of the coat.

3.8.5 Collar. The ends of the collar shall be 1-3/8 ±1/8 inches for all sizes when measured from the juncture of the collar and lapel to the finished edge. The collar shall have one eyelet at each end of the collar 1 inch from the side and upper edges, respectively. The eyelets shall be well worked with the purling on the outside of the collar and shall finish with a 1/8-inch diameter opening. The collar shall be edge stitched 1/8 inch from the finished edge.

3.8.5.1 Top collar. The top collar shall be joined to the under collar at the top edge with zig zag stitching, properly distributing the fullness between the notches. The zig-zag stitching shall extend to the end of the collar.

3.8.5.2 Undercollar. The undercollar assembly shall consist of one piece of under collar cloth and a single piece of interlining material. The interlining shall be padded to the undercollar with 6 to 7 rows of blind stitching. The undercollar shall be stitched to the interlining at the break-line; the stand shall be 1-1/4 ±1/8 inches at the center. The undercollar shall be stitched to the interlining 1/2 ±1/8 inch from the top and side edges.

3.8.6 Lapels. The gorge line shall be taped on the underside with 1/4-inch tape from shoulder to 1/4 inch below top of lapel. The front and top edges of the lapels shall have 1/8-inch edge stitching. The lapels shall be roll pressed on a suitable type heated pressing machine.

3.8.7 Shoulder straps. The shoulder straps shall be made of one ply of basic material and one ply of interlining and edge stitched 1/8 inch from the edge, along the folded sides and pointed end. The straps shall measure 2-1/4 ±1/8 inches wide at the armhole seam and shall taper to 1-1/2 ±1/8 inches at the buttonhole eyelet end. The shoulder straps shall be positioned with the pointed end of the strap even with the edge of the neck and with the raw edge in line with the armhole and the back finished edge of the strap 1/2 inch behind and in line with the shoulder seam. The shoulder straps shall have 1/8-inch edge stitching on all sides.

3.8.8 Sleeves. The coat shall have a two-piece sleeve. The back arm seam and the joining seam shall have a 3/4-inch seam allowance, with the fullness evenly distributed. The bottom of the sleeve outer shell shall be turned up 1-1/2 inches and blind stitched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

3.8.9 Sleeve cuffs. The point of the cuff shall be centered between the lower front creased edge and the creased back arm seam of sleeve. The cuff shall be stitched to the sleeve before the sleeve joining seam is stitched. The cuff ends shall be caught in the sleeve back arm seam. The cuff shall be 1/8-inch edge stitched. The finished cuff shall measure 2-3/4 ±1/4 inches at the front and back creased edges and 4-3/4 ±1/4 inches at the point.

3.8.10 Shoulder pads. The shoulder pads shall be inserted between the interlining and chest padding of the coat front, in line with the armhole edge and securely tacked to the interlining and chest padding only.

3.8.11 Sleeve head pads. The sleeve head pads shall be added to the coat with the folded edge of the pad approximately 1/8 inch back from the raw edge of the armhole seam and with the front end of the pad matching the notch in the fronts.

3.8.12 Sweat shields. The coat shall have sweat shields at each underarm. The sweat shield shall be cut from the basic material and shall have 1/4-inch binding along the curved, outer edge. The binding shall be stitched to the sweat shield 1/16 inch from the folded edge of the binding. The sweat shield shall be sewn into the underarm sleeve joining seam and sewn to the lining along the bound edge. The finished sweat shields shall measure not less than 2 inches in length from the folded edge of the sleeve lining.

3.8.13 Armhole stays. The armholes and shoulder edges of the front shall have reinforcement stays. The top end of the armhole stays and over edge of the shoulder stays shall form a right angle at the armholes without the stays overlapping each other.

3.8.14 Buttons. The coat shall have four 40-ligne insignia buttons for the coat front and two 27-ligne buttons for the shoulder straps. The buttons shall be securely sewn through all plies of material with the ends of the stitching securely tacked. The 40-ligne insignia buttons shall be secured with the sewing hole buttons.

3.8.14.1 Front button placement. The four 40-ligne insignia buttons shall be sewn to the left front of the coat to properly engage the buttonholes on the right front. The center of the buttons shall be 1-5/8 inches back from the finished edge of the coat front. The buttons shall be sewn with the eagle upright.

3.8.14.2 Shoulder strap button placement. Each shoulder shall have one 27-ligne insignia button to correspond with the buttonholes in each shoulder strap with no slack, bulging or distortion. The buttons for the shoulder straps shall be centered in the buttonholes at the base of the points. The buttons shall be sewn with the head of the eagle towards the edge of the collar.

3.8.15 Buttonholes. The buttonholes shall be eyelet-end, square bar, cut-first type, clean-cut, and reinforced with well worked over gimp. The stitching of the buttonholes shall be securely caught in the basic material. The end of the buttonhole shall be bar tacked. The gimp shall be pulled through to the underside of the front and caught in the bar tack. The purling of the buttonholes shall be on the outside.

3.8.15.1 Front buttonhole placement. Mark the right front in accordance with the marks on the pattern for the locations of four buttonholes. The buttonholes shall be 1-1/4 inches long and evenly spaced. The inside edge of the eyelet end of the buttonhole shall be 5/8 inch from the front edge of the coat.

3.8.15.2 Shoulder strap buttonhole placement. Mark the buttonhole 3/4 inch long in each strap midway between the back and front edges with the inside edge of the eyelet placed so that in the finished coat the edges of the shoulder strap button will be 1/4 to 1/2 inch from the edge of the collar. The purling shall finish on the outside of the strap.

3.8.16 Hanger loop. The coat shall have a hanger loop stitched into the neck of the coat at the inside center back. The hanger opening, in the finished coat, shall be 1-1/2 ± 1/8 inches long when measured along the neck edge of the collar.

3.8.17 Inside breast pocket. The inside breast pocket shall be made of 2 plies of lining material 5 inches wide by 6-1/2 inches long. The finished pocket shall have a 4-1/2-inch long opening. The ends of the pocket opening shall be back tacked.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

3.8.18 Back vent. The folded edge of the left vent shall be in vertical line with the center back seam. Stay tape (see 3.4.9.1) shall be stitched to the inside of the left center back along the vent. The left vent corner shall be finished with a mitered corner (do not cut corner). Or the left vent corner may be piped for 1-1/2 to 2 inches and turned up 1-1/4 inches at the hem and stitched by hand or machine. The edge of the right side of the vent shall extend beyond the center seam allowance of the left back part. The left and right sides of the vent shall have 1/8-inch edge stitching. The top end of the vent shall have stitching and backstitching through all plies, from the back center seam to the edge of the vent, for a distance of 1 inch.

3.8.19 Bottom hem. The bottom of the coat outer shell shall be turned up 1-1/4 inches and blind stitched. The lining shall be folded and basted approximately 1/2 inch from the bottom edge of the coat. The lining turnup shall be felled to the bottom turnup.

3.9 Workmanship. The finished coat shall conform to the quality and grade of product established by this specification. The finished coat shall have all basting thread pulled and removed. All ends of stitching shall be trimmed, and all loose ends of thread shall be removed from the coat. All spots, stains and shade tickets and markings shall be removed without injury to the material. All stitching throughout the coat shall be uniformly stitched. The coat shall finish smooth and flat without twists, gathers, puckers, pleats, or raw edges. Defects shall not exceed the established acceptance quality limits (AQL) (see 6.2) and shall not adversely affect the serviceability, appearance, and uniformity of the product.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

4.2 First article inspection. The first article, submitted in accordance with 3.1.1, shall be examined in accordance with 4.4 for compliance, with the design, configuration, workmanship, dimensional requirements, and testing as specified in this document.

4.2.1 First article sample and acceptance criteria. The first article sample size will be specified in the procurement document (see 6.2). The sample unit shall be one finished coat. The lot size shall be expressed in units of coats. The presence of defects exceeding the AQLs (see 6.2), or failure of any testing shall be cause for rejection of the first article.

4.3 Conformance inspection. Conformance inspection, submitted in accordance with 3.1.2, shall consist of the examinations and tests as specified in 4.4.1 through 4.4.4. The Government reserves the right to inspect and test all components and end items to determine conformance.

4.3.1 Component and material sampling and acceptance criteria. Unless otherwise specified in referenced documents or procurement documents (see 6.2), sampling shall be in accordance with table X and table XI. The unit for expressing the lot size and the sample unit for testing each component shall be in accordance with the applicable referenced document and table XI. The component lot shall be unacceptable if one or more sample units fail to meet any examination or test requirements specified in this document (see 6.2).

TABLE X. Material sampling.

Lot Size	Sample Size (Sample Unit)
800 or fewer	2
801 through 22,000	3
22,001 or more	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XI. Component sampling.

Component	Lot Size Expressed As	Sample Unit for Testing
Lining and armhole shield binding	Yards	3 yards full width
Chest piece padding	Yards	3 yards full width

4.3.2 End item sampling and acceptance criteria. Unless otherwise specified in the procurement documents (see 6.2), sampling for inspection shall be performed in accordance with ASQ/ANSI Z1.4. The sample shall be one finished coat. The lot size shall be expressed in units of coats. The presence of defects exceeding the AQLs or failure of any testing, as defined in the contract (see 6.2), shall be cause for rejection of the lot.

4.4 Inspection methods.

4.4.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. Testing shall be performed on components listed in table XII for characteristics noted. If one or more sample units fail to meet any applicable test requirements, that may be cause for rejection of the lot. Certificates of compliance specifying that components meet the requirements cited in section 3 may be accepted.

TABLE XII. Component verification.

Material	Requirement	Verification
Basic material	3.4.2	MIL-DTL-10176
Lining	3.4.3	As listed in table XIV
Fusible interlining	3.4.4	MIL-C-44296
Flannel cloth	3.4.5	A-A-50067
Flannel cloth: alternate material	3.4.5	As listed in table III
Shoulder pads	3.4.6	MIL-DTL-15064
Sleeve head pads	3.4.7	MIL-DTL-15064
Coat fronts	3.4.8	MIL-DTL-15065
Tape	3.4.9	A-A-52071
Hanger loop	3.4.10	MIL-DTL-371
Thread	3.4.11	as listed in table IV
Buttons: insignia buttons	3.4.12.1	MIL-B-20289
Buttons: insignia buttons, alternate	3.4.12.1	MIL-B-3461
Buttons: sewing hole buttons	3.4.12.2	A-A-59994
Labels	3.4.14	MIL-DTL-32075

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XIII. Test methods.

Components	Characteristics	Requirement	Test method	Results reported as
Cotton warp, hair wool filling cloth 1/	Colorfastness to:			Rating
	Dry cleaning	3.4.8	AATCC TM132 2/	
	Perspiration	3.4.8	AATCC TM15 2/	
	Hot pressing	3.4.8	AATCC TM133	
Interfacing	Shrinkage	3.4.4.1, 3.4.8, and 3.4.8.1	AATCC TM158	Actual value

FOOTNOTES:

1/ Sample size for cotton warp, hair wool filling cloth is 1/2 yard.

2/ Rated using AATCC EP1 and AATCC EP2.

TABLE XIV. Lining verification.

Characteristic	Requirement	Verification
Shade	Table II	Visual 1/
Fiber identification	Table II	AATCC TM20A
Weave	Table II	Visual 1/
Yarns per inch: warp and filling	Table II	ASTM D3775
Weight	Table II	ASTM D3776/D3776M
Breaking strength	Table II	ASTM D5034
Dry: warp and filling		
Wet: warp and filling		
Colorfastness to perspiration	Table II	AATCC TM15
Color change		
Staining on cotton		
Staining on wool		
Colorfastness to drycleaning	Table II	AATCC TM132
Color change		
Staining on cotton		
Staining on wool		
Colorfastness to crocking	Table II	AATCC TM8
Dimensional stability to drycleaning	Table II	AATCC TM158
Edge finish and width (armhole shield binding only)	3.4.3.1	Visual 1/ 2/

FOOTNOTE:

1/ Results reported as pass or fail.

2/ Width measurements shall be obtained using an appropriate calibrated measuring device

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

4.4.2 In-process examination. Visual and dimensional examinations shall be made at any point or during any phase of the manufacturing process to determine whether construction details that cannot be examined in the finished product are in accordance with the requirements specified in section 3. Materials and components that contain defects and damages as defined in the visual examination of 4.4.3.2 shall be removed from production. Any in-process nonconformance remaining in the finished coat shall be classified as a defect in accordance with the visual examination of 4.4.3.

4.4.3 Visual examination. The coat shall be examined for defects in color, design, material, construction, workmanship, and marking. The defects shall be classified in accordance with the list of defects specified in 4.4.3.2. The inspection conditions shall be as specified in the contract or purchase order (see 6.2).

4.4.3.1 Model forms. The coat sizes listed below shall be examined on the appropriate size model form in accordance with table XV.

TABLE XV. Model forms.

Coat Size	Model Form Size	Model Form Measurements (inches)		
		Bust	Waist	Hip
X0, 2, 4	4	33	24	34
6, 8, 10	6	34	25	35
12, 14	12	37	28	38
16, 18	16	40	31	41
Tolerance:		±1	±1/2	±1/2

4.4.3.2 Classification of defects. All defects shall be classified as indicated in table XVI. Any defect that affects appearance to an extent that it makes a coat unserviceable as a dress coat may be cause for rejection of the coat.

TABLE XVI. Defects.

Examine	Defect	Classification	
		Major	Minor
1. Pressing	a. Burned, scorched, or area with shine or gloss		201
	b. Pressing omitted entire garment		202
	c. Armhole stretched		203
	d. Poorly pressed (unless otherwise indicated)		204
	e. Basting or pressing impression not removed		205
	f. Gloss not removed		206
	g. Armholes not blocked or poorly blocked		207
	h. Edge bulky (i.e., not pressed solid)		208
	i. Inside of the armhole not creased as required		209
	j. Armhole seam not pressed open across the top as required		210
	k. Sleeve not creased at the front or back arm seam as specified		211
	l. Wrinkles not removed		212
	m. Lining not pressed smooth		213

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
2. Material defects and damages	a. Any hole, cut, tear, smash, mend, burn, scorched area, shade marking, or open place:		
	(1) On outside	101	
	(2) On inside (longest dimension in any direction)		
	(a) Up to 1/4 inch, inclusive		214
	(b) More than 1/4 inch		215
	b. Loose yarn, misweave, area of no dye penetration, dye streak, or woven in waste: more than 1/4 inch (largest dimension in any direction) on the outside		216
	c. Permanent fold, pleat, or crease in the cloth (when caught in the seaming or stitching) on the outside	102	
	d. Visible needle hole(s) (no thread present) or needle chew (i.e., presence of scuffed or broken yarns caused by stitching):		
	(1) On outside:		
	(a) Up to 1/4 inch, inclusive		217
	(b) More than 1/4 inch	103	
	(2) On inside, more than 1/2 inch		218
	e. Knot or slub on the outside (note: only knots and slubs that exceed the limits specified in the material specification shall be scored as defects in evaluating quality of the coat)		219
3. Shaded parts	a. On outside:		
	(1) Variation in shade between two or more parts (except parts which may be cut from ends)	104	
	(2) Variation in shade within a part (except part which may be cut from ends)	105	
	(3) Part cut from ends badly shaded		220
	b. On inside:		
	(1) Any lining part shaded (except sleeve lining)		221
	(2) Any sleeve lining part shaded or pairs not matching each other		222
4. Cleanness	a. Any spot or stain clearly noticeable:		
	(1) On outside	106	
	(2) On inside		223
	b. Thread ends not trimmed throughout the garment, one or more bastings not removed, or two or more shade tickets not removed		224
	c. Any residue of synthetic thread (when used) not brushed off or removed		225
5. Components and assembly	a. Any component part or required operation omitted (not herein classified)		226
	b. Any defective component or defect of assembly (not herein classified)		227

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
6. Cutting	a. Any component part not cut in accordance with the patterns or the specified requirements	107	
	b. Twill line of any outside part not running in specified direction	108	
7. Seams and stitching	a. Accuracy of seaming:		
	(1) Any seam twisted, gathered, puckered, or pleated		228
	(2) Part of the garment caught in any unrelated operation or stitching		229
	(3) Unsightly hand felling or blind stitching exposed on the outside of the coat affecting appearance		230
	(4) End of any stitching (when not caught in other seams or stitching) not back tacked or backstitched as required		231
	(5) Wrong shade of thread or two shades of thread used on the outside of the coat, affecting appearance		232
	b. Gage of stitching (edge, raise, and topstitching):		
	(1) Irregular (i.e., unevenly gaged, or various stitching not uniform), affecting appearance		233
	(2) Beyond the range of width specified or varies more than 1/16 inch when no range is specified		234
	c. Open seams:		
	(1) On outside:		
	(a) Up to 1/4 inch, inclusive		235
	(b) More than 1/4 inch but not more than 1/2 inch		236
	(c) More than 1/2 inch	109	
	(2) On inside, except machine felling:		
	(a) More than 1/2 inch		237
	(b) Up to 1/2 inch, inclusive		238
	(3) Machine felling:		
	(a) Up to 1 inch, inclusive		239
	(b) More than 1 inch		240
	d. Needle perforations visible on outside		241
	NOTE: One or more broken stitches or two or more continuous skipped or run-off stitches constitute an open seam.		
	e. Raw edges:		
	(1) On outside:		
	(a) Up to 1/8 inch, inclusive		242
	(b) More than 1/8 inch but not more than 1/4 inch		243
	(c) More than 1/4 inch	110	
	(2) On inside:		
	(a) More than 1/8 inch but not more than 1/4 inch		244
	(b) More than 1/4 inch		245
	NOTE: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under. Raw edges not caught in stitching shall be classified as an open seam.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
7. Seams and stitching - Continued	f. Stitch tension:		
	(1) Loose tension resulting in a loose seam (stitches grin)	111	
	(2) Loose tension on raised, edge, or top stitching, resulting in loosely exposed bobbin or top thread		246
	(3) Tight tension (stitches break when normal strain is applied)	112	
	g. Stitches per inch less than minimum specified by:		
	(1) One or two stitches (except label stitching)		247
	(2) Three stitches (except label stitching)		248
	(3) Four or more stitches (except label stitching)	113	
	(4) One or more stitches on the label		249
	NOTE: To be scored only if condition exists on major portion of the seam.		
	h. Wrong stitch or seam type		250
	i. Stitching skipped or broken (on edge, raised or topstitching when seam is seamed, turned, and stitched):		
	(1) 1/4 inch or more, but not more than 1/2 inch		251
	(2) More than 1/2 inch		252
	j. Outer shell panel seams not pressed open		253
	k. Any curved panel seam stretched or distorted, affecting appearance		254
8. Buttonholes	a. One or more omitted, added, or wrong type	114	
	b. Not corresponding to the size of the button:		
	(1) Too small, not permitting the button to enter the buttonhole	115	
	(2) Too large, longer than the diameter of the button by 3/4 inch or more (measured at the inside of the purling)	116	
	(3) Too large, longer than the diameter of the button by more than 3/8 inch, but less than 3/4 inch (measured at the inside of the purling)		255
	c. Buttonhole not securely caught on the fabric, causing the stitching to pull away from the fabric	117	
	d. Bartack missing or loose on the following:		
	(1) One front buttonhole		256
	(2) Two or more front buttonholes	118	
	e. Bartack misplaced, not serving intended purpose on one or more buttonholes		257
	f. One or more broken stitches in the following:		
	(1) One buttonhole		258
	(2) Two or more buttonholes	119	
	g. More than two skipped stitches in one or more buttonholes		259
	h. Ragged edge, affecting appearance		260
	i. Any uncut buttonhole		261

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
8. Buttonholes - Continued	j. Gimp omitted in one or more buttonholes or the end of the gimp not pulled through to the underside		262
	k. Two or more stitches less than the minimum specified per buttonhole (not including the bartack)		263
	l. One or more buttonholes finished with the purling on the underside	120	
	m. Buttonhole stitching extending beyond bartack		264
	n. Inside edge of the front buttonhole eyelet positioned less than 1/2 inch or more than 3/4 inch from the front edge		265
	o. Front buttonholes unevenly spaced from the front edge by more than 3/16 inch		266
9. Buttons	a. One or more missing, loose, defective, or improper size or type		267
	b. One or more buttons sewn with the head of the eagle in other than the upright position		268
	c. Out of horizontal or vertical alignment		
	(1) 3/16 to 3/8 inch inclusive		269
	(2) More than 3/8 inch		270
	NOTE: Buttons shall be considered defective if they have sharp, rough, cracked, or split edges; unsound soldering; scratches, dents, blemishes, or imbedded foreign matter; loose or bent shanks; or are poorly plated or badly shaded.		
	d. Button stitching caught through the interlining (buttonhole stand) but not caught in the facing:		
	(1) On 1 button		271
	(2) On 2 or more buttons		272
	e. Button stitching not caught through the interlining (buttonhole stand) on 1 or more buttons	121	
10. Fusible	a. Omitted on any component part	122	
	b. Twisted or causing puckers or pleats on any fused component	123	
	c. Full, causing waviness on any fused component	124	
	d. Any partial or complete delamination of any fused component	125	
	e. Any strike through, bleed through, or color change	126	
	f. Any resin transfer to the coat:		
	(1) On any fused component	127	
	(2) On any non-fused component		273

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
11. Fronts	a. Front edges stretched, affecting appearance		274
	b. Bottom edge stretched, puckered, or uneven, affecting appearance		275
	c. Bottom corner of the right front poorly shaped, affecting appearance		276
	d. Front edge irregular, affecting appearance		277
	e. Length:		
	(1). Right front at the corner shorter than the left front at the bottom by the following:		
	(a) More than 1/8 inch but not more than 1/4 inch		278
	(b) More than 1/4 inch	128	
	(2). Right front at the corner longer than the left front by the following:		
	(a) More than 1/4 inch but not more than 3/8 inch		279
	(b) More than 3/8 inch		280
	f. Front rolling outward below bottom button	129	
12. Front facing	a. Short, tight, or twisted, causing fullness or twist on the fronts, affecting appearance		
	b. Facing full; lapel will not lie smooth and flat	130	
	c. Facing exposed beyond front or bottom edge by more than 1/16 inch for a distance of more than 1 inch		281
13. Eyelets	a. One or more omitted or added	131	
	b. Wrong type		282
	c. Eyelet not securely caught in the fabric, causing the stitching to pull away from the fabric	132	
	d. Diameter of the inside opening less than 1/8 inch or more than 1/4 inch		283
	e. Any eyelet uncut		284
	f. One or more broken stitches in the following:		
	(1) One eyelet		285
	(2) Two eyelets		286
	g. More than two skipped stitches in one or both eyelets		287
14. Collar construction	a. Interlining omitted	133	
	b. Interlining tight or twisted, causing puckers on the collar, affecting appearance		288
	c. Tight at the joint to front or back, causing puckers or pleats at the neck of the coat, affecting appearance		289
	d. Center of the eyelet from the finished end of the collar less than 7/8 inch or more than 1-1/8 inches		290
	e. One or both eyelets off-center with the top edge of the collar by more than 1/16 inch	134	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
14. Collar construction - Continued	f. Collar off-center by more than 1/4 inch	135	
	g. Finished height of the collar stand: Less than 1-3/8 inches or more than 1-5/8 inches		291
	h. Collar irregular in height by 3/16 inch or more	136	
	i. Front finished ends of the collar uneven in length by 3/16 inch or more		292
	j. End of the collar distorted, twisted, or crooked, caused by hand felling or hand stitching exposed on the outside of either collar end		293
	k. Hand tacking at the lower corner of the collar to the coat lapel insecure or omitted		294
	l. Gorge seam length is not uniform by 1/4 inch or more		295
	m. Undercollar exposed beyond collar edge by more than 1/16 inch or for a distance of more than 1 inch		296
	n. Center seam of undercollar not aligned with center seam of coat by more than 1/4 inch		297
	o. Undercollar joining seamline exposed below edge of collar across back		298
	p. Back end of gorge seam machine stitched less than 1 inch back of lapel break line		299
15. Lapel	a. Gap between top edge of lapel and end of collar or overlap of collar end on lapel step on one side of coat is not uniform with other side of coat by:		
	(1) 1/8 inch up to 1/4 inch inclusive		200a
	(2) More than 1/4 up to 5/16 inch inclusive	137	
	(3) More than 5/16 inch	138	
	b. Length of lapel step not within (±) 1/4 inch from required length		201a
	c. Bridle tape not held taut causing break line to finish flat or to be misplaced (i.e. tape extending beyond break line on lapel side)	139	
	d. Bridle tape misplaced:		
	(1) At gorge:		
	(a) more than 3/8 inch behind lapel break line	140	
	(b) bridle tape basted onto or extending beyond break line on lapel side	141	
	(c) more than 5/8 inch behind lapel break line	142	
	(2) At 1-1/2 inches from lapel bottom:		
	(a) more than 5/8 inch behind lapel break line	143	
	(b) bridle tape basted onto or extending beyond break line on lapel	144	
	(c) bridle tape more than 7/8 inch behind lapel break line	145	
	(3) Bridle tape end not within 1 to 1-1/2 inches from bottom of lapel		202a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
16. Shoulder construction	a. Improperly sewn, causing the shoulders or back to twist		203a
17. Shoulder pads	a. Not completely caught in the armhole tacking		204a
	b. Misplaced, not serving intended purpose (i.e., too far back or too far forward)		205a
	c. One or both pads omitted	146	
18. Shoulder straps	a. Misplaced (i.e., one shoulder strap further forward or back from the position of the other strap affecting appearance)		206a
	b. Shoulder strap stitched to the coat too full or twisted, or stitched to the coat too tight, causing fullness or twist on the front or back of the coat	147	
	c. Poorly shaped	148	
	d. Shoulder seam exposed beyond the back edge of the shoulder strap (except the rounded end)		207a
	e. Width of the shoulder strap at the armhole seam not within tolerance:		
	(1) Less than 2-1/8 inches or more than 2-3/8 inches		208a
	f. Width of the shoulder strap across the center of the insignia button not within tolerance:		
	(1) Less than 1-3/8 inches or more than 1-5/8 inches		209a
	g. Rounded end of the shoulder strap positioned less than 1/4 inch or more than 3/8 inch from the collar edge		210a
	h. Buttons not uniformly set from the collar edge by more than 1/4 inch		211a
	i. Ends of both shoulder straps unequally placed from finished edge neckline by more than 1/4 inch.		212a
	j. Shoulder straps are not uniform in size or shape	149	
	(1) More than 3/8 inch with corresponding point on matching part	150	
	(2) 1/4 inch up to 3/8 inch inclusive with corresponding point on matching part		213a
19. Armholes (construction)	a. Stretched causing excessive fullness on back between shoulder and underarm		214a
	b. Taped too tight, causing puckering around the armhole seam, affecting appearance		215a
	c. Crooked seam		216a
	d. Tape stitching exposed and visible on the outside of the coat		217a
	e. Sleeve head pads not completely tacked to the armholes or misplaced, not serving intended purpose		218a
	f. One or both sleeve head pads omitted		219a
	g. Armhole not tacked completely or insecurely tacked		220a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
20. Sleeves	a. Setting and hang:		
	(1) Sleeve fullness misplaced, affecting appearance		221a
	(2) Sleeve too far front (i.e., the front edge of the creased sleeve bottom more than 2 inches in front of the front/side front seam)		222a
	(3) Sleeve too far back (i.e., the front edge of the creased sleeve bottom less than exactly even going back from the front/side front seam)		223a
	(4) Hang of sleeves in opposite directions (i.e., one sleeve too far forward and one sleeve too far back, tolerance of 1-1/2 inches)		224a
	(5) Sleeve tight in the armhole (i.e., roll effect not present at the front or back of the sleeve)		225a
	b. Sleeve lining:		226a
	(1) Twisted, tight, or short, causing bulge, twist, or puckering on the outside of the sleeve		227a
	(2) Sleeve lining too long, causing the lining to sag at the bottom more than 1/2 inch		228a
	(3) Sleeve lining seams out of alignment more than 3/8 inch with the sleeve seams at the armholes or at the bottom of the sleeve		229a
	c. Construction of sleeves:		
	(1) Tacking on the bottom turnup to the sleeve interlining omitted or insecure		230a
	(2) Sleeve bottom edge uneven by more than 1/4 inch		231a
	(3) Tacking on one or both sleeve lining seams to the sleeve seams omitted or insecure		232a
	(4) Bottom edge of the sleeve lining turnup less than 1 inch or more than 1-1/2 inches up from the bottom edge of the sleeve		233a
21. Sleeve Cuff	a. Full, tight, puckered, or twisted		234a
	b. Point of cuff not uniformly shaped or not forced out to a sharp point.		235a
	c. Cuffs not uniform in width by 1/4 inch or more		236a
	d. Top edge of cuffs at back arm or underarm seamline staggered more than 1/8 inch		237a
	e. Finished height of cuff at point more than 5 inches or less than 4-1/2 inches		238a
	f. Finished height of cuff at front and back creased edges more than 3 inches or less than 2-1/2 inches		239a
	g. Poorly shaped, affecting appearance		240a
	h. Set on crookedly, affecting appearance		241a
	i. Misplaced (i.e., point of one piece further forward or back from the position of the other piece), affecting appearance		242a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
22. Fitting	a. Body lining:		
	(1) Tight, short, or twisted causing fullness or twist on outside of coat	151	
	(2) Lining too long, exposed beyond bottom edge of coat		243a
22. Fitting (continued)	b. Interlining:		
	(1) Tight, short, or twisted causing fullness or twist on outside of coat	152	
	(2) Too full, causing front to have a wavy appearance or not lie smoothly	153	
23. Darts	a. One or more front darts omitted	154	
	b. One or more darts not tapered to a point causing bulge on outside		244a
	c. Corresponding darts unequal in length by more than 1/2 inch		245a
	d. Fold of one or more darts not facing direction specified		246a
	e. One or more darts not pressed flat		247a
24. Vent opening	a. Left vent edge stretched, causing the vent to spread open, affecting appearance		248a
	b. Row of stitching across the top of the vent opening omitted or insecure or not caught through the vent lining		249a
	c. Left and right vent differ in length by 1/4 inch or more		250a
	d. Left edge tight, causing puckering on the vent edge, affecting appearance		252a
	e. Left vent edge crooked, affecting appearance		253a
	f. Left vent back part overlapping the right vent back part at the bottom edge less than 2-1/2 inches or more than 3 inches		254a
	g. Width of the left vent (measured at the bottom piped edge) less than 1-7/8 inches or more than 2-1/8 inches		255a
	h. Row of stitching across the top of the vent opening less than 1-5/8 inches long or more than 2 inches long		256a
	i. Row of stitching across the top of the vent opening misplaced, not serving intended purpose		257a
	j. Vent not topstitched as specified		258a
	k. Bottom turn-up exposed or visible on left vent edge		259a
25. Inside Pockets	Width of opening or depth of pocket not within tolerances specified		260a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
26. Shields	a. Not positioned as specified by more than 1/2 inch		261a
	b. One or both, omitted	155	
	c. Top edge not securely caught in armhole tacking or stitching		262a
	d. Puckered, pleated or twisted		263a
	e. Top or bottom raw edge of binding on shield not turned under and caught in stitching		264a
	f. Binding omitted on one or both sweat shields		265a
	g. Binding not securely stitched to fabric		266a
27. Hanger loop	a. Hanger loop omitted or any end not securely stitched		267a
	b. Less than 1-3/8 inches or more than 1-5/8 inches long, measured along the collar seam		268a
	c. Hanger loop not stitched to the neck of the coat prior to seaming the collar to the neck of the coat		269a
	d. Misplaced 1/2 inch or more off center with center back	156	
28. Labels	a. Any required label misplaced, missing, incorrect, illegible or the size label not securely caught in the stitching		270a
	b. Combination instruction/identification label not stitched on all 4 sides or not positioned as specified on the facing		271a
	c. Barcode omitted or not readable by the scanner on the barcode label		272a
29. Front facing	a. Fullness or pleats on the facing between the buttons, between the buttonholes, or between the front edge and the button or buttonholes when buttoned		273a
	b. Tacking on back edge to one or both interlinings:		
	(1) Omitted		274a
	(2) Insecure or incomplete for a distance of more than 5 inches below the shoulder seam, or more than 4 inches above the bottom edge of the lining		275a
30. Back lining	a. Excessive fullness or pleats		276a
	b. Twisted, not affecting smoothness on the outside surface of the back		277a
	c. Bottom raw edge of the body lining not turned under in stitching forming the hem		278a
	d. Pleat in the center of the lining omitted		279a
	e. Hem twisted	157	
31. Front linings	a. Excessive puckering or pleated		280a
	b. Twisted, not affecting smoothness on the outside of the coat		281a
	c. Side seam of the lining not tacked to one or both side seams of the outer shell		282a
	d. Back stitch omitted at the lower armhole edge from approximately 1-1/2 inches to the front of the forearm sleeve lining seam to the side seam of the body lining		283a
	e. Hem twisted		284a
	f. Bottom raw edge of the body lining not turned under in the stitching forming the hem		285a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

TABLE XVI. Defects. Continued

Examine	Defect	Classification	
		Major	Minor
32. Right vent lining	a. Top edge not completely covering the edges of the center back seam outlets		286a
	b. Felling at the corners of the vent opening omitted or insecure		287a
	c. Folded edge of the lining not extending beyond the center seam allowance or right back part		288a
	d. Tight, short, or twisted, causing fullness or twist on the outside of the coat		289a

4.4.4 Dimensional examination. The coat shall be examined for conformance to the dimensions specified in table V and table VI and the methods of measure specified in table VII. Any measurement deviating from dimensions and tolerances specified in table V and table VI shall be scored as a measurement defect. Sleeve lengths uneven by 1/2 inch or more shall be classified as a measurement defect. The inspection and the AQL shall be as specified in the contract or purchase order (see 6.2).

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The coats covered by this specification is intended to be worn by female officer or enlisted personnel of the United States Marine Corps.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Types, classes and sizes required (see 1.2).

c. The specific issue of individual documents referenced (see 2.2 and 2.3).

d. When a DLA exclusive label is required (see 3.4.13.3)

e. When first article is required (see 3.1.1 and 4.2).

f. When conformance inspection is required (see 3.1.2 and 4.3).

g. Shade standard information (see 3.4.3, 3.4.5, and 6.4).

h. Applicable pattern information, including pattern date (see 3.5).

j. Acceptance Quality Limits (AQLs) (see 3.9, 4.2.1, 4.3.2, and 4.4.4)

k. Packaging requirements (see 5.1).

6.3 Standard sample. The standard sample and color sample may be obtained from the procuring activity or as directed by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

6.4 Shade criticality. Some items may be deemed “non-shade-critical” by the contracting agency and alternative shade standards or information regarding shade may be specified in the contract or order (see 6.2). It is recommended that manufacturers refer to the contract or order to determine the criticality of the shade matching or alternate shade standards that are acceptable.

6.5 Subject term (key word) listing.

Female

Gabardine

Garment

Outerwear

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

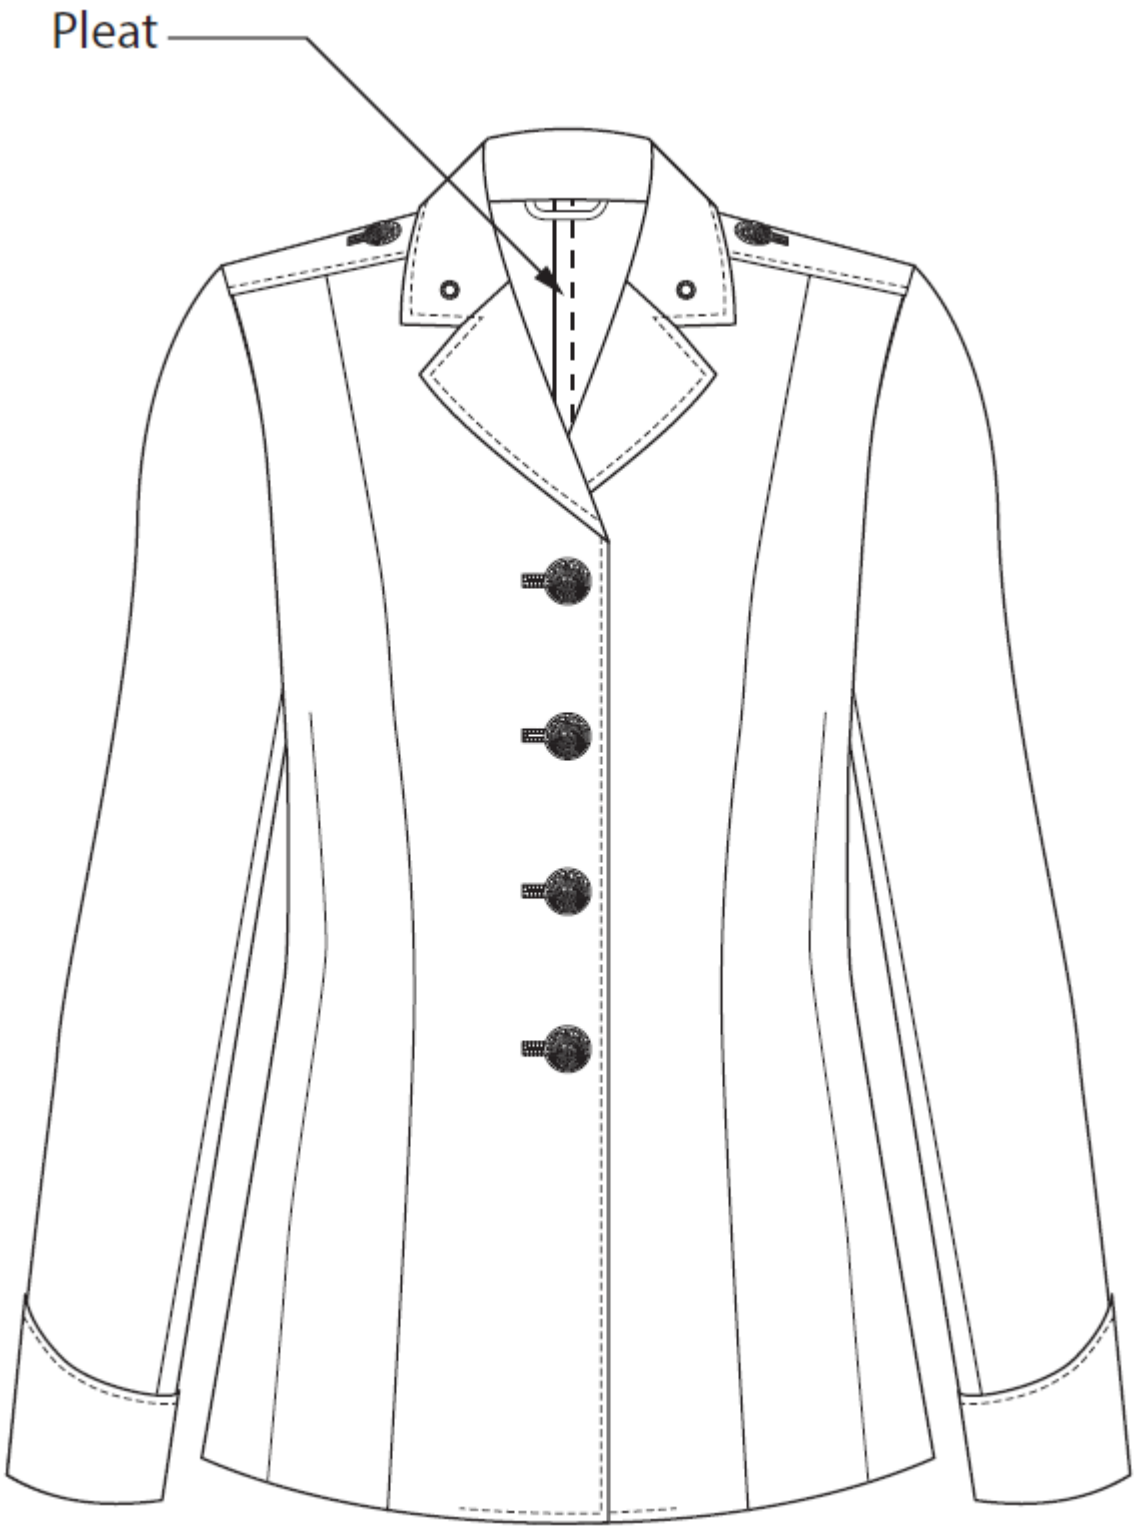


FIGURE 1. Coat, woman's, USMC - outside front view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

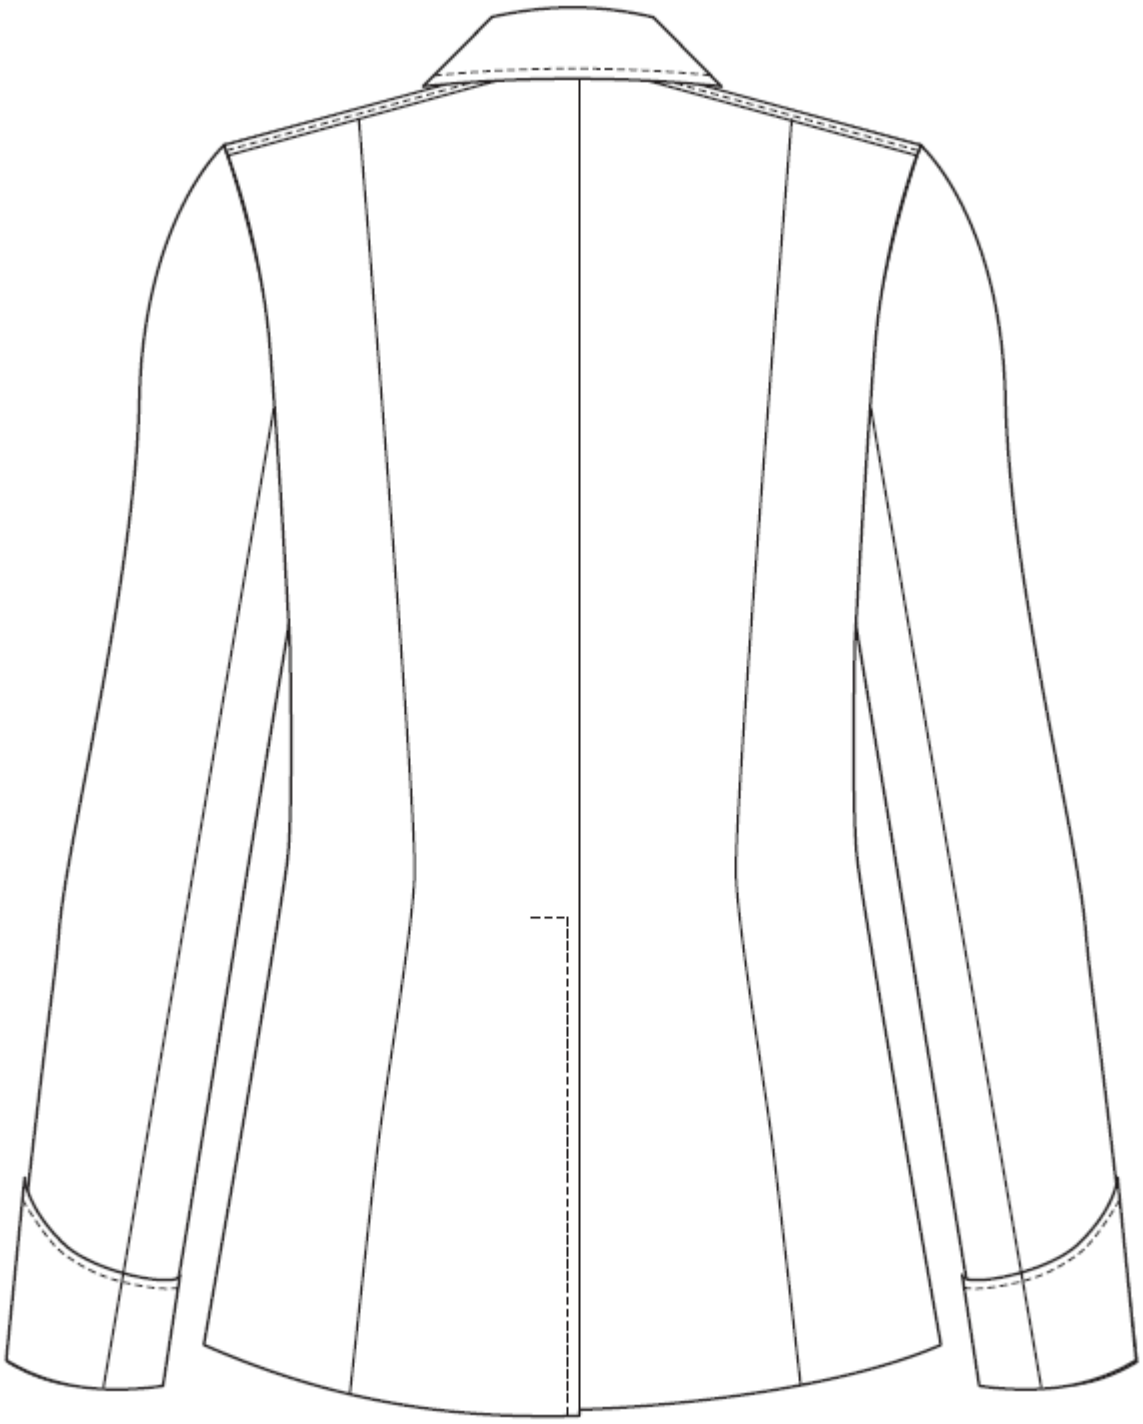


FIGURE 2. Coat, woman's, USMC - outside back view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

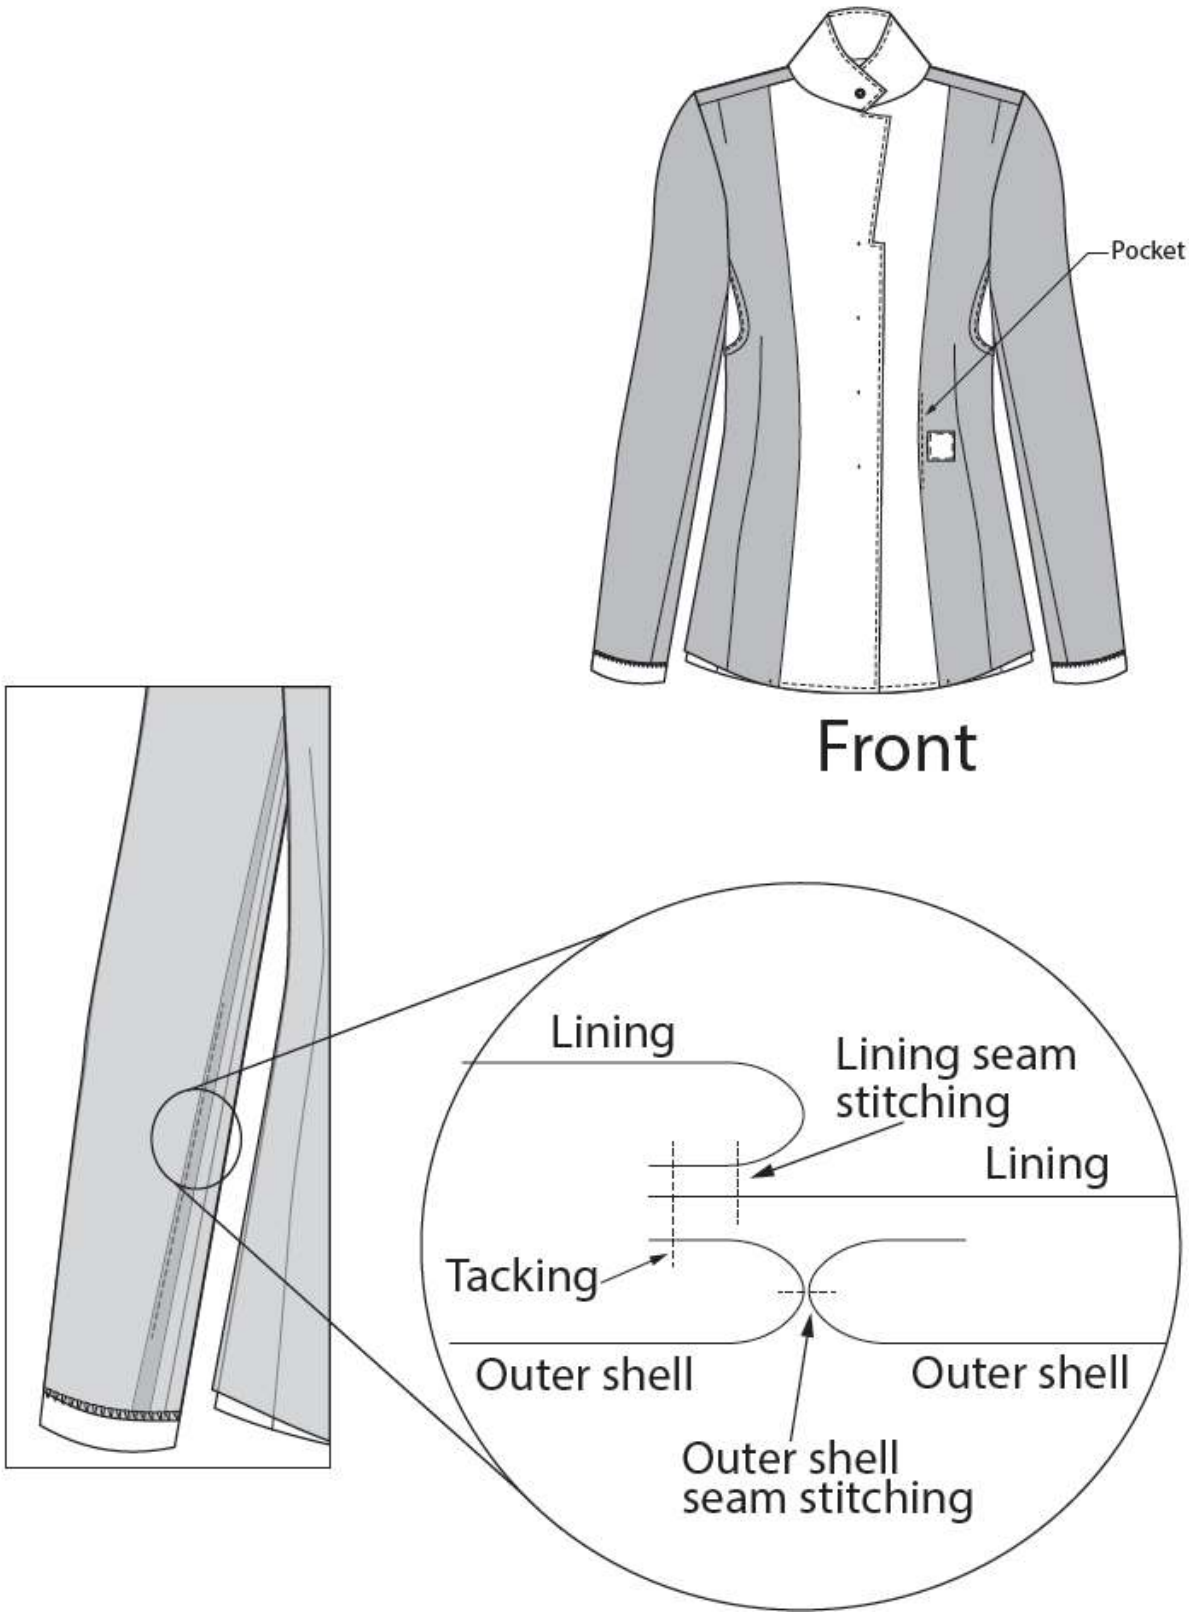


FIGURE 3. Coat, woman's, USMC – inside front view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

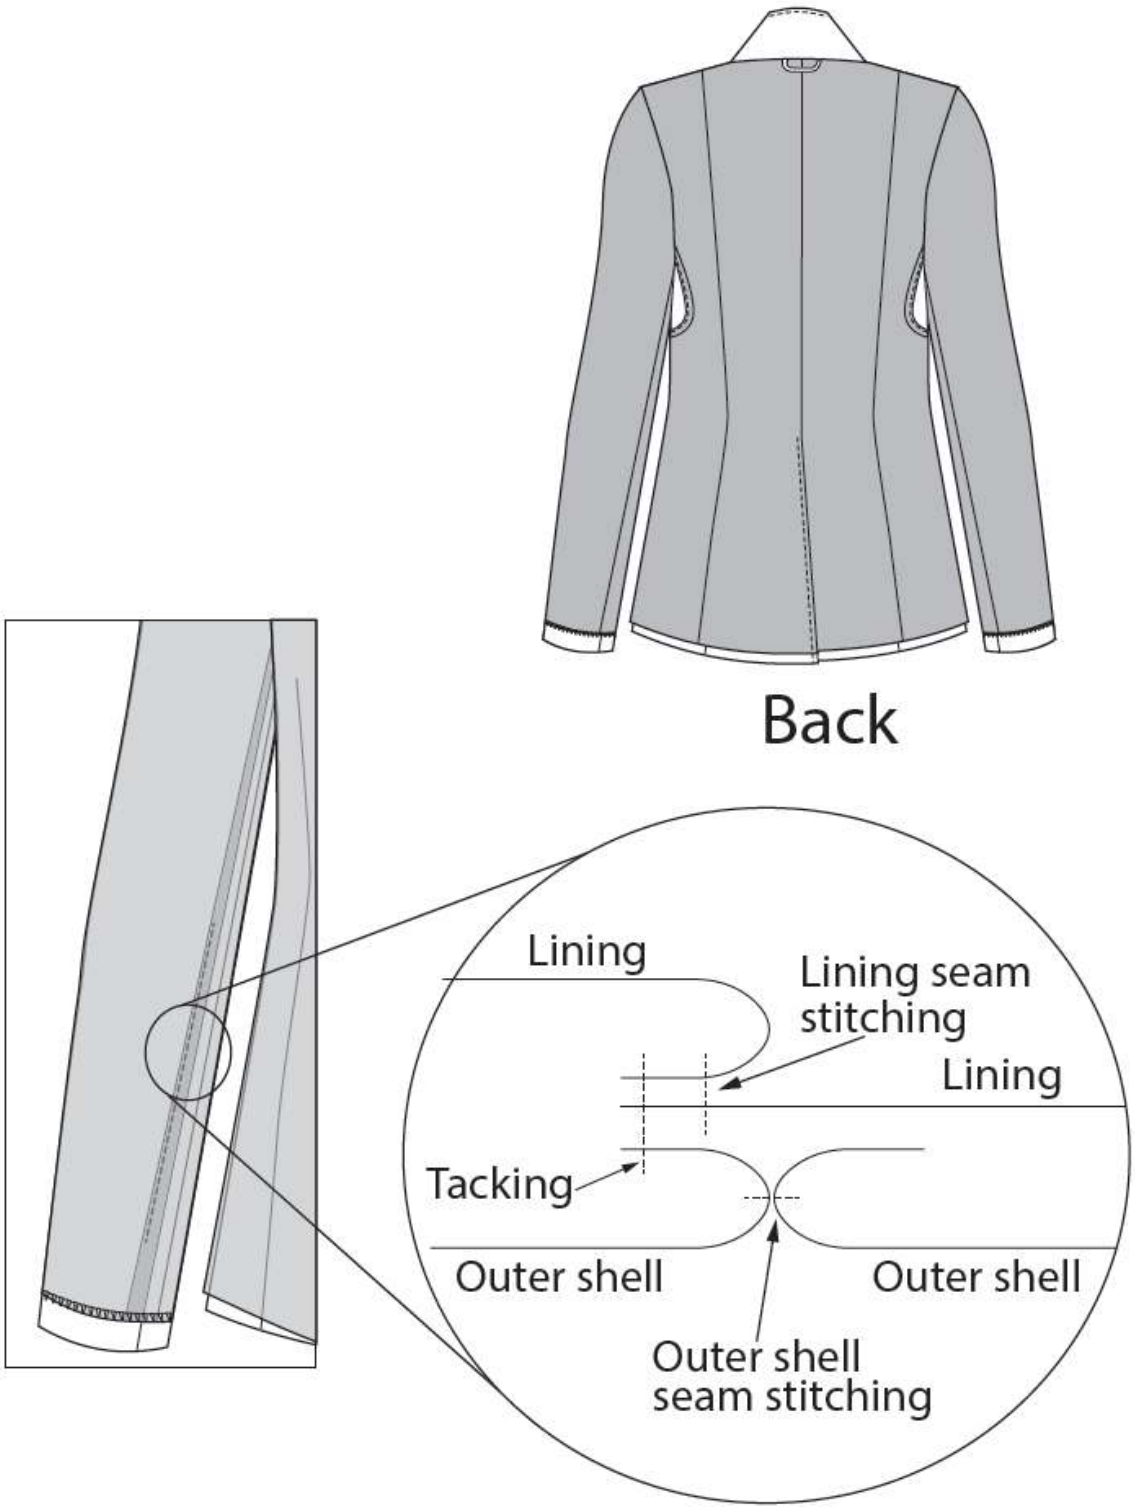


FIGURE 4. Coat, woman's, USMC – inside back view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

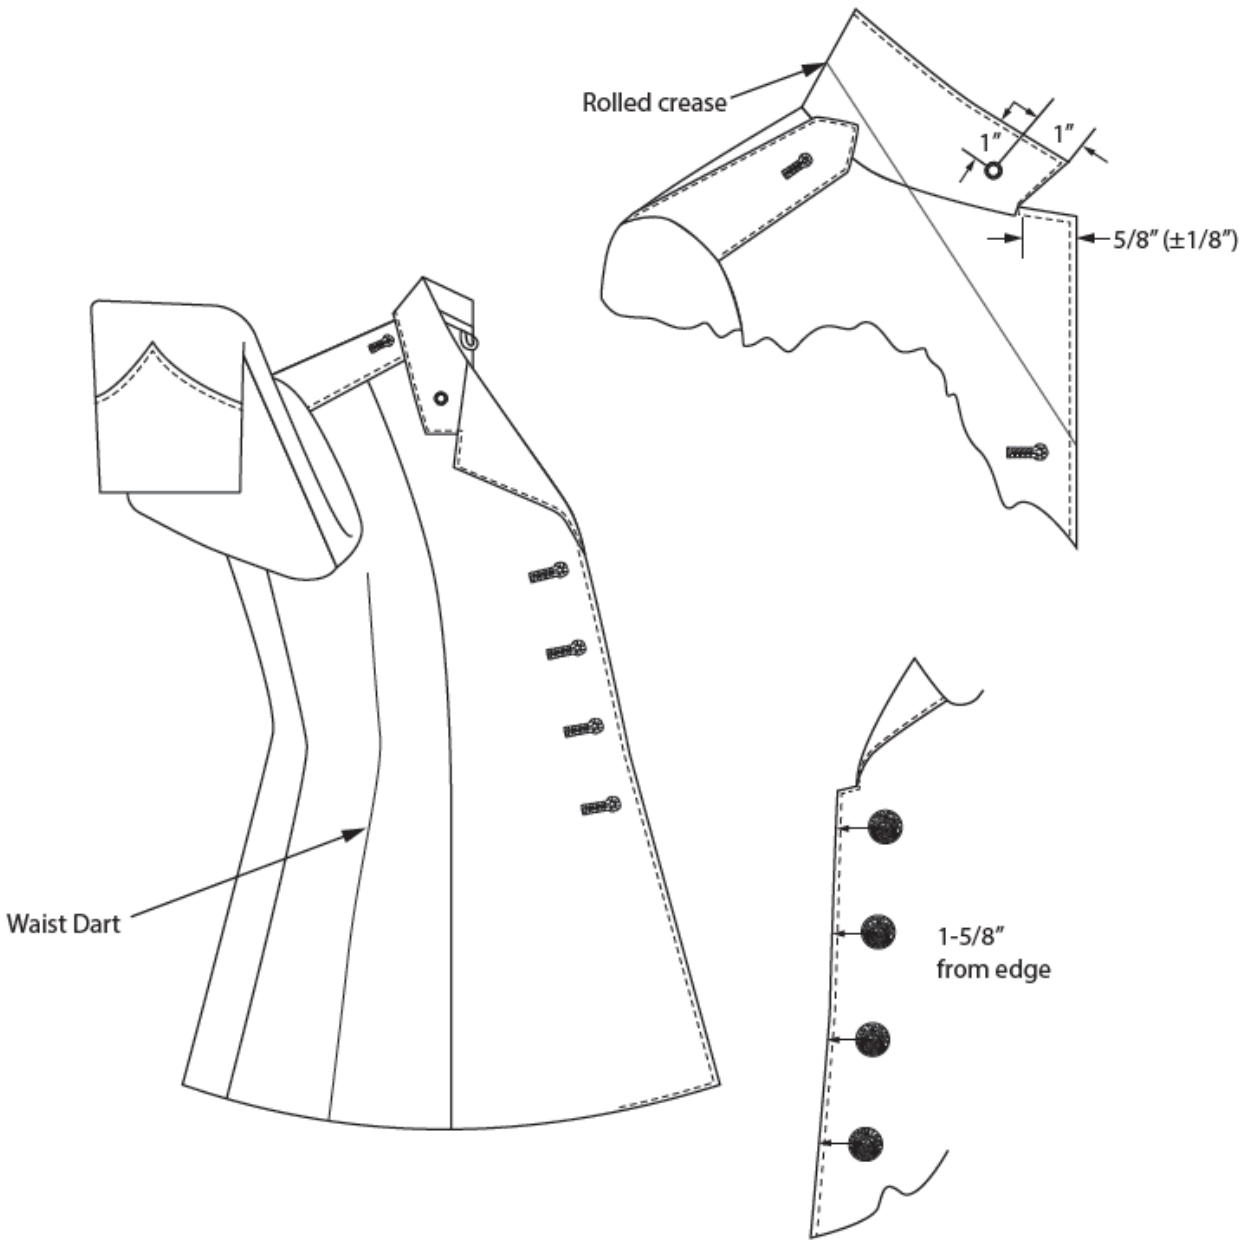


FIGURE 5. Coat, woman's, USMC – outside details view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

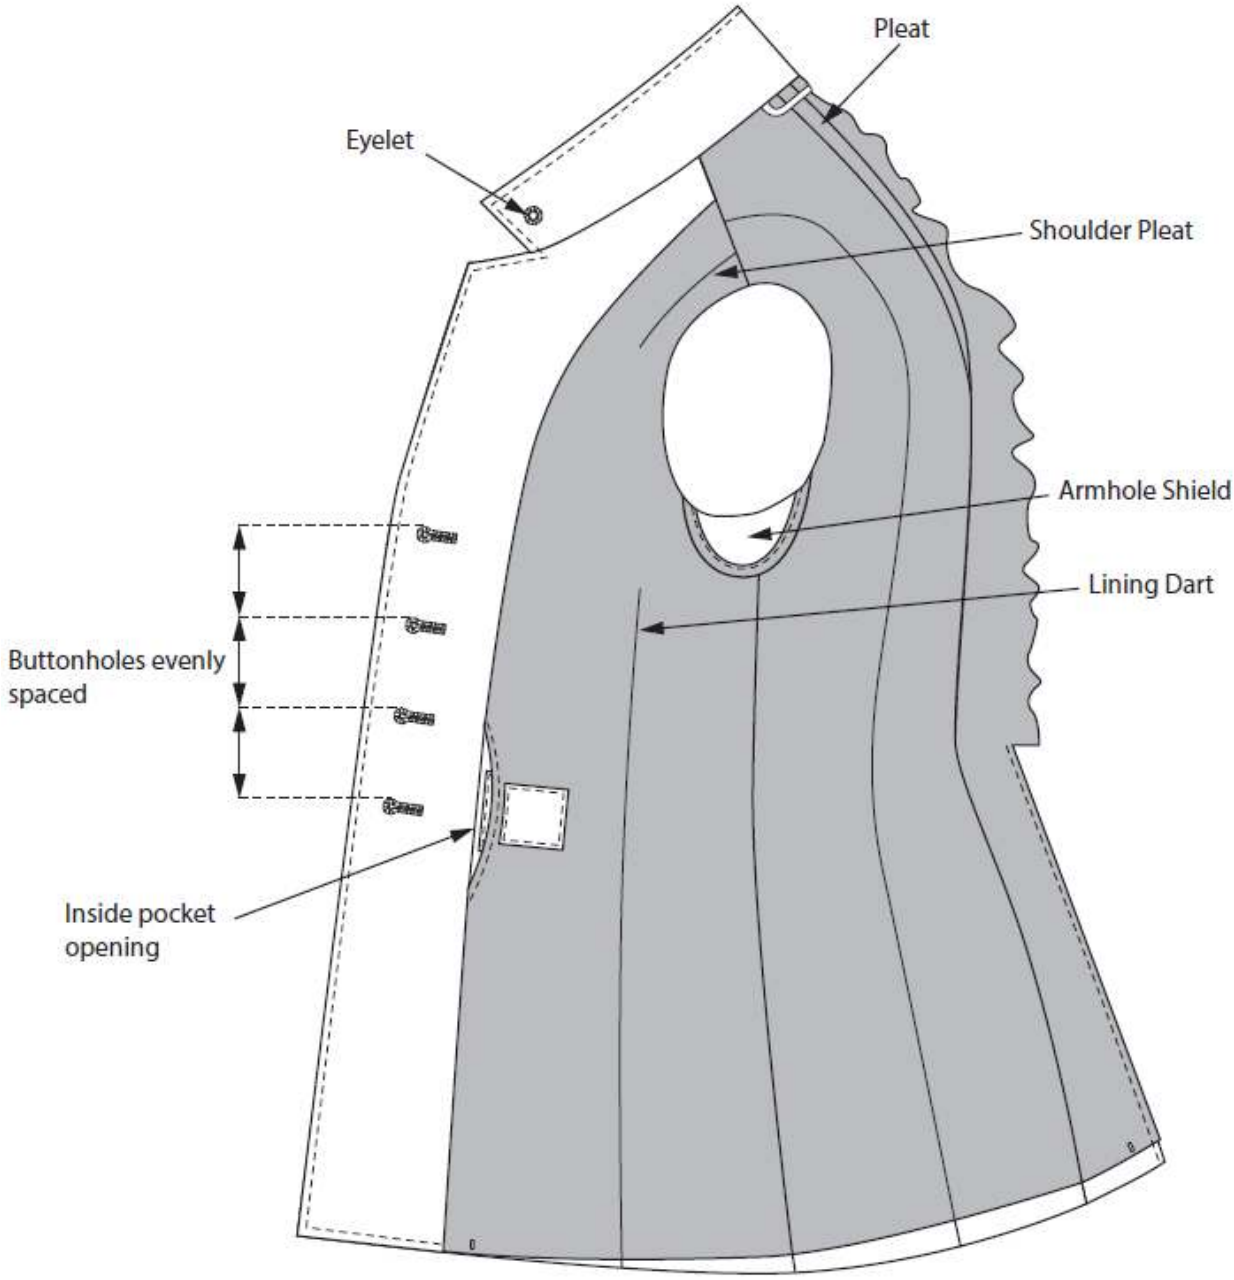


FIGURE 6. Coat, woman's, USMC – inside details view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

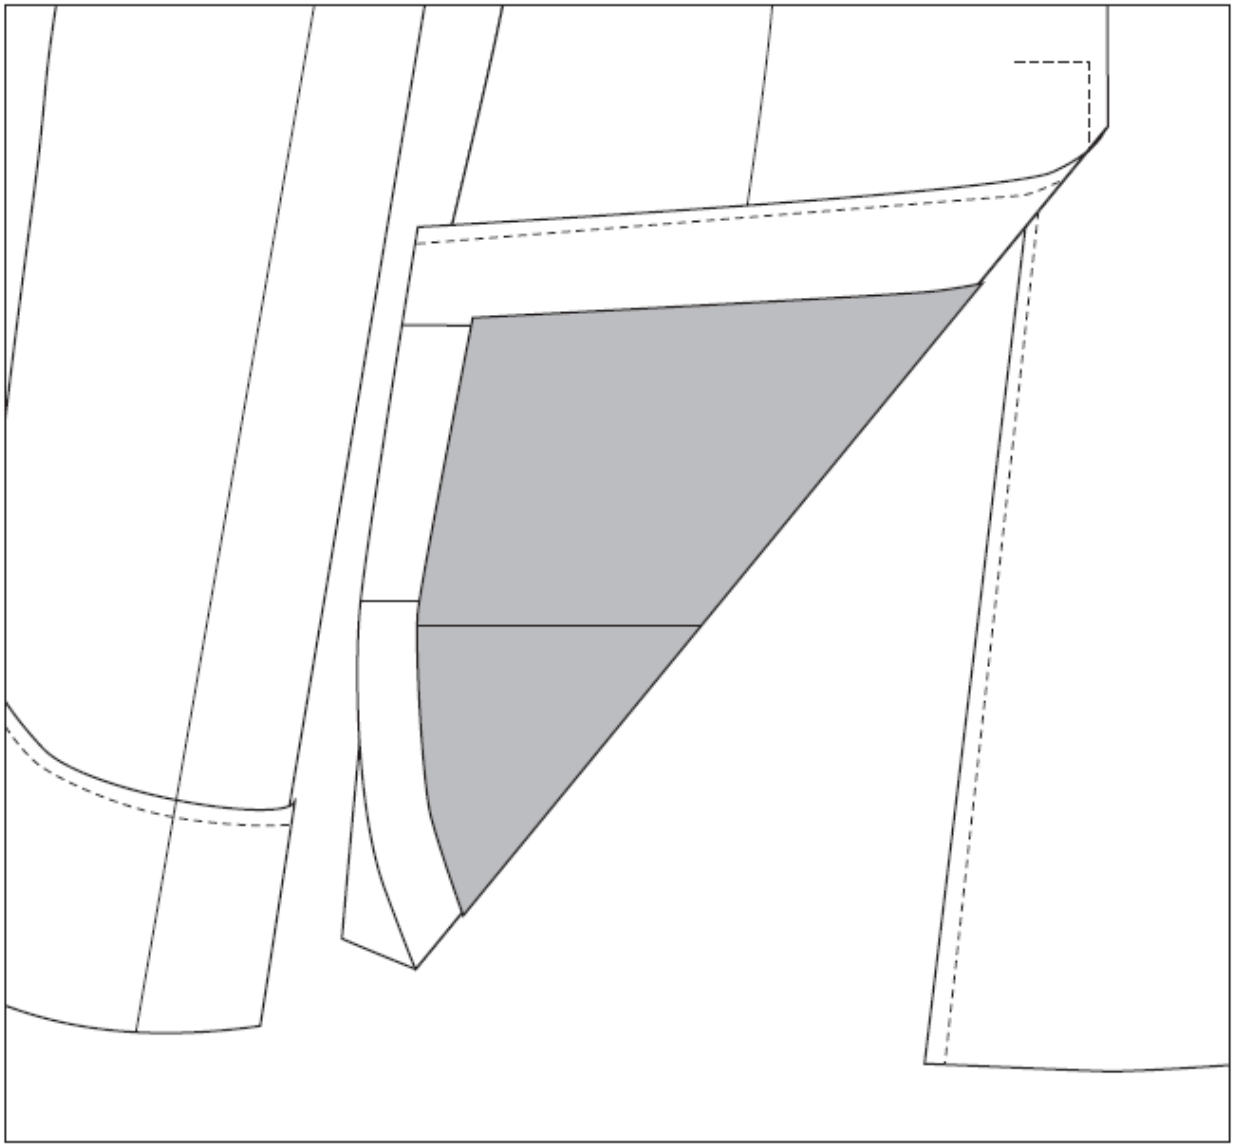


FIGURE 7. Coat, woman's, USMC –back vent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:

Navy – MC

Preparing activity:

DLA-CT

(Project 8410-2025-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:04Z
Check the source to verify that this is the current version before use.