INCH POUND

MIL-S-29429B
01 June 1994
SUPERSEDING
MIL-S-29429A
21 December 1990

MILITARY SPECIFICATION

SKIRTS, WOMEN'S

This specification is approved for use by the U. S. Marine Corps, Department of the Navy, and is available for use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for polyester/wool skirts.

1.2 Classification. The skirts shall be of one type in the following classes, sizes and lengths (see 6.2):

Class 1 - Polyester/Wool, Gabardine; Green 2212
Class 2 - Polyester/Wool, Gabardine; Blue 2312

Schedule of Sizes and Lengths

Sizes OX, 2, 4, 6, 8, 10, 12, 14, 16, 18
Lengths: Short, Regular and Long

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FQSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50198	-Thread, Gimp, Cotton
A-A-50199	-Thread, Polyester, Core, Cotton or Polyester Covered
A-A-52094	-Thread, Cotton
A-A-52106	-Cloth, Twill or Plain Weave, Polyester and Polyester Blend
V-B-871	-Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-Fastener, Slide, Interlocking
V-T-295	-Thread, Nylon
UU-P-268	-Paper, Kraft, Wrapping
DDD-L-20	-Label; For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	-Cloth, Satin, Rayon and Cloth, Twill Rayon
MIL-B-371	-Braid, Textile, Tubular
MIL-T-5237	-Tape, Textile; Webbing, Textile; Rayon
MIL-C-10176	-Cloth, Gabardine, Wool, Polyester and Wool
MIL-B-17757	-Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-44296	-Cloth Fusible

STANDARDS

FEDERAL

FED-STD-751	-Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-Sampling Procedures & Tables for Inspection by Attribute
MIL-STD-129	-Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

MIL-STD-147 -Palletized Unit Loads
MIL-STD-984 -Provisions for Size Labeling of Women's Uniform Clothing
MIL-STD-1609 -Provisions for Evaluating Quality of Women's Skirts

(Unless otherwise indicated, copies of Federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094).

2.1.2 Other Government publications. The following other Government publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those effect on the date of the solicitation.

Department of Defense (DoD) Standard Color Card for Sewing Threads

Department of Defense (DoD) Standard Shades for Buttons

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Lexington Avenue, New York, NY 10016.)

(Copies of specifications, standards and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Non-Government publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF TESTING MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article, consisting of the number of finished skirts specified by the procuring activity (see 6.2), shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of the responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials

3.3.1 Basic materials. The basic material for each class of skirt shall be as follows:

3.3.1.1 Class 1. Cloth, 10.6 ounce polyester/wool gabardine, Green, shade 2212 conforming to type II, class 12 of MIL-C-10176.

3.3.1.2 Class 2. Cloth, 10.6 ounce polyester/wool gabardine, Dark Blue, shade 2312 conforming to type II, class 12 of MIL-C-10176.

3.3.2 Lining. The material for lining the skirts shall be as follows:

3.3.2.1 Class 1. Cloth, twill, rayon, Green shade 2209, conforming to class 1 (3.7 ounce) of MIL-C-368.

3.3 2.2 Class 2. Cloth, twill, rayon, Black shade 2604, conforming to class 1 (3.7 ounce) of MIL-C-368.

3.3.3 Waistband interlining. The waistband interlining and top ply of watch pocket material shall be black twill polyester and cotton conforming to class 1 of A-A-52106. As an alternate, a fusible waistband interlining conforming to type V class 1, style B of MIL-C-44296 may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

3.3.4 Finishing tape. The tape for finishing the bottom of the skirt and edges of the back pleat shall be tape, textile, rayon conforming to type 1 of MIL-T-5237. The color shall be the same as specified for thread in 3.3.6.2.

3.3.5 Hanger braid. The braid for the skirt hangers shall be braid, textile, tubular conforming to type IX, class 1 of MIL-B-371. The color shall be the same as specified for thread in 3.3.6.2.

3.3.6 Thread. Cotton thread shall be used conforming to A-A-52094 as follows:

Operation	Type	Ticket No.	Ply
Buttonholes	III	0	3
Seams, stitching	I	70, 50	2 or 3
Buttons	II	16, 20	4

As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to A-A-50199 ticket No. 50, 2 or 3 ply may be used for seaming and ticket No. 70, 2 ply may be used for overedging.

3.3.6.1 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards. This thread shall be tested for these requirements and for colorfastness (see 3.3.6.3) in accordance with test methods in V-T-295.

3.3.6.2 Color. The color of the thread shall be as follows:

Class 1 -Olive drab, shade T-1, Cable No. 66023
Class 2 -Black, shade AA, Cable No. 66043

(See DoD Standard Color Card of Official Standardization Shades for Sewing Threads.)

3.3.6.3 Colorfastness. The colored thread shall show colorfastness to light and wet dry cleaning equal to or better than the standard sample. When no standard sample is available, the colored thread shall show "good" colorfastness to light and wet-dry cleaning.

3.3.7 Gimp. The gimp for reinforcing the buttonhole shall conform to type I or II, size No. 8 of A-A-50198. The color of the gimp shall be the same as indicated for thread in 3.3.6.2 with colorfastness requirements specified for thread in 3.3.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

3.3.8 Buttons. The buttons for the waistband shall be 27-line conforming to type II, class D, style 4 of V-B-871. The color of the buttons shall be as follows:

Class 1	-Green shade AF, Cable No. 62017
Class 2	-Black shade BT, Cable No. 62001

(See DoD Standard Shades for Buttons.)

3.3.9 Slide fasteners. The slide fasteners shall conform to either 3.3.9.1 or 3.3.9.2.

3.3.9.1 Metal. The slide fasteners shall conform to type I, style 3, short tab pull, cam lock size LS (commercial No. 4), of V-F-106, except that the salt spray test shall not be required. All the components of the slide fastener shall be brass and from the same supplier (see 4.5.1). The tape shall be cotton or synthetic or a combination. The length of the slide fastener shall be 7 inches long for all sizes.

3.3.9.2 Plastic coil. The slide fastener shall be manufactured of polyester of nylon consisting of an automatic or cam lock and shall be equal to commercial size No. 2. The tape shall be a blend of nylon and cotton or polyester and cotton or polyester. The length of the slide fastener shall be 7 inches long for all sizes.

3.3.9.3 Color. The color of the slide fastener shall be as follows:

Class 1	-Green shade AF, Cable No. 66531
Class 2	-Black shade G, Cable No. 66507

3.3.9.4 Colorfastness. The dyed slide fastener tape shall show colorfastness to laundering equal to or better than the standard sample when tested as specified in V-F-106. When no standard sample is available, the tape shall show "good" colorfastness when tested as specified in V-F-106.

3.3.10 Labels. Each skirt shall have a combination identification and instruction label conforming to type VI, class 1 and 3 of DDD-L-20. The colorfastness to laundering requirements of DDD-L-20 shall apply. The contents shall be 55 percent polyester and 45 percent wool. The inscription shall be as follows:

SKIRT, WOMEN's
STOCK NO.: 8410-00-000-0000 (Example)
CONTENTS: 55% polyester/ 45% wool
CONTRACT NO.: DLA-100-00-000 (Example)
NAME OF CONTRACTOR
DRY CLEAN ONLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

3.3.10.1 Size label. The size label shall conform to type VI, Class 2 of DDD-L-20 except the stock number is not required. The inscription on the size label shall conform to MIL-STD-984; Table II Body Dimensions for Marine Corps, Table III Height Ranges and Figure 2. Examples of labels are as follows:

Hip Circ	36"
Waist Circ	25 1/2"
Height	63-1/2 - 67" (R)

(Size Code 6)

3.4 Design. The skirts shall be the U. S. Marine Corps design shown in Figures 1, 2, 3 and 4, having a gore style skirt with three front panels and two back panels, full lining, an opening at the top of the center back seam with a slide fastener closure, and a one-piece set-on waistband with both ends to button at the center opening. The skirt shall have a center back pleat and the bottom shall be pinked.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government (see 6.3). The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, seam allowances, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts. The patterns provide an allowance of 3 inches for hemming the bottom of the skirt.

3.5.1 Pattern parts. The skirts shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature	Cut Parts
	Material: Basic	
1.	Center front	1
2.	Side front	2
3.	Back	2
4.	Waistband	1
5.	Placket	1
6.	Watch Pocket (Bottom Ply)	1
	Material: Lining	
7.	Front	1
8.	Left Back	1
9.	Right Back	1

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

Item	Pattern Nomenclature	Cut Parts
	Material: Twill, Polyester and Cotton or Fusible	
10.	Watch Pocket (Top Ply) (twill)	1
11.	Waistband interlining (twill or fusible)	1

3.6 Construction. The skirts shall be manufactured in accordance with the operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operation as listed in Table I, but all operations specified shall be used to manufacture the skirts.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.1.1 Thread breaks and ends of seams. The ends of seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches may be repaired by using 301 stitch type. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread ends of darts shall be trimmed to a length of 1/2 inch. When an automatic dart machine is used, the ends shall be backstitched not less than 3 stitches.

3.6.2 Buttonhole. The buttonhole shall be eyelet end, taper bar type. The finished cut length of buttonhole shall be 3/4 inch.

3.6.3 Pressing. Pressing as required in Table I shall be accomplished with a heated pressing iron or machine.

3.6.4 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the skirt. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices
(b) Sew-on shade tickets
(c) Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting.				
	a. Cut the skirt in strict accordance with patterns furnished by the Government.				
	b. Cut all materials in the direction indicated by directional lines on pattern. The directional line shall be placed in the warp direction of the cloth unless otherwise indicated on the pattern.				
	c. Cut component parts of skirt from one piece of basic material, except placket, which may be cut from ends.				
	d. Cut front and back lining parts of the skirt from one piece of lining material.				
	NOTE: The back lining may be cut on the selvage.				
	e. Cut braid for skirt hangers in lengths of 4 ± 1/8 inches. Each skirt shall be provided with two hangers.				
	f. Cut hem tapes not less than 65 inches long (see operation 26) and 18 inches long for edges of the kick pleat.				

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
2.	Replacement of damaged parts.					
	a. Replace at time of cutting any part of the skirt containing holes or seriously weakening defect such as smashes, multiple floats, loose weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc.					
	b. Replace any part damaged during manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.					
3.	Shade marking.					
	a. Mark, ticket or bundle all component parts (see 3.6.4) cut from one piece of basic material, except those parts cut from ends, to ensure uniform shade and size throughout the skirt.					
4.	Join front and back skirt panels.					
	a. Join the side front panels to the center front panel with a 3/4 inch seam allowance and with notches matching. The ends of the seam shall start and finish evenly at the seam line.	301	SSa-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Join front and back skirt panels. - (contd.)					
	b. From the bottom of the upper notch to the mark at the top of the kick pleat, join the back panels with a 1-inch seam allowance. The ends of the seams shall start and finish evenly at the seam line.	301	SSa-1	12-14	50	50
5.	Tape edges of kick pleat.					
	a. The edges of the kick pleat shall be taped from the top of curve to bottom of unfinished hem. Place the left edge of tape to the top raw edge of pleat opening and stitch 1/8 inch from the edge. Turn tape to underside of basic fabric and blindstitch other edge of tape to the underside of skirt.	301	BSa-1	12-14	50	50
6.	Overedge seams.					
	a. The raw edges of the seam allowance on the front and back parts shall be neatly overedge stitched.	501 or 503	EFd-1	8-10	70	70
	b. The center back seam shall be overedged together from the bottom of zipper (at the right side notch) to the curve at the top of the kick pleat. **NOTE:** Care shall be exercised during the overedging operation to ensure that no seam allowance is reduced by more than 1/16 inch.	501	EFd-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
7.	Tack the kick pleat.					
	a. The pleat shall finish left over right and shall be tacked through all plies from the center seam to the edge of the width of the pleat (approximately 2 - 3/4 inches, slanted downward 1/2 inch over total length).	301	SSa-1	12-14	50	50
8.	Join front and back parts.					
	a. Join the front and back parts of skirt at the side seams with a 1 inch seam allowance and with notches matching.	301	SSa-1	12-14	50	50
9.	Press seams.					
	a. Spread open all seams and press smooth and flat with a heated iron or pressing machine.					
	The edges of the back opening shall be folded back in a straight line with the back seam line and well creased.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

COTTON SCARLET GOOD

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	BOB/ LPR
10.	Pink bottom edge of skirt.					
	a. The raw edge of the bottom of the front and back skirt shall be neatly and evenly pinked with the points of the pinking 1/8 inch in depth.					
	NOTE: Care shall be exercised during the pinking operation to ensure that the length of skirt is not reduced by more than 1/16 inch.					
11.	Make watch pocket.					
	a. The watch pocket shall be made of one ply of basic material and one ply of poly/cotton twill, and shall finish not less than 4 inches wide and 4 inches deep.					
	b. Position both plies of watch pocket face up and with sides and bottom edges even. Join both plies together 3/8 inch from raw edges, 1/2 down from top raw edges at each side.	301	SSa-1	12-14	50	50
	or					
	c. The watch pocket may be joined by seaming and overedge stitching the raw edges together in one operation.	516	SSa-2	12-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

orm to MIL-F-2065?, sheet 1A-BBlUS, and pe eyelets shall conte

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
12.	Attach watch pocket					
	a. Position the top inside edge of the poly/cotton twill side of pocket to the top raw edge of the right front of the skirt waist. The notch of the pocket shall be 1 inch in from the side seam. Join the pocket to the skirt waist with a 3/8 inch seam from notch to notch forming a 4 inch wide opening at the top of the waist seam. Turn the pocket up and raise stitch 1/6 inch through twill cloth and front of skirt, catching all plies.	301	Bar-tack	12-14	50/3	50/3
	b. Notch and turn pocket to the inside and bartack each edge of opening.		Bartack	21-28	0	0
	NOTE: Watch pocket shall be between basic fabric and lining.					
13.	Join lining back parts.					
	Finished appearance. The lining back parts shall be joined without gathers, puckers or pleats.					
	a. Position the lining back parts face to face with edges even and join at the center with a 1 inch seam, from the bottom of zipper mark to bottom of lining.	301	SSa-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

seams except as otherwise specified in

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
14.	Stitch darts in front and back lining.					
	Finished appearance. The darts shall be tapered to a point at the lower end and shall finish without gathers, puckers or pleats.					
	a. Fold and stitch front and back lining waist darts in accordance with marks and notches as indicated on the pattern. The lower ends of waist darts shall be well tapered to a flat point.	301	OSf-1	12-14	50	50
	b. Press the darts smooth and flat with a heated pressing iron, with the inside folded edge of waist darts towards the center of the lining.					
15.	Join front and back parts of lining.					
	a. Join the front and back parts of lining at the side seam with a 1 inch seam and with notches matching. The back seam shall be joined from the bottom edge of lining 7-1/2 inches from the top raw edge to provide for the center back opening.	301	SSa-1	12-14	50	50
	b. The back opening shall be edge stitched 1/8 - 1/4 inch on each side.	301	EFa-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
16.	Press lining seams. a. Spread open the center back seam and the side seams and press smooth and flat with a heated iron or pressing machine.				
17.	Pink seams and bottom edge of lining. a. The raw edge of the seam allowance at the side seams, center back lining, and raw edges at the bottom of the front and back lining shall be neatly and evenly pinked with the points of the pinking 1/8 inch in depth. **NOTE:** Care shall be exercised during the pinking operation to assure that no seam allowance is reduced more than 1/16 inch.				
18.	Make waistband. Finished appearance. On the finished skirt, the outside end of the waistband shall be pointed and the inside end shall be squared. a. The waistband shall be made of a single ply of basic material and a single ply of interlining (twill or fusible).				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
18.	Make waistband. - (contd.)					
	b. Position the interlining on the inside of waistband with bottom edges even. Stitch the interlining to the underside of waistband along the top and bottom edges of interlining with a 1/8-inch seam. The line of stitching shall extend the entire length of waistband but the stitching shall not show on the front of the waistband. or When fusing the interlining to the waistband, position the interlining on the inside of waistband with bottom edges even. Stay stitch is not required.	301	SSa-1	12-14	A	A
	c. Overedge stitch the inside raw edge of waistband.	503 or 504	EFd-1	8-10	70	70
	d. Fold the waistband in half lengthwise face to face with notches matching. Join the two plies together, at the pointed end, with 3/8-inch seam, starting at the folded edge.	301	SSe-2	12-14	50	50
	e. Close the squared end by seaming the two plies together 3/8 inch from the bottom raw edges, starting approximately midway between the notches and the end of the waistband, then seam straight across the width of the waistband to close the end.	301	SSe-2 (a)	12-14	50	50
	f. Cut the stabbing for					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
18.	Make waistband. - (contd.)					
	f. Trim the excess material at both ends to 1/8 inch from the seams. Turn the waistband, forcing out the corners and point completely, and edgestitch 1/16 inch from the seamed edges at the pointed and squared ends.	301	SSe-2 (b)	12-14	50	50
	g. Continue to edgestitch along the length of the waistband 1/16 inch from the folded edge.	301	OSf-1	12-14	50	50
	h. The edgestitching may be performed continuously with the top stitching on the outside of the waistband in operation 23.a.					
19.	Assemble placket and slide fastener (see Figure 4).					
	Finished appearance. The placket shall be smooth and flat. The folds of the skirt shall completely cover the slide fastener when slide fastener is closed. The stitching shall not interfere with the operation of the slider.					
	a. Fold the placket in half lengthwise, with the right side out. Baste the two plies together along the folded edge.	101	OSf-1	6-8	50	50
	or					
	b. The folded edge may be pressed.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
19.	Assemble placket and slide fastener (see Figure 4). (contd.)					
	c. Overedge stitch the side and bottom raw edges of placket together.	503 or 504	Efd-1	8-10	70	70
	d. Place the closed slide fastener on the face overedge seam to right) side of the placket with the top end of the chain 1/2 inch below the top raw edge of the chain 5/8 to 3/4 inches from the folded edge of placket.					
	e. Join the right half of the fastener to the placket with a single row of stitches 3/16 to 1/4 inch from the chain edge through the tape and both plies of the placket.	301	SSak-1	12-14	50	50
20.	Join placket assembly to skirt (see Figure 4).					
	a. Open the slide fastener and place the front half of it on the inside of the right part of the skirt at the back opening, with the top end of the chain positioned 1/2 inch below the top raw edge and the chain positioned even with the creased front edge of the back opening.					
	b. Join the left half of the slide fastener to the skirt with a single row of stitches through the tape and left back panel of the skirt.	301	SSak-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
20.	Join placket assembly to skirt (see Figure 4). (contd.)					
	b The row of stitches shall extend from the top edge of the left back panel to 1/4 to 3/8 inch below the bottom end of the chain, and shall be uniformly 5/6 inch from the center edge of the back opening.					
	c. Close the slide fastener and turn the skirt right side out. Position the right back part of the skirt on the placket, holding the right edge of the opening as close as possible to the chain of the slide fastener so that in the finished skirt, the edge of the opening conceals the zipper when the skirt is worn Join the right back to the placket assembly with a 5/16 inch seam from the folded edge of the right back opening, through the slide fastener tape and the placket.	301	LSah-1	12-14	50	50
	d. Topstitch across the bottom end of the opening through the slide fastener tape and the placket with a single row of stitches. The stitching shall not extend past the finished stitching of each side opening.	301	SSv-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
21.	Joining lining to skirt.					
	Finished appearance. The right side of lining shall be 3/4 ± 1/8 inch from the folded edge of placket and the left side lining shall be 1/4 ± 1/8 inch from the folded edge of back opening.					
	a. Join lining to the skirt at the waist with a 1/4 inch seam from the respective seams with the right side seams matching equally distributing the fullness. The back opening of the lining shall not overlap the slide fastener.	301	SSa-1	12-14	50	50
22.	Join waistband to skirt, with hangers.					
	a. Position the waistband on the outside of the skirt, with notches at the pointed end of waistband even with the left back edge of skirt, with the raw edge of the waistband even with the top raw waist edge of skirt and with the notches at the square end of waistband matching the right back folded edge of skirt.					
	b. Join the outside part of the waistband to the skirt with a 3/8 inch seam, with the braid for the hanger folded in half to form a loop and with the ends of the loops placed on the inside of the skirt and the watch pocket caught in the stitching.	301	BSr-1 (a)	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
22.	Join waistband to skirt, with hangers. - (contd.) c. The hangers shall be positioned one at the right side seamline and one at the left side seamline. d. In the finished skirt, the length of the hanger loop shall be 1-5/8 ± 1/8 inches, measured the from the bottom edge of the waistband to the end of the loop.					
23.	Topstitch waistband. Finished appearance. The waistband shall be sewn on smoothly and evenly and shall have a flat appearance without gathers, puckers, pleats or other distortions either in the waistband, front part or back part, and shall be even width along the entire length. The waistband shall be 1-1/4 ± 1/8 inch wide. The pointed end shall extend 1-1/2 ±1/8 inches center back edge of the back opening, and the squared end shall extend 2 ± 1/8 inches beyond back opening. a. Turn back the waistband and topstitch the waistband to the skirt 1/16 inch from the raised edged, catching the overedge stitched portion in the stitching, and with the stitching extending the entire length of the waistband.	301	BSr-2 (b)	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
24.	Make buttonholes.					
	Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The stitching shall be securely caught in the basic material. The buttonholes shall be well worked over gimp to fit 27-line buttons. The purling of the buttonholes shall be on the outside of the waistband.					
	a. Make a 3/4-inch-long horizontal, eyelet-end, taper-bar type buttonhole through the center of the pointed and squared ends of waistband with the inside purled edge of the eyelet 1/2 to 5/8 inch from finished ends to waistband.	Buttonhole		52-54 per buttonhole including tack	0/3	0/3
25.	Clean skirt.					
	a. All ends of stitching shall be trimmed and the loose threads removed from skirt. Pull and remove any basting threads.					
	b. Any spots, stains and shade tickets or markings shall be removed without injury to the material.					
26.	Press skirt.					
	a. The entire skirt shall be pressed smooth with a heated steam pressing iron or steam pressing machine. Press marks and gloss shall be removed.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. - Manufacturing requirements

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
27.	Sew on buttons.				
	a. Close the slide fastener and mark the inside and outside ends of waistband with the location for sewing on the buttons to correspond with the eyelet of button-holes.				
	b. The buttons shall be positioned to engage with the eyelet end of buttonholes so that, on the finished skirt, the ends of the waistband lie smooth and flat without twisting, bulging or other distortion.				
	c. Securely sew a 27-line button at each mark. The thread ends of hand sewn buttons shall be securely tacked. The button on the outside of waistband shall be sewn through all plies of waistband. The stitches for the button sewn to the inside of the waistband shall not be visible on the outside.	Hand or 101 or 301		4-6 per button hole (dou-ble) thread 14-16	16/4
28.	Prepare for packing.				
	a. Examine skirt.				
	b. An envelope containing the tape for the skirt hem shall be attached by string to the left hanger loop.				

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished skirt shall conform to the measurements shown in Table II.

Table II.- Finished measurements

Size	Waist 1/	Seat 2/	Length 3/
Short			
OX	22-1/2	34-1/2	26
2	23-1/2	35-1/2	26
4	24-1/2	36-1/2	26
6	25-1/2	37-1/2	26
8	27	39	26
10	28-1/2	40-1/2	26
12	30	42	26
14	32	44	26
16	34	46	26
Regular			
OX	22-1/2	34-1/2	27-1/2
2	23-1/2	35-1/2	27-1/2
4	24-1/2	36-1/2	27-1/2
6	25-1/2	37-1/2	27-1/2
8	27	39	27-1/2
10	28-1/2	40-1/2	27-1/2
12	30	42	27-1/2
14	32	44	27-1/2
16	34	46	27-1/2
18	36	48	27-1/2
Long			
2	23-1/2	35-1/2	29
4	24-1/2	36-1/2	29
6	25-1/2	37-1/2	29
8	27	39	29
10	28-1/2	40-1/2	29
12	30	42	29
14	32	44	29
16	34	46	29
18	36	48	29
Tolerances:	± 1/2	± 1/2	± 1/2

1/ Twice the measurement taken from folded edge to folded edge at center of waistband with slide fastener closed and waistband buttoned

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

* Braid not pressed smooth and

2/ Twice the measurement taken from folded edge to folded edge of skirt, 7 inches down from lower edge of waistband

3/ Measurement taken at center front from lower edge of waistband-to bottom edge of unhemmed skirt (see Figure 1)

3.8 Workmanship. The finished skirts shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to the prescribed requirements.

4.1.1 Responsibility of compliance. All items must meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified all inspections shall be performed in accordance with the test conditions specified in MIL-STD-1609.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated skirt for all provisions of this specification.

4.5 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1609.

4.5.1 Components and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. A certificate or compliance will be acceptable for the plastic coil slide fastener requirements of 3.3.9.2. In addition, the requirements that all components of the slide fastener have been furnished by one supplier shall be accepted on a certificate of compliance (see 3.3.9.1).

4.5.2 End item examination. Sampling and examination of the end item shall be performed for dress (D) skirts in accordance with the provisions of MIL-STD-1609.

4.5.3 Dimensional examination. The dimensional examination provisions for the finished skirts shall be as listed in 3.7 and as specified in MIL-STD-1609.

4.5.4 Examination of packaging requirements. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-1609.

4.5.5 Examination of palletization. An examination shall be made to determine that the palletization complies with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:06Z
Check the source to verify that this is the current version before use.

causing puckering on outside

Examine	Defect
Finished dimension	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified. Container pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial (see 6.2).

5.1.1 Level A. Fold skirts in half lengthwise, with the slide fastener closed and waistband buttoned, and then fold again in half lengthwise. Skirts shall then be folded in half in the width, with bottom edge even with top edge, to form a length of approximately 15 inches, or bottom edge of skirt may be turned under and folded edge placed even with top edge. The length of the completed fold shall be approximately 15 inches. Stack 10 folded skirts of one size in a bundle, placing the top of the first five skirts at one end of the bundle and the top of the second five at the other end. Tie with cotton tape or twine.

5.1.2 Commercial. Skirts shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A or commercial (see 6.2).

5.2.1 Level A. Thirty (30) skirts of one size only, folded as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to class weather resistant, variety DW, grade V15C, size 2A of MIL-B-17757. In addition, each container shall have the contents completely covered on top and bottom with a sheet of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled, closed and reinforced as specified in the appendix to the box specification.

5.2.2.1 Commercial. Skirts, preserved as specified in 5.1, shall be packaged in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:06Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or purchase order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.4 Palletization. When specified (see 6.2), skirts packed as specified in 5.2.1 and 5.2.2 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The skirts described herein are intended for wear by female personnel of the U.S. Marine Corps.

6.2 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Classes and sizes required (see 1.2).
(c) Whether first article is required (see 3.2.).
(d) Number of skirts in first article (see 3.2).
(e) Levels of packaging and packing required (see 5.1 and 5.2).
(f) When palletization is required (see 5.4).

6.3 Samples and patterns. For information regarding the availability of samples and patterns, address inquiries to the acquiring activity issuing the invitation for bids.

6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1 through 4 show general design of the skirts and are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

6.6 Subject term (keyword) listing.

Skirts
Women's

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:06Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - MC

Preparing Activity:
DLA - CT

Project No 8410-0843

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.


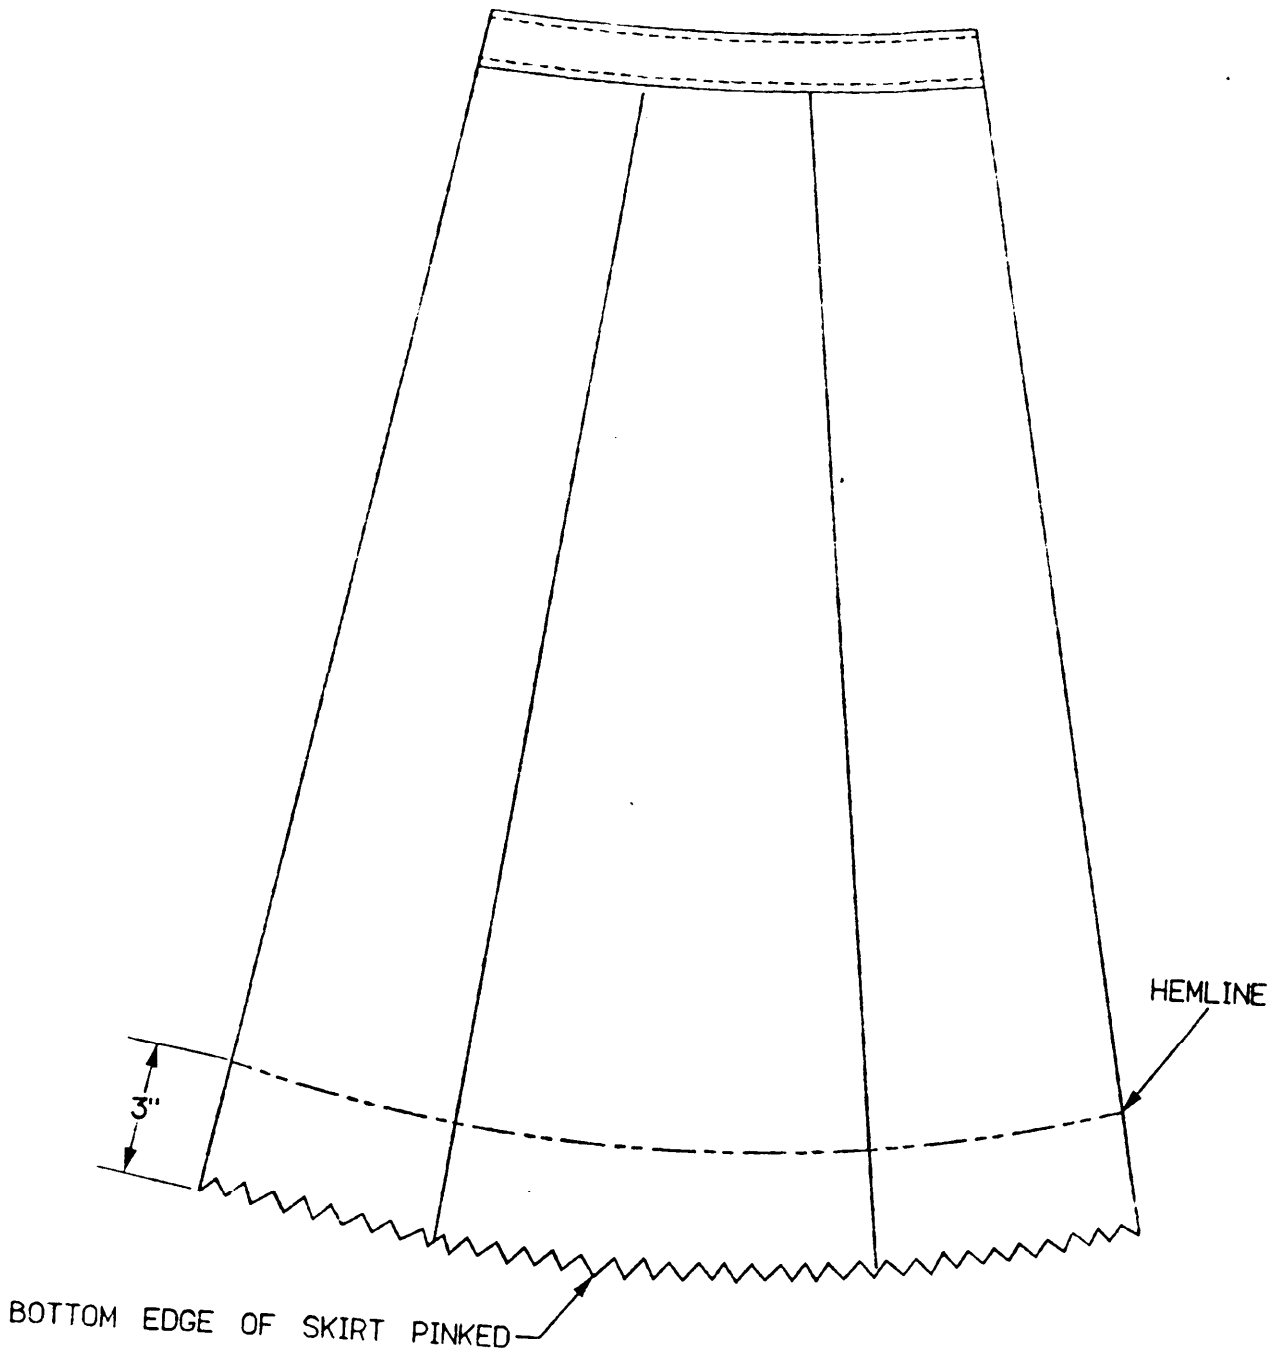


FIGURE 1: SKIRT, WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

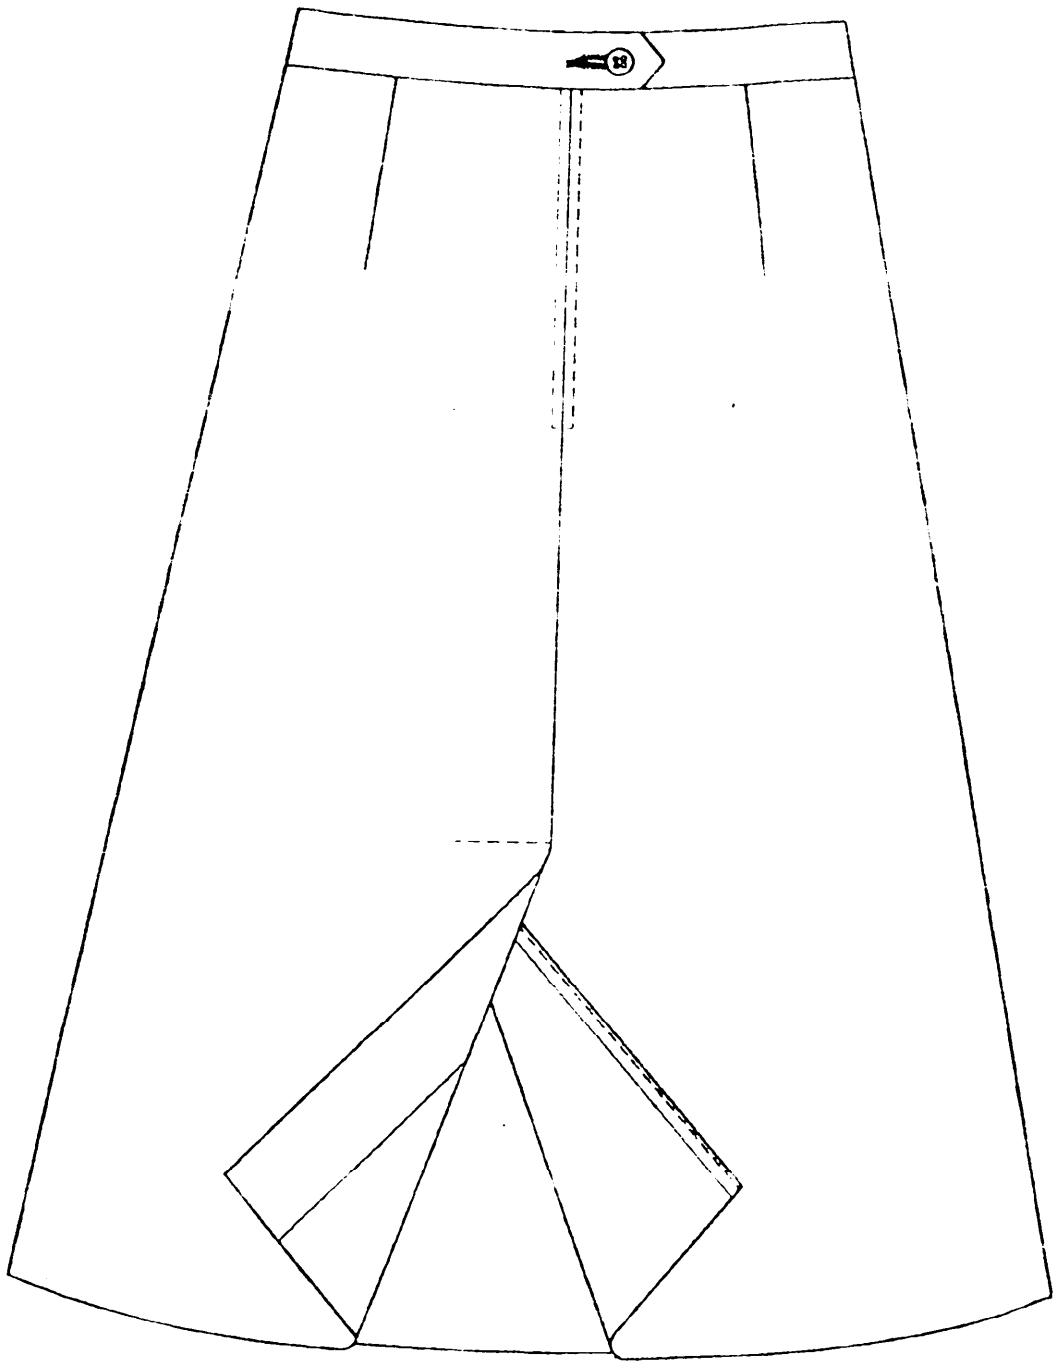

BACK VIEW

FIGURE 2: SKIRT, WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.


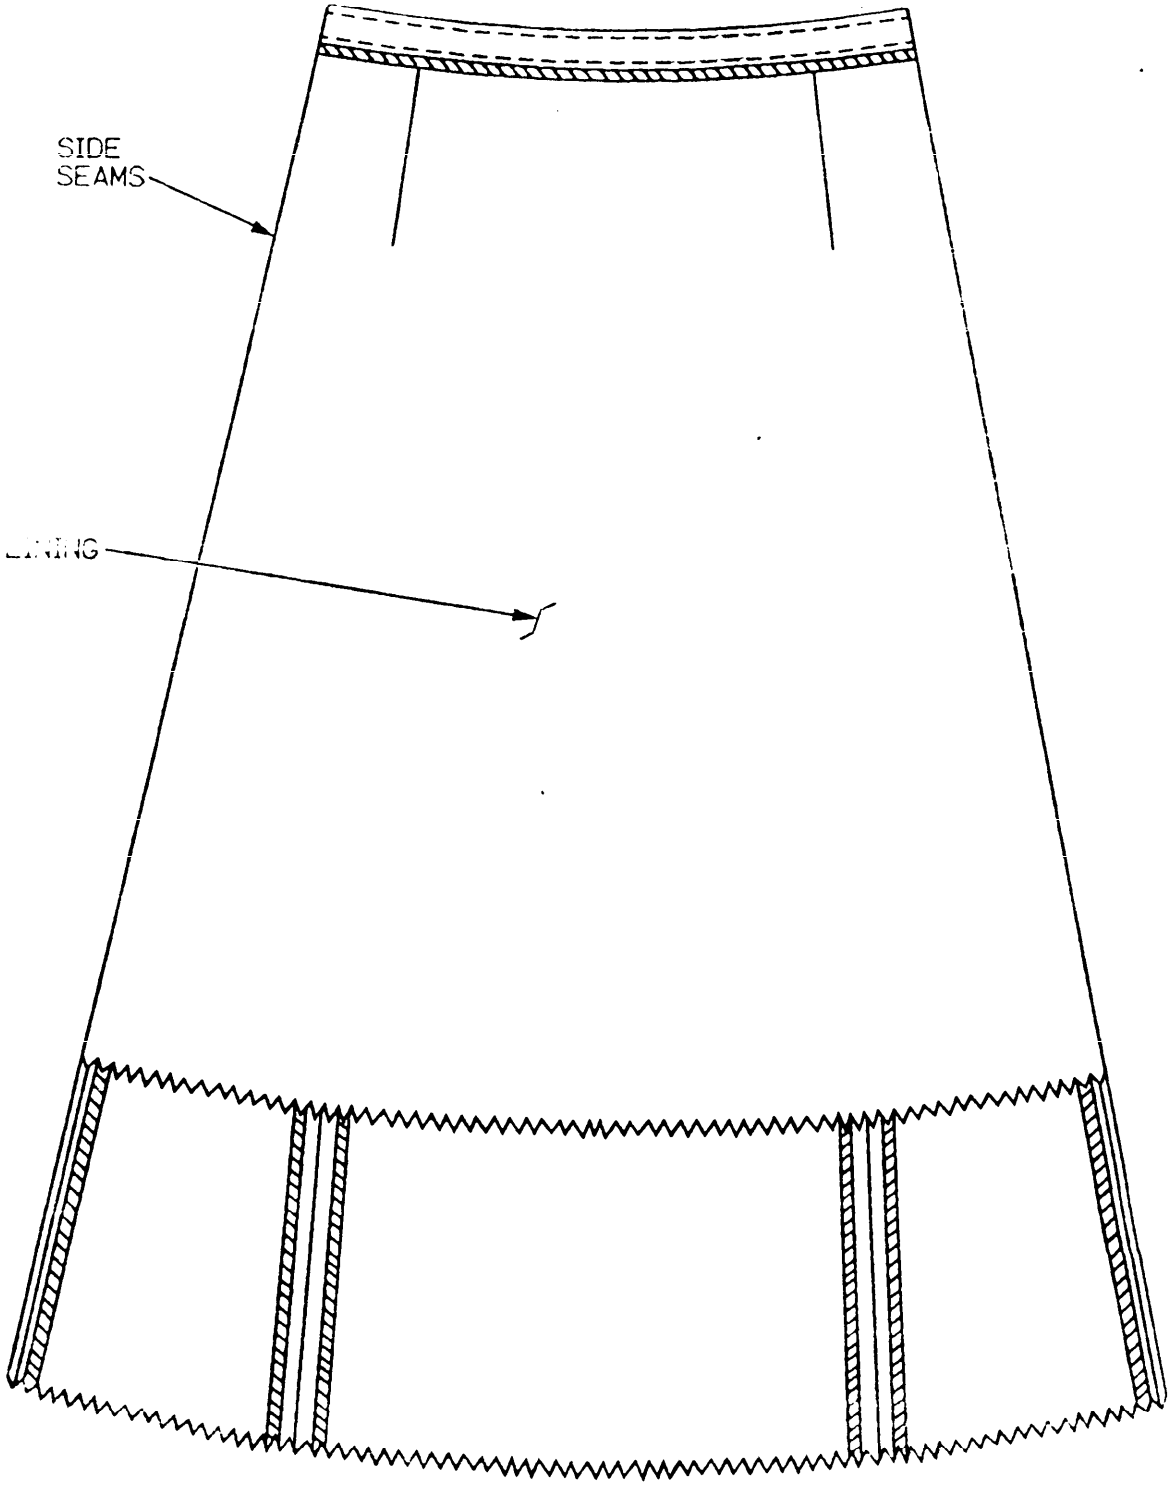


FIGURE 3: SKIRT, WOMEN'S


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

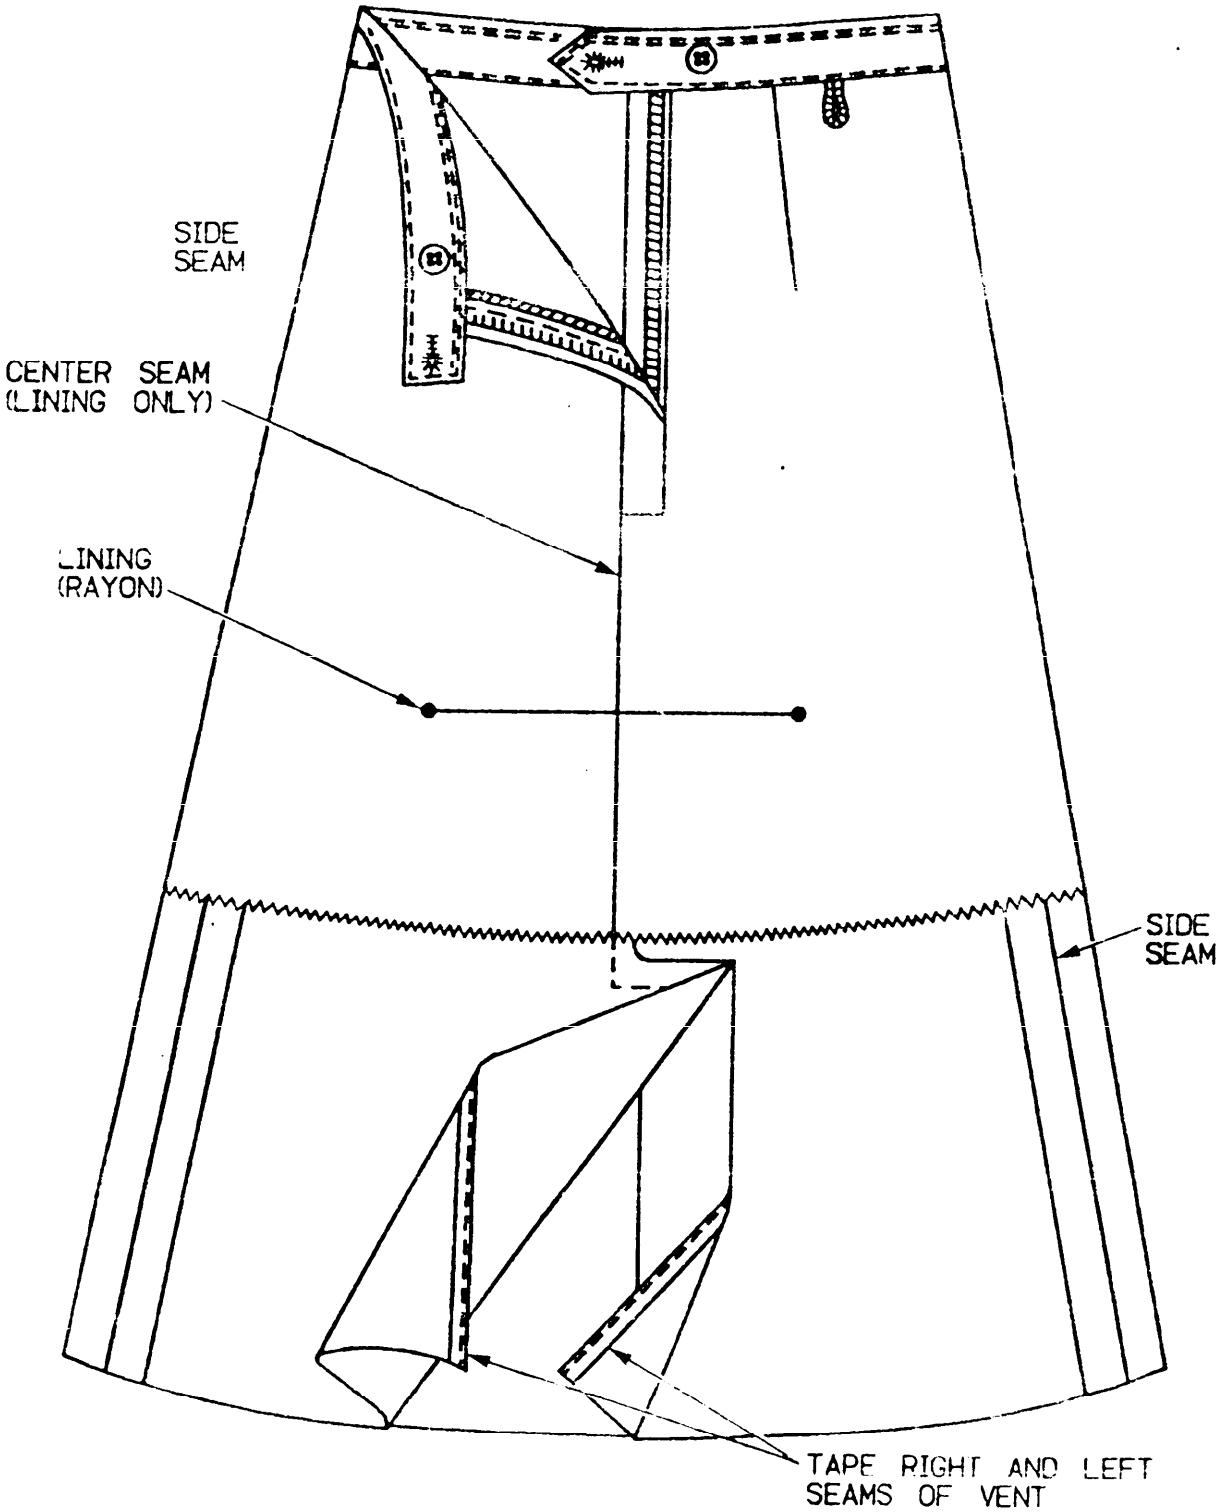

INSIDE VIEW-BACK

FIGURE 4: SKIRT, WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 20261O-20T23:06Z
Check the source to verify that this is the current version before use.

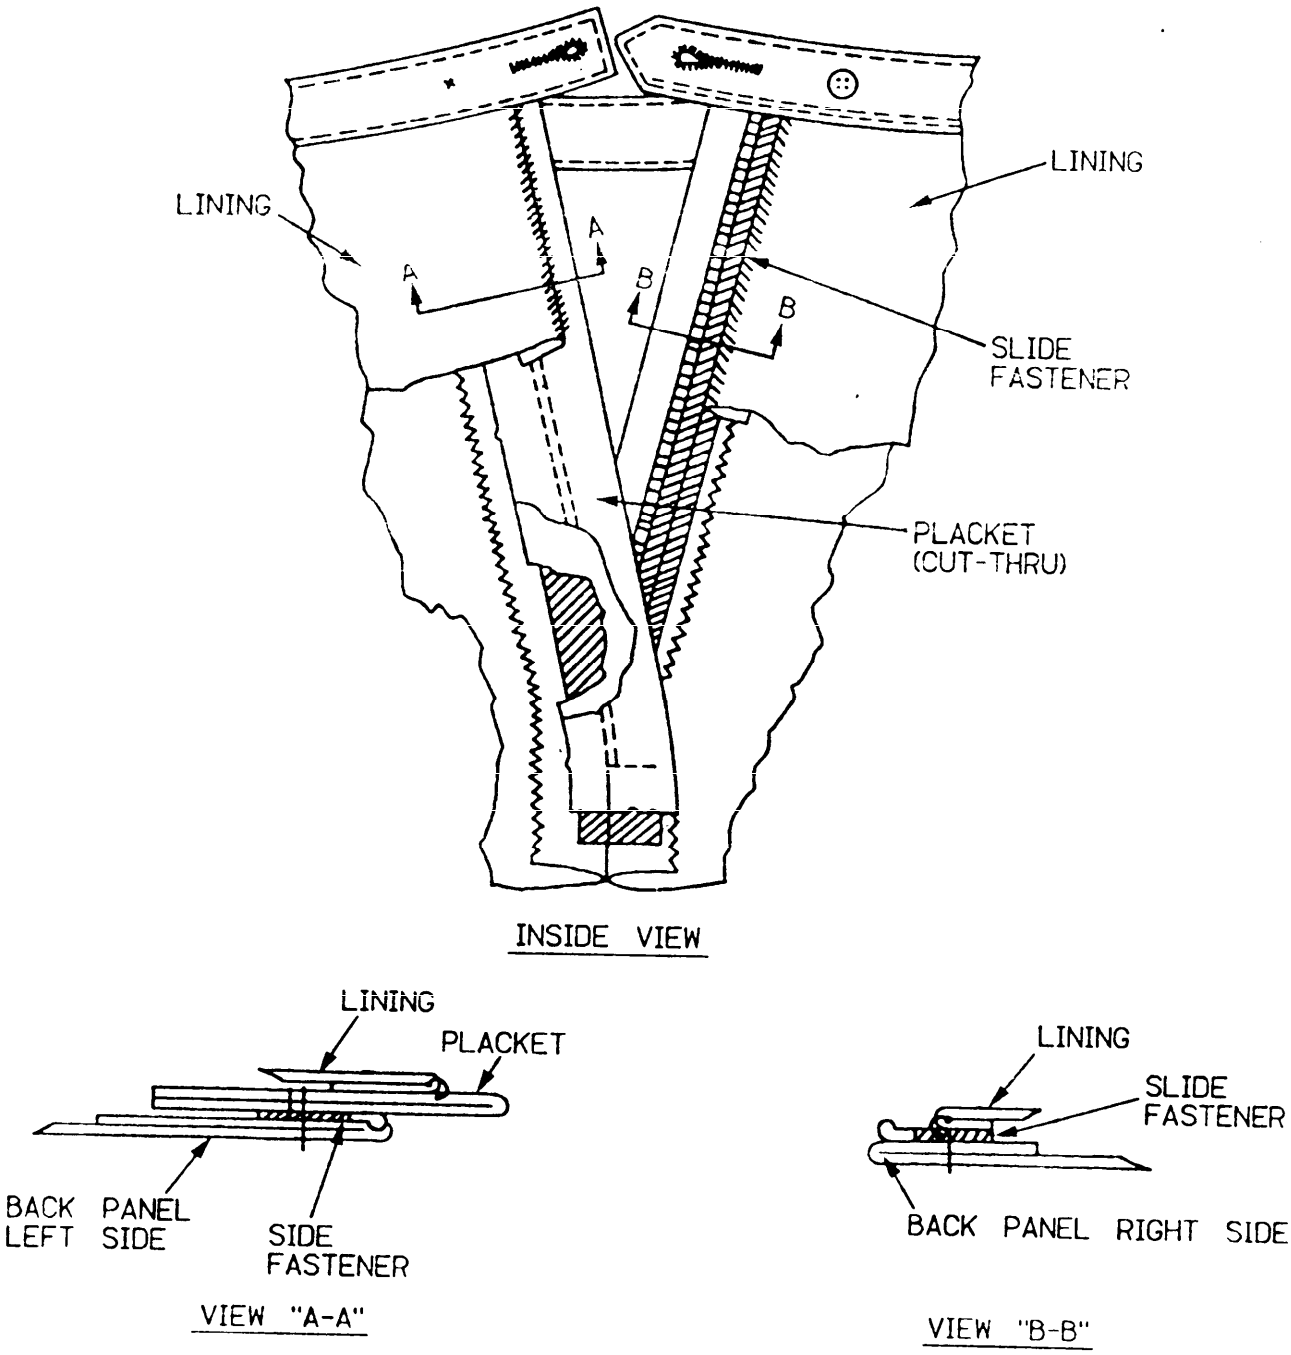

DETAIL: PLACKET OPENING

FIGURE 5: SKIRT, WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:06Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-S-29429B	2. DOCUMENT DATE (YYMMDD) 940601

3. DOCUMENT TITLE
SKIRTS, WOMEN's

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME DPSC/PQSD	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON
c. ADDRESS *(Include Zip Code)* 2800 S 20th Street Philadelphia, PA 19101	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466

Source: https://assist.dla.mil -- Downloaded: 20260410T230622
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.