MILITARY SPECIFICATION

CAPS, GARRISON: WOMEN'S

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirement for women's garrison caps.

1.2 Classification. The garrison caps shall be one type in the following classes and sizes as specified (see 6.2).

Class 1 - Polyester/Wool, Gabardine, Green Shade 2212
Class 2 - Wool, Gabardine, Green Shade 2210

Schedule of Sizes

21	21-1/2	22	22-1/2	23	23-1/2	24

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-2), Headquarters U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

AMSC N/A
Distribution Statement A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:07Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-301	- Thread, Silk
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label, For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-10176	- Cloth, Gabardine: Wool, Polyester/Wool
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-29118	- Cloth, Twill, Cotton
MIL-T-43548	- Thread, Polyester, Cotton Covered and Rayon Covered

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized, Unit Load
MIL-STD-902	- Provisions for Evaluating Quality of Caps, Garrison, Women's

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies of the manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association Inc., Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20036.)

Department of Defense (DOD) Standard Color Card of
Official Standardized Shades for Sewing Threads 1968

(Application for copies should be addressed to the Color Association of the United States Inc., 200 Madison Avenue, New York, New York 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards) the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), contractor shall furnish sample caps for first article inspection and approval.

3.3 Materials

3.3.1 Basic material. The basic material for each class of caps shall be as follows:

(a) Class 1. Cloth, polyester/wool gabardine, 10.6 ounce, green shade 2212 conforming to type II, class 12 of MIL-C-10176 (see 6.3).

(b) Class 2. Cloth, wool gabardine, 14.5 ounce, green shade 2210 conforming to type I, class 5 of MIL-C-10176 (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the currentversion before use.

3.3.2 Lining. The material for lining the caps shall be cloth, rayon twill 3.7 ounce, conforming to class 1 of MIL-C-368, green shade 2208.

3.3.3 Sweatband. The material for the sweatband shall be cloth, twill, cotton, 5.7 to 6.3 ounces, conforming to MIL-C-29118, except the color shall be green shade 2224.

3.3.4 Thread. All outside seaming and stitching shall be performed with silk thread, conforming to type I of V-T-301 and other seaming and stitching with cotton thread conforming to type I of V-T-276. As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to MIL-T-43548, ticket No. 50, 3 ply or ticket No. 70, 2 ply may be used. The proper threads for the various operations shall be as follows:

Operation	Type	Ticket No.	Ply	Material	Needle/Bobbin
Inside seaming and stitching	IC2	A	3	Cotton	Both
Topstitching top crown hemming curtain and tacking curtain	I	A	3	Silk	Both

3.3.4.1 Color and colorfastness. The thread shall be dyed olive drab shade T-1 cable No. 66023 (See DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968). The colored threads, when tested in accordance with the applicable thread specification shall show good fastness to wet (dry) cleaning, and in addition, the thread shall show good fastness to light.

3.3.5 Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored with 6 to 8 scores. The flange of the eyelet shall be enameled a shade to closely match the shade of the basic material (see 3.3.1), or the entire eyelet may be enameled. Eyelets with a washer may be used. The eyelets, when tested as specified in Section 4, Table III shall comply with the requirements specified herein. The eyelets shall conform to the following dimensions:

Outside diameter of barrel, inch:	0.185 ± 0.004
Outside diameter of flange, inch:	0.312 ± 0.005
Length of barrel under flange, inch:	0.145 ± 0.004
Metal thickness, inch:	0.008 ± 0.001

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the current version before use.

3.3.6 Labels. Each cap shall have a combination identification and size label conforming to type VI, class 4 of DDD-L-20 except the content shall include the name of contractor 1/ and the Wool Product Act Information. The label shall measure not less than 1-3/4 by 1-1/4 inches, with a minimum 1/4-inch margin at the top edge for sewing. The caps are intended to be dry cleaned and shall show fastness to dry cleaning.

Nomenclature (Item identification)
Contract Number
Name of Contractor
Size
National Stock Number
Wool Product Act
Dry Clean Only

3.4 Design. The cap shall be the U. S. Marine Corps design shown on Figure 1.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the working patterns. The standard patterns provide 1/4-inch seam allowance, except as otherwise specified in Table I, show size and are marked or notched for the proper cutting, placement, and assembly of the component parts.

3.5.1 Pattern parts. The component parts of the caps shall be cut from materials as specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature (Classes 1 and 2)	No. of cut parts
	Basic Material	
1.	Side crown	2
2.	Top crown	1
3.	Curtain	2
	Material: Cloth, Rayon Twill	
4.	Lining, side crown	2
5.	Lining, top crown	1

3.6 Construction. The caps shall be manufactured in accordance with operations specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the caps.

3.6.1 Stitches, seams and stitching. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch, as specified in Table I, indicates the minimum and maximum number permitted. Ends of seams and stitching produced with 301 type stitch, when not caught in

1/ Size of characters for name of contractor shall be minimum 6 point (approximately 1/16 inch).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:07Z
Check the source to verify that this is the current version before use.

other seams or stitching, shall be securely backtacked not less than 1/4 inch. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch.

3.6.2 Pressing. All pressing operations specified in Table I shall be accomplished with a heated pressing iron or pressing machine set at medium (low) temperature (285°F maximum).

3.6.3 Shade marking. The component parts of the cap, except the sweatband and underply of curtain shall be marked to insure a uniform shade and size throughout the cap. Any method of shade marking may be used except:

1. Corrosive metal fastening devices.
2. Sew-on shade tickets.
3. Adhesive type tickets whose adhesive discolors or adheres to the material after removal of the tickets.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the cap in strict accordance with the patterns furnished by the Government. b. Cut the material in the direction indicated by directional lines on the pattern. c. Cut the wool and polyester/ wool parts of the cap from one piece of the basic material. d. Cut the lining for the cap from one piece of the rayon twill material. e. Cut the sweatband on the straight (warp or filling direction) of the cotton twill material. The sweatband shall be cut 1-1/4 inches wide and sufficiently long in order to lap the ends 3/4 inch, with the top end turned under not less than 3/4 inch.					
2.	Replacement of damaged parts. a. Replace, at time of cutting, any part of the cap or lining materials containing damages, such as holes or seriously weakening defects, such as smashes, multiple floats, and slubs likely to develop into a hole.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:07Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2.	Replacement of damaged parts.(cont'd)					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cut, tear, holes, mends, burns and large exposed drill holes.					
3.	Shade marking.					
	a. Mark all component parts as specified in 3.6.3, in order to insure a uniform shade and size throughout the cap and proper assembly.					
4.	Make curtain.					
	Finished appearance. The curtain shall finish smooth and flat, without twists, pleats, puckers or other distortion. The edge shall not be stretched. The edges shall be neatly and completely worked out.					
	a. The curtain shall be made of two plies of basic material.					
	b. Position the two plies face to face, with edges even and notches matching. Stitch together with a 1/4-inch seam along the upper edges to the step.	301	SSe-3 (a)	10-14	A	A
	c. Edge stitch the curtain uniformly with a double row of stitches 1/16 and 1/4 inch respectively from the seamed edges.	301	SSe-3 (b)	10-14	A	A Silk
	d. Seam the two plies of curtain together 1/4 inch from the raw lower edge.	301	SSa-1	10-14	A	A
	e. Press the curtain smooth and flat with a heated pressing iron or pressing machine (see 3.6.2).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:07Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL		BOB/ LPR
5.	Join ends of curtain.						
	Finished appearance. The ends of the curtain shall be joined without twists, fullness or puckers.						
	a. Lap the right end of the curtain on the outside of the left end, with the bottom edges even, and with the notch at the right front in line with the notch of left front.						
	b. Seam the ends together along the bottom edge 1/4 inch from the edge.	301	LSa-1	10-14	A	A	
6.	Join lining to top crown.						
	Finished appearance. The lining shall be joined to the top crown without twists, puckers, pleats or distortion.						
	a. Position top crown and top crown lining with edges even and notches matching and seam together 1/8 inch from the edges.	301	SSa-1	6-8	A	A	
	b. Fold the top crown-lining assembly in half lengthwise, with the lining side out and stitch along the folded edge from end to end. The line of stitching shall taper from zero at each end to 1/4 inch from the folded edge at the center.	301	OSf-1	10-14	A	A	
7.	Join top and side crowns.						
	Finished appearance. The top and side crown shall be joined without twists, puckers, pleats or distortion.						
	a. Position the left and right side crown, respectively, on the outside of the top crown with edges even and notches matching and with front and back point of top crown matching the upper corners of side crown.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:07Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL		BOB/ LPR
7.	Join top and side crowns.(cont'd)						
	b. Join the left and right side crown, respectively, to the top crown with a 1/4-inch seam, beginning and ending on the center fold of the top crown 1/4 inch from each end. The specified manner of joining the side crowns to top crown will permit the front and back corners of the cap to be more sharply formed when joining side crowns at the ends.	301	LSq-2 (a)	10-14	A	A	
8.	Join side crown lining to cap.						
	Finished appearance. The side crown lining shall be joined to the cap without twists, puckers, pleats or distortion.						
	a. Position the left and right side crown lining, respectively, on the inside of top crown, with edges even and notches matching and join to the top crown-side crown seam outlet with a 1/4-inch seam. The seam shall begin and end on the center fold of the top crown, 1/4 inch from each end.	301	SSa-1	10-14	A	A	
9.	Join ends of side crown.						
	Finished appearance. The ends of side crown shall be joined together without twists, puckers, pleats or distortion. The center of the top crown shall be in line with the front and back seams of cap. The stitching shall not extend to the top edge of the side crown.						

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Join ends of side crown. (cont'd)					
	a. Join the left and right side crown at front and back ends of cap with a 1/4-inch seam, from the lower edge up to the joining seam line of the side and top crown.	301	SSz-3 (a)	10-14	A	A
10.	Join ends of side crown lining.					
	Finished appearance. The ends of the side crown lining shall be joined without twists, puckers, pleats or other distortion. The stitching shall not extend to top edge of the lining.					
	a. Join the left and right side crown lining at front and back ends of cap with a 1/4-inch seam, from the lower edge up to the joining seam line of the side and top crown.	301	SSa-1	10-14	A	A
11.	Topstitch side crown.					
	Finished appearance. The side crown shall be uniformly topstitched. The side crown lining at front and back ends of cap shall not be caught in the topstitching.					
	a. Turn cap right side out, working out the upper front and back corners. Spread open the seam at each end of cap and topstitch the left and right side crowns, respectively, 1/16 inch from the seam. Turn the crown seam outlet towards the side and continue to topstitch the side crown 1/16 inch from the raised edge, catching the outlet in the stitching. The topstitching at each end of cap shall not be through the side crown lining.	301	SSz-3 (b) (ends) LSq-2 (b) (raised edge)	10-14	A	A Silk

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12.	Join lining to side crown.					
	Finished appearance. The lining shall be joined to side crown without twists, puckers, pleats or other distortion. The front and back seams of lining and side crown shall match.					
	a. Turning cap wrong side out, match the front and back lining seams to the respective crown seam with bottom edges even. Join lining to side crown 1/4 to 3/8 inch from raw bottom edge, with the front and back seams of side crown lining turned flat against the respective side crown seams and with the ends caught in the stitching.	301	SSa-1	6-8	A	A
13.	Join curtain to cap.					
	Finished appearance. The curtain shall fit close to sides of cap without twists, puckers, pleats or other distortion. The ends of the curtain shall lap on the left side of cap. The curtain shall be the proper height for each size cap.					
	a. Turn cap right side out. Position the curtain on the outside of cap with bottom edges even and notches in curtain matching the respective side crown joining seam. Join the curtain to the cap through the lining with a 3/8-inch seam.	301	LSq-2 (a)	10-14	A	A
	b. Turn the cap curtain down with the raw bottom edge of curtain and side crown turned to the inside. Topstitch the side crown on the outside 1/16 inch from the raised bottom edge.	301	LSq-2 (b)		A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:07Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14.	Join sweatband to cap. Finished appearance. The edges of the sweatband shall be properly turned under to finish uniformly 5/8 to 3/4 inch wide. The sweatband shall be uniformly stitched to the cap; shall finish smooth and flat without pleats, puckers, gathers, twists or other distortion; shall cover the raw bottom edge of the curtain and side crown; and the lower edge shall be 1/8 to 3/16 inch above the bottom finished edge of cap. The ends of the sweatband shall finish to the right or left, but not on, the back seam of cap, and shall lap each other not less than 1 inch. The combination identification-size label shall be properly positioned. a. Properly position the 1-1/4 inch wide sweatband on the inside of the cap. b. Stitch the sweatband to the cap with a double row of stitches, turning under the top and bottom edges to finish 5/8 to 3/4 inch wide, lapping the ends, turning under the top end and catching the turned-under edges and top end in the stitching 1/16 inch from the top and bottom folded edges. The combination identification-size label shall be positioned to the right or left of the back seam with the top edge placed under the sweatband and caught in the top row of stitches. c. Turn up curtain.	301	LSd-1 (each edge)	10-14	A A	

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
15.	Clean cap. a. Trim all ends of stitching and remove all loose ends of thread from the cap. Remove all spots, stains and shade tickets and markings, without injury to the material.					
16.	Press cap. a. The cap shall be well pressed with a heated pressing iron or pressing machine (see 3.6.2). The bottom edge of curtain shall be smoothly and carefully folded and well creased. The front and back of the curtain shall not be creased. b. The spread at the top of the crown shall be evenly distributed on each side of the cap. The sweatband shall not be exposed below the bottom edge of the cap. All pressing marks shall be removed.					
17.	Tack ends of curtain. a. Superimpose tack on inner row of the double row of stitching below the curved edge for a distance of 1-3/4 to 2 inches.	301 or Hand	SSa-1	10-14 4-6 per	A C	A Silk
18.	Attach eyelet to curtain. Finished appearance. The eyelet shall be properly positioned and securely attached through the lapped ends of the curtain, and securely clinched on the inside without distorting and cutting the material or splitting the flange of the eyelet.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
18.	Attach eyelet to curtain.(cont'd) a. Mark the left side of the curtain 1-3/4 ± 1/8 inches from the top edge and 1-1/2 ± 1/8 inches from the side edge for the location of one metal eyelet (See Figure 1). b. Attach the metal eyelet to the curtain at the mark.					

3.7 Finished measurements. The finished caps shall conform to the measurements shown in Table II.

Table II. Finished measurements 1/

	Cap				
	Height 2/			Width 3/	
Size	Front (inches)	Back (inches)	Center (inches)	Top Crown (inches)	Circumference 4/
21	2-7/8	2-7/8	3-3/8	4	21
21-1/2	2-7/8	2-7/8	3-3/8	4-1/8	21-1/2
22	3	3	3-1/2	4-1/4	22
22-1/2	3	3	3-1/2	4-3/8	22-1/2
23	3-1/8	3-1/8	3-5/8	4-1/2	23
23-1/2	3-1/8	3-1/8	3-5/8	4-5/8	23-1/2
24	3-1/8	3-1/8	3-5/8	4-3/4	24

	CURTAIN (Height) 5/			
	Front (inches)	Back (inches)	Center Left and Right	Through eyelet (inches)
21	2-3/4	2	2	2-3/4
21-1/2	2-3/4	2	2	2-3/4
22	2-7/8	2-1/8	2-1/8	2-7/8
22-1/2	2-7/8	2-1/8	2-1/8	2-7/8
23	3	2-1/4	2-1/4	3
23-1/2	3	2-1/4	2-1/4	3
24	3	2-1/4	2-1/4	3

1/ Tolerance: ± 1/8 inch.

2/ Height of cap measurement taken at the location for front and back seams and at the center of side crown from folded lower edge of curtain to upper raised edge of side crown.

3/ Width of top crown measurement taken at the center of the crown from raised edge to raised edge of side crown with the spread fully extended.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the current version before use.

4/ Circumference of the cap taken along the center of the sweatband.

5/ Heights of curtain measurement taken at the location for front and back seams, at the center of left and right side of curtain, and through the center of the metal eyelet, from folded bottom edge of curtain to outer edge of curtain.

3.8 Workmanship. The finished caps shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-902.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated cap for all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the current version before use.

Except as otherwise specified in the contract or purchase order, the

4.5 Quality conformance inspection

4.5.1 Testing of components. Testing of components shall be made in accordance with applicable subsidiary specifications and drawings referenced herein to the extent applicable, except that this specification shall govern in the event of conflict. In addition, inspection shall be performed on components listed in Table III for characteristics noted.

Table III. Test methods

Components	Characteristics	Rqmt. Para.	Test Method	Results Reported as
Eyelets 1/	Material identification	3.3.5	Std Comm'l	Pass or Fail
	Finish	3.3.5	Visual	Pass or Fail
	Color	3.3.5	Visual	Pass or Fail
	Dimensions			
	- outside dia. - barrel	3.3.5	Std Comm'l	Pass or Fail
	Outside dia flange	3.3.5	Std Comm'l	Pass or Fail
	Length of barrel	3.3.5	Std Comm'l	Pass or Fail
	Metal thickness	3.3.5	Std Comm'l	Pass or Fail

1/ A certificate of compliance will be acceptable for this requirement.

4.5.1.1 Sampling for testing. Government furnished material shall not be sampled or tested unless specifically requested by the Government. The sample unit for testing of each component shall be the quantity necessary to perform all required tests one time each. The inspection level for each component shall be S-1 of MIL-STD-105. The AQL for each characteristic tested shall be 6.5 defects per 100 units (DHU's). The unit for expressing lot sizes and the sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Component	Lot size expressed as	Sample unit for testing
Eyelets	each	10 each

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the current version before use.

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.3 End item examination. Samplings and examination of the end item shall be performed in accordance with the provisions of MIL-STD-902.

4.5.4 Finished measurement examination. The provisions for the finished measurement examination of the finished cap shall be as specified in MIL-STD-902 and Table II of this specification.

4.5.5 Examination of packaging. Shipping containers that are fully prepared for delivery except for closure shall be subjected to the examination of preparation for deliviery described in MIL-STD-902. The occurrence of defects during this examination shall not exceed the applicable point value or defect limit specified in MIL-STD-902.

4.5.6 Examination of palletization. An examination shall be made to determine that the palletization complies with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 DHU's.

Examine	Defect
Finished dimension	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified.
	Container pattern not as specified.
	Interlocking of loads not as specified.
	Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the currentversion before use.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A, or commercial as specified (see 6.2).

5.1.1 Level A. Each cap shall be placed in an individual polyethylene bag measuring approximately 6 inches wide by 15 inches long with a 1-inch lip at the open end along the 6-inch dimension. The polyethylene flexible film shall be 0.00125 inch thickness (± 25 percent tolerance). Each bag shall contain a label (see 5.3.1).

5.1.2 Commercial. Caps shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A

5.2.1.1 Method 1. One hundred twenty five (125) caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, conforming to weather-resistant class, size No.2A of MIL-B-17757, assembled, closed and reinformced as specified in the Appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (5.3.2).

5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers (750 caps of one size only) shall be packed in a fiberboard shipping container conforming to weather-resistant class, size No. 4 of MIL-B-17757, assembled, closed and reinforced as specified in the Appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.2).

5.2.2 Level B. One hundred twenty five (125) caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to domestic class, size No. 2A of MIL-B-17757, assembled and closed as specified in the Appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.2).

5.2.3 Commercial. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U. S. Postal Service Manual, Uniform Freight Classification Rule or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the currentversion before use.

5.3 Marking. In addition to any special marking required by the contract or purchase order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information.

STOCK NUMBER
NOMENCLATURE
SIZE
CONTRACT NUMBER
NAME OF CONTRACTOR

5.3.2 Mixed sizes. Each shipping container packed with mixed sizes shall have a 5 X 4 inch white paper label securely attached to the end and side directly under the printing or stenciling. The words "MIXED SIZES" shall be plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.4 Palletization. When specified (see 6.2), caps packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C,K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I, Class 1, Style 1, Size A, Wood Group I, II, III or IV of MIL-P-15011, or 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, Wood Group I, II, III or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The caps described herein are intended for wear by women personnel of the U. S. Marine Corps.

6.2 Ordering data

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Class and size (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When level A, method 2, packing is required (see 5.2.1.2)
(f) When palletization is required (see 5.4)

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:07Z
Check the source to verify that this is the currentversion before use.

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs.

Paragraph no.	Data Requirements	Applicable DID no.	Options
(a) 4.2	Inspection System Program Plan	DI-R-4803	--
(b) 4.4	First Article Inspection Procedures	DI-T-4901	—
(c) 4.4	First Article Inspection Report	DI-T-4902	—

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Standard sample and patterns. For information regarding the availability of standard sample and patterns, address inquiry to the acquiring activity issuing the invitation for bids.

6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

6.6 Subject term (key word) listing
Cap
Garrison
Women's

Preparing Activity
Navy - MC
Project No 8410-N629

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:07Z
Check the source to verify that this is the current version before use.

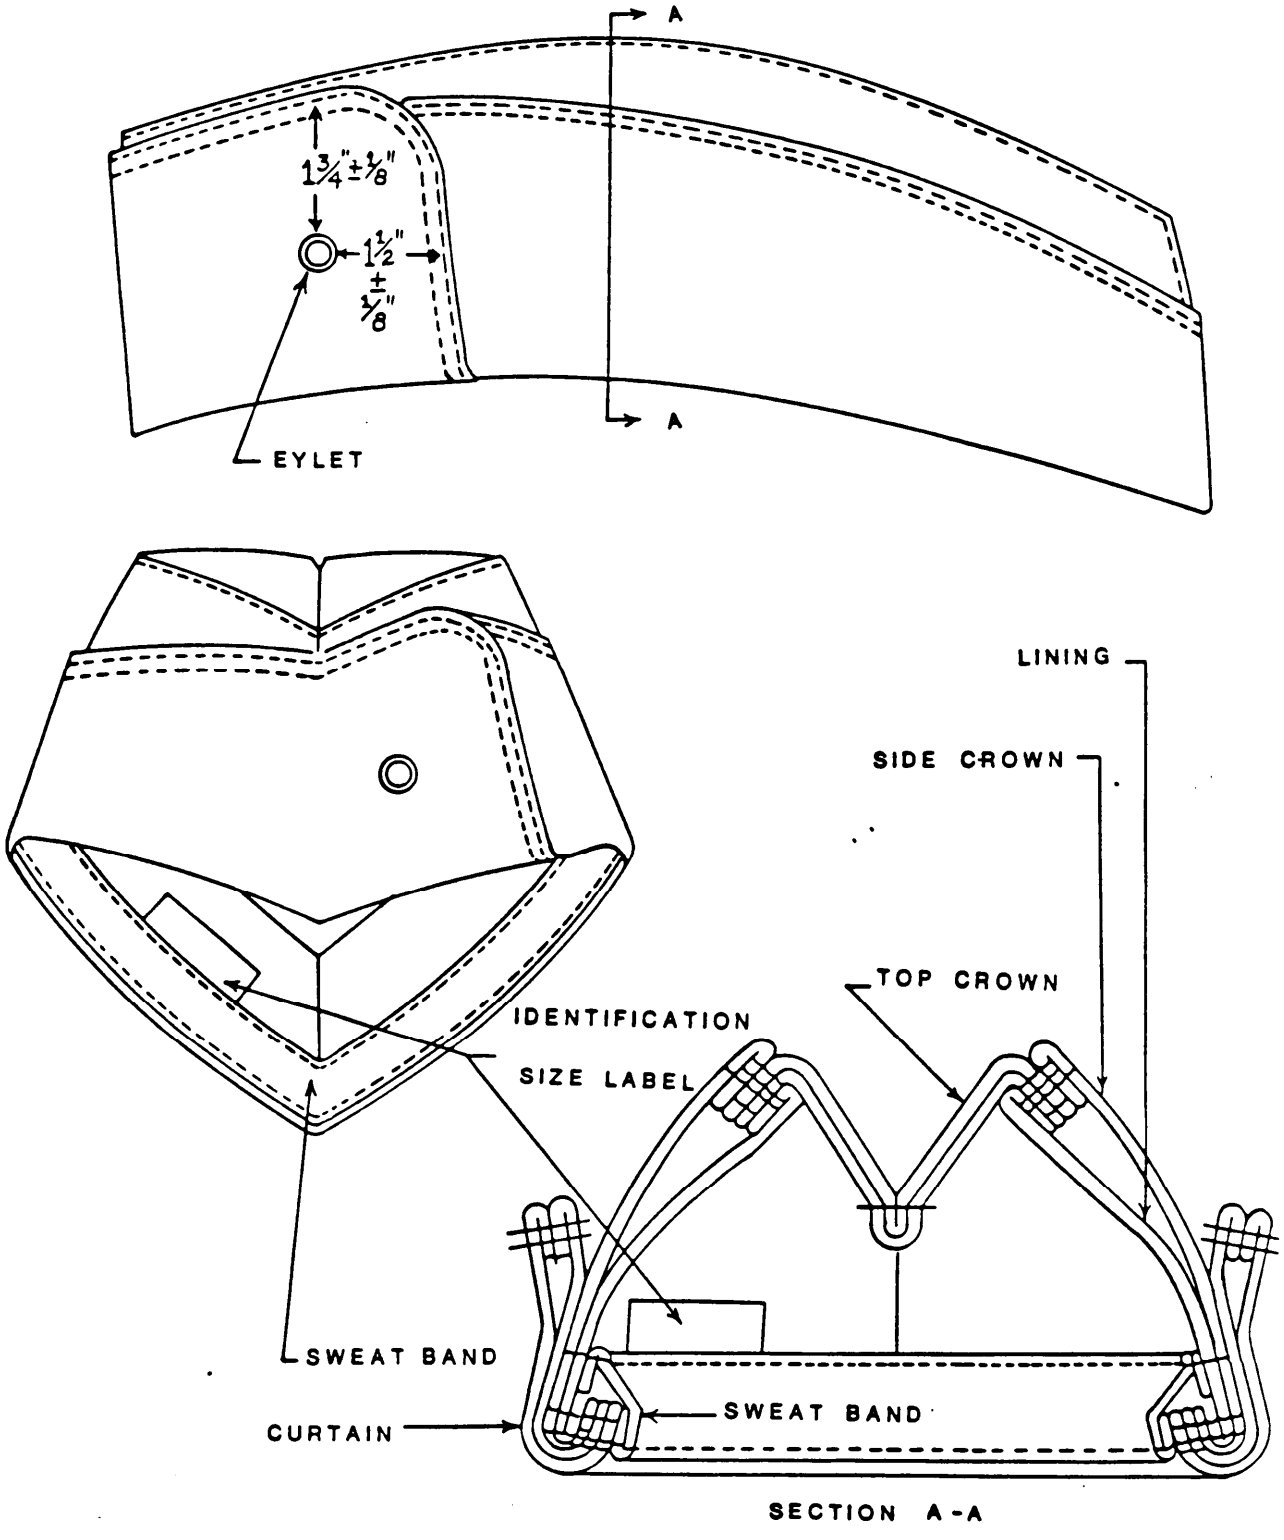


FIGURE 1: CAP, GARRISON, WOMAN'S

Source: https://assist.dla.mil -- Downloaded: 20261020T23:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, U.S. Marine Corps
Washington, D.C. 20380-0001
Attn: LMA-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-29431(MC)	CAPS, GARRISON: WOMEN'S

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T23:07Z
Check the source to verify that this is the current version before use.