MILITARY SPECIFICATION

CAPS, GARRISON: MEN'S,

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for men's garrison caps.

1.2 Classification. The caps shall be of one type in the following classes and sizes as specified (see 6.2):

Class 1 - Cap, Polyester/Wool, Gabardine, Green 2212
Class 2 - Cap, Gabardine, Wool, Green 2210
Class 3 - Cap, Elastique, Wool, Green 2222

Schedule of sizes

6-3/8	6-7/8	7-3/8
6-1/2	7	7-1/2
6-5/8	7-1/8	7-5/8
6-3/4	7-1/4	7-3/4

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions), and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

Distribution Statement A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:08Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
V-T-301	- Thread, Silk.
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way Entry (Partial)
CCC-C-461	- Cloth, Twill Uniform, Cotton.
DDD-L-20	- Label; For Clothing, Equipage, and Tentage, (General Use).

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon.
MIL-C-3577	- Sweatband, Headgear (Leather)
MIL-C-3738	- Cloth, Elastique, Wool
MIL-C-10176	- Cloth, Gabardine, Wool, Polyester and Wool.
MIL-C-10296	- Cloth, Sateen, Cotton.
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings.

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-147	- Palletized Unit Loads.
MIL-STD-901	- Provisions for Evaluating Quality of Caps, Garrison, Men's.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:08Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association Inc., Tariff Order Section, 1616 P Street, N. W., Washington, D.C. 20036.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. The standard sample is furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), contractor shall furnish sample caps for first article inspection and approval.

3.3 Materials.

3.3.1 Basic material. The basic material for each class of cap shall be as follows:

(a) Class 1. Cloth, 10.6 ounce polyester/wool gabardine, green shade 2212 conforming to type II, class 12 of MIL-C-10176.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:08Z
Check the source to verify that this is the current version before use.

(b) Class 2. Cloth, 14.5 ounce wool gabardine, green shade 2210 conforming to type I, class 5 of MIL-C-10176.

(c) Class 3. Cloth, 18 ounce wool elastique, green shade 222 conforming to type II, class 1 of MIL-C-3738.

3.3.2 Lining. The material for lining the class 1 caps shall be cloth, rayon twill, 3.7 ounce, green shade 2208 (see 6.3), conforming to class 1 of MIL-C-368.

3.3.3 Sweatband. The material for the sweatband shall be cloth, cotton, uniform twill, green shade 2224 (see 6.3), 8 ounce, conforming to type III of CCC-C-461, except the requirements for colorfastness to bleaching and light shall not apply, or cloth, sateen, cotton, olive green shade 107 conforming to class 1 of MIL-C-10296. As an alternate for classes 2 and 3 caps only, a leather sweatband, dyed brown, not less than 7/8 inch in width and conforming to MIL-S-3577 may be used. The leather sweatband shall be embossed with an imitation turned line 1/8 inch from the top edge.

3.3.3.1 Sweatband reinforcement. If the alternate leather sweatband is used, the material for the sweatband reinforcement shall be 5/8-inch-wide strip of either print cloth or sheeting that is lightly coated on both sides with proxylin or vinyl.

3.3.4 Thread.

3.3.4.1 Cotton thread. The cotton thread used for inside seaming shall be type IC2, 3 ply, ticket No. A and for overedging type IA3, 2 ply, ticket No. 70 conforming to V-T-276.

3.3.4.2 Silk thread. The silk thread used for topstitching the top crown and hemming the curtain shall be type I, 3 ply, size A conforming to V-T-301.

3.3.4.3 Color and colorfastness. The cotton and silk thread shall be green shade T-1, Cable No. 66023. The threads, when tested in accordance with the applicable thread specification, shall show good fastness to wet-dry cleaning and light.

3.3.5 Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored with 6 to 8 scores. The flange of the eyelet shall be enameled a shade to closely match the shade of the basic material (see 3.3.1), or the entire eyelet may be enameled. Eyelets with a washer may be used. The eyelets, when tested as specified in Section 4, Table IV, shall comply with

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the currentversion before use.

the requirements specified herein. The eyelets shall conform to the following dimensions:

Outside diameter of barrel, inch:	0.185 ± 0.004
Outside diameter of flange, inch:	0.312 ± 0.005
Length of barrel under flange, inch:	0.145 ± 0.004
Metal thickness, inch:	0.008 ± 0.001

3.3.6 Labels. Each cap shall have a combination identification, instruction and size label conforming to type VI, class 4 of DDD-L-20, except the content shall include the name of contractor 1/ and the Wool Products Act information. The label shall measure not less than 1-3/4 by 1-1/4 inches, with a minimum 1/4-inch margin at the top edge for sewing. The caps are intended to be dry cleaned and shall show fastness to dry cleaning.

Nomenclature (item identification)
Contract number
Name of contractor
Size
National Stock Number
Wool Product Act
DRY CLEAN ONLY

3.4 Design. The cap shall be the U. S. Marine Corps design shown on Figures 1 and 2.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the working patterns. The standard patterns provide 1/4-inch seam allowance, except as otherwise specified in Table I, show size and are marked or notched for the proper cutting, placement, and assembly of the component parts.

3.5.1 List of pattern parts. Caps shall be cut from materials specified herein in accordance with the pattern parts indicated below:

Pattern Nomenclature

Item	Basic material	No. of cut parts
1.	Side crown	2
2.	Curtain (class 1)	2
3.	Curtain (class 2 and 3)	1
4.	Top crown	1
	Material: Cloth, Rayon Twill (Class 1)	
5.	Lining, side crown	2
6.	Lining, top crown	1

1/ Size of characters for name of contractor shall be minimum 6 point (approximately 1/16 inch).

Source: https://assist.dla.mil -- Downloaded: 2026-04-20T23:08Z
Check the source to verify that this is the current version before use.

3.6 Construction. The caps shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the caps.

3.6.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified for the same operation, any one of them may be used. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.1 Serge stitching. Serge stitching shall be done on serging machines having a knife attachment properly set to trim the raveled edge without cutting the material.

3.6.1.2 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching, shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

3.6.2 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the cap. Any method of shade marking may be used except:

(a) Corrosive metal devices.
(b) Adhesive-type tickets which show discoloration and adhesive mass which adheres to the material upon removal of the tickets.
(c) Sew-on shade tickets.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the cap in strict accordance with the patterns furnished by the Government. b. Cut the material in the direction indicated by directional lines on the patterns. c. Cut the wool and polyester/wool parts of the cap from one piece of the basic material. d. Cut the lining for the Class 1 cap from one piece of the rayon twill material.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. (con't) e. Cut the sweatband on the straight (warp or filling direction) of the cotton material. The sweatband shall be cut 1-5/8 inches wide and sufficiently long in order to lap the ends 3/4 inch, with the top end turned under not less than 3/8 inch.					
2.	Replacement of damaged parts. a. Replace, at time of cutting, all parts of the cap or lining materials containing holes, seriously weakening defects such as smashes,multiple floats, loose or weakening slubs, etc., expected to develop into a hole, shade bars, dye streaks or unslightly slubs, etc., affecting appearance. b. Replace any part damaged during manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns and large drill holes in the material affecting appearance.					
3.	Shade marking. a. Mark all component parts as specified in 3.6.2, in order to insure a uniform shade and size throughout the cap and proper assembly.					
4.	Make curtain (Class 1). Finished appearance. The curtain shall be uniformly stitched and shall be smooth and flat without twists, gathers, puckers, or pleats. a. The curtain shall be made of two plies of basic material.					

Source: https://assist.dla.mil -- Downloaded: 20261O-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4.	Make curtains (Class 1). (con't)					
	b. Position the two plies face to face, with edges even and notches matching. Stitch together with a 1/4-to 5/16-inch seam along the upper edges.	301 or 101	SSe-2 (a)	12-16 or 10-14	A	A
	c. Turn curtain, forcing out the seam. Uniformly edgestitch 1/8 inch from seamed edge.	301 or 101	SSe-2 (b)	12-16 or 10-14	A (silk)	A
	d. Close bottom of curtain uniformly with 3/16 to 1/4-inch seam.	301 or 101	SSa-1	12-16 or 10-14	A	A
5.	Serge stitch curtain, top and side crowns (Class 2 and 3).					
	Finished appearance. The curtain, top and side crowns shall be properly serge stitched.					
	a. Serge stitch raw top edge of curtain, all raw edges of top crown, and side crown except bottom raw edge of side crown. When serging raw edges, care shall be exercised in setting the gage so that the raveled edge only of the material is trimmed off.	503 or 505	EFd-1 EFd-1	6-8 6-8	70/2 70/2	70/2 70/2
6.	Hem curtain (Class 2 and 3).					
	Finished appearance. The hem shall be uniformly stitched without pleats, puckers or twists, and shall be uniform in width.					
	a. Hem the serged edge of the curtain 1/4 to 3/8 inch with the stitching 1/16 inch from the folded edge.	301 or 401	EFa-1 EFa-1	12-16 12-16	A (silk) A (silk)	A A
7.	Join ends of curtain.					
	Finished appearance. The ends of the curtain shall be joined without twists, fullness, or puckers.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Join ends of curtain. (con't)					
	a. Lap the left end of the curtain over the outside of the right end, with the bottom edges even and the front notches matching. Seam together along the bottom 1/8 to 3/16 inch from the raw edge.	301	SSa-1	12-16	A	A
8.	Make top crown (Class 1).					
	Finished appearance. The top crown lining shall not be tight, short, or twisted, affecting smoothness on the outside of crown. The folded edge of top crown-lining assembly shall be stitched without twists, puckers, pleats, or distortion.					
	a. Top crown shall be made of one ply of basic material and one ply of lining material.					
	b. Position lining on underside of crown, with edges even and notches matching. Seam together 1/8 inch from raw edges.	301	SSa-1	12-16	A	A
	c. Fold crown-lining assembly in half lengthwise with lining side out. Stitch along folded edge from end to end. The line of stitching shall taper from zero at each end to 1/8 to 3/16 inch from folded edge at the center.	301	OSf	12-16	A	A
	d. Stitch the folded top crown-lining assembly 3/4 ± 1/8 inch from raw edge.	301	SSa-1	12-16	A	A
9.	Join top crown (Class 2 and 3).					
	Finished appearance. The top crown shall be joined together without twists, puckers, pleats or distortion.					
	a. Fold top crown in half lengthwise with serged edges even and notches matching. Stitch along	301	OSf-1	8-12	A	A

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Join top crown (Class 2 and 3). (con't)					
	fold edge from end; the line of stitching shall taper from zero at each end to 1/8 to 3/16 inch from folded edge at center.					
	b. Stitch top crown 3/4 ± 1/8 inch from serged edge.	301	SSa-1	8-12	A	A
10.	Join top and side crowns.					
	Finished appearance. The top and side crowns shall be joined together without twists, puckers, pleats, or distortion.					
	a. Position the left and right side crown on the outside of the respective top crown, with top edges even and the point at each end of the top crown matching the notches in the side crowns.					
	b. Join the left and right side crowns, respectively, to the top crown with a 1/4-inch seam, beginning and ending on the top crown 1/4 inch from each end.	301 or 101	LSq-2 (a)	10-14 or 6-10	A	A
11.	Join side crown lining to cap (Class 1.					
	Finished appearance. The side crown lining shall be joined to the cap without twists, puckers, pleats or distortion.					
	a. Position the left and right side crown lining, respectively, on the lining side of top crown, with edges even and notches matching, and join to the top crown-side crown seam outlet with a 1/4-inch seam. The seam shall begin and end on the center fold of the top crown 1/4 inch from each end.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 20261O-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12.	Join ends of side crown.					
	Finished appearance. The ends of side crown shall be joined together without twists, puckers, pleats, or distortion. The center of the top crown shall be in line with the front and back seams of cap. The stitching shall not extend to the top edge of the side crown.					
	Class 1.					
	a. Join the left and right side crowns at front and back ends of cap with a 3/8-inch seam at the lower end, tapering to 1/4 inch at the top crown joining stitch.	301	SSz-3(a)	10-14	A	A
	Class 2 and 3.					
	b. Join the left and right side crowns at front and back ends of cap with a 1/4-inch seam from the lower serged edge up to the notch.	301	SSz-3 (a)	8-12	A	A
13.	Join ends of side crown lining (Class 1).					
	Finished appearance. The ends of the side crown lining shall be joined without twists, puckers, pleats, or other distortion.					
	a. Join the left and right side crown lining at front and back ends of cap with a 3/8-inch seam at the lower end tapering to 1/4 inch at the top crown joining stitch.	301	SSa-1	10-14	A	A
14.	Topstitch side crown.					
	Finished appearance. The side crown shall be uniformly topstitched. On Class 1 caps, the side crown lining at front and back ends of cap shall not be caught in the topstitching.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL.	BOB/ LPR
	a. Turn cap right side out, working out the upper front and back corners. Spread open the seam at each end of cap and topstitch each side crown 1/16 inch from the seam. Turn the side-top crown joining seam towards the side and continue to topstitch each side crown 1/16 inch from the raised edge, catching the side-top crown joining seam in the stitching.	301	SSz-3 (b) (ends LSq-2 (b) (raised edge)	12-16	A (silk)	A
	NOTE: Class 1. The topstitching at each end of cap shall not be through the side crown lining.					
	b. On the finished cap, the width of the top crown shall be 3/4 ± 1/8 inch, measured from raised edge of side crowns with the spread fully extended.					
15.	Join lining to side crown (Class 1).					
	Finished appearance. The lining shall be joined to side crown without twists, puckers, pleats or other distortion. The front and back seam of lining and side crown shall match.					
	a. Turn cap wrong side out, matching the front and back lining seams to the respective crown seam. Join lining to side crown 1/4 inch from raw bottom edge of crown, with the front and back seams of side crown lining turned flat against the respective side crown seams and with the ends caught in the stitching.	301	SSa-1	10-14	A	A
16.	Join curtain to cap.					
	Finished appearance. The curtain shall fit close to sides of the cap without pleats or puckers. The right and left ends of the curtain shall cross at the center front 1/2 inch below the top end of the side crown seam.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16.	Join curtain to cap. (con't)					
	a. Turn the cap right side out and position the curtain on the outside with bottom edges even and notches in curtain matching the front seam.					
	b. Join the curtain to the cap through the lining with a 3/8-inch seam, and with the front and back seams turned flat against the body of the cap and caught in the stitching.	101	SSa-1	6-10	A	A
	c. On the finished cap, the left end of the curtain shall overlap the right end 4-1/2 ± 1/4 inches, as indicated on Figure 1, measured along the bottom finished edge of the cap.					
17.	Join sweatband to cap.					
	Finished appearance. The sweatband shall be smoothly and evenly stitched to the cap, without wrinkles, puckers, gathers, twists, or other distortion. The sweatband shall cover the raw bottom edge of the curtain, with the lower edge of sweatband 1/8 to 3/16 inch above the bottom finished edge of cap. The ends of the sweatband shall finish to the right or left of, but not on, the back seam for the crown and shall lap each other not less than 3/4 inch with the top end turned under not less than 3/8 inch. The combination identification, instruction and size label shall be placed to the right or left of the back seam of the crown with the top end under the sweatband.					
	a. The sweatband shall finish 1 ± 1/8 inch wide.					
	b. Turn down the curtain and position the sweatband on the inside of cap, with both side edges of sweatband turned under in line with the	301	LSd-1 (each edge)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17.	Join sweatband to cap. (con't)					
	stitching joining the curtain and side crown. Stitch the sweatband through curtain and side crown 1/8 inch from each folded edge, catching the turned-under portion in the stitching and leaving one end free for attaching the label.					
	c. Turn under and lap the free end of the sweatband on the opposite end. Place the top end of the label under the upper free edge of sweatband. Secure the free end of the sweatband to the cap with a row of stitches 1/8 inch from the folded upper and lower edges, catching the turned-under portions and the label in the stitching.	301	LSd-1	8-12	A	A
	d. Turn up the curtain.					
	e. When the leather sweatband is used in lieu of the cotton sweatband for class 2 and 3 caps, the curtain and side crown shall be overedge stitched together at the bottom edges. (see 17f)	502 or 503	SSa-1 SSa-1	10-14 10-14	A A	A A
	f. The leather sweatband shall be cut to the required length. The ends of the sweatband shall be abutted and joined with a row of zigzag stitching reinforced on the underside with a strip of the coated cloth.	304	LSa-1	8-12	A	A
	g. The sweatband shall be zigzag stitched to the cap on the inside through the curtain seam allowance and side pieces, with the stitching on the bottom edge of the sweatband. The combination identification size label shall be caught behind the sweatband during this joining operation. The curtain shall be turned up.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17.	Join sweatband to cap. (con't)					
	NOTE: The caps must be completely set and pressed before sewing the leather sweatband (see oper. 19).					
	h. Turn down the curtain and stitch the curtain to the side crown 1/16 inch from raised edge.	301	SSa-1	8-12	A	A
18.	Clean cap.					
	a. Pull and remove all basting thread. Trim all ends of stitching and remove all loose ends of thread from the cap. Remove all spots, stains, shade tickets and markings without injury to the material.					
19.	Press caps.					
	Finished appearance. The top crown shall not extend beyond the topstitched upper edge of side crowns. The front and back of cap curtain shall not be creased.					
	a. Insert a side shaper between the cap curtain and each side crown, and spread the curtain smoothly and evenly on the shaper.					
	b. Press the cap smooth and flat with a heated pressing machine or heated pressing iron, carefully folding and creasing the bottom edge. The pressing shall be done in such a manner that the seams joining side crowns to top crown will finish at the top edge of cap and the sweatband will not be exposed beyond the bottom edge of cap.					
	c. Remove all pressing marks.					

Source: https://assist.dla.mil -- Downloaded: 20261010-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
20.	Attach eyelet to curtain. Finished appearance. The eyelet shall be properly positioned and securely attached through the outside of the left side of the curtain and securely clinched on the inside without distorting and cutting material or splitting the flange of the eyelet. a. Mark the left side of the curtain 1-1/4±1/8 inches from the top edge 2 ±1/4-1/8 inches from front of cap when laid flat as shown in Figure 1. b. Attach the metal eyelet to the curtain at the mark.					

3.7 Finished measurements. The finished caps shall conform to the measurements shown in Table II.

Table II - Finished measurements

Size	Head measurements 1/	Height of cap at center 2/	Height of curtain 3/ front	back
	inches	inches	inches	inches
6-3/8	20-1/8	4-7/8	2-3/8	2-7/8
6-1/2	20-1/2	4-7/8	2-3/8	2-7/8
6-5/8	20-7/8	4-7/8	2-3/8	2-7/8
6-3/4	21-1/4	4-7/8	2-3/8	2-7/8
6-7/8	21-5/8	4-7/8	2-3/8	2-7/8
7	22	4-7/8	2-3/8	2-7/8
7-1/8	22-3/8	4-7/8	2-3/8	2-7/8
7-1/4	22-3/4	4-7/8	2-3/8	2-7/8
7-3/8	23-1/8	4-7/8	2-3/8	2-7/8
7-1/2	23-1/2	4-7/8	2-3/8	2-7/8
7-5/8	23-7/8	4-7/8	2-3/8	2-7/8
7-3/4	24-1/4	4-7/8	2-3/8	2-7/8
Tolerance	+1/4 -1/8	+1/4 -1/8	+1/4 -1/8	+1/4 -1/8

1/ Head measurements shall be taken with a gage (see 6.4).

2/ Height of cap measurement shall be taken at the center of the cap from the folded edge at the bottom of the curtain to the raised edge of the side crown.

3/ Height of curtain measurements shall be taken at the location for the front and back seams from the folded bottom edge to the folded top edge of the curtain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:08Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality level (AQL).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility of compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3)
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Inspection shall be in accordance with provisions set forth in MIL-STD-901, except where otherwise indicated herein.

4.4 First article. When first article is required, inspection and testing shall be made on a completely fabricated cap of each class for all provisions of this specification applicable to end product examination and tests.

4.5 Quality conformance inspections

4.5.1 Component and material testing. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components listed in Table III for characteristics noted. All requirements are applicable to the sample unit. All test reports shall contain the individual values utilized in expressing the final results.

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the currentversion before use.

4.5.2 Sampling for testing. Sampling shall be in accordance with MIL-STD-901 except for components specified below. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein. The unit for expressing lot size and sample unit for testing each component shall be in accordance with the following:

Component	Lot size expressed as	Sample Unit for Testing
Eyelets	1000	15

4.5.3 Examination of the end item. The end item examination for the finished caps shall be as specified in MIL-STD-901.

4.5.4 Finished measurements. Any measurement deviating from the nominal dimension and tolerance specified in Table II, shall be classified as a measurement defect.

4.5.5 Examination of packaging requirements. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-901.

4.5.6 Examination of palletization. An examination shall be made to determine that the palletization complies with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load full prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall 6.5 defects per hundred units (DHU's).

Examine	Defect
Finished dimension	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified.
	Container pattern not as specified.
	Interlocking of loads not as specified.
	Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the current version before use.

TABLE III - Test Methods

Components	Characteristic	Rqmt. para.	Test method	Determinations per sample unit	Results reported are:
Eyelets	Material identification 1/	3.3.5	Std. Com'l	1	Pass or fail
	Flange color	3.3.5	Visual	1	Pass or fail
	Barrel				
	Scores	3.3.5	Visual	1	Pass or fail
	Outside diameter	3.3.5	Std. Com'l	1	Pass or fail
	Length	3.3.5	Std. Com'l	1	Pass or fail
	Flange				
	Outside diameter	3.3.5	Std. Com'l	1	Pass or fail
	Metal thickness	3.3.5	Std. Com'l	1	Pass or fail

1/ A certificate of compliance will be acceptable for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T23:08Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each cap shall be placed in an individual polyethylene bag measuring approximately 6 inches wide by 15 inches long. The polyethylene flexible film shall be 0.0015 inch thick. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. The caps shall be packaged in accordance with the manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. One hundred twenty-five (125) caps of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner conforming to class weather resistant, size No. 2A or MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container.

5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers, (750 caps of one size only) shall be packed in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. One hundred twenty five (125) caps of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to class domestic, size No. 2A of MIL-B-17757, assembled and closed as specified in the appendix thereto. Fiberboard used to fabricate the boxes shall be grade 275. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Commercial. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules, National Motor Freight Classification Rule and U. S. Postal Services Manual, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Polyethlene bagged packages. Polethylene bagged packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information.

STOCK NUMBER
NOMENCLATURE
SIZE
CONTRACT NUMBER
NAME OF CONTRACTOR

5.3.2 Mixed sizes. Each shipping container packed with mixed sizes shall have a 5 X 4 inch white paper label securely attached to the end and side directly under the printing or stenciling. The words "MIXED SIZES" shall be plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

5.4 Palletization. When specified (see 6.2), caps packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance bonding means C,K and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I, Class 1, Style 1. Size A, Wood Group I, II, III, or IV of MIL-P-15011, or 4-way, Type IV, V or VIII, Class1, Style A, Size 2, Wood Group I, II, III, IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The caps described herein are intended for wear by enlisted male personnel of the Marine Corps.

6.2 Ordering data.

6.2.1 Acquisition requirements. The acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Class and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of caps in first article (see 3.2).
(e) Selection of applicable level of packaging and packing (see 5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).
(g) When palletization is required (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the currentversion before use.

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DoD FAR Supplement, Part 27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs.

Paragraph no.	Data requirements	Applicable DID no.	Options
(a) 4.	Inspection System Program Plan	DI-R-4803	------
(b) 4.4	First Article Inspection Procedures	DI-T-4901	------
(c) 4.4	First Article Inspection Report	DI-T-4902	------
(d) 4.5	Production/Acceptance Inspection Procedures	DI-T-4903	------
(e) 4.5	Production Inspection Reports	DI-T-4904	-------

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Standard samples. For information regarding the availability of a sample of the cap and of the standard shades specified, address inquiry to the acquiring activity issuing the invitation for bids.

6.4 Gages. Information concerning the gages may be obtained upon request to the contracting officer.

6.5 First article. Examinations, test, and approval shall be as specified by the contracting officer (see 3.2).


6.6 Figures. Figures 1 and 2 are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

6.7 Subject term (keyword) listing

Caps
Garrison
Men's

Preparing activity:
Navy-MC
Project No. 8405-N015

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the currentversion before use.

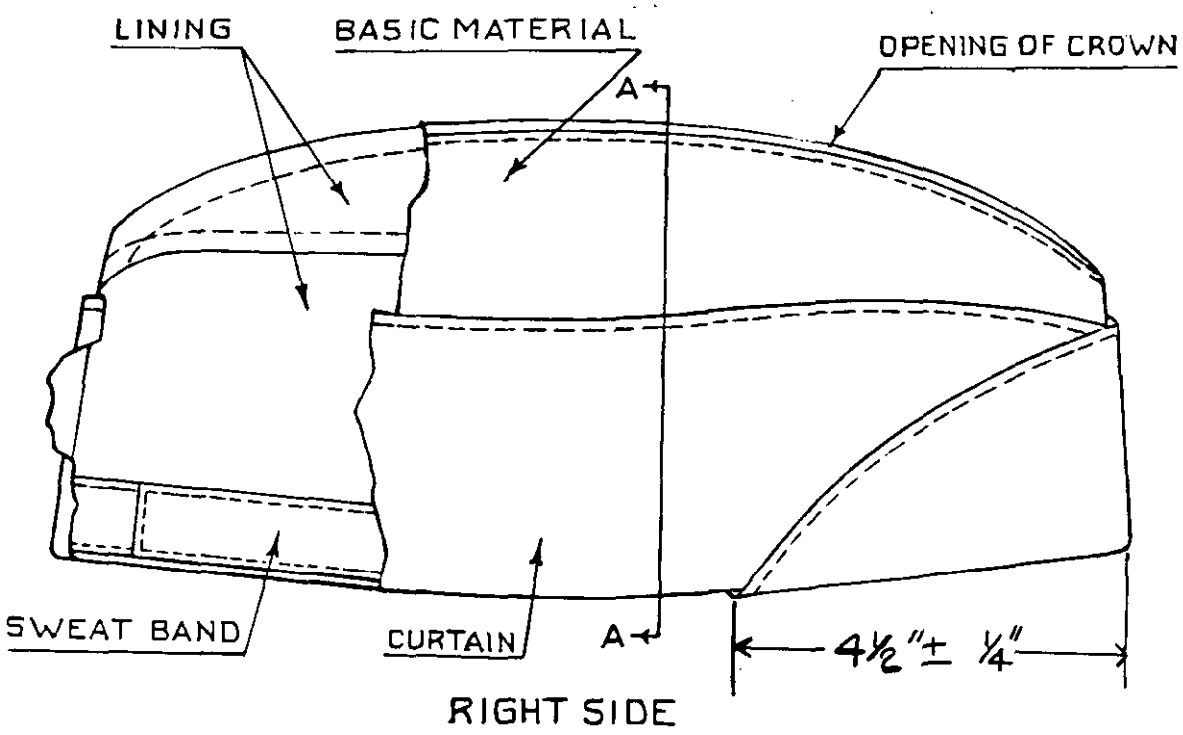

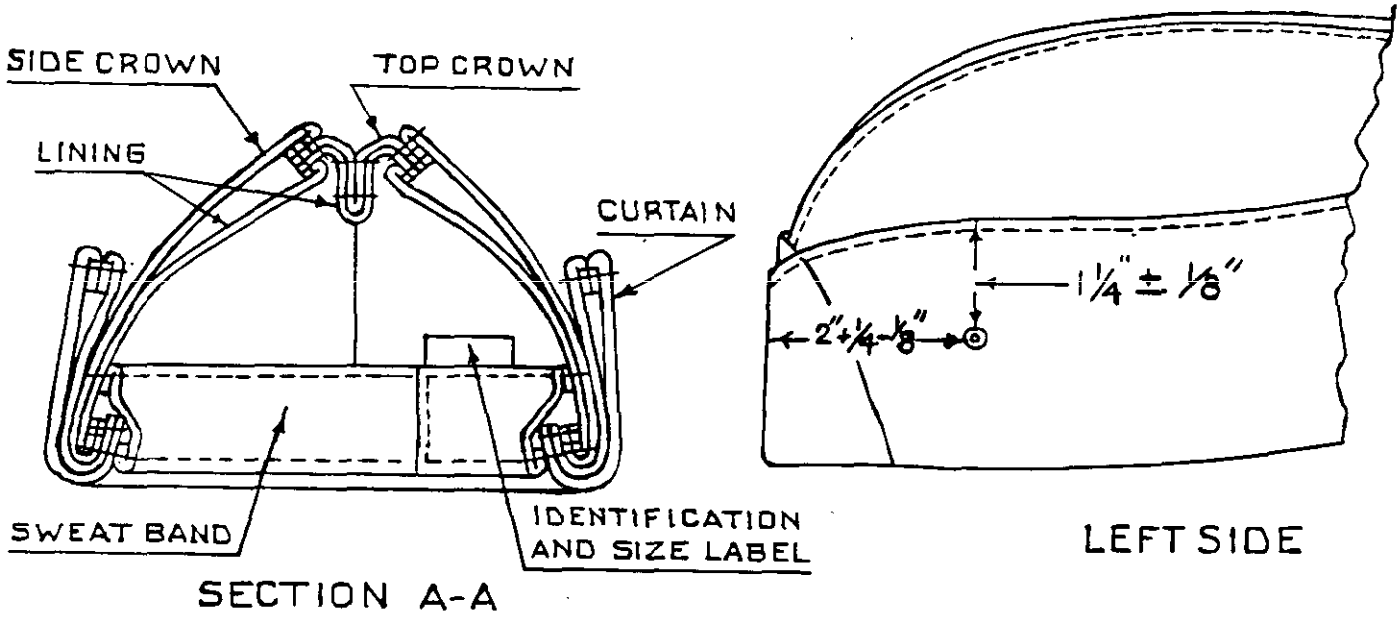
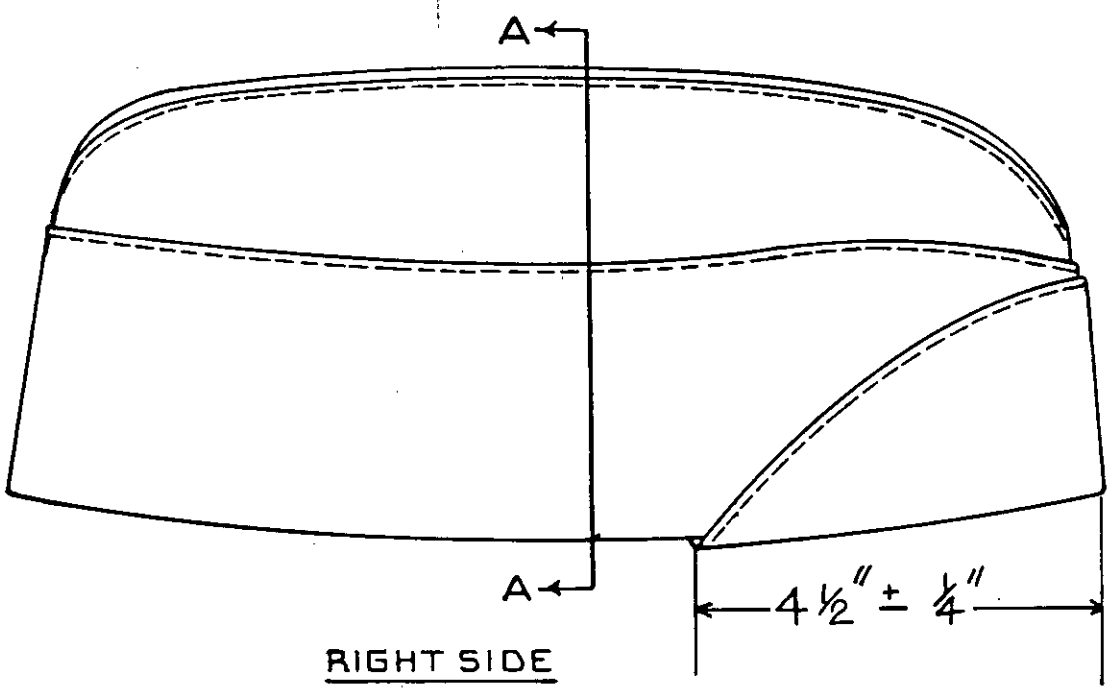


FIGURE 1. CAPS, GARRISON: MEN'S, POLYESTER/WOOL (Class 1 Only)

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:08Z
Check the source to verify that this is the current version before use.



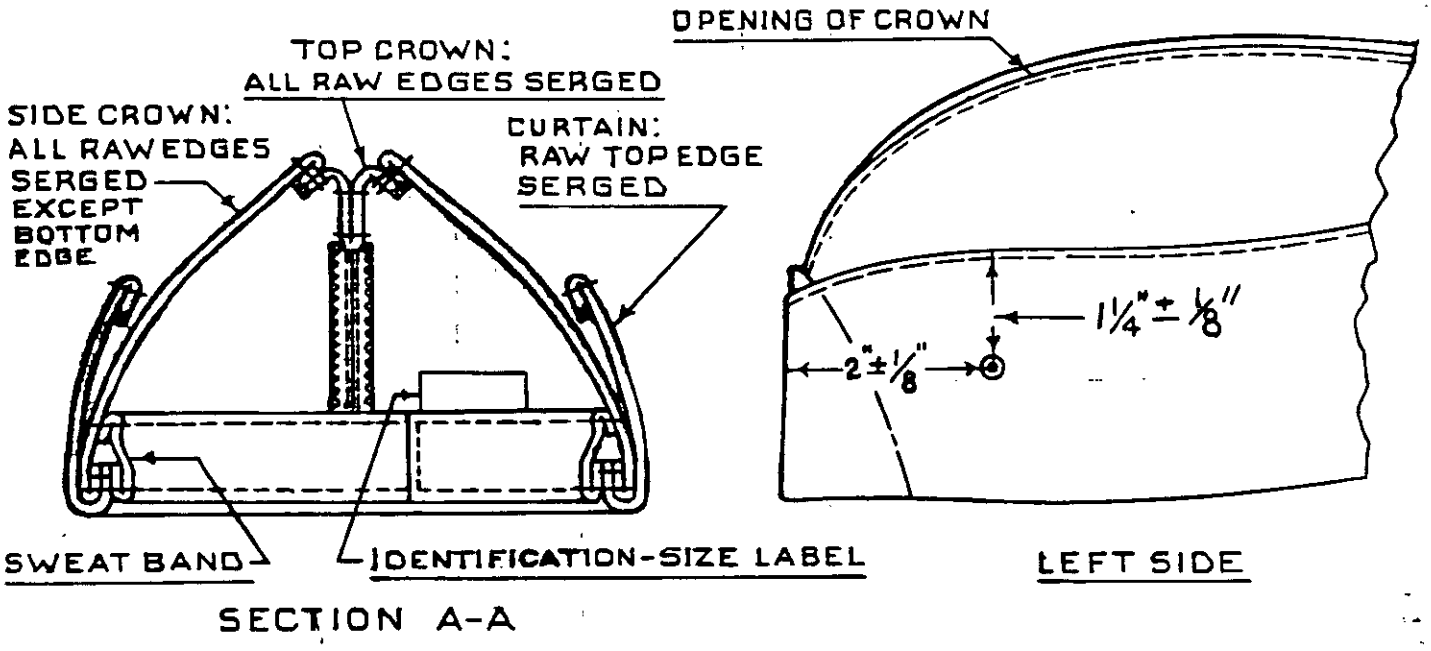


FIGURE 2. CAP, GARRISON, MEN'S: WOOL, GREEN CLASS 2 AND.

Source: https://assist.dla.mil -- Downloaded: 202640-20T23:08Z
Check the source to verify that this is the current version before use.