INCH-POUND

MIL-S-29428A(MC)
6 MAY 1991
SUPERSEDING
MIL-S-29428(MC)
11 February 1987

MILITARY SPECIFICATION

SCARF: HEADOVER, WOOL

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for one type and size knitted wool headover scarf.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC-NA FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
UU-P-268	- Paper, Kraft, Wrapping.
DDD-L-20	- Label For Clothing, Equipage and Tentage (General Use).

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry.
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes).
MIL-C-43665	- Cloth Wool; Mothproofing Treatment of.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-147	- Palletized Unit Loads.
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government publications. The following other Government documents and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U. S. DEPARTMENT OF AGRICULTURE
Methods of Test for Grade of Wool

(Application for copies should be addressed to the U. S. Department of Agriculture, Agricultural Marketing Service, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

2.2 Non-government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20026.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. The standard sample is furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), the contractor shall furnish a sample unit for first article inspection and approval (see 4.2 and 6.4).

3.3 Materials

3.3.1 Wool yarn. The yarn for knitting the scarfs shall be a 2-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

ply, worsted yarn made of fleece or pulled sheep's wool, or a combination of both, not lower in grade than 56's U. S. Standard.

3.3.1.1 Mothproofing. The wool shall be mothproofed in accordance with MIL-C-43665.

3.3.1.2 Shrink resistant treatment. The yarn shall be treated for resistance to felting shrinkage in stock, top, yarn or fabric as specified in Table IV.

3.3.1.3 Alkali solubility. The alkali solubility of the shrink resistant treated wool for the finished scarf, in the form in which it has been treated (stock, top, yarn or fabric) shall not be increased by more than 6.0 percent (absolute) over the untreated material when tested as specified in Table IV, Section 4.

3.3.2 Knitted fabric. The fabric for the scarf shall be a flat-jersey knit tube made on a circular machine using two ends of 2-ply worsted yarn (see 3.3.1) in each feed.

3.3.2.1 Color. The color of the scarf shall be Olive Green shade 208. The color shall match the standard sample under artificial daylight having a color temperature of 7500 Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800 Kelvin.

3.3.2.2 Colorfastness. The dyed scarf shall show fastness to laundering, perspiration, light and crocking equal to or better than the standard sample. When no standard sample is available, the dyed scarf shall show good fastness to laundering, perspiration and light, and shall show a Munsell Value for crocking not lower than 8.5. Testing shall be specified in Table IV, Section 4

3.3.2.3 Finishing. The fabric shall have a lightly brushed finish on both sides of scarf.

3.3.2.4 Bursting strength. The knitted fabric of the finished scarf shall have a bursting strength of not less than 60 pounds when tested as specified in 4.5.5.

3.3.2.5 Wool content. The knitted fabric of the finished scarf shall contain not less than 95 percent wool based on the dry weight of the specimen when testing as specified in 4.5.5.

3.3.3 Thread. The cotton thread for seaming and stitching shall conform to type IA3, ticket No. 50, 3 ply of V-T-276. The color of the thread shall be Olive Drab, shade S-1, C.A. 66022. The dyed thread shall show fastness to laundering and light equal to or better than the standard sample when tested as specified in V-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

T-276. When no standard sample is available, the dyed thread shall show good fastness to laundering and light.

3.3.4 Label. Each scarf shall have a combination identification and instruction label conforming to type VI, class 14 of DDD-L-20. Instructions shall be as follows:

NOMENCLATURE:
NATIONAL STOCK NUMBER:
CONTRACT NUMBER:
CONTRACTOR:
CONTENT:

DRY CLEAN OR HANDWASH GENTLY. IN LUKEWARM SUDS. DO NOT TWIST OR WRING. DRY ON FLAT SURFACE AWAY FROM HEAT

3.4 Design. The scarf shall be a tubular knit type with hemmed ends.

3.5 Construction. The scarfs shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations.

3.5.1 Stitches, seams and stitchings. Stitches, seams and stitching types specified in Table I shall conform to FED-STD-751. Thread breaks shall be backstitched not less than 1/2 inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements

No.	Operation	Stch Type	Seam Stch Type	Stch/ Inch	Thread Ndl	Thread bob/ lpr
1	Cutting. Cut tubing to finish the specified scarf length (see Table II).					
2.	Hem bottoms and attach label. a. Fold under 1 inch at each end of the scarf. Position the bottom of label in the fold of the hem and attach in the hem stitches.					
	b. Stitch through the scarf forming the hem and sewing the label.	402 or 406	EFb-1	10-14	50/3	50/3
3.	Press scarf. a. Press scarf flat with the label centered on one-half the width of scarf.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

3.6 Measurement and weights. The measurements and weight of the finished scarfs shall conform to Table II. All measurements in Table II shall be made with the scarf laid out flat under no tension.

3.6.1 Total shrinkage requirements. The finished scarf shall not shrink or elongate more than 13.0 percent in either direction when tested as specified in 4.5.2.

TABLE II. Measurements and weight.

Measurements and Weight		Tolerance
Courses per inch	10	Minimum
Wales per inch	8	Minimum
Width inches 1/	9	± 1/2 inch
Length, inches	24	± 1/2 inch
Weight, ounce per scarf	2.8	Minimum

1/ One-half of scarf

3.7 Workmanship. The finished scarf shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article. When first article is required, inspection shall be made of a completely fabricated scarf for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, the contractor shall submit certificates of compliance for the ply of yarn (2-ply) using that worsted yarn made of fleece or pulled sheep's wool, or a combination of both has been used, that an approved shrink resistant treatment has been used, and that the yarn has been mothproofed in accordance with MIL-C-43665.

4.5.1.1 Wool grade. The wool shall be tested for grade in top form by comparison with applicable U.S. Standard. In the event of a dispute, the wool grade shall be determined by the width (wedge) method. The sample unit shall be one yard of undyed (or untreated) top. The sample size shall be in accordance with Table III and the lot shall be unacceptable if one or more units fail to meet any requirements specified.

TABLE III. Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

4.5.2 Testing of the end item. The test methods listed in Table V shall be in accordance with FED-STD-191 except as otherwise noted, and as described herein. The physical and chemical values specified in section 3 apply to the average of the determinations

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

made on a sample unit for test purposes as specified in the applicable test methods. The sample unit shall be four scarfs. The lot size shall be expressed in units of one scarf each. The sample size shall be in accordance with Table III and the lot shall be unacceptable if one or more units fail to meet any requirement specified.

TABLE IV. End item tests

Characteristic	Requirement Reference	Test Method
Shrinkage Resistant treatment	3.3.1.2	5558
Alkali solubility (stock, top yarn or fabric)	3.3.1.3	2800 1/
Type of knit	3.3.2	Visual 2/
Colorfastness to:	3.3.2.2	5651
Crocking	3.3.2.2	5614
Laundering	3.3.2.2	5660
Light	3.3.2.2	5680
Perspiration	3.3.2.2	5680
Bursting strength	3.3.2.4	5120
Wool content	3.3.2.5	2101
Shrinkage	3.6.1	5556 3/
Texture:		
Courses per inch	3.6.1	5070
Wales per inch	3.6.1	5070
Weight of scarf	3.6.1	4.6.1

1/ Sample unit for test shall consist of treated and untreated material as follows:
Stock - 1/4 pound, top - 1 yard, yarn - 1 cone, fabric - 1/4 yard.

2/ One determination per sample unit and the result reported as "pass" or "fail".

3/ Wool laundering procedure, except that the specimens shall not be pressed prior to measuring.

4.5.3 Examination of the end item. The end item shall be examined for defects listed in 4.5.3.1 and 4.5.3.2. The sample unit for these examinations shall be one scarf. The lot size shall be expressed in units of one scarf each. The inspection level shall be II (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

4.5.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor
Cloth	Any hole, cut, tear or dropped stitches.	101	
	Any mend.		201
	Broken or missing yarn over 1 inch.	102	
	Burr, shive or sisal clearly visible.		202
	Nonuniform in appearance, slubby yarn or tiger strip, clearly visible.		203
	Knot not pulled through from face fabric.		204
	Face of fabric not lightly brushed.		205
	Wrong color.	103	
	Shade bar, off shade or stains clearly visible.		206
Seams and Stitching			
Open seams	Up to and including 1/2 inch.		207
	More than 1/2 inch.	104	
Raw edges	More than 1/2 inch.		208
Seam & stitch type	Wrong seam or stitch type.	105	
	Seams pleated or badly puckered.		209
Stitch tension	Tension loose, resulting in loose top or bottom thread.	106	
	Tension tight, resulting in puckering of material.		210
Stitches per inch	One or two stitches less than minimum specified		211
	Three or more stitches less than minimum specified.	107	
Thread breaks, skipped stitches or run offs	Overstitched less than one inch in each direction beyond the defective stitching area.		212

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Identification	Omitted, incorrect, illegible, misplaced or size characters not as specified.		213
Cleanness	Grease, ink, or oil stains clearly noticeable.		214
	Thread ends not trimmed.		215

4.5.3.2 Dimensional examination. The end item shall be examined for conformance to the dimensions specified in Table II. Any dimensions deviating from the specified requirements shall be classified as a defect.

4.5.4 Examination of packaging. An examination shall be made to determine that preservation-packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for the closure defects listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Marking (exterior interior)	Omitted; incorrect; illegible; of improper and size location, sequence, or method of application.
Material	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling.
	Bulged or distorted container.
Content	Number of bundles per container is more or less than required.
Preservation	Omitted or improperly applied.

4.5.5 Examination of palletization. An examination shall be made to determine that the palletization complies with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

palletized unit loads in the end item inspection lot. The inspection level shall be S-1 (see 6.5).

Examine	Defect
Finished dimension	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified. Container pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

4.6 Test.

4.6.1 Weight. Prior to determination of any other test characteristic, the four scarfs encompassing the sample unit for testing, shall be allowed to reach equilibrium under standard conditions as defined in FED-STD-191. After reaching equilibrium, the four scarfs shall be individually weighed to the nearest 0.1 ounce and the average of the four determinations shall be reported to the nearest 0.1 ounce.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each scarf shall be laid out flat. The width shall be folded in half and the length lap folded. The folded scarf shall measure approximately 8 inches in length by 4-1/2 inches in width. Five folded scarfs shall be stacked and tied with cotton tape or twine, 2 inches in from each end to form a bundle.

5.1.2 Commercial. Scarfs shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A. One hundred twenty-five scarfs, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed, and reinforced conforming to class

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

weather-resistant, grade V2s, size 3A of MIL-B-17757. The liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A bundles shall be packed flat, five in length, one in width and three in depth, within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.2 Level B.

5.2.2.1 Method 1. One hundred twenty-five scarfs, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled and closed, conforming to class domestic, grade 275, size 3A of MIL-B-17757. The liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level B bundles shall be packed flat, five in length, one in width, and three in depth within a shipping container. Each container shall have its contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.2.2 Method 2. When specified (see 6.2), the shipping container shall be grade V3c or V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Commercial. Scarfs, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.4 Palletizaion. When specified (see 6.2), scarfs packed as specified in 5.2.1 and 5.2.2 shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

patterns specified in MIL-STD-147, the pallet used shall be approved by the contracting officer.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.

6.1 Intended use. The scarfs are intended for use by personnel of the Department of Defense.

6.2 Acquisition data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) When first article is required (see 3.2).
(c) Selection of applicable levels of packaging and packing see (5.1 and 5.2).
(d) When level B, method 2, packing is required (see 5.2.2.2).
(e) When palletization is required (see 5.4).
(f) Acceptance criteria (see 6.5)

6.3 Standard samples. The standard sample may be obtained from the acquisitioning activity or as directed by the contracting officer.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 10.0 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.5.4 For palletization examination. An AQL, expressed in terms of defects per hundred units, of 6.5 is recommended.


6.6 Figure. The figure is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

6.7 Subject (Key word) listing.
Scarf
Wool

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensive changes.

Preparing Activity
Navy-MC
Project No. 8440N198

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

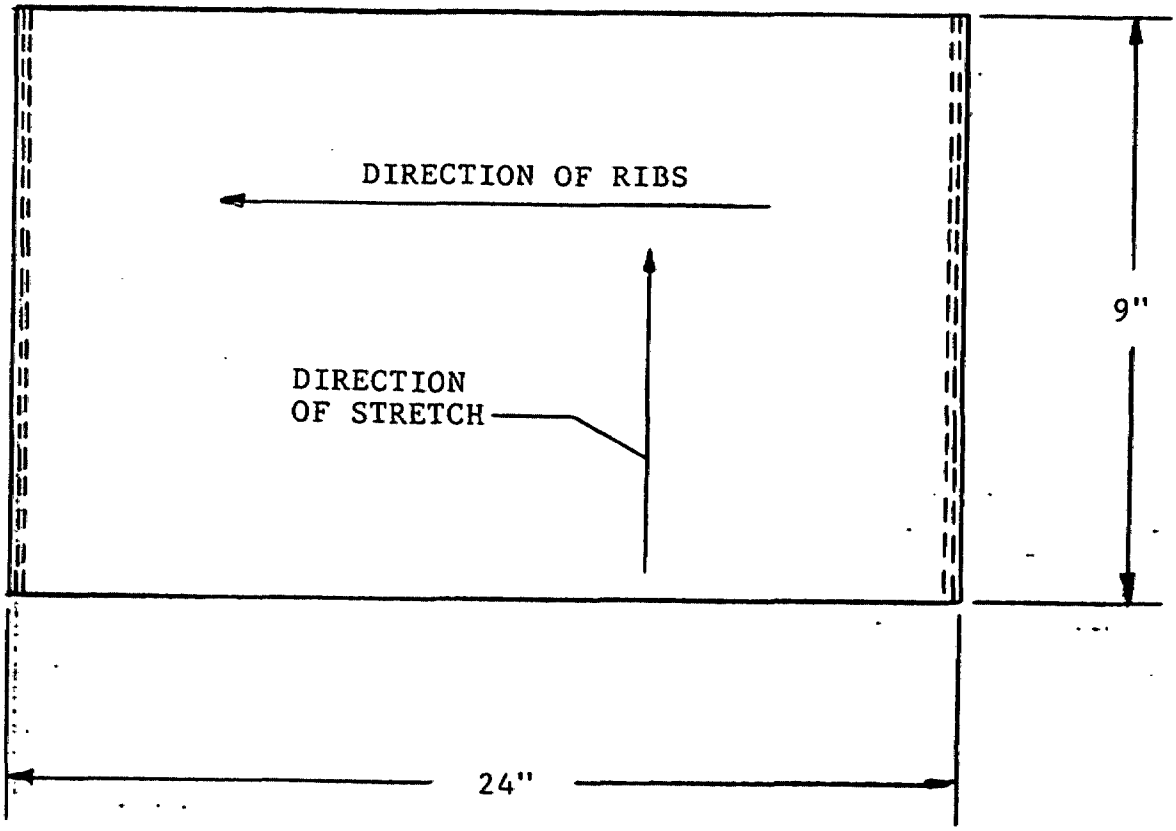

CUT TUBING 24 INCHES LONG

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:06Z
Check the source to verify that this is the current version before use.

STANDARDIZAT N DOCUMENT IMPROVEMF''T PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-29428A(MC)	6 MAY 1991

3. DOCUMENT TITLE
SCARF: HEADCOVER, WOOL

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(202) 696-1186/87/88	226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2020-10-20T23:00Z
Check the source to verify that this is the current version before use.