INCH-POUND
A-A-59204
30 May 2001
SUPERSEDING
MIL-C-52286/3B
10 July 1978

COMMERCIAL ITEM DESCRIPTION

CABLE ASSEMBLIES, POWER, ELECTRICAL

The General Service Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description (CID) covers cable assemblies for interior and exterior power and lighting (see figure 1).

2. CLASSIFICATION

Type I - 120 inches long
Type II - 300 inches long

3. SALIENT CHARACTERISTICS

3.1 Jacketing material. The jacketing material shall be medium-low temperature, heat resistant with the flexibility and durability of styrene-butadiene rubber (SBR) in accordance with the American Society for Testing and Materials (ASTM) D 518, "Standard Test Method for Rubber Deterioration - Surface Cracking" (DoD adopted).

3.1.1 Temperature range. The ambient temperature range is -55 °C for the jacket material to +75 °C for the conductors in accordance with ASTM D 1053, "Standard Test Methods for Rubber Property - Stiffening at Low Temperatures: Flexible Polymers and Coated Fabrics" (DoD adopted).

3.1.2 Overheating. Applying 600 volts (V) at 15 amperes (A) shall cause no overheating, arcing, or damage in accordance with ASTM D 1149, "Standard Test Method for Rubber Deterioration - Surface Ozone Cracking in a Chamber" (DoD adopted).

3.1.3 Hardness. The Shore Durometer "A" hardness shall be 60 +/- 10.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

3.1.4 Insulation. The jacket material shall be molded integrally with the insulation in accordance with ASTM D 1765, "Standard Classification System for Carbon Blacks Used in Rubber Products" (DoD adopted).

3.2 Pin characteristics. The end of pin hemispherical radius shall be one-half the pin diameter. The pin size shall be consistent with the dimensions as shown in figures 1 through 3.

3.3 Socket fit. Female sockets shall be rounded for centering with metal bands on sockets.

3.4 Connection strength. The minimum bond between connector and cable is 70 pounds (lbs.).

3.5 Dielectric strength. The molded components shall withstand five times the rated voltage (600 V at 15 A) for one minute without damage, arcing, or breakdown.

3.6 Cable hangers. The cable hangers shall be molded of the same material as the cable jacket and shall be securely vulcanized to the cable jacket (see figure 4).

3.7 Storage requirements. The cable shall not be damaged when stored at -65 to 125 °F at maximum humidity in accordance with ASTM D 518, ASTM D 1053, and ASTM D 1149.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID.

5.2.1 The manufacturer/distributor must have been producing the product meeting the requirements of this CID for at least three years.

5.2.2 The company must provide a warranty of replacing defective items.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3(b)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

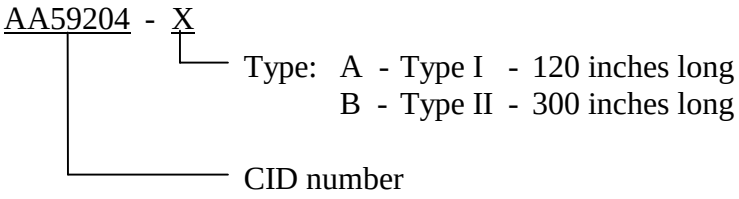

7.2 Sources of documents.

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

7.2.2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.3 Ordering data. Acquisition documents must specify the following:

a. CID document number, revision, and CID PIN.
b. Packaging requirements (see 6).

7.4 National stock number (NSN). The NSNs listed below are assigned for the listed product types. Other NSNs may also correspond with this document.

Type	Assigned NSN
I	6230-00-299-7697
II	6230-00-299-7698

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

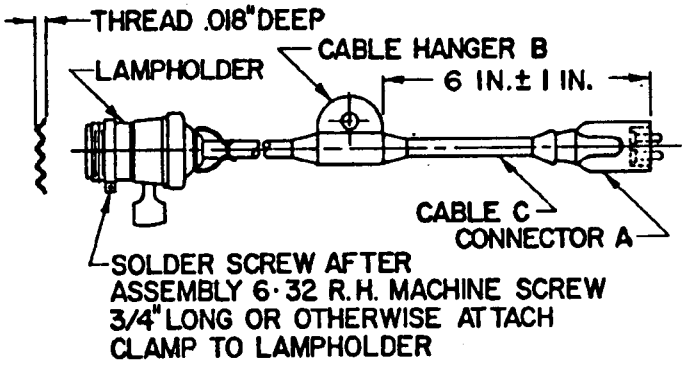

FIGURE 1. Cable assembly, light extension - type I = 120 inches, type II = 300 inches.

Notes:

1. Connector A - see figure 2
2. Cable hanger B - see figure 4
3. Cable C = CO-02 LLF(2/16) 0345
   Low temperature, heat and weather resistant
   -55 °C to +90 °C
   2 conductor, 16 AWG
   0.0345 inch jacket diameter
   insulation thickness = 0.016 inch (minimum 0.013 inch)
   conductor resistance: 4.49 ohms/1000 ft. at 25° maximum
4. Pin size (see figure 4)
   A - 0.594 - 0.656 inch
   B - 0.154 - 0.156 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

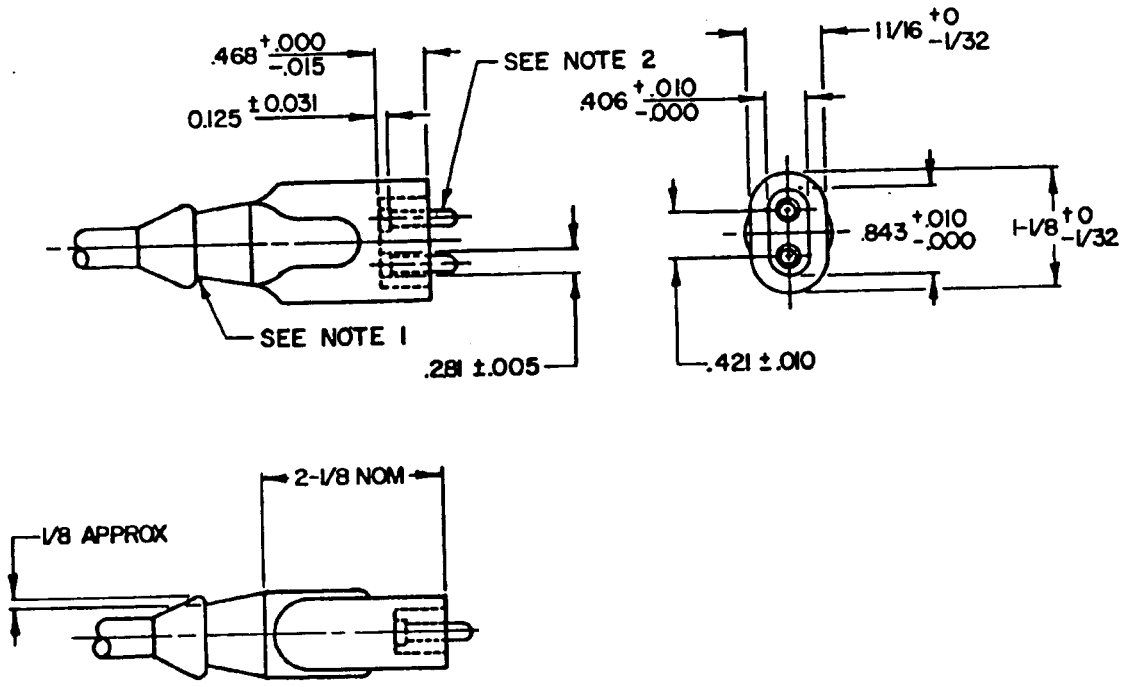

FIGURE 2. Molded plug, male.

Notes:

1. This groove to be of any shape with sufficient depth, width, or cross section to support 1/8 inch twine or cord.
2. Pin dimensions (see Figure 3)
   A = 0.594 - 0.656
   B = 0.154 - 0.156
3. Connector rating: 600 V at 15 A
4. Voltage drop: Not more than 10 mV at 15 A
5. Connect/disconnect force = 10 - 35 lbs

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

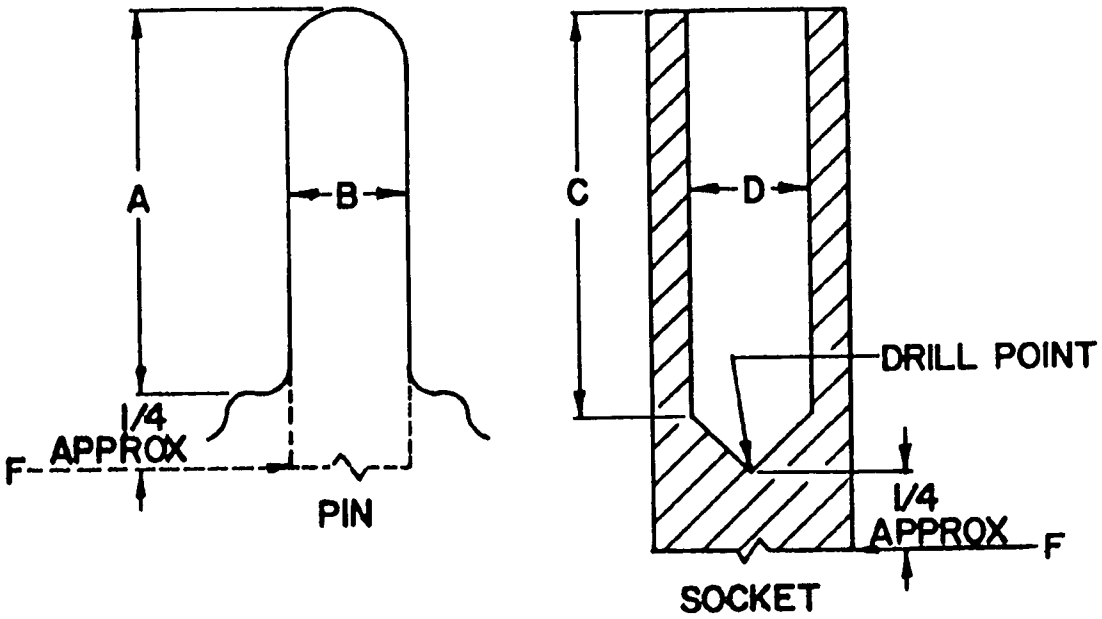

FIGURE 3. Pin configuration.

Note:
1. F - Point for voltage drop on contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

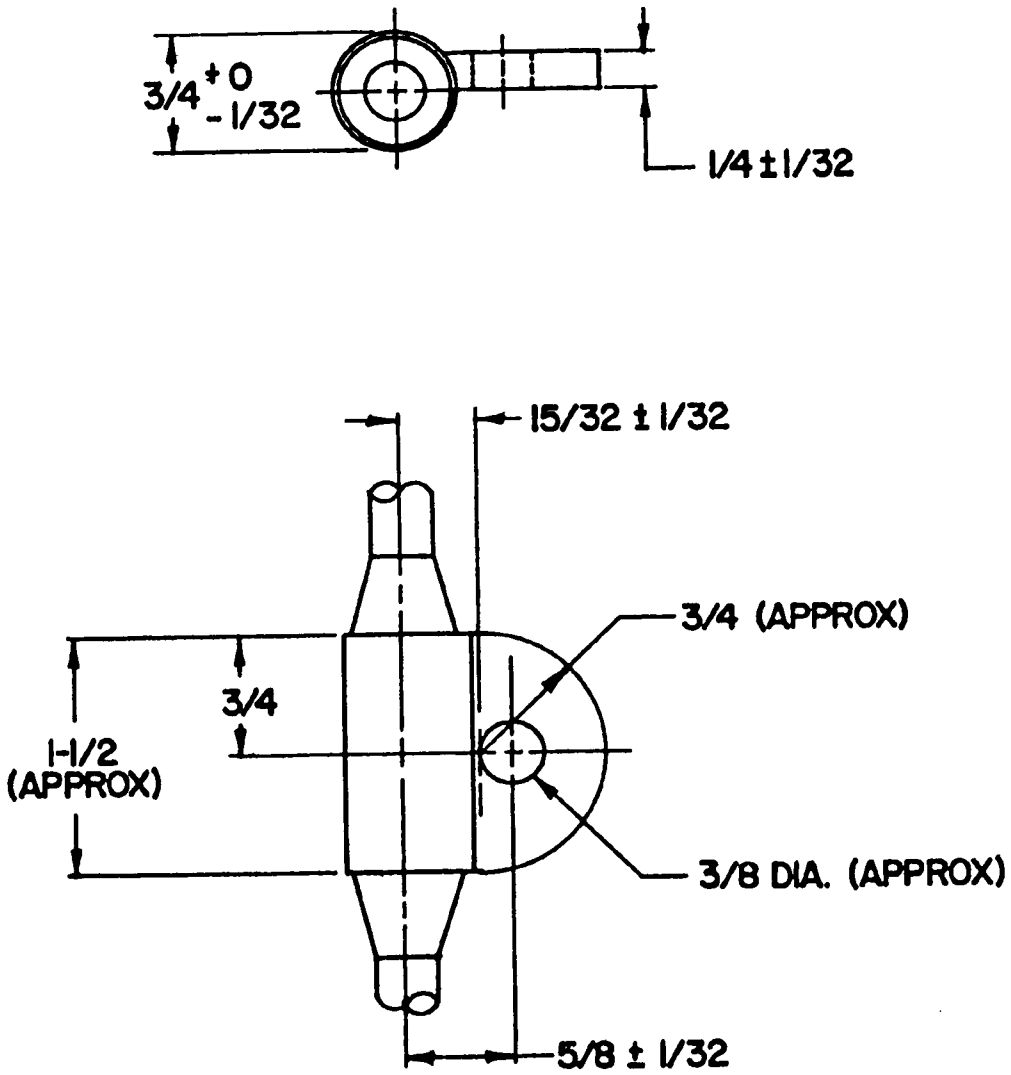

FIGURE 4. Cable hanger.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodian:
Army - CR4

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:
DLA - GS2

(Project 6150-0279)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.