INCH-POUND
A-A-59205
8 November 2000
SUPERSEDING
MIL-C-52286/7A
4 August 1972

COMMERCIAL ITEM DESCRIPTION

LEAD ASSEMBLY, POWER, ELECTRICAL

The General Service Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description lead assembly is used for interior and exterior power and lighting. It includes the cable assembly, connector, and pins (see figures 1, 2, and 3).

2. SALIENT CHARACTERISTICS

2.1 Jacketing material. The jacketing material shall be medium-low temperature, heat resistant with the flexibility and durability of styrene-butadiene rubber (SBR) in accordance with the American Society for Testing and Materials (ASTM) D 518, "Rubber Deterioration - Surface Cracking" (DoD adopted).

2.1.1 The ambient temperature range is -55 °C for the jacket material to +75 °C for the conductors.

2.1.2 Applying 600 volts (V) at 20 amperes (A) shall cause no overheating, arcing, or damage.

2.1.3 The Shore Durometer "A" hardness shall be 60 +/- 10.

2.1.4 The jacket material shall be molded integrally with the insulation in accordance with ASTM D 1765, "Standard Classification System for Carbon Blacks Used in Rubber Products" (DoD adopted).

2.2 Pin characteristics. The end of pin hemispherical radius shall be one-half the pin diameter. The pin size shall be consistent with the dimensions as shown in figure 3.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

2.3 Socket fit. Female sockets shall be rounded for centering with metal bands on sockets (see figure 2).

2.4 Connection strength. The minimum bond between connector and cable shall be 300 pounds (lbs.) (see Figure 1 note 3).

2.5 Dielectric strength. The molded components shall withstand five times the rated voltage (600 V at 20 A) for one minute without damage, arcing, or breakdown.

2.6 Storage requirements. The cable shall not be damaged when stored at -65 to 125 °F at maximum humidity in accordance with ASTM D 518, ASTM D 1053, "Test Methods for Rubber Property - Stiffening at Low Temperatures: Flexible Polymers and Coated Fabrics" (DoD adopted), and ASTM D 1149, "Test Method for Rubber Deterioration - Surface Ozone Cracking in a Chamber" (DoD adopted).

3. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. PRODUCT CONFORMANCE PROVISIONS

4.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

4.2 Market acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID.

4.2.1 The company/distributor must have been producing the product meeting the requirements of this CID for at least three years.

4.2.2 The company must provide a warranty of replacing defective items.

5. PACKAGING

5.1 Preservation, packing, and marking. For acquisition purposes, the lead assembly shall be preserved, packed, and marked as specified in the acquisition order (see 6.3(b)).

6. NOTES

6.1 Part or identification number (PIN). The part or identification numbering procedure is AA59205-1. It is for government purposes and does not constitute a requirement for the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

6.2 Sources of documents.

6.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

6.2.2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

6.3 Ordering data. Acquisition documents must specify the following:

a. CID document number, revision, and CID PIN
b. Packaging requirements (see 6.1)

6.4 National stock numbers (NSN). The CID is associated with NSN 6150-00-371-9431. Other NSNs may also correspond with this document.

MILITARY INTERESTS:	CIVIL AGENCY COORDINATING ACTIVITY:
Custodian: Army - CR4	GSA - 7FXE
Reviewer: Army - AT	Preparing activity: DLA - GS
	(Project 6150-0280)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

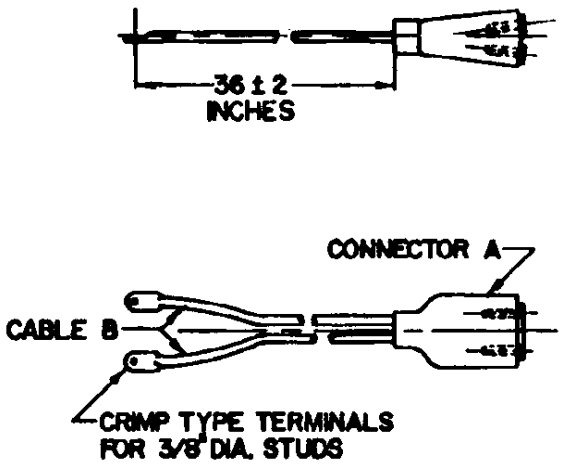

FIGURE 1. Cable assembly, power electrical.

Notes:
1. Connector A see figure 2.
2. Cable B - CO-01 MLF (1/8) 0410 medium light, flexible 8 AWG, .0410 outside diameter.
3. Minimum bond between connector and cable: 300 lbs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

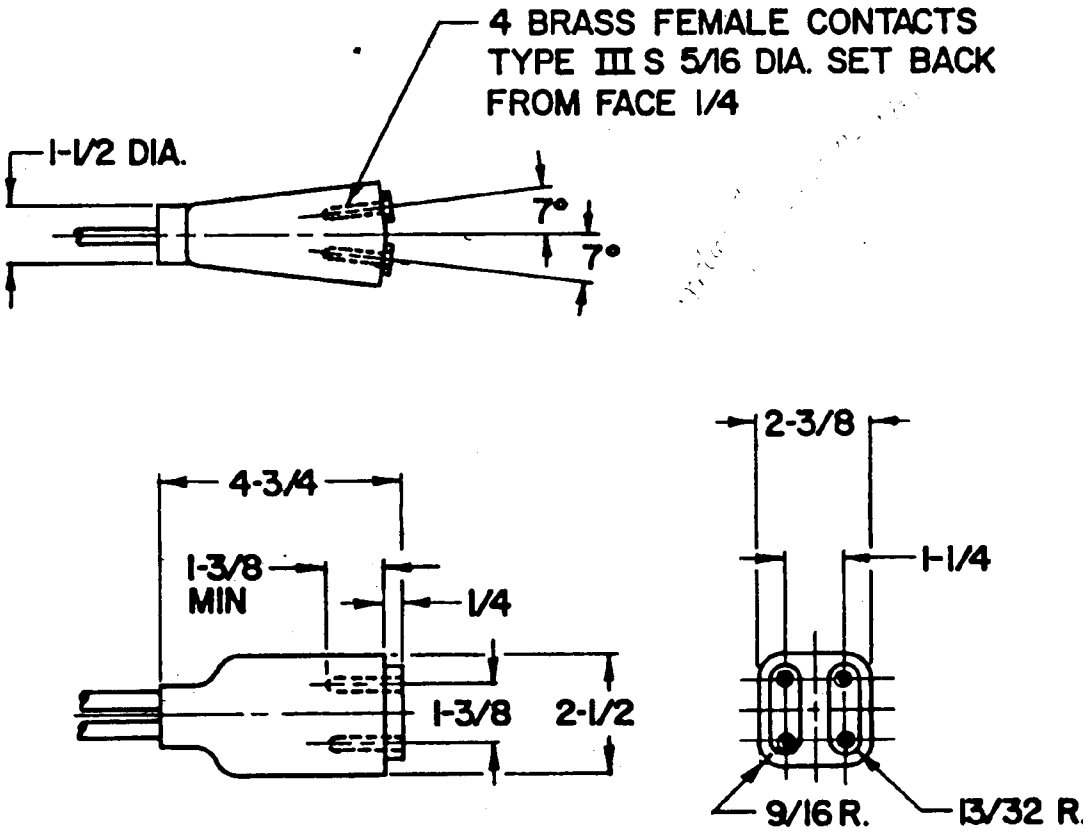

FIGURE 2. Connector, waterproof.

Notes:
1. Connector rating: 600 V, 20 A.
2. Voltage not more than 20 MV at 20 A.
3. Connect/disconnect force: 15 - 35 lbs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

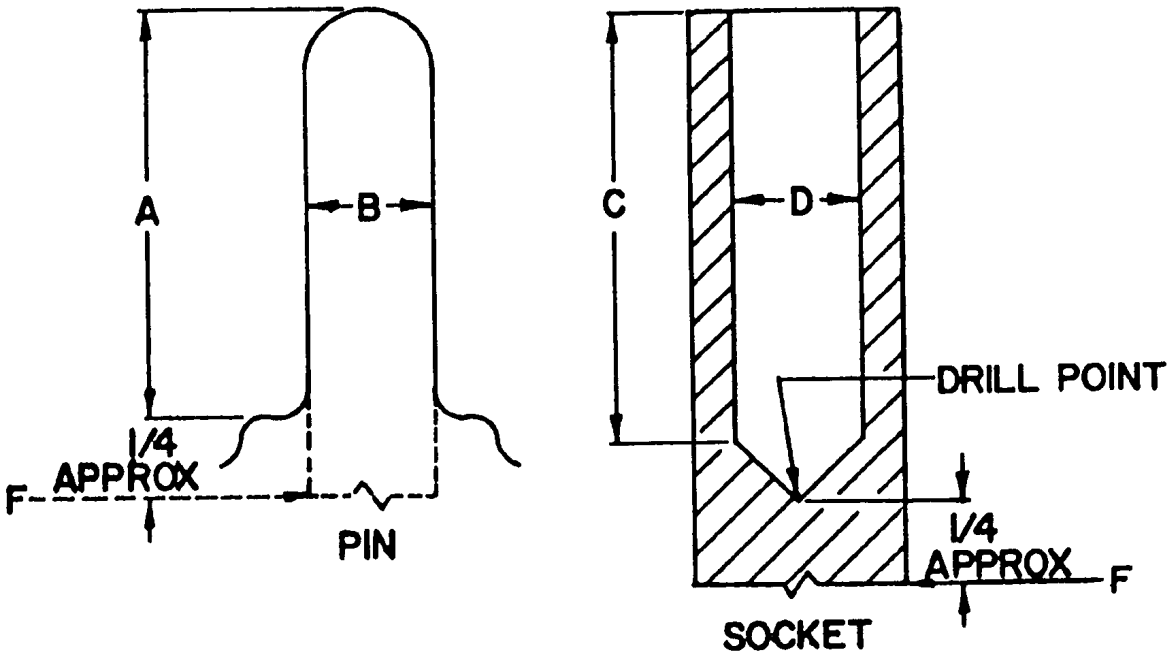

FIGURE 3. Pin configuration.

Note:
1. F - Point for voltage drop on contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.