INCH-POUND

A-A-59206
3 June 1998
SUPERSEDING
MIL-P-12001D
29 March 1977

COMMERCIAL ITEM DESCRIPTION

PROBE LIGHT KIT, INSPECTION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers hand-held inspection probe lights intended for use in illuminating inaccessible areas with small clearances.

2. CLASSIFICATION. The lights shall be of the following types and sizes. Type is determined by the power source. Size is determined by the reach, which is the distance from the handle to the light. The type and size to be furnished shall be as specified (see 7.2(b)).

Type I - Battery powered
Type II - Cord connected (120 volts ac, single phase, 60 hertz)

Size 1 - 4 inches
Size 2 - 6 inches
Size 3 - 9 inches
Size 4 - 12 inches
Size 5 - 18 inches
Size 6 - 24 inches
Size 7 - 27 inches
Size 8 - 36 inches
Size 9 - 42 inches

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6230

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 General requirements. The light shall produce a forward-directed beam of illumination emanating from the end of an extension arm. The light without batteries shall weigh not more than 2.5 pounds. When specified (see 7.2(c)), the light shall have the capability to adjust the beam between broad and pinpoint. The type II light shall operate from a 120-volt ac, single-phase, 60-hertz circuit and shall include 6 feet of 3-conductor SJ-type cord meeting the requirements of Underwriters Laboratory (UL) 62. The plug end of the cord shall meet the requirements of figure 5-15 of National Electrical Manufacturers (NEMA) WD 6. Unless otherwise specified (see 7.2(d)), the type I light shall require not more than two batteries, each not larger than size D.

3.2 Components. The light shall include, as a minimum, the following components:

3.2.1 Handle. The handle shall be not less than 3.5 inches long and shall serve as the battery case for the type I light and the power cord interface for the type II light. When specified (see 7.2(e)), the handle shall include a magnet of sufficient strength to affix the light to a ferrous surface.

3.2.2 On-off switch. The on-off switch shall be external to the light and clearly marked.

3.2.3 Extension arm. Unless otherwise specified (see 7.2(f)), the extension arm shall have a diameter of not greater than 5/8 inch and shall be of a flexible gooseneck design capable of maintaining any desired position.

3.2.4 Lamp. The lamp shall be capable of generating a mean spherical candlepower (MSCP) of not less than 0.5.

3.2.5 Inspection mirror. If required, the light shall include an inspection mirror that attaches to the lamp end of the extension arm and shall be of the type and size specified (see 7.2(g)).

3.2.6 Carrying case. Unless otherwise specified (see 7.2 (h)), the inspection probe light, extension arm(s), mirror(s), spare lamp(s), and other components, as specified, shall be packaged in a carrying case for easy transport and handling.

3.3 Optional components. Optional components shall be furnished as specified (see 7.2(i)).

3.4 Performance. The inspection probe light shall operate when switched on with the appropriate number and type of batteries installed. The extension arm shall be capable of maintaining its position at all desired adjustments, including fully contracted and fully extended, during normal handling and movement.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

5.1 Product conformance. The light shall meet the salient characteristics of this commercial item description, conform to the manufacturer's own drawings, specifications, standards, and quality assurance practices, and be the same light offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Warranty. Unless otherwise specified (see 7.2(j)), the manufacturer's standard commercial warranty, terms, and conditions shall apply.

6. PACKAGING. Preservation, packing, and marking shall be as specified (see 7.2(k)) in the contract or purchase order.

7. NOTES

7.1 Sources of documents.

7.1.1 Government documents. Copies of paragraph 24.403 of the FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.2 Nongovernment documents. Copies of industry (voluntary) standards referenced in this CID may be obtained from the following addresses:

Underwriters Laboratories Inc. (UL)

ANSI/UL 62 Flexible Cord and Fixture Wire

Applications for copies should be sent to: Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062.

National Electrical Manufacturers Association (NEMA)

ANSI/NEMA WD 6 Wiring Devices-Dimensional Requirements

Applications for copies should be sent to: National Electrical Manufacturers Association, 1300 North 17th Street, Suite 1847, Rosslyn, VA 22209

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type and size of light required (see 2).
c. Adjustable light beam, if required (see 3.1).
d. Battery requirements, if different (see 3.1).
e. Magnet in handle, if required (see 3.2.1).
f. Type of extension arm, if different (see 3.2.3).
g. Inspection mirror, specify if required (see 3.2.5).
h. Carrying case, if required (see 3.2.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

i. Optional components, if required (see 3.3).
j. Warranty, if different (see 5.2).
k. Packaging requirements, as specified (see 6).

7.3 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor:

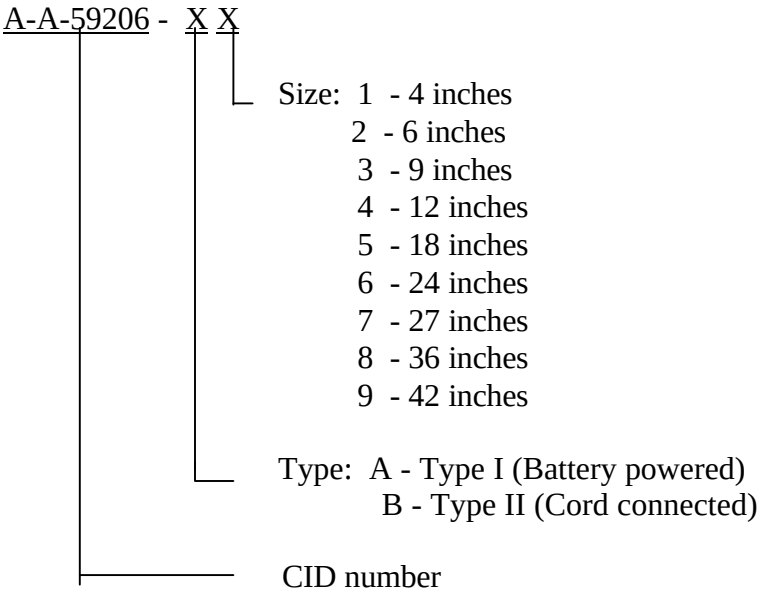

MILITARY INTERESTS:

Custodians
Air Force - 99
Army - CR4
Navy - OS

Reviewers
Navy - AS, MC

CIVIL AGENCY COORDINATING ACTIVITY
GSA-7FXE

PREPARING ACTIVITY
DLA-GS

(Project 6230-1062)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.