[METRIC]
A-A-59207A
November 23, 2007
SUPERSEDING
A-A-59207
April 18, 2003

COMMERCIAL ITEM DESCRIPTION

FUSE, CARTRIDGE, SUBMINIATURE, TIME DELAY, AXIAL LEAD

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for axial leaded, subminiature fuse cartridges. Fuse cartridges covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system that is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

AA59207	-	001
CID Number		Dash number (see table I)

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuse cartridges supplied to this CID shall be as specified herein (see figure 1).

3.2. Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 125 V ac/dc maximum.

3.4 Interrupting ratings. The interrupting ratings shall be 50 amperes at 125 V ac/dc.

3.5 Opening time characteristics. The opening time characteristics shall be as indicated in table II.

3.6 Operating temperature. The operating temperature shall be -55°C (-67°F) to +125°C (257°F).

3.7 Shock. Fuse cartridges shall meet shock requirements in accordance with method 213 of MIL-STD-202, test condition I (100 g's peak for 6 milliseconds).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, P.O. Box 3990, Columbus, OH 43218-3990, or email to mailto:CircuitProtect@dscc.dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

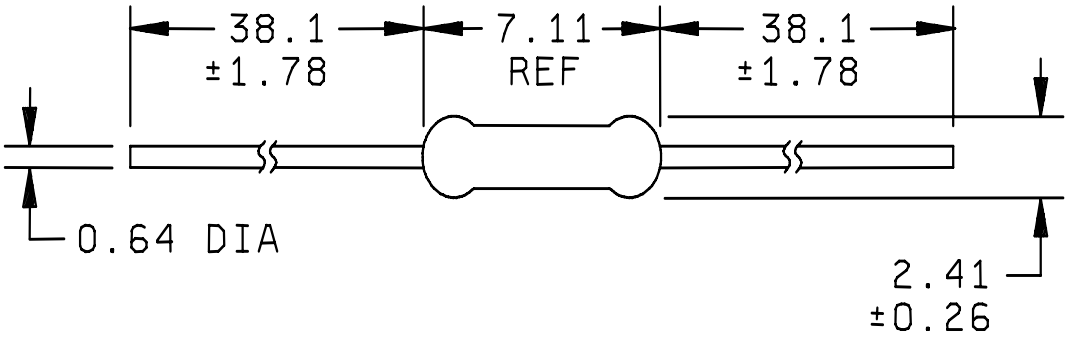

mm	Inches
0.264	.0104
0.64	.025
1.783	.0702
2.413	.0950
7.11	.280
38.1	1.5

NOTES:

1. Dimensions are in millimeters.
2. Unless otherwise specified, tolerance is ± 0.15 mm (0.006 inch).

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA59207-	Ampere rating	Nominal cold resistance (Ohms)	Nominal melting I^2t (A^2sec.)
001	.5	0.189	0.159
002	1	0.085	0.722
003	1.5	0.054	1.610
004	2	0.039	2.500
005	2.5	0.030	4.390
006	3	0.023	6.960
007	4	0.012	10.600
008	5	0.008	15.400

TABLE II. Rating versus opening time.

Percent of ampere rating	Opening time
100 percent	4 hours, minimum.
200 percent	120 seconds, maximum.

3.8 Vibration. Fuse cartridges shall meet vibration requirements in accordance with method 201 of MIL-STD-202, (10 Hz to 55 Hz); method 204, test condition C (55 - 2,000 Hz at 10 g's peak).

3.9 Resistance to soldering heat. Fuse cartridges shall meet resistance to soldering heat requirements in accordance with method 210 of MIL-STD-202, test condition C (20 seconds at 260°C (500°F)).

3.10 Moisture resistance. Fuse cartridges shall meet moisture resistance requirements in accordance with method 106 of MIL-STD-202 (90 - 98 percent relative humidity (RH), heat (65°C (149°F)).

3.11 Materials. Fuse cartridges shall have a encapsulated, epoxy-coated body with solder coated copper wire leads.

3.12 Soldering parameters. Fuse cartridges shall be able to withstand, without electrical or mechanical damage to the fuse cartridge, a wave solder of +260°C (+500°F) for 10 seconds maximum.

3.13 Solderability. Fuse cartridges shall meet solderability requirements in accordance with method 208 of MIL-STD-202.

3.14 Lead pull force. Fuse cartridges shall be able to withstand a 7 lb. axial pull test in accordance with method 211 of MIL-STD-202, test condition A.

3.15 Marking. Fuse cartridges supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN. (NOTE: The part number marked on the unit pack shall be the CID PIN.)

3.16 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

3.17 Workmanship. Fuse cartridges shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company producing the item must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order. . In addition, enclosed link fuse cartridges may be supplied individually or in a quantity of 5,000 on a 52.37 mm (2.062 inch) wide T1, tape reel in accordance with EIA-296.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible to meet the requirements of this specification. As of the dating of this document, the U.S. Environmentally Protection Agency (EPA) is focusing efforts on reducing 31 priority chemicals. The list of chemicals is available on their website at http://www.epa.gov/epaoswer/hazwaste/minimize/chemlist.htm. Further information is available at the following EPA site: http://www.epa.gov/epaoswer/hazwaste/minimize/. Included in the EPA list of 31 priority chemicals are cadmium, lead, and mercury. Use of the materials on the list should be minimized or eliminated unless needed to meet the requirements specified herein (see Section 3).

7.3 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuse cartridges to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.4 Source of documents.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-202 - Electronic and Electrical Component Parts.

(Copies of this document is available online at http://assist.daps.dla.mil/quicksearch/ or http://dodssp.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

FEDERAL REGULATIONS

FEDERAL ACQUISITION REGULATION (FAR)

FAR - Federal Acquisition Regulations.

(Copies of this document are available online at http://www.acquisition.gov/comp/far/index.html or from the U.S. Government Printing Office, 732 N. Capital Street, NW, Washington D.C. 20401-0001.)

Other Publications

ELECTRONICS INDUSTRY ASSOCIATION (EIA)

EIA 296 - Lead Taping of Components in Axial Lead Configuration for Automatic Handling.

(Copies of this document is available online at http://www.eia.org/ or from the Electronic Industries Alliance, 2500 Wilson Boulevard, Arlington, VA 22201-3837)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.5 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.6 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 Phone number (847) 824-1188 Facsimile number (847) 391-0894 E-mail: mailto:electronics@littelfuse.com Uniform Resource Locator (URL): http://www.littelfuse.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

7.7 Part number (P/N) supersession data. This CID PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

CID dash number AA59207- (see table I)	MFR's CAGE	MFR's P/N 1/
001	75915	0471.500
002	75915	0471001
003	75915	047101.5
004	75915	0471002
005	75915	047102.5
006	75915	0471003
007	75915	0471004
008	75915	0471005

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements see 3.15.

7.8 Government users. To acquire information on obtaining these fuse cartridges from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-FMXA, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-7435.

7.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2008-007

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.