[INCH-POUND]
A-A-59208
29 June 1998
SUPERSEDING
MIL-L-11848C
26 February 1976

COMMERCIAL ITEM DESCRIPTION

LIGHTS, POWER TOOL

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers various portable, adjustable, electric, power tool lights suitable for mounting on lathes or other stationary power tools for workpiece illumination.

2. CLASSIFICATION. The power tool lights shall be of the following types, sizes, and styles. The type, size, and style to be furnished shall be as specified (see 7.2(b)). Type is determined by the type of mounting base and the design of the arm used to adjust the position of the lamp. Size is determined by the reach, which is the maximum length of extension from the mounting base to the lamp housing. Style is determined by the type and wattage of the lamp(s) used. Table I lists the minimum light output in lumens for various lamp types and wattages.

Type 1A - Flexible (gooseneck) arm, clamp base
Type 1B - Flexible (gooseneck) arm, magnetic base
Type 2A - Articulated arm, clamp base
Type 2B - Articulated arm, magnetic base

Size 01 - 12 to 15 inches	Size 06 - 37 to 42 inches
Size 02 - 16 to 19 inches	Size 07 - 43 to 48 inches
Size 03 - 20 to 24 inches	Size 08 - 49 to 54 inches
Size 04 - 25 to 30 inches	Size 09 - 55 to 60 inches
Size 05 - 31 to 36 inches	Size 10 - 61 to 65 inches

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6230

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

Style AA - 60 watt incandescent lamp
Style AB - 75 watt incandescent lamp
Style AC - 100 watt incandescent lamp
Style BA - 25 watt fluorescent lamp
Style BB - 60 watt fluorescent lamp
Style BC - 75 watt fluorescent lamp
Style CA - 25 watt halogen lamp
Style CB - 60 watt halogen lamp
Style CC - 75 watt halogen lamp
Style CD - 100 watt halogen lamp

TABLE I. Minimum illumination output requirements, lumens.

Lamp, watts	Fluorescent	Halogen	Incandescent
25	1000	600	-
60	2000	900	600
75	3000	1200	1000
100	-	1400	1400

3. SALIENT CHARACTERISTICS

3.1 General requirements. The power tool lights shall meet the requirements of Underwriters Laboratory (UL) 153. Unless otherwise specified (see 7.2(c)), the power tool lights shall operate from a 120-volt, single-phase, 60-hertz circuit. The light may contain a built-in transformer for reducing the lamp operating voltage. When specified (see 7.2(d)), the lamp housing and all of the electrical items shall be waterproof. Unless otherwise specified (see 7.2(e)), the power tool lights shall be supplied with all lamps needed for normal operation of the lamp. The lamps shall be replaceable and commercially available.

3.2 Components. The power tool lights shall include, as a minimum, the following components:

3.2.1 Lamp housing. The lamp housing shall provide mechanical and electrical connections for one or more lamps of the style specified. The lamp housing shall provide a means of directing the lamp illumination toward the workpiece and away from the eyes of the tool operator.

3.2.2 Power cord. The power tool lights shall be equipped with a three-conductor SJ-type cord meeting the requirements of UL 62. The cord shall have a grounded plug that conforms to figure 5-15 of National Electrical Manufacturers Association (NEMA) WD 6. Unless otherwise specified (see 7.2(f)), the cord shall extend a minimum of 6 feet beyond the mounting base.

3.2.3 Adjustable arm. The adjustable arm shall be horizontally and vertically adjustable and be capable of positioning and holding the lamp housing at the desired location and direction. Any positioning positioning lockdown and friction adjustment devices shall be capable of being operated without the use of tools. The flexible (gooseneck) arm on type 1 power tool lights shall consist of a single gooseneck tube of a constant diameter, which normally encloses the power cord. The articulated arm on type 2 power tool lights shall consist of two or more rigid arms hinged together, which normally enclose the power cord except at its' ends and hinges. When specified (see 7.2(g)), the adjustable arm shall completely enclose the power cord from the mounting base to the lamp housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

3.2.4 Mounting base. The mounting base shall be metal and shall be designed for vertical and horizontal mounting. The base of type 1A and 2A power tool lights shall be of the clamp variety. The base of type 1B and 2B power tool lights shall be of the magnetic variety.

3.2.5 Switch. The on-off switch shall be clearly visible and marked. The switch shall be located on the lamp housing, the base, or on the power cord within 3 feet of the base. When a waterproof light is specified (see 3.1, 7.2(d)), the switch shall be waterproof. When specified for non-waterproof lights (see 7.2(h)), the switch shall be covered with a moisture-resistant seal or rubber boot.

3.2.6 Optional components. Optional components shall be furnished as specified (see 7.2(i)).

3.3 Performance. The light shall be capable of retaining a steady position at all desired adjustments, including fully contracted and fully extended, under conditions normally encountered in machine tool operations. The light shall have an illumination output of not less than the number of lumens shown in table I when equipped with a lamp or lamps appropriate to its maximum wattage.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The power tool lights shall meet the salient characteristics of this commercial item description; conform to the manufacturer's own drawings, specifications, standards, and quality assurance practices; and be the same light offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.1.1 Verification of conformance. Suitable verification of conformance to UL 153 and UL 62 shall be either the UL label on the product or certification of such conformance by an accredited testing laboratory satisfactory to the government.

5.2 Warranty. Unless otherwise specified (see 7.2(j)), the manufacturer's standard commercial warranty, terms, and conditions shall apply.

6. PACKAGING.

Preservation, packing, and marking shall be as specified (see 7.2(k)) in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Sources of documents.

7.1.1 Government documents. Copies of paragraph 23.403 of the FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.2 Nongovernment documents. Copies of industry (voluntary) standards referenced in this CID may be obtained from the following addresses:

Underwriters Laboratories Inc. (UL)

ANSI/UL 153 UL Standard for Safety Portable Electric Lamps
ANSI/UL 62 UL Standard for Safety Flexible Cord and Fixture Wire

Applications for copies should be sent to: Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062.

National Electrical Manufacturers Association (NEMA)

ANSI/NEMA WD 6 Wiring Devices-Dimensional Requirements

Applications for copies should be sent to: National Electrical Manufacturers Association, 1300 North 17th Street, Suite 1847, Rosslyn, VA 22209.

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type, size, and style of light required (see 2).
c. Power source, if different (see 3.1).
d. Waterproof, if required (see 3.1).
e. Lamp(s) not included (see 3.1).
f. Power cord length, if different (see 3.2.2).
g. Power cord completely enclosed, as specified (see 3.2.3).
h. Moisture-resistant switch, if required (see 3.2.5).
i. Optional components, if required (see 3.2.6).
j. Warranty, if different (see 5.2).
k. Packaging requirements, as specified (see 6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

7.3 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

Example of PIN for A-A-59208:

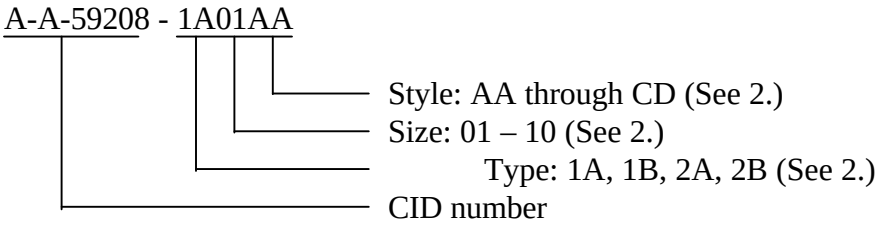

7.4 Sources of supply. The following suppliers are known to offer products that conform to the requirements of this CID. This list is not indicative of all known suppliers:

Amtos Lighting
Dazor
Electrix Lighting
Fostoria Industries
Halogen Lighting Products Corporation
Luxo Corporation
Roxter Manufacturing Corporation
Waldmann Lighting
Wilton Machinery Products

MILITARY INTERESTS:

Custodians
Air Force - 99
Navy - SH

Reviewers
Air Force - 82
Air Force - 84

PREPARING ACTIVITY
DLA - GS

(Project 6230-1061)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.