[INCH-POUND]
A-A-59214
May 18, 1998
SUPERSEDING
W-J-800F
July 24, 1992

COMMERCIAL ITEM DESCRIPTION

JUNCTION BOX: EXTENSION, JUNCTION BOX; COVER, JUNCTION BOX (STEEL, COATED WITH CORROSION-RESISTANT FINISH)

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description (CID) covers sheet-steel junction boxes, junction box extensions, and junction box covers for use with rigid metallic, intermediate metallic conduit, electrical metallic tubing, flexible metallic conduit, armored cable, nonmetallic sheathed cable, and nonmetallic tubing. It does not cover nonmetallic junction boxes, cast metal boxes, conduit bodies, or hinged covered boxes.

2. CLASSIFICATION. Junction boxes, extensions, and covers covered by this commercial item description are of the following type as specified (see 7.2):

Type I	-	Octagon junction box.
Type II	-	Square junction box.
Type III	-	Junction box.
Type IV	-	Device box, sectional type (gangable).
Type V	-	Octagon junction box extension ring.
Type VI	-	Square junction box extension ring.
Type VII	-	Junction box ring.
Type VIII	-	Covers.
Type IX	-	Device box, welded type (nongangable).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commanding Officer (Code 15E2), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5975

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The junction boxes, extensions, and covers specified in this commercial item description shall be constructed of steel, coated with corrosion-resistant finish, as specified (see 7.2). Styles and sizes shall conform to table I and as specified (see 7.2). All bolts and screws shall have standard screw threads. Knockouts shall be provided (see table I). Where applicable, location of knockouts shall be in accordance with standards of NEMA OS-1.

3.2 Standard commercial product. The junction boxes, extensions, and covers shall, as a minimum, be in accordance with the requirements of this commercial item description and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this commercial item description but which are a part of the manufacturer's standard commercial product, shall be included in the junction boxes, extensions, and covers being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

4. REGULATORY REQUIREMENTS.

4.1 Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR). Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this commercial item description are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of ASTM SI-10 (IEEE/ASTM SI-10), and all other requirements of this commercial item description including form, fit and function are met. If a product is manufactured to metric dimensions and these dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

6. PACKAGING. The preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Source of documents.

7.1.1 The Federal Acquisition Regulation (FAR) is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.2 ASTM Standard is available from the Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.1.3 IEEE Standard is available from the Institute of Electrical and Electronics Engineers (IEEE), IEEE Service Center, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331.


7.1.4 NEMA Standard is available from the National Electrical Manufacturers Association, 1300 North 17th Street, Suite 1847, Rosslyn, VA 22209.

7.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Type of junction box, extension, or cover required (see 2).
c. Material finish desired (see 3.1).
d. Styles and sizes of junction box, extension, or cover required (see 3.1 and table I).

7.3 Supersession data. This CID replaces Federal Specification W-J-800F dated July 24, 1992.

7.4 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for items acquired to this description are created as follows:

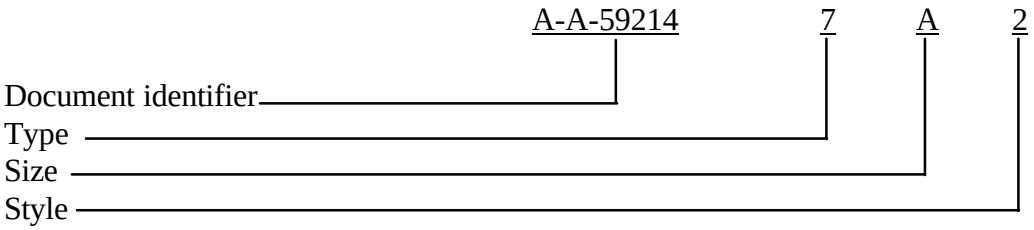

The above PIN if for type 7 (VII - junction box ring), size A (4.00 x 2.13 x 1.50 (102 x 54 x 38 millimetre (mm)), style 2 (eight 0.50-inch (12.7 mm) side knockouts).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

7.5 Metric units. The values stated in either inch-pound units or SI units are to be regarded separately as standard. Within the text, the SI units are shown in brackets. The values stated in each system are not exact equivalents; therefore, each system should be used independently of the other. Combining values from the two systems may result in non-conformance with the standard.

7.6 Subject term (key word) listing.

Boxes
Electrical
Metallic

7.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Army - CR
Navy - YD1
Air Force - 85

Review Activities:
Army - HD
Navy - AS, CG, NW
Air Force - 19, 82
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:
Navy - YD1

(Project 5975-1158)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

TABLE I. Types, sizes and styles of junction boxes, extension rings, and covers.

Type	Description	Size inch (mm)		Style no.	Bottom		Side knockouts			
					0.50 (12.70)	0.75 (19.05)	0.50 (12.70)	0.75 (19.05)	1.00 (25.40)	Cable box
I	Octagon junction box	A	3.25 x 1.50 (82.55 x 38.10)	2	1		4			
				3	1			4		
				4	1		2	2		
				5	1		2			4
		B	3.50 x 1.50 (88.90 x 38.10)	6	1		4			
				7	1		2			4
		C	4.00 x 1.50 (101.60 x 1.50)	8	1		2			4
				9	3	2		4		
				10	5		4			
				11	3	2	2	2		
				12	1		2			4
		D	4.00 x 2.13 (101.60 x 54.10)	13	3	2		4		
				14	5		4			
				15	3	2	2	2		
				16	3	2			4	
				17	1		2			4
				18	3	2	4			
II	Square junction box	A	4.00x 1.50 (101.60 x 38.10)	2	5		12			
				3	1	4		8		
				4	3	2	8	4		
				5	3	2		8		4
				6	5		10			
		B	4.00 x 2.13 (101.60 x 54.10)	7	5		12			
				8	1	4		8		
				9	3	2	8	4		
				10	3	2			8	
				11	3	2		8		
				12	3	2	12			
				13	1		6			4
		C	4.69 x 1.50 (119.06 x 38.10)	14	3	2	12			
				15	1	4		10		
				16	3	2	8	4		
				17	3	2		10		
		D	4.69 x 2.13 (119.06 x 54.10)	18	3	2	12			
				19	3	2	8	4		
				20	3	2			8	
				21	3	2		4	4	
				22	3	2		8		
				23	3	2		12		
III	Junction box (nongangable)	A	4.00 x 2.13 x 1.50 (101.60 x 54.10 x 38.10)	2	3		8			
				3	1		2			
	Nongangable device box	B	4.00 x 2.13 x 1.88 (101.60 x 54.10 x 47.63)	4	3		8			
	Handy junction box (nongangable)	B	4.00 x 2.13 x 1.88 (101.60 x 54.10 x 47.63)	5		2		6		
				6	3			6		
	Nongangable device box	C	4.00 x 2.13 x 2.13 (101.60 x 54.10 x 54.10)	7	3		8			
				8		2		6		
IV	Device box sectional type (gangable)	A	3.00 x 2.00 x 2.00 (76.20 x 50.80 x 50.80)	2	2		6			
				3	1		6			
				4	1					4
		B	3.00 x 2.00 x 2.50 (76.20 x 50.80 x 63.50)	5	2		6			
				6	1		2			8
				7	2		4			
				8	1		2			4
	Lateral bracket			9	1		1			8
		C	3.00 x 2.00 x 2.75 (76.20 x 50.80 x 69.85)	10	2		6			
				11	1		6			4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

TABLE I. Types, sizes and styles of junction boxes, extension rings, and covers - Continued.

Type	Description	Size inch (mm)		Style no.	Bottom		Side knockouts			
					0.50 (12.70)	0.75 (19.05)	0.50 (12.70)	0.75 (19.05)	1.00 (25.40)	Cable box
IV	Device box sectional type (gangable)	C	3.00 x 2.00 x 2.25 (76.20 x 50.80 x 57.15)	12	1		2			4
				13	1		4			
				14		1		4		
				15	2		4	2		
		D	3.00 x 2.00 x 2.50 (76.20 x 50.80 x 88.90)	16	1		8			
				17	1			8		
				18	1		6	2		
				19	1		6			4
V	Octagon box extension ring	A	3.25 x 1.50 (82.55 x 38.10)	2			4			
		B	4.00 x 1.50 (101.60 x 38.10)	3			4			
				4				4		
				5			2	2		
		C	4.00x 2.13 (101.60 x 54.10)	6			2	2		
VI	Square junction box extension ring	A	4.00 x 1.50 (101.60 x 38.10)	2			12			
				3				8		
				4			8	4		
		B	4.00 x 2.13 (101.60 x 54.10)	5			8	4		
				6					8	
		C	4.69 x 1.50 (119.06 x 38.10)	7			8	4		
		D	4.69 x 2.13 (119.06 x 54.10)	7			8	4		
				8			8	4		
				9					8	
VII	Handy junction box extension ring	A	4.00 x 2.13 x 1.50 (101.60 x 54.10 x 38.10)	2			8			
		B	4.00 x 2.13 x 1.88 (101.60 x 54.10 x 47.63)	3			8			
				4				6		

Type	Description	Size inch (mm)		Style no.	Other description
VIII	Cover	A	3.25-inch (82.55 mm) octagon box	2	Flat blank
				3	Flat with 0.50-inch (12.70 mm) knockout in center
		B	4.00-inch (101.60 mm) octagon junction box	4	Flat blank
				5	Flat with 0.50-inch (12.70 mm) knockout in center
				6	Raised 0.63-inch (15.88 mm) with 0.50-inch (12.70 mm) knockout in center
				7	Raised 0.50-inch (12.70 mm) with 2.75-inch (69.85 mm) opening
				8	Raised 0.63-inch (15.88 mm) with 2.75-inch (69.85 mm) opening
				9	Raised 0.75-inch (19.05 mm) with 2.75-inch (69.85 mm) opening
				10	Raised 1.00-inch (25.40 mm) with 2.75-inch (69.85 mm) opening
				11	Raised 1.25-inch (31.75 mm) with 2.75-inch (69.85 mm) opening
				12	Raised 0.63-inch (15.88 mm), center blanked for single device
				13	Flat center blanked for single device
				14	Flat, single receptacle 1.41-inch (35.72 mm) blanked hole
				15	Flat center blanked for duplex receptacle
		C	4.69-inch square junction box	16	Flat blank
				17	For 1.00-inch (25.40 mm) flush device
				18	Flat with 0.50-inch (12.70 mm) knockout in center
				19	Raised 0.50-inch (12.70 mm), with 2.75-inch (69.85 mm) opening
				20	Raised 0.63-inch (15.88 mm), with 2.75-inch (69.85 mm) opening

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

TABLE I. Types, sizes and styles of junction boxes, extension rings, and cover - Continued.

Type	Description	Size inch (mm)		Style no.	Other description
VIII	Covers	C	4.69-inch (119.06 mm) square junction box	21	Raised 0.75-inch (19.05 mm), with 2.75-inch (69.85 mm) opening
				22	Raised 1.00-inch (25.40 mm), with 2.75-inch (69.85 mm) opening
				23	Raised 1.25-inch (31.75 mm), with 2.75-inch (69.85 mm) opening
		D	4.00-inch (101.60 mm) junction box surface	24	Raised 0.25-inch (6.35 mm) for toggle switch
				25	Raised 0.25-inch (6.35 mm) for duplex receptacle
				26	Raised 0.50-inch (12.70 mm) for toggle switch
				27	Raised 0.50-inch (12.70 mm) for single receptacle
				28	Raised 0.50-inch (12.70 mm) for duplex receptacle
				29	Raised 0.50-inch (12.70 mm) for two toggle switches
				30	Raised 0.50-inch (12.70 mm) for two duplex receptacles
				31	Raised 0.50-inch (12.70 mm) for toggle switch and single receptacle
				32	Raised 0.50-inch (12.70 mm) for toggle switch and duplex receptacle
				33	Raised 0.50-inch for three gangable device boxes
				34	Raised 0.50-inch (12.70 mm) for six gangable device boxes
				35	Raised 0.50-inch (12.70 mm) for 30 - 50 amp single receptacle
				36	Raised 0.50-inch (12.70 mm) for 30 amp twist lock single receptacle
				37	Raised 0.50-inch (12.70 mm) for 20 amp receptacle
				38	Raised 0.50-inch (12.70 mm) for 30 - 50 - 60 amp receptacle
		E	4.00-inch (101.60 mm) square junction box flush mounted	39	Flat blank
				40	Flat with 0.50-inch (12.70 mm) knockout in center
				41	Raised 0.50-inch (12.70 mm) with 2.75-inch (69.85 mm) opening
				42	Raised 0.63-inch (15.88 mm) with 2.75-inch (69.85 mm) opening
				43	Raised 0.75-inch (19.05 mm) with 2.75-inch (69.85 mm) opening
				44	Raised 1.00-inch (25.40 mm) with 2.75-inch (69.85 mm) opening
				45	Raised 1.25-inch (31.75 mm) with 2.75-inch (69.85 mm) opening
				46	Raised 0.25-inch (6.35 mm) for one flush device
				47	Raised 0.50-inch (12.70 mm) for one flush device
				48	Raised 0.50-inch (12.70 mm) for two flush devices
				49	Raised 0.63-inch (15.88 mm) for one flush device
				50	Raised 0.63-inch (15.88 mm) for two flush devices
				51	Raised 0.75-inch (19.05 mm) for one flush device
				52	Raised 0.75-inch (19.05 mm) for two flush devices
				53	Raised 1.00-inch (25.40 mm) for one flush device
				54	Raised 1.00-inch (25.40 mm) for two flush devices
				55	Raised 1.25-inch (31.75 mm) for one flush device
				56	Raised 1.25-inch (31.75 mm) for two flush devices
		F	Handy junction box	57	Blank cover
				58	For single receptacle
				59	For duplex receptacle
				60	For toggle switch
				61	Multiple wiring device

Type	Description	Size inch (mm)		Style no.	Bottom		Side knockouts			
					0.50 (12.70)	0.75 (19.05)	0.50 (12.70)	0.75 (19.05)	1.00 (25.40)	Cable box
IX	Device box welded type (nongangable)	A	3.00 x 2.00 x 2.50 (76.20 x 50.80 x 63.50)	2	2		6			
				3	1		2			4
		B	3.00 x 2.14 x 2.84 (76.20 x 54.37 x 72.23)	4	1		2			4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER**	**2. DOCUMENT DATE (YYMMDD)**
	A-A-59214	980518

3. DOCUMENT TITLE
JUNCTION BOX: EXTENSION, JUNCTION BOX; COVER, JUNCTION BOX (STEEL, COATED WITH CORROSION-RESISTANT FINISH)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *Include Area Code)* (1) Commercial	(2) AUTOVON
DWAYNE MILLS	805-982-9681	551-9681
c. ADDRESS *(Include Zip Code)* COMMANDING OFFICER, NCBC CODE 15E2M 1000 23RD AVENUE PORT HUENEME, CA 93043-4301	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil/Document Id: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.