[INCH-POUND]
A-A-59219
May 18, 1998
SUPERSEDING
MIL-A-3908C
7 March 1969

COMMERCIAL ITEM DESCRIPTION

AUGERS, POSTHOLE, HAND

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description (CID) covers hand-held posthole augers.

2. CLASSIFICATION. Augers shall be of the following types, classes and sizes as specified (see 7.2).

Type I - Telescoping stem.

Class 1 - Nonadjustable bit - 6-inch (152 millimetre (mm)).
Class 2 - Adjustable bit - 8 to 14 inches (203 to 356 mm).

Type II - Nontelescoping stem, and nonadjustable bit.

Size 1 - 2-inch (51 mm).
Size 2 - 4-inch (102 mm).
Size 3 - 6-inch (152 mm).
Size 4 - 8-inch (203 mm).

3. SALIENT CHARACTERISTICS.

3.1 Description. Posthole hand augers are for use in producing holes in the earth, primarily for the insertion of posts (fence or other).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commanding Officer (Code 15E2), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

3.2 Standard commercial product. The auger shall, as a minimum be in accordance with this commercial item description and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by the commercial item description but which are a part of the manufacturer's standard commercial product, shall be included in the auger being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Design and construction.

3.3.1 Type I auger. The type I auger shall be of the telescoping stem design, capable of being extended to an additional length of not less than 90 percent of the nonextended length with a fixed position interval of not greater than 7 inches (179 millimetre (mm)). A self-positioning, positive locking mechanism shall be provided for securing the stem in its extended position.

3.3.1.1 Class 1. The class 1 auger shall have a nonadjustable 6-inch (152 mm) bit.

3.3.1.2 Class 2. The class 2 auger shall have an adjustable 8-inch to 14-inch (203 mm to 356 mm) bit with a fixed position interval of not greater than 1-inch (25 mm). The class 2 auger shall be capable of producing a hole having a nominal depth of 8 feet, 3 inches (21 metre (m)).

3.3.2 Type II auger. The type II auger shall be similar to the type I, class 1 auger except that the stem shall be nonadjustable, 0.75-inch (19 mm) diameter by 33-inch (838 mm) long. Only the outer stem as described in 3.3.1 shall be provided. This type shall be furnished with a bit size as specified in accordance with 2. Sizes 3 and 4 shall be designed to permit attachment of an extension (see 3.3.2.1).

3.3.2.1 Stem extension (for sizes 3 and 4). When specified (see 7.2), one or more additional extensions for the stem shall be furnished. Thread both ends to fit as stem extensions, with one coupling for each extension.

3.3.3 Handles. Type I and type II handles shall be a diameter of not less than 1-inch (25 mm). The handle length shall be not less than 30 inches (762 mm) for type I and 22 inches (559 mm) for the type II auger. The handle shall be removable from the stem.

3.3.4 Fastening devices. All nuts, bolts, pins, and similar parts shall be installed with adequate means for preventing loosening or becoming out of adjustment. All fastening devices subject to removal or adjustment shall not be swaged, peened, staked, or otherwise permanently deformed.

3.3.5 Threaded parts. Threads shall comply with NBS Handbook H28.

3.3.6 Finish. The auger shall be thoroughly cleaned of all rust, grease, and dirt, and given one coat of enamel. Painted surfaces shall be free from blisters and embedded foreign matter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

3.4 Marking for identification. Augers shall be marked with the manufacturer's name or readily identifiable trademark.

3.5 Workmanship. All burrs and sharp edges shall be removed; parts shall operate without any binding or stiffness; handles shall be free of splinters and knots.

3.5.1 Forgings. Forgings shall be free from scale, enclosures, cold shuts, mismatching, and other similar defects that may affect the structural strength of the forgings involved.

4. REGULATORY REQUIREMENTS.

4.1 Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR). Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this commercial item description are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of ASTM SI-10 (IEEE/ASTM SI-10), and all other requirements of this commercial item description including form, fit, and function are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING. The preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

7. NOTES.

7.1 Source of documents.

7.1.1 The Federal Acquisition Regulation (FAR) is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.2 Handbook H28 is available from the National Bureau of Standards, Superintendent of Documents, Government Printing Office, Washington, DC 20402.

7.1.3 ASTM Standard is available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.1.4 IEEE Standard is available from the Institute of Electrical and Electronics Engineers (IEEE), IEEE Service Center, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331.

7.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Type, style, class, and size required (see 2.).
c. When one or more stem extensions are to be furnished (see 3.3.2.1).

7.3 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PIN to be used for items acquired to this description are created as follows:

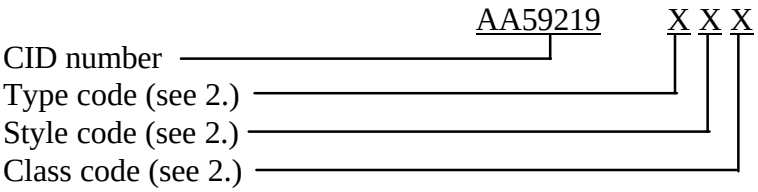

7.3.1 Example of PIN. PIN numbers are developed as follows (see 2.):

A = Type I
B = Type II

1 = Class 1
2 = Class 2

1 = Size 1
2 = Size 2
3 = Size 3
4 = Size 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

7.4 Classification cross reference. Classifications used in this CID (see 2.) are identical to those found in the superseded Military Specification MIL-A-3908C.

7.5 Supersession data. This CID replaces Military Specification MIL-A-3908C, dated 7 March 1969.

7.6 Metric products. The values states in either inch-pounds or SI units are to be regarded separately as standard. Within the text, the SI units are shown in brackets. The values stated in each system are not exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in non-conformance with standard.

7.7 Subject term (keyword) listing.

Auger
Hand-held
Posthole

MILITARY INTERESTS:

Custodians:
Army - GL
Navy - YD1
Air Force - 84

Review Activities:
Army - CE
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:
Navy - YD1

(Project 5120-0090)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** A-A-59219	**2. DOCUMENT DATE (YYMMDD)** 980518

3. DOCUMENT TITLE

AUGERS, POSTHOLE, HAND

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME KENNETH A. POLLOCK	b. TELEPHONE *Include Area Code)* (1) Commercial 805-982-5612 (2) AUTOVON 551-5612
c. ADDRESS *(Include Zip Code)* COMMANDING OFFICER, NCBC CODE 15E2K 1000 23RD AVENUE PORT HUENEME, CA 93043-4301	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.