MIL-V-28639A(YD)
8 April 1985
SUPERSEDING
MIL-V-28639(YD)
3 December 1976

MILITARY SPECIFICATION

VANITY; WOOD, OR WOOD AND STEEL

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for component materials and their assembly into a sturdily constructed vanity.

1.2 Classification. Vanities shall be of the types and sizes specified (see 6.2).

Type I - Single lavatory, double doors.

Size A - 30 inches wide.
Size B - 36 inches wide.
Size C - 42 inches wide.
Size D - 48 inches wide.

Type II - Double lavatory, two sets of double doors.

Size A - 60 inches wide.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

L-P-508	-	Plastic Sheet, Laminated, Decorative.
FF-H-111	-	Hardware, Builders' Shelf and Miscellaneous.
QQ-A-200/9	-	Aluminum Alloy Bar, Rods, Shapes, and Tube, Extruded.
QQ-S-698	-	Steel, Sheet and Strip, Low Carbon.
TT-C-490	-	Cleaning Method and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-529	-	Enamel, Alkyd, Semi-Gloss.
TT-P-636	-	Primer Coating, Alkyd Wood and Ferrous Metals.
MMM-A-188	-	Adhesive, Urea-Resin Type (Liquid and Powder).

MILITARY

MIL-P-116	-	Preservation, Method of.

STANDARDS

FEDERAL

FED-STD-H28	-	Screw Thread Standards for Federal Services.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking for U.S. Military Property.
MIL-STD-794	-	Parts and Equipment, Procedures for Packaging of.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent specified herein.

DEPARTMENT OF COMMERCE (DOC)

Voluntary PS 51-71 - Hardware and Decorative Plywood.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as Department of Defense (DoD) adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D1037 - Evaluating the Properties of Wood-Base Fiber and Particle Panel Materials.
D3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

ARCHITECTURAL WOODWORK INSTITUTE (AWI)

Section 400 - Casework.

(Application for copies should be addressed to Architectural Woodwork Institue, 5055 South Chesterfield, Arlington, VA 22206.)

THE ALUMINUM ASSOCIATION (AA)

A-21 - Clear (Natural) Coating.
C-22 - Etched Finish Medium Matte.

(Application for copies should be addressed to the Aluminum Association, 420 Lexington Ave., New York, NY 10017.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The vanity design shall be as shown in figure 1, a one-piece countertop with a curved backsplash and a raise, drip-proof front edge. The countertop shall be surfaced with one-piece, post forming, laminated plastic sheet. Doors shall be wood surfaced on both sides with laminated plastic sheets. The body of the vanity may be either wood or steel. If wood, the body shall be surfaced with laminated plastic sheets.

3.2 First article. When specified (see 6.2), the contractor shall furnish one vanity of each classification included in the contract for first article inspection and approval (see 4.2.1 and 6.2).

3.3 Standard commercial product. The vanity shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

the vanity being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.4 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.5 Materials. Materials shall be as specified herein and in applicable specifications and standards, and other referenced documents. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification. Materials shall be free of defects which adversely affect performance or serviceability of the finished product.

3.5.1 Steel. Steel shall conform to cold-rolled, condition 4 of QQ-S-698. Sheets of 16 gage and lighter shall have stretcher-leveled standard of flatness.

3.5.2 Particleboard. Particleboard shall weigh at least 42 pound-force per cubic foot, at 6 to 9 percent moisture content. The particleboard panels may be single ply homogeneous wood flake, three layer wood flake, or three layer with a graded medium size wood chip center and wood flake faces. All chips and flakes shall be resin coated, impregnated and bonded together under heat and pressure by the flat-platen method of pressing. Particleboard panels shall be dimensionally stable and free from appreciable warpage which may adversely effect appearance or serviceability. Panel faces shall be flat and smooth to eliminate "telegraphing" of defects through plastic laminate surface material. The particleboard shall be the following physical properties determined in accordance with ASTM D1037:

Modulus of Elasticity	-	425,000 pound-force per square inch (psi) minimum.
Modulus of Rupture	-	2,700 psi minimum.
Internal Bond	-	80 psi minimum.
Swelling (thickness)	-	10 percent maximum.
Screw Holding (face)	-	280 pounds (lb) minimum.
Screw Holding (edge)	-	235 lb minimum.

3.5.2.1 Edge scales. Unless particleboard edges are otherwise covered, edges shall be sanded, filled to smoothness, and coated with a pigmented, catalyzed, alkyzed-urea conversion or polyurethane plastic finish. Pigment shall be a close match to the color of the laminated plastic sheet on the counter top exterior surface.

3.5.3 Plywood. Plywood shall be a minimum of 5 plies and shall meet or exceed the requirements of PS 51-71, type II with face and back veneers grade 2 or better.

3.5.4 Decorative laminated plastic sheets. Decorative laminated plastic sheets shall be in accordance with style D, class 1 of L-P-508, type I for doors and panels shall be 0.032 inch thick and type II for tops shall be 0.040 inch thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

3.5.5 Nondecorative laminated plastic sheets. Nondecorative laminated plastic sheets shall be 0.030 inch thick and shall be in accordance with L-P-508, style ND, type IV.

3.5.6 Adhesives. Adhesive for bonding vertical surface plastic sheets a nondecorative backing sheets to cores shall conform to MMM-A-188. Adhesive for bonding posts forming plastic sheets to the tops shall be specified by the plastic sheet manufacturer.

3.6 Hardware.

3.6.1 Magnetic catches. Magnetic catches for securing doors in the clos position shall conform to type 1079 of FF-H-111.

3.6.2 Door pulls. Door pulls shall be 1/16 inch thick aluminum extrusio conforming to temper T-5 of QQ-A-200/9 and as shown on figures 1 and 3. Finish shall be as specified in 3.8.2.

3.6.3 Door hinges. Door hinges shall be of the semi-concealed type, steel, 5-knuckle with bullet tip pins, 1-1/2 inch minimum joint length, and 0.050-inch minimum thick leaves. Finish shall be satin chromium.

3.6.4 Miscellaneous hardware. Miscellaneous hardware items with threads shall conform to FED-STD-H28 for thread requirements and shall be chromium plated or similarly treated to prevent rust, oxidation, or electrolytic acti

3.7 Construction.

3.7.1 General. The vanity shall consist of a body with wood doors and a counter top. The vanity body, except doors, may be steel or wood at the option of the contractor. The material option selected shall be consistent the same purchase order or contract. Materials shall be as specified in 3.5 and hardware shall be as specified in 3.6. The vanity shall be capable being anchored to the wall. Components shall be fastened to particleboard with sheet metal screws. The gap between the doors and the frame shall be uniform on all sides, and within 1/8-inch tolerance. The size of the openin in the counter top to accommodate the lavatory for type I, and two lavatorie for type II shall be as specified (see 6.2).

3.7.2 Wood vanity.

3.7.2.1 General. Exterior dimensions, horizontal and vertical reveals, and toe space shall be as shown on figure 1 and the overall depth shall be 24 inches. Door pulls, hinges, door catches, and counter top requirements shall be as specified herein.

3.7.2.2 Grade. Casework shall conform to the Custom Grade requirements AWI Quality Standard, Section 400, laminated plastic surfaced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

3.7.2.3 Construction. Details shall conform to the "Exposed Face Frame-Flush" design as shown in the AWI publication Architectural Casework Details, except that the exterior surfaces of sides, doors, and front reveals and interior surfaces shall be surfaced with laminated plastic sheets in accordance with 3.5.4 and 3.5.5 respectively. Finish and color for laminated plastic sheets on doors and panels shall be as specified (see 3.8.1 and 6.2). The back shall be open for access to plumbing, except for a top and bottom horizontal rail to make a rigid integral unit. Four 1/8-inch thick aluminum angle brackets, with holes to accommodate two screws on each angle leg, shall be fastened to interior of the sides at the top and bottom for fastening the unit to the walls.

3.7.3 Steel vanity. Vanity construcion shall be as shown on figures 1 through 5. Any details not shown or specified herein shall be logical and compatible with the details shown or specified. The construction shall be flush panel with top overhang, inset doors, and toe space at bottom. The unit shall consist of a steel body and particleboard or plywood top and doors surfaced on both sides with laminated plastic sheets. All dimensions, sizes, and thickness of materials shall be as shown on figures 1 through 5 or as specified herein.

3.7.3.1 Body assembly. Each vanity end upright or side shall be one piece, formed at the front and flanged at the back, top, and bottom, as shown in figure 2. All corners, top and bottom, shall be overlapped and spot welded and further secured with 6-inch gussets spot welded to the flange to form rigid and stable corners. The formed front of each side shall be the front frames as shown on figure 2. Each front frame shall be mortised for hinge reinforcements which are welded to the inside of the front frame for securing the hinges as shown on figure 3. To form a rigid integral unit; the bottom assembly consisting of the front and back bottom rails, formed front, and bottom, with a 3-inch hat section; the top back rail; and apron rail; shall be formed and spot welded to the sides as shown on figures 2, 3, and 4. In addition; the size, quantity, and spacing of spot welds shall be as specified in table I. The back shall be open for access to plumbing. For type I, size D vanities, a 6-inch wide intermediate panel shall be centered between the doors to provide additional support. The intermediate panel shall be spot welded to the apron rail and to the bottom. For type II vanities with two sets of double doors, as intermediate panel, 1-1/4 inch wide, between the set of doors shall be provided as shown on figure 1. The steel components shall be finished in accordance with 3.8.2. The vanity top shall be fastened with sheet metal screws through punched holes in the top flanges on a maximum of 18-inch centers.

3.7.4 Doors. Doors shall be flush with face of the unit. Double doors or two sets of doors shall be determined by type of unit specified (see 1.2). Doors shall be minimum 11/16-inch thick particleboard or plywood core covered on both sides with laminated plastic sheets. Exterior of doors shall be covered with decorative laminated plastic sheets of finish and color specified (see 3.8.1). The interior shall be covered with nondecorative laminated plastic sheets. All edges shall be self-edged with the same decorative

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

laminated plastic as used on the door exterior, except the vertical front edge shall be covered by an extruded aluminum door pull. The laminated plastic shall be bonded to the core with adhesive conforming to MMM-A-188. The assembly periods, clamping, or pressing time shall be in accordance with the adhesive manufacturer's instructions to assure a permanent and secure bond. All edges and corners of laminated plastic shall be beveled smooth to eliminate sharp edges. Each door shall be secured to the frame by two hinges. Doors shall be retained in closed position by magnetic catches. An aluminum extrusion pull extending the full height of each door shall be fastened with a minimum of three equally spaced sheet metal screws. The ends of the front edge of the pull shall be rounded to avoid sharp corners. Doors shall close against rubber bumpers as shown in figure 4.

3.7.5 Counter top. The counter top shall be a one-piece unit with a covered splash back and built-up front edge including and 3/16 inch dripproof rise at the counter front as shown on figures 2 and 4. Opening for single or double lavatory shall be provided and shall be determined by the type specified (see 1.2, 3.7.1 and 6.2). The top shall be constructed as shown in figures 2 and 4. The counter top shall overhang the body at front and sides one inch, except when end curbs are specified sides shall be flush as shown in figures 1 and 5. When specified (see 6.2 and 6.5), end curbs shall be provided as shown on figure 2. End curbs shall be surfaced and self-edged with laminated plastic matching the plastic on the counter top. The joint between the end curb and counter top shall be sealed with a waterproof adhesive. The post forming laminated plastic sheet shall be bonded to the core with an adhesive specified by the laminated plastic manufacturer. Finish and color of plastic shall be as specified (see 3.8.1 and 6.2). The underside of the particleboard core shall be surfaced with a nondecorative plastic sheet. The counter top shall be fastened to the body as specified in 3.7.3.1.

TABLE I. Spot Welding

Part Name	Description of Joint (Size = 0.16 inch Diameter ±0.03 inch)	Quantity (Minimum)
Vanity Side Panel	Side Panel To Apron	5
Vanity Side Panel	Side Panel To Back Rain	4
Vanity Side Panel	Side Panel To Bottom	11
Vanity Side Panel	Side Panel To Bottom Rail	3
Vanity Side Panel	Side Panel To Bottom Rail	10
Corner Gusset	Corner Gusset To Side Panel, Bottom, & Rail	6 Per Gusset

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

3.8. Finishes.

3.8.1 Decorative laminated plastic sheets. The finish and color for counter tops, doors, and panels, when wood, shall be as specified (see 6.2 and 6.4).

3.8.2 Steel. All steel components, except those to be chromium plated or similarly treated, shall be coated and finished as specified in the following paragraphs:

3.8.2.1 Surface preparation. Surface preparation for painting of steel shall be in accordance with types I or II of TT-C-490.

3.8.2.2 Primer coatings. All treated components shall be given one coat of primer coating conforming to TT-P-636, applied to a minimum dry film thickness of 0.7 mil.

3.8.2.3 Finish coat. Paint color shall be as specified (see 6.2 and 6.4). All primed surfaces shall be finished with a minimum combined 1.2 mil dry film thichness of semi-gloss enamel conforming to class II of TT-E-529, applied to complete hiding. Painted finishes shall be smooth, without dirt, dust, or other foreign matter, sags, runs, bare spots, or scratches.

3.8.3 Finish of aluminum pulls. Pulls shall be anodized in accordance with the Aluminum Association Designation A-21 or C-22.

3.9 Identification marking. Each vanity shall be marked for identification in accordance with MIL-STD-130. The marking shall be placed on the interior of one of the sides.

3.10 Workmanship.

3.10.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.10.1 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.10.2 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

3.10.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shal be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one vanity when a first article is required (see 3.2 and 6.2). This inspection shall include the examination of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4, and the packaging inspection of 4.5. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one vanity. All vanities offered for delivery at one time shall be considered a lot for the purpose of inspection. The inspection level shall be level II and the Acceptable Quality Level (AQL) shall be 2.5 defects per hundred units (DHU) for major defects and

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

4.0 DHU for minor defects. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separated from new lots, and shall be clearly identified as reinspected lots.

4.4 Examination. Each vanity selected shall be examined for defects listed in table II. Each attribute within each classification of multiple defects shall constitute one defect.

TABLE II. Classification of defects.

Classification	Defects	Requirement paragraph
Critical	None defined.	
Major:		
101	Design not as specified.	3.1 & fig. 1
102	Dimensions not as specified.	figs 1 thru 5
103	Units not interchangeable	3.4
104	Steel not as specified.	3.5.1
105	Particleboard not as specified.	3.5.2
106	Plywood not as specified.	3.5.3
107	Laminated plastic sheet not as specified.	3.5.4 & 3.5.5
108	Adhesive not as specified.	3.5.6
109	Adhesive not used as specified.	3.5.6
110	Hardware not as specified.	3.6
111	Component not fastened to particle-board with sheet metal screws.	3.7.1
112	Gap between doors and frame not uniform or in excess of 1/8 inch.	3.7.1
113	Hole in top for lavatory not as specified.	3.7.1
114	When wood construction selected grade not as specified.	3.7.2.2
115	Wood construction not as specified.	3.7.2.3
116	Steel construction not as specified.	3.7.3
117	Each steel side not one piece.	3.7.3.1
118	Top not fastened to body as specified.	3.7.3.1
119	Corner not overlapped and gussetted.	3.7.3.1
120	Front frame not mortised and hinge reinforcements installed as specified.	3.7.3.1
121	Bottom not as specified and hat section missing.	3.7.3.1 & figs. 2 & 3
122	Spot welding size, quality and spacing not as specified.	3.7.3.1 & table I

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects. - Continued

Classification	Defects	Requirement paragraph
Critical	None defined.	
Major:		
123	Doors not constructed as specified.	3.7.4
124	Door core less that 11/16-inch thick.	3.7.4
125	Door pulls not as specified.	3.7.3.2 & 3.6.2
126	Doors not self-edged.	3.7.4
127	Hinges not as specified.	3.7.4 & 3.6.3
128	Counter top construction not as specified.	3.7.5
129	Splashback not coved and of height specified.	3.7.5
130	Front edge of top not as specified.	3.7.5
131	Finishes not as specified.	3.8
132	Identification marking missing.	3.9
133	Workmanship not of quality specified.	3.10
Minor:		
201	Miscellaneous hardware not plated for corrosion resistance.	3.6.4
202	Aluminum pulls not anodized.	3.8.3
203	Identification marking not legible.	3.9
204	Fasteners not pulled-up tight.	3.10.2

4.5 Packaging Inspection. An examination shall be made to determine compliance with the requirements of section 5. The sample unit shall be one unit prepared for shipment. Sampling shall be in accordance with MIL-STD-105. The inspection level shall be level II with an AQL of 4.0 percent defective.

5. PACKAGING

5.1 Preservation and packing. Preservation and packing shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. Each vanity shall be preserved method III in accordance with MIL-P-116. The unit package shall be the shipping container. Packing shall be accordance with MIL-STD-794. Only closed containers shall be used. Case liners are required. Contents shall be cushioned, blocked, and braced to prevent movement within the shipping container.

5.1.2 Level B. Level B shall be the same as level A requirements. Packing shall be in accordance with MIL-STD-794. Case liners are not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

5.1.3 Level C. Each vanity shall be preserved, packaged, and packed in accordance with ASTM D3951.

5.2 Marking. Marking shall be in accordance with MIL-STD-129; and, shall include the fragile and arrow handling.

6. NOTES.

6.1 Intended use. The vanities are for use in military bachelor quarters.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type and size of vanity required (see 1.2).
c. When a first article is not required for inspection and approval (see 3.2, 4.2.1, and 6.3).
d. Specify size of hole or holes required for the top to accommodate lavatories (see 3.7.1).
e. Specify if end curbs are required and if required, on which side (see 3.7.5).
f. Specify finish and color for laminated plastic covered surfaces and paint color for steel sides and other steel components (see 3.7.2.3, 3.8.1, 3.8.2.3, and 6.4).
g. Level of preservation and level of packing required (see 5.1).

6.3 First article. When a first article inspection is required, the item will be tested and should be a first article sample or it may be a standard production item from the contractor's current inventory as specified in 4.3.1. The first article should consist of two units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.4 Since a wood or steel vanity body is the supplier's option, specify both finish and color for laminated plastic and paint color for steel.

6.5 If one side of the vanity is to be located in a corner or abuts a wall, the counter top should be provided with an end curb to avoid spillage over the side

Custodian:


Navy - YD

Preparing Activity:

Navy - YD

(Project 7105-N251)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

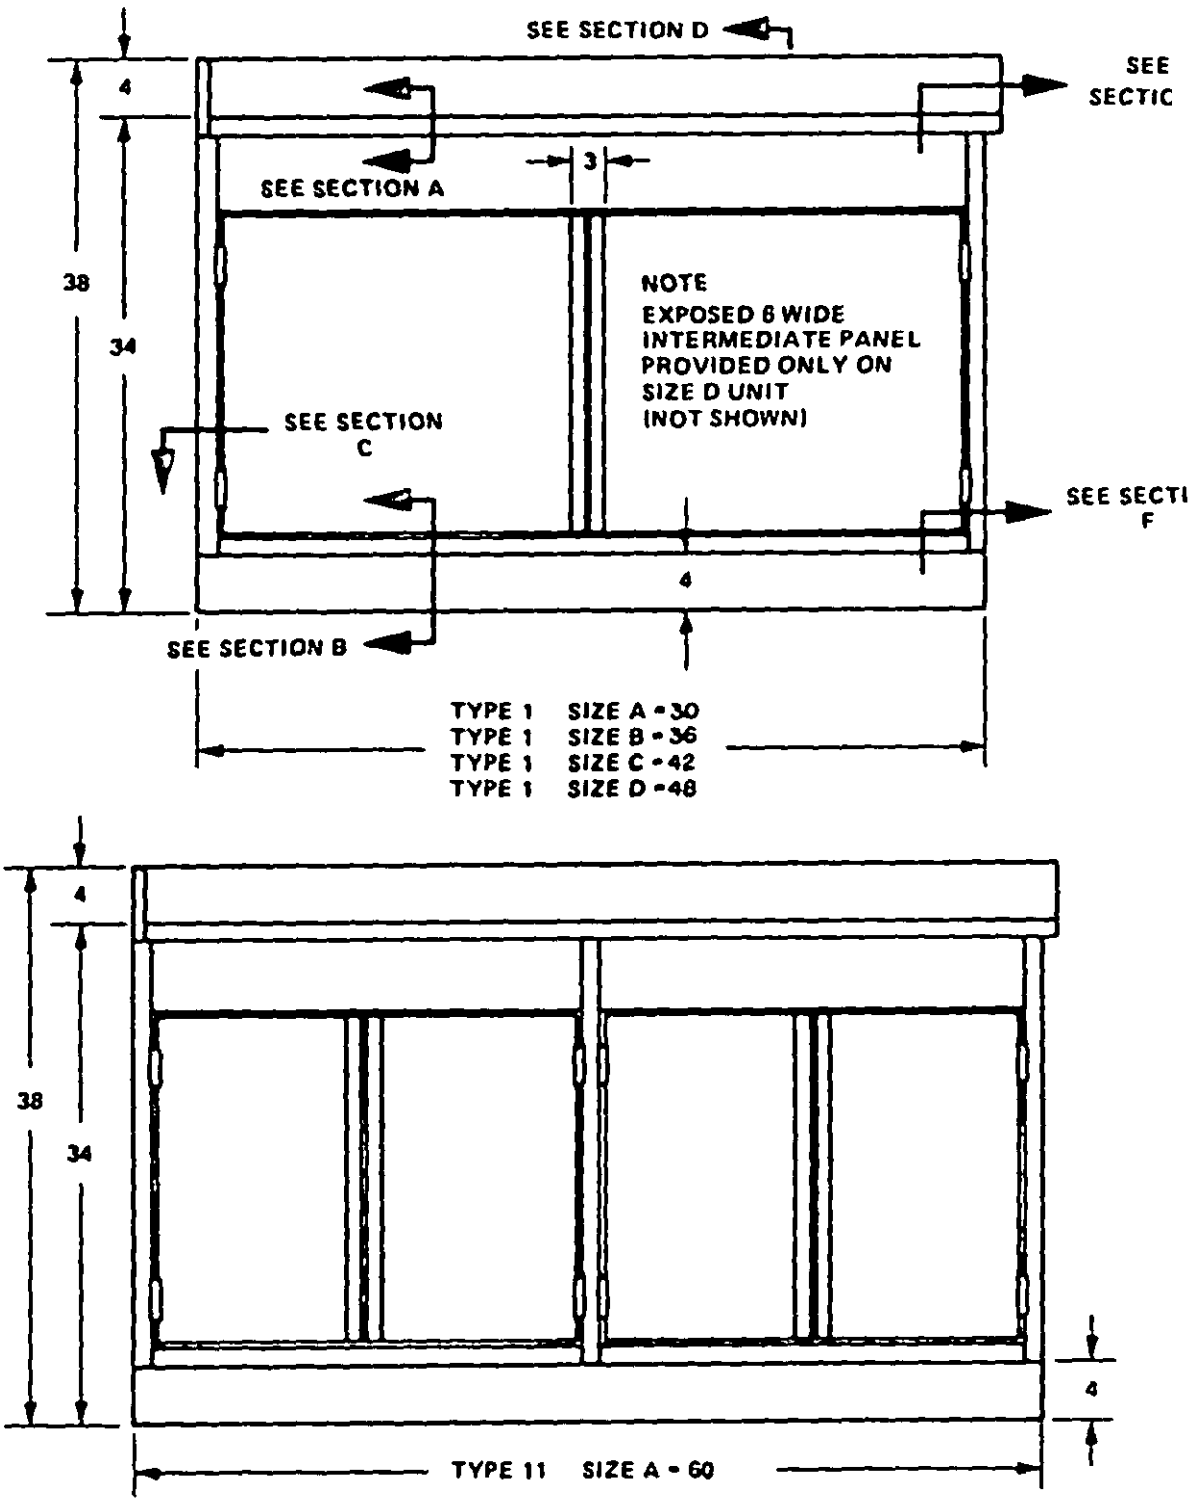

Notes:
1. Dimensions are in inches.
2. Figures are not to scale.

FIGURE 1. Vanity elevations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

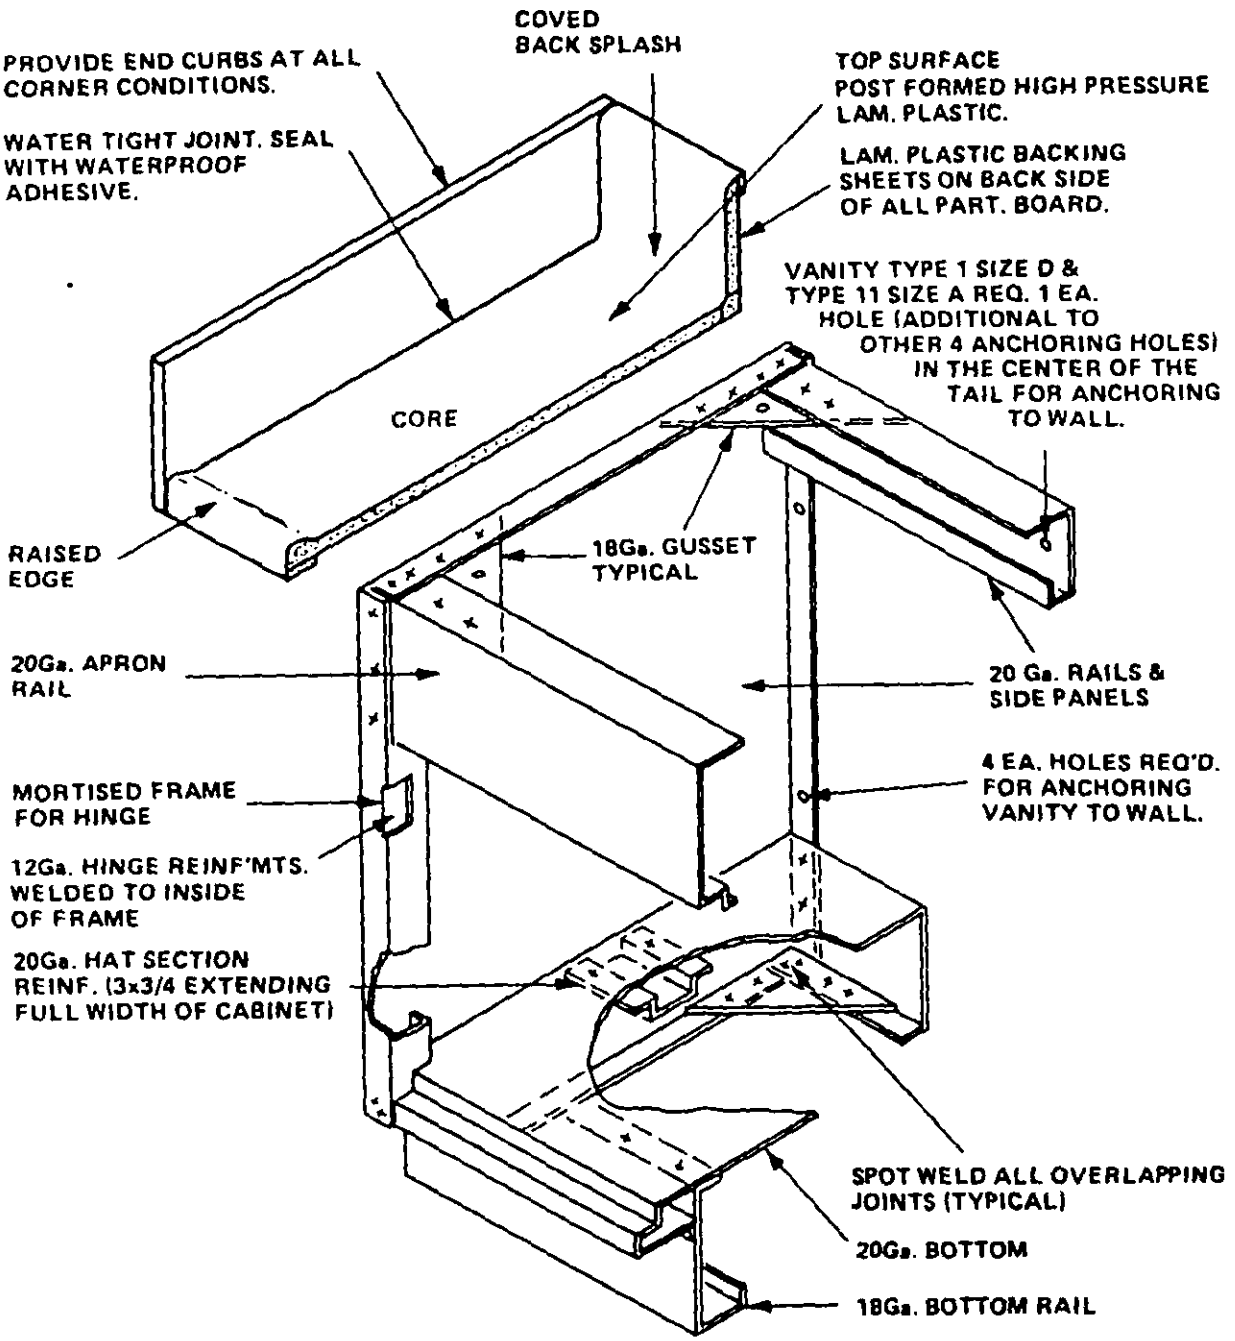


Notes:

1. Dimensions are in inches.
2. Figures are not to scale.

FIGURE 2. Vanity details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

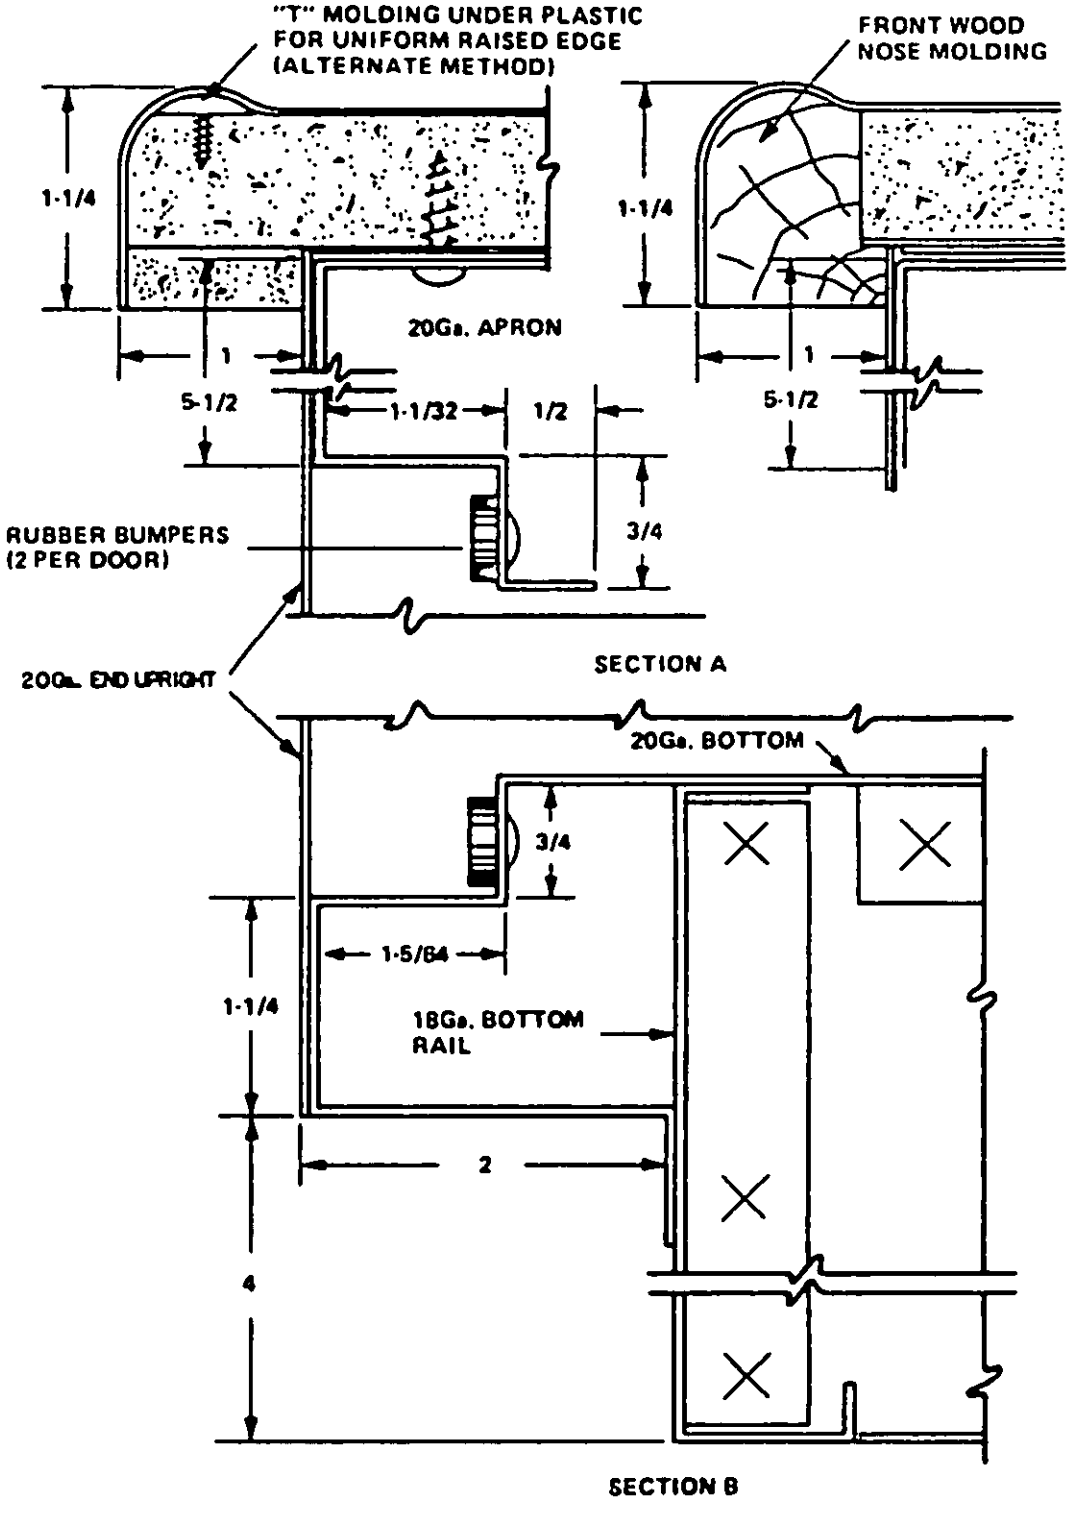


Notes:


1. Dimensions are in inches.
2. Figures are not to scale.

FIGURE 3. Sections A and B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

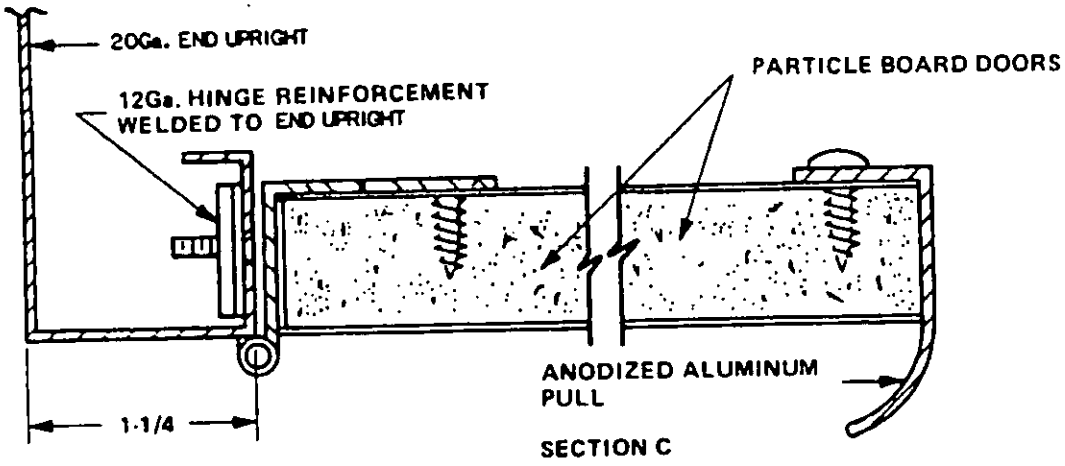

SECTION C

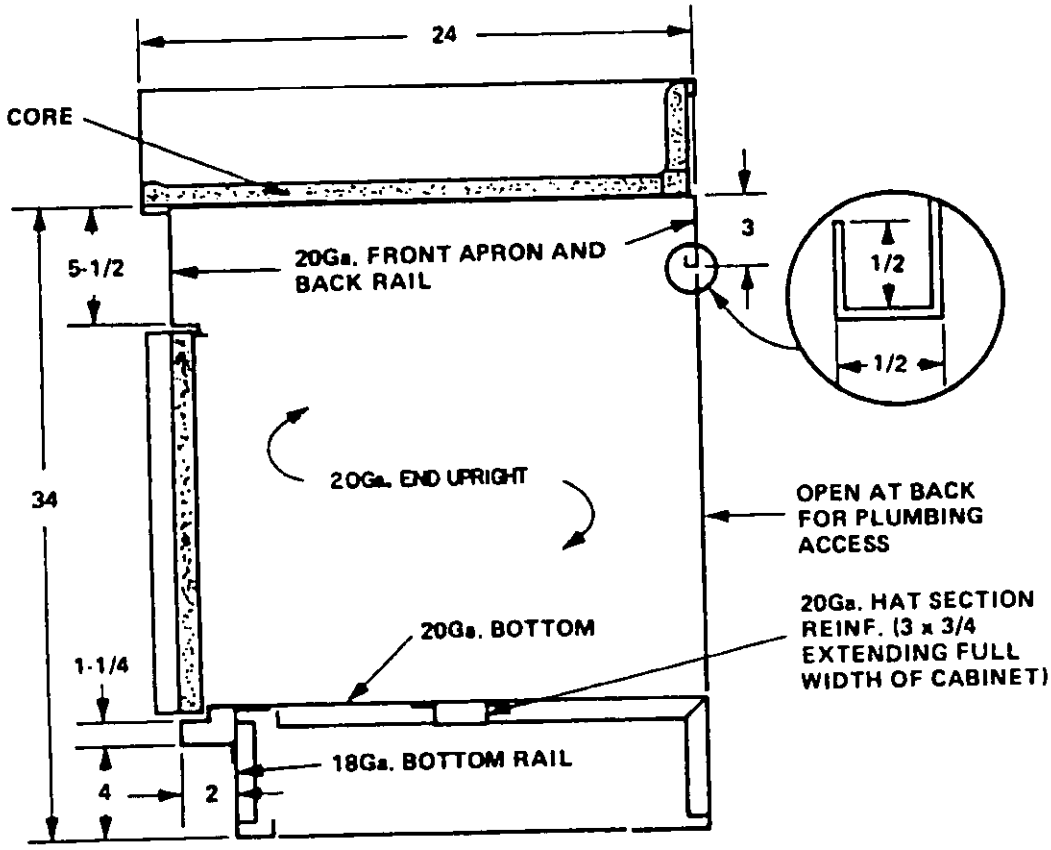


SECTION D


Notes:
1. Dimensions are in inches.
2. Figures are not to scale.

FIGURE 4. Sections C and D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.

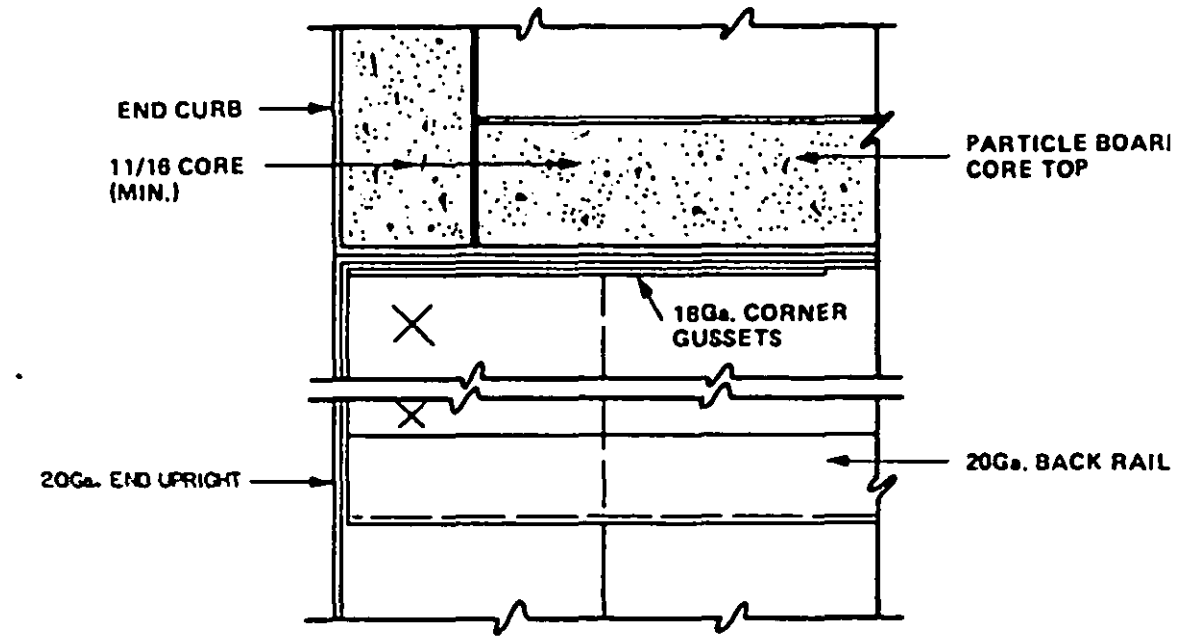

SECTION E

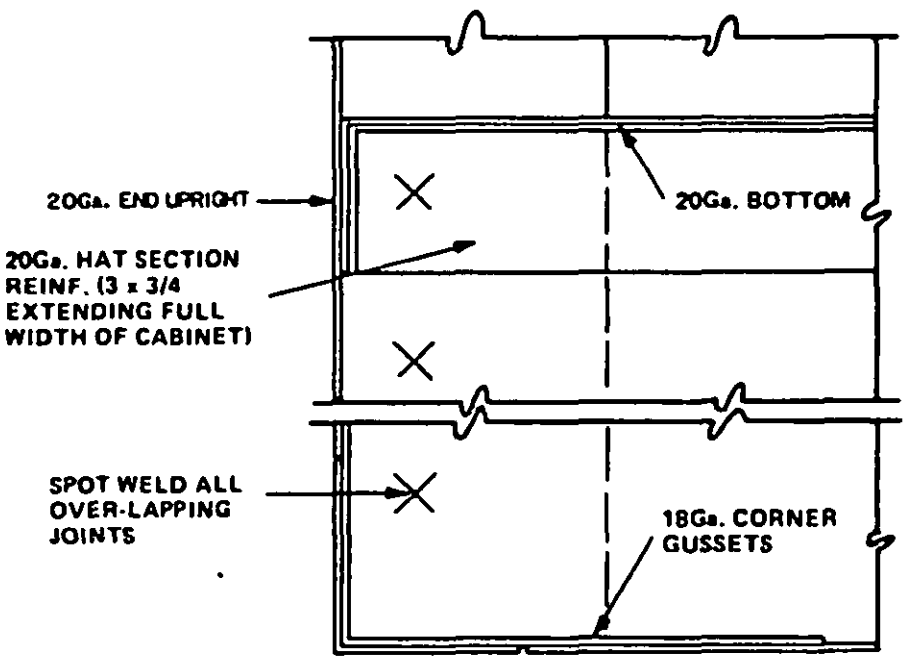

SECTION F

Notes:
1. Dimensions are in inches.
2. Figures are not to scale.

FIGURE 5. Sections E and F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:30Z
Check the source to verify that this is the current version before use.