MILITARY SPECIFICATION

BODY ASSEMBLY
FOR
MINE, ANTI-PERSONNEL: BLU-92/B

This specification is approved for use by the US Army Armament Research and Development Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification contains quality assurance provisions for the fabrication and inspection of parts, assembly and packing of an electronic body assembly for Mine, Anti-Personnel: BLU-92/B.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.

MILITARY

MIL-B-117	-	Bags, Sleeves and Tubing - Interior Packaging
MIL-P-14232	-	Parts, Equipment and Tools for Army Materiel, Packaging of
MIL-E-17555	-	Electronic and Electrical Equipment Accessories, and Repair Parts, Packaging and Packing of

FSC: 1345

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn: DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

MIL-S-19500/240	-	Semi-conductor Device, Diode, Silicon, Rectifier, Types IN645, IN647, IN649, IN645-1, IN647-1, IN649-1, TX and Non-TX Types.
MIL-S-19500/255	-	Semiconductor Device, Transistor, NPN, Silicon, Switching Types 2N2221, 2N2221A, 2N2222, and 2N2222A JAN, JANTX, JANTXV, A and JANS
MIL-S-19500/291	-	Semiconductor Device, Transistor, PNP, Silicon Switching Types 2N2906, 2N2906A, 2N2907 and 2N2907A JAN, JANTX, JANTXV, and JANS
MIL-S-19500/406	-	Semiconductor Device, Diode Silicon, Voltage Regulator Types JAN An JANTX IN4460 thru IN4496
MIL-R-39008/4	-	Resistor, Fixed, Composition (Insulated) Established Reliability Style RCR05
MIL-C-39014/5	-	Capacitor, Fixed, Ceramic Dielectric (General Purpose), Established Reliability, Style CKR12
MIL-S-45743	-	Soldering, Manual Type, High Reliability, Electrical and Electronic Equipment
MIL-S-46844	-	Solder Bath Soldering of Printed Wiring Assemblies
MIL-G-45204	-	Gold Plating (Electrodeposited)
MIL-A-48078	-	Ammunition, Standard Quality Assurance Provisions, General Specification for
MIL-P-50884	-	Printed Wiring, Flexible General Specification For

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-202	-	Test Methods For Electronic and Electrical Component Parts
MIL-STD-275	-	Printed Wiring for Electronic Equipment
MIL-STD-331	-	Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-750	-	Test Methods for Semiconductor Devices
MIL-STD-1188	-	Commercial Packing of Supplies and Equipment

DRAWINGS (see 6.10)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

PRODUCT AND PACKAGING DRAWING

9292713	-	Body Assembly
9347080	-	Test Mine, BLU 92/B (AP-40)

INSPECTION EQUIPMENT DRAWINGS

1183AS616	-	Standard Wave Forms

2.2 Other Publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

CODE OF FEDERAL REGULATIONS

TITLE 49 - Transportation, Parts 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402. Orders should specify, "49 CFR 100-199 (latest revision)").

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM E 18 - Standard Method of Test for Rockwell Hardness

(Application for copies should be addressed to: American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specification procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer.)

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings, specifications and standards.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing (Dwg) 9292715, all associated drawings, and with all requirements specified in applicable specifications and standards.

3.3 Environmental conditioning.

3.3.1 Transportation vibration. The Body Assemblies shall be safe to handle and transport and shall show no evidence of internal or external damage that will affect the intended functions following transportation vibration Test No. 119, Procedure 2 of MIL-STD-331.

3.3.2 Temperature conditioning of Body Assemblies. The Body Assemblies shall function as specified in 3.4 after temperature conditioning as follows:

a. Cold, minus 40°-5°F for four (4) hours minimum (min).

b. Ambient, for four (4) hours min.

c. Hot, 145°+5°F for four (4) hours min.

3.4 Functioning. After being conditioned as specified in 3.3.1 and 3.3.2, the Body Assembly, assembled in a test mine, shall be capable of arming and functioning high order after being subjected to high velocity impact in any of the following modes:

a. Anti-disturbance (AD) mode.

b. Trip-line (TL) mode.

c. Self-destruct (SD) mode.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.5 Ultrasonic welded assemblies.

3.5.1 Seal leakage testing of ultrasonic welded assemblies. The Power Supply Housing Assembly (Dwg 9292616) and the Upper Housing Assembly (Dwg 9292631) shall not exhibit a pressure drop greater than ten (10) psig in five seconds min when subjected to an internal pressure of 75 ± 3 psig of dry nitrogen gas.

3.5.2 Torque test of selector switch weldment. The selector switch weldment to the housing assembly (Dwg 9292714) shall withstand a torque of 35 inch pounds (in-lbs) min without cracking or failure of selector switch/housing assembly ultrasonic weldment.

3.6 Electronic assemblies performance characteristics.

3.6.1 Quiescent current. The electronic assembly quiescent current shall be less than 220 microamperes when the supply voltage is 6.5 ± 0.15 volts at ambient temperature and the input/output terminals loaded as specified in 4.5.7.3.

3.6.2 Primary Time Base (PTB) oscillator period. The PTB oscillator period shall be verified when tested as specified in 4.5.7.1.

3.6.3 Test Time Base (TTB) oscillator period. The TTB oscillator period shall be verified when tested as specified in 4.5.7.2.

3.6.4 S&A assembly arm signal. The PTB clock count at which the Safety and Arming (S&A) assembly arm signal functions the piston actuator firing circuit shall be verified when tested in accordance with 4.5.7.4.

3.6.4.1 S&A arm signal inhibit test. The S&A arm signal shall not occur when the TTB oscillator is inhibited. This function shall be verified when tested as specified in 4.5.7.12.

3.6.5 Pressure cartridge signal. The PTB clock count at which the pressure cartridge signal functions the pressure cartridge firing circuit shall be verified when tested as specified in 4.5.7.5.

3.6.6 Electronic arm. The electronic assembly shall not process destruct signals from the low voltage detect, tripline-sensor interface or anti-disturbance circuits until after electronic arm. The PTB clock count that initiates electronic arm and the ability of the electronic assembly to inhibit destruct signals prior to electronic arm shall be tested as specified in 4.5.7.6.

3.6.7 Low voltage detect. The supply voltage level at which the low voltage detect circuit functions the detonator firing circuit shall be verified when tested as specified in 4.5.7.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.6.8 SD1 self-destruct signal. The PTB clock count at which the SD1 self-destruct signal functions the detonator firing circuit shall be verified when tested as specified in 4.5.7.11.

3.6.9 SD2 self-destruct signal. The PTB clock count at which the SD2 self-destruct signal functions the detonator firing circuit shall be verified when tested as specified in 4.5.7.10.

3.6.10 SD3 self-destruct signal. The PTB clock count at which the SD3 self-destruct signal functions the detonator firing circuit shall be verified when tested as specified in 4.5.7.9.

3.6.11 Anti-disturbance. The anti-disturbance circuit shall initiate the function of the detonator firing circuit when the anti-disturbance switch closes; that is, a transition from an open to closed switch condition. This requirement shall be tested as specified in 4.5.7.15 (applies after electronic arm).

3.6.12 Tripline. The tripline-sensor interface circuit shall initiate the function of the detonator firing circuit for the conditions specified in 3.6.12.1; however, it shall not function the detonator firing circuit for the conditions specified in 3.6.12.2. The sensitivity of the tripline-sensor interface circuit shall be tested for as specified in 4.5.7.7. (Applies after electronic arm).

3.6.12.1 Turn on conditions. A resistance change from 3.9×10^3 ohms $\pm$ 5% to 10×10^3 ohms $\pm$ 5% that occurs after electronic arm at any one of the four inputs of the tripline-sensor interface circuit shall cause the function of the detonator firing circuit.

3.6.12.2 Non-turn on conditions. A resistance of 3.9×10^3 ohms $\pm$ 5% existing at any time at any one or all of the inputs of the tripline-sensor interface circuit, or resistance of 10×10^3 ohms $\pm$ 5% existing etc., before electronic arm shall not function the detonator firing circuit after electronic arm.

3.6.13 Primary Time Base (PTB) check. The oscillator check circuit shall initiate the function of the detonator firing circuit when the primary time base oscillator period becomes greater than the test time base oscillator period. This requirement shall be tested for as specified in 4.5.7.14.

3.6.14 Firing circuits. The piston actuator, pressure cartridge, and detonator firing circuits shall each provide a minimum of 1500 ergs to a 10 ohm load within a 20 millisecond interval when tested as specified in 4.5.7.15.

3.6.14.1 Piston actuator firing circuit. When functioned, the piston actuator firing circuit shall remain on for only one PTB clock count. The piston actuator firing circuit shall function again after the detonator circuit of 3.6.14.3 has turned off, and remain on as long as the electronics is functionally operable or is intentionally reset.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.6.14.2 Pressure cartridge firing circuit. When functioned, the pressure cartridge firing circuit shall remain on for only one PTB clock count.

3.6.14.3 Detonator firing circuit. When functioned, the detonator firing circuit shall remain on for 64 minimum and 128 maximum PTB clock counts. Thereafter, it shall remain off as long as the electronics is functionally operable or is intentionally reset.

3.7 Low temperature operation. The electronic assembly shall meet the performance characteristics specified in 3.6 at minus 40° -5°F when tested as specified in 4.5.7.17.

3.8 High temperature operation. The electronic assembly shall meet the performance characteristics specified in 3.6 at 145° + 5°F when tested as specified in 4.5.7.16.

3.9 Soldering. Soldering procedures and acceptance criteria for the soldered components shall be in accordance with MIL-S-45743 and MIL-S-46844, except as specified in Appendix A herein.

3.9.1 Solderability. Electronic assembly parts that are to be soldered shall comply with the solderability requirements of MIL-S-45743, MIL-S-46844 and Appendix A herein.

3.10 Verification of safe condition of S&A assembies prior to assembly to Body Assemblies. Prior to assembly in the Body Assembly, positive verification of the following safety features shall be made for each S&A Assembly:

a. Presence and safe position of the interlock assembly.

b. Presence of the borerider ball lock.

c. Minimum dimension of borerider: distance from end of sleeve to borerider.

d. Safe position of spring loaded slider assembly: distance from end of S&A to slider assembly, max.

e. Safe position of slider release pin and shear pin.

3.11 Verification checks on Body Assembly.

3.11.1 Verification of safe condition of Body Assemblies. Positive verification of each completely assemblied Body Assembly shall be made: 1) that both battery cells are unactivated, 2) that the firing capacitor is shorted by the shorting bar, 3) that the distance of the S&A slider assembly from the end of the S&A is within the maximum (max) allowed, and 4) that the borerider has not functioned. (See 3.10 above and 4.5.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.11.2 Verification of Body Assembly circuit resistance. Circuit resistance checks of completely assembled Body Assembly shall be made for all triplines, the magnetic coupling device (MCD) circuit, pressure cartridge, S&A piston actuator and S&A detonator, as specified in 4.5.4.

3.12 Process control. The contractor shall submit to the Government for approval with the first article sample, process control documents for the processes listed in the following subparagraphs. These processes shall be those used in the fabrication of the first article sample and shall not be changed after approval of the first article sample without prior approval of the Government. At unscheduled intervals during the operation of the approved processes, the Government inspector shall observe the processes to ascertain that production to the approved process control documents is being maintained. No deviation without approval from the procuring activity shall be allowed. In the event that the contractor desires a change in an approved process control document, a new first article sample may, at the discretion of the Government be required. (Ref Sec 6.7, DI-P-1604(MOD) with Attachment 1).

3.12.1 Process control of molded plastic parts. A process control document shall be prepared for each of the molded plastic parts. These documents shall briefly describe the entire process and shall fully document the controls to be utilized for maintaining the process. They shall specify the time, temperature, pressure ranges and cure process which shall be maintained during production of the molded parts as well as how the glass content of the raw material will be controlled.

3.12.2 Process control of ultrasonic weldments. A process control document shall be prepared for each of the following weldments. These documents shall fully describe the entire assembly process and the controls to be utilized for maintaining the process. They shall specify the preparation of all material and components and the assembly operations that are needed prior to welding to meet the requirements of the applicable drawing as well as the welding pressure, weld time and hold time for the welding operation, and curing temperature and time after welding.

a. Selector Switch Assembly, Dwg 9292609.

b. Housing, Power Supply (Weldment), Dwg 9292617.

c. Housing, Upper (Weldment), Dwg 9292633.

d. Selector Switch Assembly to Upper Housing Assembly, Dwg 9292714.

e. Body Assy - Power Supply Housing Assy to Electronic and Housing Assy, Dwg 9292713.

f. Body Assy - Cover, Power Supply to Power Supply Housing Assy, Dwg 9292713.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.12.3 Process control of potting. A process control document shall be prepared for each of the following potting operations. These documents shall fully describe the entire process and the controls for maintaining the process. They shall specify the preparation of all materials, pot life, and subsequent cure temperature and time.

a. Potting of sensors in Power Supply Housing Assy, Dwg 9292616.

b. Potting of sensors in Upper Housing Assy, Dwg 9292631.

c. Potting of Pressure Cartridge in Body Assy, Dwg 9292713.

d. Potting of Receiver Coil Assy in Body Assy, Dwg 9292713.

e. Potting of Electronic Assembly, Dwg 9292725.

3.12.4 Process control of soldering. Process control documents/procedures shall be prepared for all soldering operations. These documents shall fully describe the entire process and controls for maintaining the process/procedures in compliance with the soldering requirements of 3.9.

3.13 Material control. The contractor shall prepare and submit to the Government a material control document. This document shall detail the procedures used to identify and control the components/subassemblies to assure that only qualifed components/subassemblies from qualified suppliers are used in the manufacture or assembly of the BLU-92 Mine, Body Assembly.

3.14 Qualified suppliers. A qualified component supplier shall be one who has successfully met the requirements of this specification and First Article inspection specified herein.

3.15 First article inspection. This specification contains provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.16 Workmanship.

3.16.1 Mechanical workmanship. All parts and assemblies shall be fabricated and assembled in a thorough, workmanlike manner. They shall be free of burrs, sharp edges, cracks, dirt, grease, rust, and other foreign matter. The cleaning method used shall not be injurious to any parts, nor shall the parts be contaminated by the cleaning agents. Exterior surface coatings shall be continuous; however, a few light scratches not exposing base material may be permitted. All required marking and stamping shall be neat and sharply defined.

3.16.2 Electrical workmanship. All soldered electrical connections shall comply with MIL-S-45743, MIL-S-46844, Appendix A herein, and requirements of applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item.

a. First Article Inspection

b. Quality Conformance Inspection

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample, as designated by the Contracting Officer, for evaluation in accordance with the provisions of 4.3.2 and 4.3.3. The first article sample shall consist of the items and sample quantities listed in Table I.

4.3.2 Inspections to be performed.

4.3.2.1 Components and subassemblies. See MIL-A-48078 and Table I specified herein.

4.3.2.2 Electronic assemblies. The electronic assemblies listed in Table I (48 with AD switches and 48 without AD switches) shall be subjected to the following tests prior to assembly into body assemblies. The Electronic Assemblies shall be serialized to identify the units with AD switches from the units without AD switches. Further, the serial numbers shall also be used for the Body Assemblies and Test Mines containing the electronics.

4.3.2.2.1 Temperature cycle. Subject the electronic assemblies to temperature cycle per MIL-STD-202, Method 107D, Condition A1, except that the temperature range shall be -65°F to 160°F. (Non-destructive test)

4.3.2.2.2 Mechanical shock. Following temperature cycle, subject the electronic assemblies to mechanical shock per MIL-STD-202, Method 213B, Condition E with a 1000g peak and 2ms max duration. (Non-destructive test).

4.3.2.2.3 Performance test. Following mechanical shock, the electronic assemblies performance characteristics shall be verified by testing as specified in 4.4.2.14, ambient condition only. The test sample shall be rejected if, during test, a defect occurs. (Non-destructive test)

4.3.2.3 Body assemblies. The body assemblies listed in Table I, manufactured using electronic assemblies from 4.3.2.2.3 and complying with 4.4.2.52 shall be assembled in to test mines (4.4.5) and subjected to the function tests of 4.3.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.3.2.4 Function tests. The test mine assemblies shall be function tested in the mode and temperature noted in figure 1. Each group shall be preconditioned at only one temperature for a minimum of four (4) hours without borerider clips installed. Within five (5) minutes after being removed from the conditioning chamber, the test mines shall have borerider clips installed and shall be launched to enable the S&A's, activate the battery cells and set the self destruct feature for the desired SD time (4.4.6). (Destructive test)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

		TEMPERATURE/FUNCTION															ACCEPT/REJECT			
		-40 -5°F					Ambient					145 +5°F								
With	Sample Size	TL/BW	SD1	SD2	SD3	AD	TL/BW	SD1	SD2	SD3	AD	TL/BW	SD1	SD2	SD3	AD	Failure Dud *	Early SD	Hazard-ous Dud	Premature arming or Detonation
AD Switch	48	12	-	-	-	4	12	-	-	-	4	12	-	-	-	4	0-1	0-1	0-1	0-1
Without AD Switch	48	4	4	4	4	-	4	4	4	4	-	4	4	4	4	-	0-1	0-1	0-1	0-1

* Includes TL/BW, SD & AD Failures

Notes:

1. See 6.9 for definitions of defects listed above under accept-reject.
2. See 4.5.6.5 for data to be recorded.
3. See 4.5.6.1 for AD Function.
4. See 4.5.6.2 for TL/BW Function.
5. See 4.5.6.3 for SD Function.

FIGURE 1. Function test mode.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.3.3 Rejection. See MIL-A-48078 and as specified herein.

4.3.4 Requalification. The contractor shall be subjected to another first article as stipulated in the contract if any of the following occur:

a. Manufacturing techniques or process controls which effect the form, fit, or function of the assembly are revised by either the contractor or one of his subcontractors supplying parts, assemblies, or materials.

b. The contractor relocates his production facilities or portions thereof.

c. The contractor desires to use a new subcontractor (unqualified) for material, parts or assemblies.

d. A change occurs in the design, material, performance or assembly of the Body Assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I. FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 5		DRAWING NUMBER
	Body Assembly and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Semiconductor Device, Diode (JANTX IN645)	10	--	3.2	4.4.2.3
	Diode, Zener (JANTX 4463)	10	--	3.2	4.4.2.4
	Diode, Zener (JANTX 4471)	10	--	3.2	4.4.2.4
	Switch Assembly (Dwg. 9298512)	20	--	3.2	4.4.2.9
	Wiring, Printed, Flexible (Dwg. 9292728)	20	--	3.2	4.4.2.10
	Electronic Assembly (Dwg. 9292725) 3/				
	Mechanical	96 1/	--	3.2	4.4.2.13
	Performance Characteristics @ Ambient	96	--	3.2	4.4.2.14 2/
	Performance Characteristics @ -40° -5°F	96	--	3.2	4.4.2.14, Sheets 3 & 4
	Performance Characteristics @ +145° +5°F	96	--	3.2	4.4.2.14, Sheets 5 & 6
	Selector Switch Assembly (Dwg 9292609) Examination for defects	20	--	3.2	4.4.2.15
	Housing, Upper, Selector Switch (Dwg 9292620) Examination for defects	10	--	3.2	4.4.2.16
	Housing, Lower, Selector Switch (Dwg 9292621) Examination for defects	10	--	3.2	4.4.2.17
	Transistor JANTXV 2N2907 (Dwg 9287122) Examination for defects	10	--	3.2	4.4.2.2

NOTES: 1/ Assemble 48 without AD Switch (Dwg. 9298512).
2/ Major #106 not applicable to assemblies without AD Switches.
3/ Electronic Assemblies to be assembled into the Body Assemblies required for first aricle/qualification test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I. FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 2 OF 5		DRAWING NUMBER
	Body Assembly and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Transistor JANTXV 2N2222A (Dwg 9287122)				
	Examination for defects	10	--	3.2	4.4.2.2
	Insert (Dwg 9292629)				
	Examination for Defects	10	--	3.2	4.4.2.18
	Disc, Polyester, Double Coated (Dwg 9292637)				
	Examination for Defects	10	--	3.2	4.4.2.19
	Gasket (Dwg 9292651)				
	Examination for defects	10	--	3.2	4.4.2.20
	Terminal (Dwg 9292628)				
	Examination for defects	10	--	3.2	4.4.2.21
	Post, Weld (Dwg 9292717)				
	Examination for defects	10	--	3.2	4.4.2.22
	Spring, Take-Up (Dwg 9292676)				
	Examination for defects	10	--	3.2	4.4.2.23
	Hardness Test	10	--	3.2	4.4.2.23
	Cover, Power Supply (Dwg 9292614)				
	Examination for defects	10	--	3.2	4.4.2.24
	O-Ring (Dwg 9292657)				
	Examination for defects	10	--	3.2	4.4.2.25

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I. FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 3 OF 5	DRAWING NUMBER
	Body Assembly and Components		See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Holder, Lead (Dwg 9292611) Examination for defects	10	--	3.2	4.4.2.26
	Battery and Lead Assembly (Dwg 9292678) Examination for defects Pull Test	15 15	-- --	3.2 3.2	4.4.2.27 4.5.2
	Circuit Board (Dwg 9292654) Examination for defects	10	--	3.2	4.4.2.28
	Receiver Coil Assembly (Dwg 9292652) Examination for defects	15	--	3.2	4.4.2.29
	Coil (Dwg 9292653) Examination for defects	10	--	3.2	4.4.2.30
	Retainer, Coil (Dwg 9292660) when used Examination for defects	10	--	3.2	4.4.2.31
	Housing, Power Supply (Weldment) (Dwg 9292617) Examination for defects	10	--	3.2	4.4.2.32
	Housing, Power Supply (Dwg 9292618) Examination for defects	10	--	3.2	4.4.2.33

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I. FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	Body Assembly and Components	4 OF 5	See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Plate, Power Supply (Dwg 9292619)				
	Examination for defects	10	--	3.2	4.4.2.34
	Power Supply Housing Assembly (Dwg 9292616)				
	Examination for defects	15	--	3.2	4.4.2.35
	Leak Test	15	--	3.5	4.5.3
	Pin, Retaining, Test Point (Dwg 9292675)				
	Examination for defects	10	--	3.2	4.4.2.36
	Housing, Upper (Weldment) (Dwg 9292633)				
	Examination for defects	10	--	3.2	4.4.2.37
	Housing, Upper (Dwg 9292635)				
	Examination for defects	10	--	3.2	4.4.2.38
	Plate, Upper (Dwg 9292634)				
	Examination for defects	10	--	3.2	4.4.2.39
	Shorting Bar, Ceramic (Dwg 9292157)				
	Examination for defects	10	--	3.2	4.4.2.40
	Shorting Bar and Connector Assy (Dwg 9292158)				
	Examination for defects	15	--	3.2	4.4.2.41

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I. FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH CATEGORY	TITLE: Body Assembly and Components		SHEET 5 OF 5		DRAWING NUMBER: See Below NEXT HIGHER ASSEMBLY
	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Shorting Bar (Dwg 9292682)				
	Examination for defects	10	--	3.2	4.4.2.42
	Upper Housing Assembly (Dwg 9292631)				
	Examination for defects	15	--	3.2	4.4.2.43
	Leak Test	15	--	3.5	4.5.3
	Cushion (Dwg 9292636)				
	Examination for defects	10	--	3.2	4.4.2.44
	Electronic and Housing Assembly (Dwg 9292714)				
	Examination for defects	15	--	3.2	4.4.2.45
	Leak Test	15	--	3.5	4.5.3
	Body Assembly (Dwg 9292713) 1/				
	Examination for defects	96	--	3.2	4.4.2.46-52
	Functional tests	96	--	3.3, 3.4	4.5.2.3

NOTES: 1/ Body Assemblies containing previously examined electronic assemblies, 48 assemblies are to be assembled without AD Switches.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, each inspection lot shall contain the following:

a. Subassemblies (excluding b tnrough m) of one lot interfix number from one manufacturer.

b. S&A assembly (Dwg 9328743) of one lot interfix number from one manufacturer.

c. Electronic assemblies (Dwg 9292725) of one lot interfix number from one manufacturer.

d. Sensor assemblies (Dwg 9292972) of one lot interfix number from one manufacturer.

e. Receiver coil assemblies (Dwg 9292652) of one lot interfix number from one manufacturer.

f. Battery, Single Cell Primary Reserve (Dwg 9275567) of one lot interfix number from one manufacturer.

g. Microcircuit parts (Dwg 9332000) from one lot interfix identification code from one manufacture.

h. Microcircuit parts (Dwg 9292968) from one lot interfix identification code.

i. Resistor network parts (Dwg 9292966) from one lot interfix number.

j. Resistor network parts (Dwg 9328687) from one lot interfix number from one manufacturer.

k. Microcircuit parts (Dwg 9292967) from one lot interfix number.

l. Fuses (Dwg 9328688) of one lot interfix number from one manufacturer.

m. Wiring, Printed, Flexible (Dwg 9292728) from one lot interfix number.

4.4.2 Examination. (See MIL-A-48078).

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Tests forms, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, general inspection level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
3.4.2.1	Resistor, Fixed Composition, ± 5%, 1/8 w	1 OF 1	MIL-R-39008/4 PN See Below
			NEXT HIGHER ASSEMBLY 9292726

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Part Number — Part Value RCR05G 10 4JS — 100K ohm RCR05G 10 3JS — 10K ohm RCR05G 10 2JS — 1K ohm RCR05G 13 1JS — 130 ohm				
Critical	None defined				
Major					
101	Resistance		0.40%	3.2	MIL-R-39008/4
102	Solderability, 2 leads	10	10-0-1	3.9.1	MIL-STD-202, Method 208
Minor					
201	Identification or marking incorrect		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH 4.4.2.2	TITLE Transistor (P/N 9287122-1, JANTXV-2N2907 and 9281122-2 JANTXV-2N2222A)		SHEET 1 OF 1		DRAWING NUMBER 9287122 NEXT HIGHER ASSEMBLY 9292725
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Wire material	32	1/	3.2	Visual
102	Wire bond	32	1/	3.2	Pull tester 2/
103	Compliance with MIL-S-19500/291 or/255	--	--	3.2	3/ Certification
104	Solderability (3 leads ea)	10	1/	3.9.1	MIL-S-45743
105	Leakage current Icer over max		0.40%	3.2	4/
106	Internal visual	32	1/	3.2	MIL-STD-750, Method 2072
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: 1/ Reject for one (1) or more leads defective. 2/ Pull all leads on each device. 3/ Visual evidence of JANTXV marking. 4/ See applicable note and test schematic of dwg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-S-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Semiconductor Device, Diode, Type JANTXIN645-1	1 OF 1	9287168-2
			NEXT HIGHER ASSEMBLY: 9292726

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Missing or incorrect color band on cathode end of diode		100%	3.2	Electrical, 1/
2	Reverse current		100%	3.2	MIL-STD-750, Method 4016 dc
Major					
101	Forward voltage drop		100%	3.2	MIL-STD-750, Method 4011
102	Solderability (2 leads)	10	10-0-1	3.9.1	MIL-S-45743
103	Compliance with MIL-S-19500/240			3.2	2/ Certification
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: 1/ Color band end shall be used as cathode end during reverse current test; reverse current test is used to confirm that the color band is on cathode end of diode.

2/ Visual evidence of JANTX marking.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE			SHEET 1 OF 1	DRAWING NUMBER
4.4.2.4	Diode, Zener, JANTX IN 4463 and JANTX 4471				MIL-S-19500/460
					NEXT HIGHER ASSEMBLY
					9292726
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Missing or incorrect color band on diode (polarity)		100%	3.2	Electrical, 1/
2	Reverse current		100%	3.2	MIL-STD-750, Method 4016, dc
3	Zener Breakdown voltage Vz		100%	3.2	MIL-STD-750, Method 4022
Major					
101	Forward voltage drop		100%	3.2	MIL-STD-750, Method 4011
102	Solderability (2 leads)	10	10-0-1	3.9.1	MIL-S-45743
103	Compliance with MIL-STD-19500/460	--	--	3.2	2/ Certification
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:
1/ Color band end shall be used as cathode end during reverse current test; reverse current test is used to confirm that the color band is on cathode end of diode.
2/ Visual evidence of JANTX marking.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.5	Capacitor, Fixed, Plastic Dielectric (.22 uF)	1 OF 1	9287104
			NEXT HIGHER ASSEMBLY: 9292726

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Capacitance		0.40%	3.2	MIL-STD-202, Method 305
102	Dissipation factor		0.40%	3.2	MIL-STD-202, Method 306
103	Insulation resistance		0.40%	3.2	MIL-STD-202, Method 302
104	Solderability (2 leads)	10	10-0-1	3.9.1	MIL-S-45743
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Capacitor, Fixed, Electrolytic Tantalum Solid (82 uF)				9287126-2
					NEXT HIGHER ASSEMBLY
					9292726
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Capacitance		0.40%	3.2	MIL-STD-202, Method 305
102	Leakage current		0.40%	3.2	MIL-STD-202, Method 302
103	Dissipation factor		0.40%	3.2	MIL-STD-202, Method 306
104	Weld strength (two sides)	8	8-0-1	3.2	Pull Tester
105	Internal workmanship	20	20-1-2	3.2	Dwg. 9292220
106	Solderability (2 leads)	10	10-0-1	3.9.1	MIL-S-45743
107	Breakdown voltage	10	10-1-2	3.2	Dwg. 9292220
108	Sleeve missing		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.7	Capacitor, Fixed, Electrolytic Tantalum Solid (39 uF)		9287096-4
			NEXT HIGHER ASSEMBLY 9292726

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Capacitance		0.40%	3.2	MIL-STD-202, Method 305
102	Leakage current		0.40%	3.2	MIL-STD-202, Method 302
103	Dissipation factor		0.40%	3.2	MIL-STD-202, Method 306
104	Weld strength (two sides)	8	8-0-1	3.2	Pull Tester
105	Internal workmanship	20	20-1-2	3.2	Dwg. 9292220
106	Solderability (2 leads)	10	10-0-1	3.9.1	MIL-S-45743
107	Breakdown voltage	10	10-1-2	3.2	Dwg. 9292220
108	Sleeve missing		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Capacitor, Fixed, Ceramic, Dielectric (P/N M39014/05 - 2037, 1000 pF)	1 OF 1	MIL-C-39014/5
			NEXT HIGHER ASSEMBLY: 9292726

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Capacitance		0.40%	3.2	MIL-STD-202, Method 305
102	Insulation resistance		0.40%	3.2	MIL-STD-202, Method 302
103	Dissipation factor		0.40%	3.2	MIL-STD-202, Method 306
104	Solderability (2 leads)	10	10-0-1	3.9.1	MIL-S-45743
105	Compliance with MIL-C-39014/5		---	3.2	Certification
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Switch Assembly (Antidisturbance Switch)				9298512
					NEXT HIGHER ASSEMBLY
					9292725
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Switch function seven (7) contact closures minimum each direction		0.40%	3.2	Note 1, Test Set Up
102	Contact closure duration 0.60 seconds max.		1.0%	3.2	Note 2, Test Set Up
103	Insulation resistance		0.40%	3.2	Ohmmeter
104	Assembly damaged, distorted or incomplete		0.40%	3.2	Visual
105	Ribbon improperly welded to can		0.40%	3.2	Visual
106	Epoxy seal missing or incomplete or beyond surface		0.40%	3.2	Visual
107	Solderability	10	10-0-1	3.9.1	MIL-S-45743
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual
	NOTES: 1. Any switch having less than six closures, reject lot. The number of switches having six contact closures shall not exceed AQL accept/reject criteria. 2. Any switch having closure time exceeding 1.2 sec., rejects lot. The number of switches having closure times between 0.60 and 1.20 sec. shall not exceed AQL accept/reject criteria.				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.10	Wiring, Printed, Flexible	1 OF 1	9292728
			NEXT HIGHER ASSEMBLY 9292727

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Visual and dimensional examination		0.40%	3.2	MIL-P-50884, 1/
102	Slit edge less than 0.01 inch from active conductor pattern		0.40%	3.2	Visual/Gage, 2/
103	Missing or improperly mounted terminals		0.40%	3.2	Visual
104	Continuity missing between holes		100%	3.2	Resistance Tester, 3/
105	Shorts between conductors		100%	3.2	Resistance Tester, 3/
Minor					
201	Flexible printed wire contamination		0.65%	3.2	Visual

NOTES:
1/ Paragraph 4.8 Methods of Examination and Test.
2/ An approved measuring device shall be used when any apparent defect is found during visual inspection.
3/ Test current limited to 10 milliamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.11	Stiffener				9292729
					NEXT HIGHER ASSEMBLY
					9292727
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter		0.40%	3.2	Gage
102	Outside diameter		0.40%	3.2	Gage
103	Diameter of through hole for lead retainer boss, 4 places		0.40%	3.2	Gage
104	Location of C.D. #103 through hole, 4 places		0.40%	3.2	Gage
105	Profile of cutout for selector switch		0.40%	3.2	Gage
Minor					
201	Hole dimensions and locations		0.65%	3.2	Gage
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.12	Fuse, Electric	1 OF 1	9328688
			NEXT HIGHER ASSEMBLY: 9292726

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Fuse resistance		100%	3.2	Milliohmmeter, 2/
102	Case to lead resistance		100%	3.2	Megohmmeter
103	No fire current for 10 second period, min.	1/	0.40%	3.2	Tester
104	Bridgewire material		100%	3.2	Certification
105	Fuse dimensioning		0.40%	3.2	Gages
106	All fire energy (capacitor discharge) test		0.40%	3.2	Tester
107	Solderability	10	10-0-1	3.9.1	MIL-S-45743
108	Evidence of etching compounds or contaminates	3/	--	3.2	Chemical Analysis
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: 1/ Use these units for All Fire Energy Test (Major 106)
2/ Limit current to 1 ma.
3/

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.13	Electronic Assembly (Mechanical)		9292726
			NEXT HIGHER ASSEMBLY
			9292725

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conformal coat missing forward of noted area and on components		0.40%	3.2	Visual, under ultra-violet illumination
102	Terminals: loose, bent, or canted more than 5 degrees		0.40%	3.2	Visual/Gage
103	Any component missing, or damaged		0.40%	3.2	Visual
104	Incorrect orientation of the microcircuit(s) index(es)		100%	3.2	Visual
105	Incorrect orientation of the transistor(s) tab(s)		100%	3.2	Visual
106	Incorrect orientation of the capacitor(s) polarity mark(s)		100%	3.2	Visual
107	Incorrect orientation of the resistor network(s) index(es)		100%	3.2	Visual
108	Switch assembly height from board (max)		0.40%	3.2	Gage
109	Component height from board (max) 1/		0.40%	3.2	Gage
110	Conformal coat in noted non-conformal coat areas		0.40%	3.2	Visual, under ultra-violet illumination
111	Soldering workmanship		0.40%	3.16	Visual
Minor					
201	Height of leads/solder on bottom of board over (max)		0.65%	3.2	Gage
202	Evidence of poor workmanship (mechanical)		0.65%	3.16	Visual

NOTES: 1/ Applies to all components except switch assembly.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 6		DRAWING NUMBER
4.4.2.14 1/	Electronic Assembly (Performance Characteristics) (Ambient)				9292725
					NEXT HIGHER ASSEMBLY 9292714
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Primary Time Base (PTB) oscillator period, over max. or under min.		100%	3.6.2	4.5.7.1
2	Test Time Base (TTB) oscillator period, over max		100%	3.6.3	4.5.7.2
3	Oscillator check circuit does not detect a PTB period that is greater than the TTB period		100%	3.6.13	4.5.7.14
4	PTB clock count at SD 1 self-destruct signal (over max)		100%	3.6.8	4.5.7.11
5	PTB clock count at SD 2 self-destruct signal (over max)		100%	3.6.9	4.5.7.10
6	PTB Clock count at SD 3 self-destruct signal (over max)		100%	3.6.10	4.5.7.9
7	PTB clock count at S&A arm signal, under min.		100%	3.6.4	4.5.7.4
8	One or more fuse open		100%	3.2	Test
9	Blocking or zener diodes have improper polarity; breakover voltage; open/short circuit (SD set circuit)		100%	3.2	Test
Major					
101	Quiescent current		100%	3.6.1	4.5.7.3
102	PTB clock count at pressure cartridge signal incorrect		100%	3.6.5	4.5.7.5
103	PTB clock count at electronic arm incorrect		100%	3.6.6	4.5.7.6

NOTES: 1/ Critical Items 1 and 2 and Major Items 101 and 105 shall be recorded as variable data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 6		DRAWING NUMBER
4.4.2.14 1/	Electronic Assembly (Performance Characteristics) (Ambient)				9292725
					NEXT HIGHER ASSEMBLY 9292714
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
104	Low voltage detect, tripline-sensor and anti-disturbance destruct signals not inhibited before electronic arm		100%	3.6.6	4.5.7.6
105	Low voltage detect circuit trigger level		100%	3.6.7	4.5.7.8
106	Antidisturbance switch test		100%	3.6.11	4.5.7.13
107	PTB clock count at SD 1 self-destruct signal (under min)		100%	3.6.8	4.5.7.11
108	PTB clock count at SD 2 self-destruct signal (under min)		100%	3.6.9	4.5.7.10
109	PTB clock count at SD 3 self-destruct signal (under min)		100%	3.6.10	4.5.7.9
110	Tripline-sensor interface circuit sensitivity test (test all four inputs)		100%	3.6.12	4.5.7.7
111	Piston actuator firing circuit energy output		100%	3.6.14	4.5.7.15
112	Pressure cartridge firing circuit energy output		100%	3.6.14	4.5.7.15
113	Detonator firing circuit energy output		100%	3.6.14	4.5.7.15
114	Arming signal inhibit test		100%	3.6.4.1	4.5.7.12
Minor	None defined				

NOTES:

1/ Critical Items 1 and 2 and Major Items 101 and 105 shall be recorded as variable data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 3 OF 6		DRAWING NUMBER 9292725
4.4.2.14	Electronic Assembly (Performance Characteristics) (-40° - 5°F)				NEXT HIGHER ASSEMBLY 9292714
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Primary Time Base (PTB) oscillator period, over max. or under min.	1/	0-1	3.6.2	4.5.7.1
2	Test Time Base (TTB) oscillator period, over max		0-1	3.6.3	4.5.7.2
3	Oscillator check circuit does not detect a PTB period that is greater than the TTB period		0-1	3.6.13	4.5.7.14
4	PTB clock count at SD 1 self-destruct signal (over max)		0-1	3.6.8	4.5.7.11
5	PTB clock count at SD 2 self-destruct signal (over max)		0-1	3.6.9	4.5.7.10
6	PTB clock count at SD 3 self-destruct signal (over max)		0-1	3.6.10	4.5.7.9
7	PTB clock count at S&A arm signal, under min.		0-1	3.6.4	4.5.7.4
8	One or more fuse open		0-1	3.2	Test
9	Blocking or zener diodes have improper polarity; breakover voltage; open/short circuit (SD set circuit)		0-1	3.2	Test
Major					
101	Quiescent current		0.40%	3.6.1	4.5.7.3
102	PTB clock count at pressure cartridge signal incorrect		0.40%	3.6.5	4.5.7.5
103	PTB clock count at electronic arm incorrect		0.40%	3.6.6	4.5.7.6
104	Low voltage detect, tripline-sensor and anti-disturbance destruct signals not inhibited before electronic arm		0.40%	3.6.6	4.5.7.6

NOTES: 1/ Sample size for critical characteristicstics to be the same as determined for Major characteristics. No defective allowed for critical characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 4 OF 6		DRAWING NUMBER
4.4.2.14	Electronic Assembly (Performance Characteristics) (-40° - 5°F)				9292725
					NEXT HIGHER ASSEMBLY 9292714
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
105	Low voltage detect circuit trigger level		0.40%	3.6.7	4.5.7.8
106	Antidisturbance switch test		0.40%	3.6.11	4.5.7.13
107	PTB clock count at SD 1 self-destruct signal (under min)		0.40%	3.6.8	4.5.7.11
108	PTB clock count at SD 2 self-destruct signal (under min)		0.40%	3.6.9	4.5.7.10
109	PTB clock count at SD 2 self-destruct signal (under min)		0.40%	3.6.10	4.5.7.9
110	Tripline-sensor interface circuit sensitivity test (test all four inputs)		0.40%	3.6.12	4.5.7.7
111	Piston actuator firing circuit energy output		0.40%	3.6.14	4.5.7.15
112	Pressure cartridge firing circuit energy output		0.40%	3.6.14	4.5.7.15
113	Detonator firing circuit energy output		0.40%	3.6.14	4.5.7.15
114	S&A Arming signal inhibit test		0.40%	3.6.4.1	4.5.7.12
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.14	Electronic Assembly (Performance Characteristics) (145° + 5°F)	5 OF 6	9292725
			NEXT HIGHER ASSEMBLY 9292714

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Primary Time Base (PTB) oscillator period, over max. or under min.	1/	0-1	3.6.2	4.5.7.1
2	Test Time Base (TTB) oscillator period, over max		0-1	3.6.3	4.5.7.2
3	Oscillator check circuit does not detect a PTB period that is greater than the TTB period		0-1	3.6.13	4.5.7.14
4	PTB clock count at SD 1 self-destruct signal (over max)		0-1	3.6.8	4.5.7.11
5	PTB clock count at SD 2 self-destruct signal (over max)		0-1	3.6.9	4.5.7.10
6	PTB clock count at SD 3 self-destruct signal (over max)		0-1	3.6.10	4.5.7.9
7	PTB clock count at S&A arm signal, under min.		0-1	3.6.4	4.5.7.4
8	One or more fuse open		0-1	3.2	Test
9	Blocking or zener diodes have improper polarity; breakover voltage; open/short circuit (SD set circuit)		0-1	3.2	Test
Major					
101	Quiescent current		0.40%	3.6.1	4.5.7.3
102	PTB clock count at pressure cartridge signal incorrect		0.40%	3.6.5	4.5.7.5
103	PTB clock count at electronic arm incorrect		0.40%	3.6.6	4.5.7.6

NOTES: 1/ Sample size for critical characteristics to be the same as determined for Major characteristics. No defective allowed for critical characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.14	Electronic Assembly (Performance Characteristics) (145° + 5°F)	6 OF 6	9292725
			NEXT HIGHER ASSEMBLY 9292714

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
104	Low voltage detect, tripline-sensor and anti-disturbance destruct signals not inhibited before electronic arm		0.40%	3.6.6	4.5.7.6
			0.40%	3.6.7	4.5.7.8
105	Low voltage detect circuit trigger level		0.40%	3.6.11	4.5.7.13
106	Antidisturbance switch test				
107	PTB clock count at SD 1 self-destruct signal (under min)		0.40%	3.6.8	4.5.7.11
108	PTB clock count at SD 2 self-destruct signal (under min)		0.40%	3.6.9	4.5.7.10
109	PTB clock count at SD 3 self-destruct signal (under min)		0.40%	3.6.10	4.5.7.9
110	Tripline-sensor interface circuit sensitivity test (test all four inputs)		0.40%	3.6.12	4.5.7.7
111	Piston actuator firing circuit energy output		0.40%	3.6.14	4.5.7.15
112	Pressure cartridge firing circuit energy output		0.40%	3.6.14	4.5.7.15
113	Detonator firing circuit energy output		0.40%	3.6.14	4.5.7.15
114	S&A Arming Signal inhibit test		0.40%	3.6.4.1	4.5.7.12
Minor	None defined				

NOTES:

D[illegible]-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.15	Selector Switch Assembly				9292609
					NEXT HIGHER ASSEMBLY
					9292714-2
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Height		0.40%	3.2	Gage
102	Binding or sticking of ball after welding		0.40%	3.2	Manual-Auditory
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.16	Housing, Upper, Selector Switch		9292620
			NEXT HIGHER ASSEMBLY
			9292609

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	*			
Major					
101	True position of O-Ring groove dia.		0.40%	3.2	Gage
	with Datum A		0.40%	3.2	Gage
102	O-Ring groove dia.		0.40%	3.2	Gage
103	Width of retaining flange for O-Ring		0.40%	3.2	Gage
104	Height from O-Ring groove to Ret. Flange		0.40%	3.2	Gage
105	Largest outside dia. of boss		0.40%	3.2	Gage
106	Inside dia. - for switch ball		0.40%	3.2	Gage
107	Angular seating requirement for switch ball		0.40%	3.2	Gage
108	Depth of switch ball hole		0.40%	3.2	Gage
109	Radius of pressure cartridge cavity		0.40%	3.2	Gage
110	Length of pressure cartridge cavity from groove				
111	Total height of boss - interface with power supply hsg		0.40%	3.2	Gage
112	Height from face to and including weld tongue (View C-C)		0.40%	3.2	Gage
			0.40%	3.2	Gage
113	Diameter of smallest hole		0.40%	3.2	Gage
114	Height to boss		0.40%	3.2	Gage
115	Length from smallest hole to epoxy groove		0.40%	3.2	Gage
116	Depth of pressure cartridge cavity				
Minor					
201	Ejection pin marks, max. (note 7)		0.65%	3.2.	Gage
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: * See 4.5.1 for qualification and production control of the mold cavities.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.17	Housing, Lower, Selector Switch		9292621
			NEXT HIGHER ASSEMBLY
			9292609

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	*			
Major					
101	Inside diameter - For switch ball		0.40%	3.2	Gage
102	Angular seating requirement for switch ball		0.40%	3.2	Gage
103	Height to boss		0.40%	3.2	Gage
104	Height from largest cavity to boss		0.40%	3.2	Gage
105	Largest outside diameter of boss		0.40%	3.2	Gage
106	Depth of pressure cartridge cavity		0.40%	3.2	Gage
107	Width of pressure cartridge cavity		0.40%	3.2	Gage
108	Smallest outside diameter of boss		0.40%	3.2	Gage
109	Depth of switch ball hole		0.40%	3.2	Gage
110	Diameter of smallest hole		0.40%	3.2	Gage
111	Length from smallest hole to groove		0.40%	3.2	Gage
112	Depth of pressure cartridge cavity from groove		0.40%	3.2	Gage
113	Total height of boss		0.40%	3.2	Gage
Minor					
201	Ejection pin marks, max (note 7)		0.65%	3.2	Gage
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: *See 4.5.1 for qualification and production control of the mod cavities.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.18	Insert				9292629
					NEXT HIGHER ASSEMBLY
					9292713
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	See 4.5.1			
Major					
101	Diameter		0.40%	3.2	Gage
102	Length		0.40%	3.2	Gage
Minor					
201	Chamfer missing, 2 places		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.19	Disc, Polyester, Double Coated				9292637
					NEXT HIGHER ASSEMBLY
					9292713
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Profile		0.65%	3.2	Gage
202	Thickness, max		0.65%	3.2	Gage
203	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.20	Gasket				9292651
					NEXT HIGHER ASSEMBLY
					9292713
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Profile		0.40%	3.2	Gage
102	Thickness		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.21	Terminal		9292628
			NEXT HIGHER ASSEMBLY 9292713

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Solderability	1/	0-1	3.9.1	MIL-STD-202, Method 208
102	Length		0.40%	3.2	Gage
103	Knurl diameter (*)		0.40%	3.2	Gage
104	Total length from flange to knurled end (*)		0.40%	3.2	Gage
105	Diameter of flange (*)		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3..16	Visual

NOTES:

*Reference part source 9292646

1/Sample size for MIL-STD-105, Inspection Level S-4.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	Post, Weld				9292717
					NEXT HIGHER ASSEMBLY
					9292713
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total length		0.40%	3.2	Gage
102	Total height		0.40%	3.2	Gage
103	Total width, 2 places		0.40%	3.2	Gage
104	Height of step relief, 4 places		0.40%	3.2	Gage
105	Height of serrations, 2 places		0.40%	3.2	Gage
106	Width of serrations, 3 places		0.40%	3.2	Gage
107	90° Angle spacing, 3 places		0.40%	3.2	Gage
108	Smallest height		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.23	Spring, Take-up	1 OF 1	9292676
			NEXT HIGHER ASSEMBLY 9292713

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total length - Datum A		0.40%	3.2	Gage
102	Width		0.40%	3.2	Gage
103	Height		0.40%	3.2	Gage
104	Largest radius		0.40%	3.2	Gage
105	Thickness		0.40%	3.2	Gage
106	Hardness Test	5	5-0-1	3.2	Test*
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

*Samples selected shall be tested in accordance with ASTM E 18, Accept 0, Reject 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.24	Cover, Power Supply	1 OF 1	9292614
			NEXT HIGHER ASSEMBLY 9292713

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	*			
Major					
101	Profile/contour		0.40%	3.2	Gage
102	Largest thickness		0.40%	3.2	Gage
103	Hole diameter, 2 places		0.40%	3.2	Gage
104	Location of terminal hole, 2 places		0.40%	3.2	Gage
105	Diameter of center recess		0.40%	3.2	Gage
106	Thickness of center recess		0.40%	3.2	Gage
107	Thickness at triangular recess, 3 places		0.40%	3.2	Gage
108	Height of angular section (View B)		0.40%	3.2	Gage
109	Width at base of angular section (View B)		0.40%	3.2	Gage
Minor					
201	Ejection pin marks, max (note 4)		0.65%	3.2	Gage
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: *See 4.5.1 for qualification and production control of mold cavities.

DP[illegible]-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.25	O-Ring		9292657
			NEXT HIGHER ASSEMBLY
			9292713

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter		0.40%	3.2	Gage
102	Thickness		0.40%	3.2	Gage
Minor					
201	Excess flash - cut or scored finish		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.26	Holder, Lead		9292611
			NEXT HIGHER ASSEMBLY 9292713

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined	See 4.5.1			
Major					
101	Inside diameter		0.40%	3.2	Gage
102	Height of pad above boss		0.40%	3.2	Gage
103	Width (datum -A-)		0.40%	3.2	Gage
104	Length (datum -B-)		0.40%	3.2	Gage
105	Height to shoulder of boss		0.40%	3.2	Gage
106	Length of clearance recess		0.40%	3.2	Gage
107	True position of pad diameter*		0.40%	3.2	Gage
108	Diameter of pad above boss*				
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: *Backing pad or boss for P.W. Board

DLA-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.27	Battery and Lead Assembly				9292678
					NEXT HIGHER ASSEMBLY 9292713
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Pull test, 2 places		100%	3.2	4.5.2
Major					
101	Height of side lead above case		0.40%	3.2	Gage
102	Height of center lead		0.40%	3.2	Gage
103	Length of center lead, max		0.40%	3.2	Gage
104	Length of side lead from top of case		0.40%	3.2	Gage
105	Distance of side lead from top of case, max.		0.40%	3.2	Gage
106	Angular location of side lead		0.40%	3.2	Gage
107	Location of center lead		0.40%	3.2	Gage
108	Solderability, 2 places	*	0-1	3.2	MIL-S-45743
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

* Sample size per MIL-STD-105, Inspection Level S-3

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.28	Circuit Board	1 OF 1	9292654
			NEXT HIGHER ASSEMBLY: 9292652

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Largest outside diameter		0.40%	3.2	Gage
102	Total thickness, max.		0.40%	3.2	Gage
103	Diameter of second smallest hole, 2 places (View B)		0.40%	3.2	Gage
104	Location of second smallest hole, 2 places (note 4)		0.40%	3.2	Gage
105	Diameter of largest solder resist rea, max. (View A) (note 2B)		.040%	3.2	Gage
106	Smallest solder resist area radius (View B) (note 2B)		0.40%	3.2	Gage
107	Outside corner radius, 3 places		0.40%	3.2	Gage
108	Minimum angular ring (note 6)		0.40%	3.2	Gage
Minor					
201	Plating of pad incorrect 9 places (note 5)		0.65%	3.2	MIL-STD-275
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.29	Receiver Coil Assembly	1	1	9292652
				NEXT HIGHER ASSEMBLY: 9292713

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical					
1	Polarity (Direction of turns)		100%	3.2	Electrical
Major					
101	Spacing of coil's 1st turn to edge of circuit board, min. - 3 places		0.40%	3.2	Gage
102	Solder workmanship, 2 places		0.40%	3.16.2	Visual
103	Thickness, max.		0.40%	3.2	Gage
104	Spacing of coil to solder pad, min. - 4 places		0.40%	3.2	Gage
105	Resistance		0.40%	3.2	Milliohmmeter
106	Inductance		0.40%	3.2	Impedance Bridge
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.30	Coil		9292653
			NEXT HIGHER ASSEMBLY 9292652

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter, max.		0.40%	3.2	Gage
102	Inside first coil diameter, min.		0.40%	3.2	Gage
103	Thickness, max.		0.40%	3.2	Gage
Minor					
201	Length of flat, 2 places		0.65%	3.2	Gage
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.31	Retainer, Coil (when used)		9292660
			NEXT HIGHER ASSEMBLY 9292652

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE - INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Thickness		0.65%	3.2	Gage
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.1.32	Housing, Power Supply (Weldment)	1 OF 1	9292617
			NEXT HIGHER ASSEMBLY 9292616

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined				
Major 101	Insulation sleeving around sensor nozzle missing or improper *		0.40%	3.2	Visual
102	Height after welding, max.		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: * Inspection performed prior to inserting sensors

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.33	Housing, Power Supply				9292618
					NEXT HIGHER ASSEMBLY
					9292617
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	*			
Major					
101	Diameter of O-Ring groove		0.40%	3.2	Gage
102	Width of O-Ring groove		0.40%	3.2	Gage
103	Length to and including groove		0.40%	3.2	Gage
104	Total height		0.40%	3.2	Gage
105	Flatness		0.40%	3.2	Gage
106	Largest outside diameter, 2 places		0.40%	3.2	Gage
107	Mismatch of mating parts (note 7)		0.40%	3.2	Gage
108	Width of smallest slot - body orientation, 2 places		0.40%	3.2	Gage
109	Diameter of blind holes - indexing - 4 places		0.40%	3.2	Gage
110	Location of holes in #109		0.40%	3.2	Gage
111	Diameter of hole for Battery Primer		0.40%	3.2	Gage
112	Depth of S&A cavity		0.40%	3.2	Gage
113	Smallest diameter of angular hole, 4 places		0.40%	3.2	Gage
114	Location of holes in #113		0.40%	3.2	Gage
115	Depth of ultrasonic weld grooves, 8 places		0.40%	3.2	Gage
116	True position of O-Ring groove diam		0.40%	3.2	Gage
117	Diameter of S&A cavity		0.40%	3.2	Gage
118	Width of Datum C		0.40%	3.2	Gage
119	Diameter of Terminal Hole, 2 places		0.40%	3.2	Gage
120	Location of Terminal Hole, 2 places		0.40%	3.2	Gage

NOTES:

*See 4.5.1 for qualification and production control of mold cavities.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.4.2.3 Cont'd.	Housing, Power Supply		9292618
			NEXT HIGHER ASSEMBLY 9292617

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Width of tapered slots - 3 for weld posts		0.65%	3.2	Gage
202	Location of slots of #201		0.65%	3.2	Gage
203	Depth of slots of #201		0.65%	3.2	Gage
204	Ejection pin marks above flush (note 8)		0.65%	3.2	Gage
205	Width of ultrasonic weld groove - 8 places		0.65%	3.2	Gage
206	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.34	Plate, Power Supply		9292619
			NEXT HIGHER ASSEMBLY 9292617

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined	*			
Major					
101	Largest outside diameter		0.40%	3.2	Gage
102	Diameter of center hole (S&A)		0.40%	3.2	Gage
103	Length to flat in center hole (S&A)		0.40%	3.2	Gage
104	Length to flats around central cavity, 4 places		0.40%	3.2	Gage
105	Height to weld tongue from Datum D		0.40%	3.2	Gage
106	Height of weld tongue		0.40%	3.2	Gage
107	Thickness to Datum D		0.40%	3.2	Gage
108	Mismatch of mating parts (note 4)		0.40%	3.2	Gage
109	Location of largest outside diameter		0.40%	3.2	Gage
110	Location of lead holder slots, 4 places		0.40%	3.2	Gage
111	Width of lead holder slots, 4 places		0.40%	3.2	Gage
112	Diameter of selector switch hole		0.40%	3.2	Gage
113	Location of selector switch hole		0.40%	3.2	Gage
114	Depth of selector switch hole		0.40%	3.2	Gage
115	Width of Datum B		0.40%	3.2	Gage

NOTES:

*See 4.5.1 for qualification and production control of mold cavities.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.3b Cont'd	Plate, Power Supply				9292619
					NEXT HIGHER ASSEMBLY 9292617
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Largest width of weld tongue		0.65%	3.2	Gage
202	Depth of smallest radius between weld tongue		0.65%	3.2	Gage
203	Width of cutout on outside diameter, 2 places		0.65%	3.2	Gage
204	Height between protrusion in central area 4 places		0.65%	3.2	Gage
205	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.35	Power Supply Housing Assembly				9292616
					NEXT HIGHER ASSEMBLY
					9292713
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of leads after potting, 4 places		0.40%	3.2	Gage
102	Potting above flush, 4 places (note 2)		0.40%	3.2	Gage
103	Leak Test		100%	3.5	4.5.3
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.16	Pin, Retaining, Test Point		9292675
			NEXT HIGHER ASSEMBLY 9292714

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined				
Major					
101	Height of pin above flange bottom		0.40%	3.2	Gage
102	Diameter of hole		0.40%	3.2	Gage
103	Knurl diameter		0.40%	3.2	Gage
104	Length of pin below flange bottom including knurl		0.40%	3.2	Gage
105	Diameter of pin above flange		0.40%	3.2	Gage
106	True position of hole		0.40%	3.2	Gage
Minor					
201	Flange diameter		0.65%	3.2	Gage
202	Incorrect finish		0.65%	3.2	Certification of Conformance
203	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.17	Housing, Upper (Weldment)	1 OF 1	9292633-2
			NEXT HIGHER ASSEMBLY: 9292631

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined				
Major					
101	Insulating sleeving around sensor nozzle missing or improper, *		0.40%	3.2	Visual
102	Height after welding, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workanship		0.65%	3.16	Visual

NOTES: * Inspection performed prior to insorting sensors.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.3.3	Housing, Upper		9292635
			NEXT HIGHER ASSEMBLY 9292633

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	1/			
Major					
101	Diameter of O-Ring groove		0.40%	3.2	Gage
102	Width of O-Ring groove		0.40%	3.2	Gage
103	Length to and including groove		0.40%	3.2	Gage
104	Total height		0.40%	3.2	Gage
105	Flatness		0.40%	3.2	Gage
106	Diameter of holes in flat on O.D., 2 places 5A/4	2/	0.40%	3.2	Gage
107	Location of holes in flat on O.D., 2 places 5A/4		0.40%	3.2	Gage
108	Largest outside diameter, 2 places		0.40%	3.2	Gage
109	diameter of second largest blind hole, 4 places		0.40%	3.2	Gage
110	Location of second largest blind hole, 4 places		0.40%	3.2	Gage
111	Smallest diameter of angular hole, 4 places		0.40%	3.2	Gage
112	Location of holes in CD #111		0.40%	3.2	Gage
113	Depth of ultra sonic weld groove, 5 places		0.40%	3.2	Gage
114	Depth of second largest central cavity S&A		0.40%	3.2	Gage
115	Depth of ring cutout between weld grooves 4 places		0.40%	3.2	Gage
116	Mismatch of mating parts (note 7 of Dwg)		0.40%	3.2	Visual/Gage
117	Diameter of largest hole 5D/3		0.40%	3.2	Gage
118	Diameter of smallest hole, 5D/3		0.40%	3.2	Gage
119	Diameter of holes in holes inflat on O.D., 2 places 4D/4		0.40%	3.2	Gage

NOTES:

1/ See 4.5.1 for qualification and production control of mold cavities.

2/ (Drawing zone locating feature/(Sheet number of drawing)

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.38 Cont'd.	Housing, Upper				9292635
					NEXT HIGHER ASSEMBLY 9292633
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major					
120	Location of holes in holes in flat on O.D., 2 places 4D/4		0.40%	3.2	Gage
121	True position of O-Ring groove diam.		0.40%	3.2	Gage
122	Diameter of second largest central cavity-S&A		0.40%	3.2	Gage
Minor					
201	Width of ultrasonic weld groove, 8 places		0.65%	3.2	Gage
202	Width of tapered slot in outside diameter, 3 places - for weld posts		0.65%	3.2	Gage
203	Location of tapered slot in outside diameter, 3 places		0.65%	3.2	Gage
204	Depth of tapered slot in outside diameter, 3 places		0.65%	3.2	Gage
205	Ejection pin marks above flush		0.65%	3.2	Gage
206	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.39	Plate, Upper		9292634
			NEXT HIGHER ASSEMBLY 9292633

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	*			
Major					
101	Largest outside diameter		0.40%	3.2	Gage
102	Smallest inside diameter		0.40%	3.2	Gage
103	Height of weld tongue		0.40%	3.2	Gage
104	Height of weld point		0.40%	3.2	Gage
105	Mismatch of mating parts (note 4 of Dwg)		0.40%	3.2	Visual-Gage
106	Diameter of central cavity		0.40%	3.2	Gage
107	Thickness to Datum D		0.40%	3.2	Gage
108	Location of largest outside diameter		0.40%	3.2	Gage
109	Diameter of selector switch hole		0.40%	3.2	Gage
110	Depth of selector switch hole		0.40%	3.2	Gage
111	Location of selector switch hole		0.40%	3.2	Gage
112	Width of Datum B				
Minor					
201	Largest width of weld tongue		0.65%	3.2	Gage
202	Depth of smallest radius between weld & tongue		0.65%	3.2	Gage
203	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES: *See 4.5.1 for qualification and production control of the mold cavities.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.40	Shorting Bar, Ceramic	1 OF 1	9292157
			NEXT HIGHER ASSEMBLY: 9292158

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined				
Major					
101	Thickness	10	0.40%	3.2	Gage
102	Solderability		10-0-1	3.9.1	Note 1
Minor					
201	Total height		0.65%	3.2	Gage
202	Total length		0.65%	3.2	Gage
203	Dielectric glaze missing or incomplete		0.65%	3.2	Visual
204	Width of conductive strip, 3 places		0.65%	3.2	Gage
205	Solder coating outside area "A" incorrect		0.65%	3.2	Visual
206	Length of neck, 4 places		0.65%	3.2	Gage
207	Length to outside of two conductive legs		0.65%	3.2	Gage
208	Depth to neck, 4 places		0.65%	3.2	Gage
209	Thickness of Solder Pad (2 places)		0.65%	3.2	Gage
210	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

(1) Per method 208 of MIL-STD-202.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.1.1	Shorting Bar and Connector Assembly				9292158
					NEXT HIGHER ASSEMBLY 9292682
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined				
Major					
101	Solder workmanship incorrect		0.40%	3.16.2	Visual (10x)
102	Evidence of cracks or chips		0.40%	3.2	Visual
Minor					
201	Edge of connector extends beyond ceramic, 2 places		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.42	Shorting Bar				9292682
					NEXT HIGHER ASSEMBLY
					9292713
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Epoxy adhesive missing or applied incorrectly		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.3.43	Upper Housing Assembly		9292631
			NEXT HIGHER ASSEMBLY 9292714

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE INSPECTION METHOD
Critical	None defined				
Major					
101	Lead location after potting, 4 places		0.40%	3.2	Visual
102	Potting above flush, 4 places		0.40%	3.2	Gage
103	Leak test		100%	3.5	4.5.3
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.44	Cushion				9292636
					NEXT HIGHER ASSEMBLY
					9292714
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of smallest holes, 4 places		0.40%	3.2	Gage
102	True position of smallest holes with Datums -A- and -B-		0.40%	3.2	Gage
103	Profile		0.40%	3.2	Gage
Minor					
201	Inside diameter		0.65%	3.2	Gage
202	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.5	Electronic and Housing Assembly		9292714
			NEXT HIGHER ASSEMBLY
			9292713

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined				
Major					
101	Leak test of selector switch and upper housing assembly (immediately following welding)	(a)	0.40%	3.5	4.5.3
102	Height to selector switch		0.40%	3.2	Gage
103	Angularity of selector switch		0.40%	3.2	Gage
104	Test point retainer missing or not secured (note 4) 4 places		0.40%	3.2	Visual
105	Location of sensor wires (note 5), 4 places		0.40%	3.2	Visual
106	Soldering of sensor wires incorrect (note 5) 8 places		0.40%	3.16.2	Visual
107	Folding of flexible wiring incorrect, 2 places		0.40%	3.2	Visual
108	Solder joints not coated (note 6), 8 places		0.40%	3.2	Visual
109	Sensor lead insulation protrudes beyond outside diameter of electronic assy while latter is held against cushion, 8 places		0.40%	3.2	Visual-Manual
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

(a) Sample per MIL-STD-105, Level S-4

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.46	Body Assembly (Assembly of Battery Primer and Insert)				9292713
					NEXT HIGHER ASSEMBLY
					--
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Staking of insert improper, Note 4		0.40%	3.2	Visual
102	Insert or electrical battery primer loose after staking, Note 4		0.40%	3.2	Visual/Manual
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4. ...	Body Assembly (Prior to Bonding of Battery Cells)	1 of 1	9292713
			NEXT HIGHER ASSEMBLY ...

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL (%) OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE OF INSPECTION METHOD
Critical	Soldering of battery cell leads missing or incorrect, 4 places. (note 2)		100%	3.16.2	Visual
Major "101"	Number of layers and position of insulation tape on end of battery cell incorrect (note 5), 4 places		[illegible]	3.2	Visual
""	Insulation disc missing or improperly applied to terminal end of battery cell, 4 places		[illegible]	3.2	Visual
""	Coating of battery cell leads missing or incorrect, 4 places. (note 3)		[illegible]	3.2	Visual
Minor "201"	Evidence of poor workmanship		0.652	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.48	Body Assembly (Prior to Welding the Power Supply Housing Assy and the Electronic/ Housing Assy together)	1 OF 2	9292713
			NEXT HIGHER ASSEMBLY --

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	1/				
1	Presence and safe position of spring loaded interlock		100%	3.10	Gage
2	Safe position of slider release pin and shear pin		100%	3.10	Gage
3	Distance from end of S&A to slider assy, max.		100%	3.10	Gage
4	Safe position of ballbearing, min. dimension of borerider position		100%	3.10	Gage
5	Presence of borerider ball lock		100%	3.10	Gage
Major					
101	Soldering of sensor leads missing or incorrect 8 places, (note 2)		0.40%	3.16.2	Visual
102	Soldering of S&A cables missing or incorrect 3 places; (note 2)		0.40%	3.16.2	Visual
103	Coating of solder joints missing or incorrect, 11 places, (note 3)		0.40%	3.2	Visual
104	Bonding of lead holders incorrect, 4 places, (note 6)		0.40%	3.2	Visual
105	Take-up spring missing or inverted		0.40%	3.2	Visual
106	S&A orientation incorrect		0.40%	3.2	Visual
107	Shorting portion of S&A cable not removed		0.40%	3.2	Visual
108	O-ring missing or not lubricated, (note 8)		0.40%	3.2	Visual
109	Tape on sensor leads missing or incorrect, 4 places		0.40%	3.2	Visual

NOTES:

1/ Safety inspection of S&A assy prior to assembly in Body Assembly.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.48 (cont'd)	Body Assembly (Prior to Welding the Power Supply Housing Assy and the Electronic/ Housing Assy together)	2 OF 2	9292713
			NEXT HIGHER ASSEMBLY --

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
110	Any component missing or incorrect		0.40%	3.2	Visual
Minor 201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.49	Body Assembly (Prior to Assembly of Gasket and Epoxy Putty)		9292713
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	Not defined				
Major					
101	Ultrasonic welding at both ends of weld post incorrect, 3 places, (note 10)		0.40%	3.2	Visual
102	Bonding of battery cells or location of side terminal incorrect, 2 places, (note 5)		0.40%	3.2	Visual
103	Assembly orientation of shorting bars incorrect 2 places - prior to soldering		0.40%	3.2	Visual
104	Seating of terminals prior to soldering incorrect, 2 places		0.40%	3.2	Visual
105	Soldering of shorting bar and battery primer leads missing or incorrect, 6 places (note 2)		0.40%	3.16.2	Visual
106	Height of shorting bar and battery primer solder joints, max (6 places)		0.40%	3.2	Gage
107	Coating of shorting bar and battery primer solder joints missing or incorrect, 6 places, (note 3)		0.40%	3.2	Visual
108	Soldering of flexible circuit to terminals missing or incorrect, 2 places, (note 2)		0.40%	3.16.2	Visual
109	Height of flexible circuit to terminal solder joints, max (2 places)		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.4	Body Assembly (Prior to Assembly Power Supply Cover)		9292713
			NEXT HIGHER ASSEMBLY --

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	Not defined				
Major					
101	Gasket missing or improperly assembled		0.40%	3.2	Visual
102	Epoxy missing from cover, (note 15)		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.40%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.5.1	Body Assembly (Prior to Applying Sealing Compound over Receiver Coil)		9292713
			NEXT HIGHER ASSEMBLY --

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	Not defined				
Major					
101	Welding of power supply cover incorrect (before assembly of coil)		0.40%	3.2	Visual
102	Bonding of receiver coil incorrect		100%	3.2	Visual
103	Soldering of receiver coil to terminals missing or incorrect, 2 places, (note 2)		0.40%	3.16.2	Visual
104	Distance from end of body assembly to end of terminals and terminal solder joints, min (2 places)		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.40%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5[illegible]	Body Assembly (Final)				9292713
					NEXT HIGHER ASSEMBLY
					--
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Resistance across shorted firing capacitor		100%	3.7.1	4.5.4
2	Distance from end of S&A to slider assy, max.		100%	3.10	Gage
Major					
101	Soldering of pressure cartridge to electronic assembly incorrect, 2 places		0.40%	3.16.2	Visual
102	Potting of pressure cartridge missing or incorrect		0.40%	3.2	Visual
103	Coating of pressure cartridge solder joints incorrect, 2 places, (note 3)		0.40%	3.2	Visual
104	Sealant over coil is over flush, (note 19)		0.40%	3.2	Visual
105	Solder joints and receiver coil not covered by potting, (note 19)		0.40%	3.2	Visual
106	Outside diameter, max		0.40%	3.2	Gage
107	Overall height		0.40%	3.2	Gage
108	Tripline circuit resistance, max (4 places)		100%	3.11	4.5.4
109	Resistance of receiver coil circuit		100%	3.11	4.5.4
110	Resistance of pressure cartridge ckt		100%	3.11	4.5.4
111	Resistance of Piston Actuator ckt		100%	3.11	4.5.4
112	Resistance of Detonator ckt		100%	3.11	4.5.4
113	Unactivated cell voltage, max, 2 places		100%	3.11	4.5.4
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-63512(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.53	Body Assembly (Packaging, Packing)		9292713
			NEXT HIGHER ASSEMBLY
			--

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conductive foam material missing from terminal pads 2 places		0.40%	5.1	Visual
102	Barrier bag missing or improperly sealed		0.40%	5.1	Visual
103	Separators and cushioning between barrier bag and outer box improper or missing		0.40%	5.2	Visual
104	Marking missing, incorrect or illegible		0.40%	5.3	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.16	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.54	Body Assembly		9292713
			NEXT HIGHER ASSEMBLY
			--

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	LOT ACCEPTANCE TESTS	(a)			
Critical					
1	Unsafe after transportation-Vibration		0-1	3.3.1	4.5.5
2	Premature arming, detonation		0-1	3.4	4.5.6.4 (See Note b)
3	Hazardous dud		0-1	3.4	4.5.6.4
Major	PERFORMANCE TEST: LAUNCH/FUNCTION	(a)	-	3.4	4.5.6
101	Tripline (TL)/Break wire (BW), self-destruct (SD), or antidistrubance (AD) failure		-	3.4	4.5.6
102	Early SD		-	3.4	4.5.6

NOTES:
(a) See Sheet 2
(b) Acoustic sensor shall be used for monitoring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4.2.54 (cont'd) Body Assembly

LOT ACCEPTANCE: TEMPERATURE CONDITIONING - LAUNCH - FUNCTION

ACCEPT/REJECT 1/

Body Insp	Assy Lot	Sample Size	-40 -5°F					Ambient					145 +5°F					Failure Dud	Early SD	Hazardous Dud	Premature arming or detonation
			TL/BW	SD	SD	SD	AD	TL/BW	SD	SD	SD	AD	TL/BW	SD	SD	SD	AD	*			
501-1200		45	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	1-2	2-3	0-1	0-1
1201-3200		75	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	2-3	4-5	0-1	0-1
3201-10k		105	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	3-4	6-7	0-1	0-1

* Includes TL/BW, SD & AD failures.

NOTES:

1/ See 6.9 for definitions of defects listed above under accept-reject.
2/ See 4.5.6.5 for data to be recorded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First Article and Quality Conformance Inspection "Classification of Defects and Test" forms and in 4.5 and as follows.

4.4.3.1 Potting material testing. The potting material shall be checked for tensile strength, and hardness in accordance with DWG 9287148. Two test samples shall be molded per the drawing for each batch of mixed material or each 1,000 electronic assemblies assembled during continuous production, or each day's production, whichever comes first. One test sample will be used for testing and one retained per the drawing. Identification shall be maintained between the sample and assemblies. Failure of the test specimen to comply with the requirements shall result in rejection of the lot of electronic assemblies assembled from that batch of potting material.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in Classification of Defects and Tests forms beginning with paragraph 4.4.2.1. The Contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and section 6.3 herein.

4.4.5 Test mine assembly. A test mine Drawing (9347080) having the equivalent testing features of a regular mine but containing inert filler and no explosive boosters will be used for lot acceptance and first article sample test of the Body Assembly.

4.4.6 Launcher simulator. An air gun shall be used as a launcher for lot acceptance testing. Design to be submitted in accordance with 6.3. The air gun shall have the following features:

a. Impart sufficient velocity to the mines to provide impacts of 150 + 6.0 feet per second (fps).

b. Provide for borerider release after ejection from the muzzle but prior to impact, (launch with borerider clip installed).

c. Provide the interface with the SD setter to initiate the mine prior to/at launch.

4.4.6.1 SD setter. The SD setter shall provide the MCD signal necessary to initiate and set the proper SD time into the mine. The signals necessary to perform this function are contained on Drawing 1183AS616, Standard Waveform. Design to be submitted in accordance with 6.3.

4.4.7 Impact medium. The impact or target material will simulate an asphalt surface and will consist of three (3) 1.5 inch thick particle boards (Chipboard), with a density of 30 $\pm$ 2 pounds per cubic foot, with a 1/2 in. thick steel back-up plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5 Test methods and procedures.

4.5.1 Dimensional control of molded or plastic parts. In place of the normal sampling and inspections associated with the Classification of Defects, and after a curing time for the parts has been approved (See Note 1), a sample of three (3) parts (as molded) from each cavity shall be fully inspected dimensionally (all dimensions on drawing) to qualify a new or reworked cavity for use in production. The molded parts shall carry the individual cavity identification. As a control of each cavity during production, the above quantity of parts from each cavity shall be inspected for at least the defects listed in paragraphs 4.4.2.1 through 4.4.2.54, after continuous production of each 5,000 parts or at the end of each week, whichever occurs first. Of the three (3) samples, one (1) sample shall be the last part produced. If any defective parts are found during qualification of the cavity, the cavity producing the defective part(s) will not be used in production. If any defective parts are found when inspection is performed for the control of the cavity, the cavity producing the defective part(s) shall be removed from production. Further, that portion of production since the last control check shall be returned to the contractor for inspection for each separate type of defect according to MIL-STD-105, using an AQL of 0.40 percent for each major defect and an AQL of 0.65 percent for each minor defect. All cavities removed from production because of some fault, may, after reworking, be returned to production providing they pass the qualification test above. The contractor may request a change of inspection frequency providing he presents objective evidence to the Contracting Officer to substantiate the request. Contractor designs of gages and test equipment required to perform the inspections listed herein shall be submitted in accordance with paragraph 4.4.4 and section 6.3 herein for approval prior to manufacture of equipment. The noted sub-paragraphs identify those items and minimum inspections subject to the requirements of this paragraph.

NOTE 1: In establishing a curing time, dimensionally check ten (10) parts from each cavity at periodic intervals (e.g. every 30, 60 etc. minutes) until dimensional stability is attained. The curing time will be from the time the part comes out of the mold until dimensional stability is attained. The inspection data used in determining the curing time shall be submitted in accordance with 6.5. If there is a change in material, or in the cycle time, or if a cavity is reworked, or a new cavity is used, a new curing time shall be established and approved.

NOTE 2: Those features of a part which are subsequently machined or otherwise worked upon to meet its drawing requirements shall be inspected in accordance with the classification of defects.

4.5.2 Pull test of battery and lead assembly leads. Dwg 9292678 - The assembly shall be placed in an approved test fixture and the pull load requirement specified on the drawing shall be applied. Observation shall be made for compliance with the applicable drawing requirement. (Non-destructive test)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.3 Ultrasonic welded assemblies.

4.5.3.1 Seal Leak Test of the power supply housing assembly and upper housing assembly. The integrity of the seal or quality of the weldment and applicable subsequent potting shall be verified by subjecting the assemblies to an internal pressure of 75 + 3 psig and measuring the pressure drop in a five (5) second minimum time interval. A leak rate in excess of that specified in 3.5 shall indicate excessive leakage and reject the assembly. Dry nitrogen shall be used to apply the required pressure and the assembly under test shall be held in a fixture such that the fixture will not aid the sealing being tested. The test fixture shall incorporate a means for sealing the outside parts of the four sensors. (Non-destructive test).

4.5.3.2 Torque test of selector switch assy. The required torque shall be applied between the selector switch assy and the upper housing assy of the Electronic and Housing Assembly, Dwg 9292679. The resistive force shall act on the upper housing assy. Observation shall be made for conformance to the requirement of 3.5.2. (Non-destructive test).

4.5.4 Electrical circuit checks of body assemblies. Dwg 9292713. The circuits checks as listed in Table II shall be performed on the complete Body Assemblies. Body Assemblies failing the requirements listed shall be rejected. (Non-destructive test.)

TABLE II. Body Assembly electrical checks prior to packaging.

	ELECTRICAL CHECK	TEST POINTS 1/	REQUIREMENT
1.	Short Across Firing Capacitor	8 to 13	0.7 Ohms max 3/
2.	Unactivated Battery Cell #1 Voltage	18 to 8	0.005 VDC Max 2/
3.	Unactivated Battery Cell #2 Voltage	10 to 18	0.005 VDC Max (Note 2)
4.	Tripline Resistance (#1 & 7)	3 to 8	6.0 Ohms Max
5.	Tripline Resistance (#2 & 6)	4 to 8	6.0 Ohms Max
6.	Tripline Resistance (#3 & 8)	1 to 8	6.0 Ohms Max
7.	Tripline Resistance (#4 & 5)	2 to 8	6.0 Ohms Max
8.	Receiver Coil Circuit Resistance	5 to 8	0.8 - 1.4 Ohms
9.	Pressure Cartridge Resistance	19 to 8	1.0 - 6.0 Ohms
10.	Piston Actuator Resistance	20 to 8	4.0 - 9.5 Ohms
11.	Detonator Resistance	17 to 8	3.0 - 7.5 Ohms

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

1/ See Dwg 9292725 for test point locations.

2/ For voltage checks use a voltmeter with a 10 Megohm input impedance.

3/ For resistance checks, use a milliohmmeter having a short circuit current of 1 ma or less e.g. Valhalla Igniter circuit checker.

4.5.5 Transportation-Vibration. The test samples (without borerider clip installed) shall be serialized and secured in fixtures, then assembled to the table of the vibrator and tested in accordance with Test 119, Procedure 2, of MIL-STD-331. Observation shall be made for compliance with the requirement of 3.3.1. Samples shall be used in subsequent testing.

4.5.6 Performance tests of body assemblies. After completion of the transportation vibration, the test sample (without borerider clip installed) shall be divided in the required groups for temperature conditioning. Each group shall be subjected to only one temperature for a minimum period of four (4) hours as specified in 3.3.2. The test assemblies shall be taken from the conditioning chamber and tested as follows:

Within five (5) minutes after being removed from the conditioning chamber, the test samples shall be launched to enable the S&A's, activate the battery cells and set the self destruct feature for the desired SD time (see 4.4.6). After enable time has occurred, the test samples shall be functioned in the three following modes: 1. AD mode; 2. Tripline mode; 3. Self destruct mode (Destructive Tests). Enable time is defined as the maximum Electronic Arm Time specified on Dwg 9292730, plus one (1) hour, minimum.

4.5.6.1 Anti-disturbance (AD) Mode functioning. Following launch (see 4.5.6) and, after enable time has occurred, the test sample shall then be subjected to the following:

(a) Functioned by rocking or jarring the mine, (two (2) attempts).

(b) If no detonation is detected, attempt to function by tripline activation. (see 4.5.6.2).

(c) Failing (b), item shall be monitored until expiration of the selected SD time.

(d) Observe and record the number and length of triplines deployed per mine.

(e) Observation shall be made for compliance with the requirements of 3.4 and Dwg 9292730.

(f) Subsequent to the test and observing necessary safety precautions, the tested assemblies shall be dismantled and failure analyzed. For duds, allow a min. of 24 hours after SD3 time out (see 4.5.6.3.a). Failure analysis shall include cause of tripline nondeployment. (Destructive test)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.6.2 Tripline (TL) Mode Functioning. Following launch (see 4.5.6), and after enable time has occurred, the samples selected for TL test shall be functioned as follows:

(a) Attempts shall be made to function the item by applying a gradual increasing pull force, in turn, to each tripline available until detonation occurs.

(b) Observe and record the number and length of triplines deployed per mine; the number and types of failures prior to the successful attempt and the pull force when detonation occurred.

(c) If detonation does not occur in (a), attempt shall be made to functon Body Assy in AD mode (see 4.5.6.1).

(d) If unsuccessful in (a), and (b), the assy shall be monitored until expiration of selected SD time.

(e) Observation shall be made for compliance with the requirement of 3.4 and Dwg 9292730.

(f). Subsequent to the test and observing necessary safety precautions, the Tested Assemblies shall be dismantled and failure analyzed. For duds, allow a min of 24 hours after SD3 timeout (see 4.5.6.3.a). Failure analysis shall include cause of tripline nondeployment. (Destructive test)

4.5.6.3 Self Destruct (SD) Mode. The test sample selected for SD mode (set at launch), shall be subjected to the following:

(a) Assemblies failing to function at the end of the programmed interval shall be made to function in AD mode (see 4.5.6.1) and/or Tripline mode (see 4.5.6.2). Failing all three modes the unit shall be set aside for 24 hours for later dismantling and analysis with precautions taken as noted above.

(b) Observe and record the number of triplines deployed per mine.

(c) Observation shall be made for compliance with requirements of 3.4 and Dwg 9292730.

(d) Subsequent to the test and observing necessary safety precautions, the Tested Assemblies shall be dismantled and failure analyzed. For duds, allow a min of 24 hours after SD3 timeout (see 4.5.6.3.a). Failure analysis shall include cause of tripline nondeployment. (Destructive test)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.6.4 Disposition of Duds. Procedural plans or methods for disposing of duds by either safely dismantling and failure analysis, or by safely detonating shall be furnished to ARRADCOM for approval see 6.6. Caution: When depleted, battery cells become unstable and generate high internal pressures.

4.5.6.5 Recording of performance data. The following performance data shall be recorded with serial numbers:

a. Orientation of body assemblies.

b. Time to arm (MCD input to actuation of micropiston actuator).

c. The time for triplines to deploy after launch.

d. The number of broken triplines per mine.

e. The number of main charge leads that functioned.

f. The number of triplines deployed per mine.

g. The pull force at which each tripline broke and assembly functioned in TL mode.

h. The number and type of tries before detonation.

i. Time from launch to SD function.

j. The number of duds.

k. Length of deployed triplines.

l. The number of hazardous duds.

m. After failure, analysis record cause of malfunctions.

4.5.7 Electronic assembly tests. Increasing the PTB oscillator frequency to reduce test time is acceptable provided the higher frequency oscillator signal maintains an approximate 50% duty cycle and has a peak amplitude frequency oscillator signal which does not cause or mask malfunctions in the functional operation of the electronic assembly; the higher frequency oscillator signal is well within the capability of the test equipment to monitor and control it with an accuracy of one cycle; the actual procedure used to increase the frequency of the signal is approved by the government before it is implemented. When the PTB oscillator frequency is increased, the TTB oscillator frequency is to be proportionately increased or the TTB oscillator inhibited, as applicable, for the test being implemented. All testing shall be performed, unless otherwise specified, at a supply voltage of 6.50 ± 0.15 volts, an ambient temperature of 70° + 5°C, and a relative humidity of 60 ± 20%. Also, the rise time of the supply voltage applied to the electronic assembly under test shall not be less than 5 milliseconds nor greater than 50 milliseconds. The following tests (4.5.7.9 through 4.5.7.11) are to be performed in sequence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.7.1 Primary Time Base (PTB) period test. With the electronic assembly under test connected to the test fixture and with both the primary and test time base circuits oscillating at their natural frequency, measure the period of the PTB oscillator (Test point TP11 or TP14). Observation shall be made for compliance with the applicable requirement, on Drawing 9292730 (see 3.6.2). (Non- destructive test.)

4.5.7.2 Test Time Base (TTB) period test. With the electronic assembly under test connected to the test fixture and with both the primary and test time base oscillators operating at their natural frequency, measure the period of the TTB oscillator (Test point TP6 or TP15). Observation shall be made for compliance with the applicable requirement, on Drawing 9292730 (see 3.6.3). (Non-destructive test.)

4.5.7.3 Quiescent current test. With the electronic assembly under test connected to the test fixture; the tripline-sensor interface circuit test points TP1, TP2, TP3 and TP4 connected to the ground; the piston actuator terminal (E30), the pressure cartridge terminal (E32), and the detonator terminal (E29) each connected to the ground through a 10 ohm resistor, measure the quiescent current of the electronic assembly. Observation shall be made for compliance with the requirement specified in 3.6.1. (Non-destructive test.)

4.5.7.4 S&A assembly arm signal test. With the electronic assembly under test connected to the test fixture, verify that the S&A assembly arm signal occurs at the PTB clock count specified on group A Drawing 9292730 (See 3.6.4). This test requires that both oscillators be operating at their natural frequency. (Non-destructive test)

4.5.7.5 Pressure cartridge signal test. With the electronic assembly undertest connected to the test fixture, verify that the pressure cartridge signal occurs at the PTB clock count specified on group A Drawing 9292730 (See 3.6.5). This test requires that both oscillators be operating at their natural frequency. (Non-destructive test)

4.5.7.6 Electronic arm test. With the electronic assembly under test connected to the test fixture, verify that electronic arming occurs at the PTB clock count specified on Drawing 9292730 (See 3.6.6). Make the verification by incorporating, as a minimum, the following checks in the test procedure:

(a) At the PTB clock count of 3 (+2) less than that required for electronic arm, open circuit one of the four tripline-sensor interface circuit input terminal and confirm that the detonator firing circuit does not turn on.

(b) At the PTB clock count of 3 (+2) greater than that required for electronic arm, open circuit one of the four tripline-sensor interface circuit input terminal and confirm that the detonator firing circuit is turned on. (Non-destructive test.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.7.7 Tripline sensitivity test. With the electronic assembly under test connected to the test fixture, verify that each input of the tripline-sensor interface circuit meets the sensitivity requirement specified in 3.6.12. Make this verification by incorporating, as a minimum, the following checks in the test procedures:

(a) Prior to the electronic assembly power up, connect each tripline-sensor interface circuit input (TP-1, TP-2, TP-3, and TP-4) to ground through a 10 ohms load.

(b) After electronic arm, confirm that the detonator firing circuit is not turned on when the resistance at the tripline-sensor interface input under test is increased to 3.9×10^3 ohms. Continue increasing the resistance and confirm that the detonator firing circuit is turned on before a resistance of 10×10^3 ohms is reached. The change in resistance from 10 ohms to 3.9×10^3 ohms to 10×10^3 ohms is to be continuous. (Non-destructive test)

(c) Reset the electronic assembly and repeat (b) above for each tripline-sensor interface circuit input.

(d) Open circuit all the tripline-sensor interface circuit inputs, then reset the electronic assembly and confirm that the detonator firing circuit does not turn on after electronic arm. (Non-destructive test.)

4.5.7.8 Low voltage detect test. With the electronic assembly under test connected to the test fixture, verify that the low voltage detect circuit initiates the turn on of the detonator firing cirucuit when the supply voltage is reduced to the low voltage detect circuit trigger level specified in Group A of Drawing 9292730 (See 3.6.8). For this test it is required that electrical arming has occurred. The initial supply voltage shall be 6.5 + 0.15 volts and linearly reduced at a rate of 0.40 (max) volts/second until the low voltage detect circuit is triggered. Observation shall be made for compliance with the applicable requirement. (Non-destructive test.)

4.5.7.9 SD 3 self-destruct signal test. With the electronic assembly under test connected to the test fixture and the fuses simulated open by connecting TP32 to the positive voltage supply, verify that the SD 3 self-destruct signals, that initiate the turn on of the detonator firing circuit, occur at TP7 and at the PTB clock count specified in Group A of Drawing 9292730 (See 3.6.10). After 64 min, 128 max, additional PTB clock counts verify that the detonator firing signal (TP7) turns off and the PA firing signal (TP12) turns on. This test is to be conducted before the SD 2 self-destruct test (4.5.7.10). (Non-destructive test.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.7.10 SD 2 self-destruct signal. With the electronic assembly under test connected to the test fixture, and the fuzes simulated open by connecting TP33 to positive voltage supply, verify that the SD 2 self-destruct signals, that initiate the turn on of the detonator firing circuit, occur at TP7 and at the PTB clock count specified in Group A of Drawing 9292730 (See 3.6.9). After 64 min, 128 max, additional PTB clock counts verify that the detonator firing signal (TP7) turns off and the PA firing signal (TP12) turns on. This test is to be conducted before the SD1 self-destruct test (4.5.7.11). (Non-destructive test.)

4.5.7.11 SD 1 self-destruct signal. With the electronic assembly under test connected to the test fixture, verify that the SD 1 self-destruct signals, that initiate the turn on of the detonator firing circuit, occur at TP7 and at the PTB clock count specified in Group A of Drawing 9292730 (See 3.6.8). After 64 min, 128 max, additional PTB clock counts verify that the detonator firing signal (TP7) turns off and the PA firing signal (TP12) turns on. (Non- destructive test.)

4.5.7.12 S&A arm signal inhibit test. With the electronic assembly under test connected to the test fixture, and the TTB clock not running, verify that the S&A arming signal does not occur at the PTB clock count specified on group A drawing 9292730 (see 3.6.4.1). (Non-destructive test.)

4.5.7.13 Anti-disturbance function mode. With the electronic assembly under test connected to the test fixture so that its plane makes an approximate 45 degree angle with the horizontal, verify the anti-disturbance function mode by slowly rotating the electronic assembly about its cylindrical axis and confirming that the detonator firing circuit turns on before a 360 degree rotation is made (See 3.6.11). (Non-destructive test.)

4.5.7.14 PTB oscillator circuit check. With the electronic assembly under test connected to the test fixture and both the PTB and TTB oscillator circuits operating at their natural frequencies and after electronic arming has occurred, verify that the oscillator check circuit is operational by confirming that the oscillator check circuit initiates the turn on of the detonator firing circuit within 2 TTB clock counts after the PTB oscillator is stopped (See 3.6.13). (Non-destructive test.)

4.5.7.15 Firing circuit energy. With the electronic assembly under test connected to the test fixture, verify that the piston actuator, pressure cartridge, and detonator firing circuits meet the requirements specified in 3.6.14, 3.6.14.1, 3.6.14.2, 3.6.14.3. (Non-destructive test.)

4.5.7.16 High temperature test. With the electronic assembly under test at the high test temperature of 145° + 5°F and connected to the test fixture, verify that the electronic assembly complies with the requirements of paragraph 3.8. The electronic assembly is to be conditioned at 145° + 5°F for two (2) hours (minimum) prior to, the start of this test, and maintained for the duration of the test. (Non-destructive test.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.7.17 Low temperature test. With the electronic assembly under test at low test temperature of minus 40° -5°F and connected to the test fixture, verify that the electronic assembly complies with the requirements of paragraph 3.7. The electronic assembly is to be conditioned at minus 40° -5°F for two (2) hours (minimum) prior to the start of this test and maintained for the duration of the test. (Non-destructive test.)

4.5.8 Switch assembly (Anti-disturbance switch)

4.5.8.1 AD switch function and closure time duration. The switch assembly shall be placed in an approved fixture. The fixture shall be capable of rotating the switch assembly through 360°on its cylindrical axis, while the axis is held at 15°+ 2°referenced to the horizontal, for both CW and CCW directions of rotation. Verify that the functional requirements of the drawing are met. This is a non-destructive test.

4.5.8.2 Insulation resistance of AD switch. The switch assembly, when in a suitable fixture, shall be measured for insulation resistance in the rest position using an approved megohmmeter. Observation shall be made for compliance with the requirements of the drawing. This is a non-destructive test.

4.5.9 Printed wiring board cleaning procedures. Printed wiring board assembly cleaning procedures shall be documented and supplied to the Government in accordance with Data Item DI-T-5372. (See 6.7).

4.5.10 Integrated circuit handling procedures. CMOS integrated circuits require care and handling to avoid damage due to static discharge. The contractor shall document his handling procedure for the CMOS integrated circuits and supply the procedure to the government (See 6.7). Adherence to the handling procedure shall be verified daily. (Ref. DI-T-5372).

4.5.11 Material control. The contractor shall submit, to the technical agency listed in 6.5, a material control document in accordance with paragraph 3.13. This document shall detail the procedures that will be used to assure that only components, material and subassemblies from qualified suppliers are used to manfuacturer the BLU 92/B Body Assembly (see 6.4).

4.5.12 Soldering procedures. All soldering procedures with respect to pre and post cleaning, touch up or rework, and workmanship (as applicable to the requirements of para. 3.9) shall be submitted for government approval (See 6.7).

5. PACKAGING

5.1 Packaging and marking. The body assembly shall be packaged in accordance with level B of MIL-P-14232 with the following mandatory requirements: The two terminal pads shall be wrapped with conductive foam material and each body assembly shall be wrapped to preclude foreign matter settling inside body assembly; the items shall be packaged in a fiberboard box and separated by loose partitions and separators as required. Cushioning as needed shall be used; the fiberboard box shall be sealed in a barrier bag conforming to Type I, Class F, style 1, Spec MIL-B-117.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

5.1.2 Level A. The Electronics Assembly shall be preserved and packaged in accordance with the requirements of MIL-E-17555 as applicable to printed circuit boards. Each electronic assembly shall be individually cushioned and secured to prevent any movement or damage to any of its parts. Folding of the flexible PWC leads is not permitted.

5.2 Packing. The body assemblies in box and barrier bag shall be packed in accordance with level B of MIL-P-14232 and Code of Federal Regulations, Title 49 with the following mandatory requirements: The outer packing box shall be wood conforming to Class 1, Style 4, of PPP-B-621 or fiberboard conforming to Spec 12H, 23F, or 23H of code of Federal Regulation, Title 49; Sufficient cushioning and separators must be used between the barrier bag and outer box to prevent damage to the items or tearing of the barrier bag.

5.2.1 Level A. The Electronic Assembly, preserved and packaged as above, shall be packed in accordance with the requirements of MIL-E-17555 as applicable to printed circuit boards.

5.3 Marking. The marking of the outer box shall be in accordance with MIL-STD-129, The Commercial Requirements of MIL-STD-1188 and DOT marking per Code of Federal Regulation, Title 49. Marking indicating the components are fragile electronics shall be employed.

5.4 Shipping. When Body Assemblies from more than one lot are shipped at one time, each lot shall be kept separate, and the division between lots clearly indicated to prevent mixing of the lots in transit.

6. NOTES

6.1 Intended use. The Body Assemblies covered by this specification are intended for use in Mine, Antipersonnel: BLU-92/B.

6.2 Ordering data. See Section 6.1 of MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078) Submit equiipment designs as required to : Commander, U.S. Army Armament Research and Development Command, ATTN: DRDAR-QAT-I, Dover, New Jersey 07801.

6.4 Submission of plans for approval. The plans required in Section 4.5.6.5 and 4.5.11 shall be submitted for approval to: Commander, ARRADCOM, Dover, NJ 07801, ATTN: DRDAR-QAT-M.

6.5 Submission of Process Control Document. Process control documents as specified in 3.12 shall be submitted in accordance with DI-P-1604 (Mod) with Attachment 1 listed on DD Form 1423 incorporated in the contract.

6.6 Distribution of ammunition data cards, inspection and test results, process controls. Distribution of ammunition data cards, inspection, and test results inspections shall be sent to: Commander, U.S. Army Armament Research and Development Command, Attn: DRDAR-QAT-M, Dover, New Jersey 07801

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

6.7 Data requirements. When this specification is used in an acquisition which incorporates a DD From 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph No.	Data Requirement	Applicable DID No.
6.5	Manufacturing Methods Report	DI-P-1604 (Mod)
4.5.9	Printed wiring board cleaning procedures	* DI-T-5372 (Tailored)
4.5.10	Integrated circuit handling procedures	* DI-T-5372 (Tailored)
4.5.12	Quality assurance soldering plan	* DI-T-5372 (Tailored)
4.4.2.1.4 & 4.4.2.5.4	Quality Inspection Defect Report (Critical Defects Only)	DI-R-1721
4.3, 4.4.2.5.4 & 4.5.6.5	Quality Inspection Test Demonstration and Evaluation Report	** DI-R-1724 (Tailored)

* Delete a, b, c, d of previous paragraph 1 block 10, DD Form 1664, and substitute contractor designated parameters and limits.

** DI-R-1724 (Tailored) with block 10 modifications dated 15 October 1981.

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

6.8 First article. Provisions for first article as specified in sections 3 and 4.

6.9 Definitions.

(a) Premature Arming is defined as arming of the S&A Assy (actuation of micropiston actuator) prior to minimum arming time specified on Dwg 9292730.

(b) Premature Detonation is defined as detonation of an armed S&A Assy prior to the minimum electronic arm time specified on DWG 9292730.

(c) Early Self Destruct is defined as detonation of an armed S&A occurring at or after the minimum electronic arm time specified on DWG 9292730 but prior to the set SD time period, or prior to being functioned by AD or TL Mode.

(d) Low Order Detonation for the Body Assembly DWG 9292713 is defined as detonation of an armed S&A where only two main charge leads detonate properly.

(e) Hazardous Dud is defined as any armed mine body assy which detonates after the programmed SD time has elapsed by any of the following:

(1) Actuation by prime fuze.

(2) Being disturbed.

(3) Power source run-down.

(f) A Non-Hazardous Dud is defined as a mine/body assy which will not detonate by conditions 1, 2, or 3 listed under Hazardous Dud.

(g) Tripline failures are defined as any of the following:

(1) Less than 28 meters of total effective length of deployed TL.

(2) Failure of two (2) breakwires to function mine.

6.10 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARRADCOM.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project 1345-A-174

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

APPENDIX

Supplemental Soldering Provisions

10 SCOPE

10.1 Scope. The appendix details supplemental soldering provisions to MIL-S-45743 for hand soldering and to MIL-S-46844 for machine soldering. The appendix is not a mandatory part of the specification. This information contained herein is intended for information only.

20 APPLICABLE DOCUMENTS

This section is not applicable to this appendix.

30 REQUIREMENTS

30.1 Exception/clarification to requirements of MIL-S-45743. The following exceptions/clarifications to reference MIL-S-45743 paragraph titles shall apply.

a. Control of airborne contaminants. Delete the sentence, "Positive pressure shall ... between them."

b. Soldering irons and resistance soldering irons. Delete the sentence, "The soldering iron shall ... or standby condition.", and substitute the sentence, "The soldering iron shall be a soldering iron approved by the technical agency or a soldering iron that attains a temperature no more than 10°F (5.6°C) above the control temperature when in an idling or standby condition."

c. Printed board terminations., Subparagraph 'b'. Change to read "... is permissible. Leads shall not extend, beyond the terminal pad or printed wiring pattern, far enough to cause less than .015 inches of clearance between conductors."

d. Printed board terminations., Subparagraph 'd'. Change to read, "When leads cannot be clinched per above, they shall extend through the printed board, be visible and properly soldered."

e. Ribbon lead geometry. Add new sentence, "Ribbon lead termination from battery and lead assembly, shall comply with "Printed board terminations", subparagraph 'b'."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

30.2 Exceptions/clarifications to requirements of MIL-S-46844. The following exceptions/clarifications to reference to MIL-S-46844 paragraph titles shall apply.


a. Flux application. Change to read "... even coated surface. Any thinner used shall be a product from the flux manufacturer recommended for the specified flux being utilized or a substitute approved by the technical agency."

b. The solder contact. Add: "Bonded components or clinched leads are acceptable restraints provided they are implemented in a manner to assure that the leads do not move during the solder cycle."

30.3 Supplemental solder workmanship standards.


30.3.1 General. The following solder workmanship standards supplement the workmanship requirements contained in MIL-S-45743 and MIL-S-46844 and are provided as additional aids in establishing the minimum acceptance standards for soldering. All examinations will be performed using a minimum 5 diopter lens. Suspected connections may be examined using 10x magnification to determine acceptability.

30.3.2 Lead, solder side. Exposed end (except copper) are visible at the end of the end. Lead is not closer than .015" to adjoining conductive circuitry. Maximum solder is permissible. Solder fillet is depressed, but the depression is less than 25% of the board thickness.

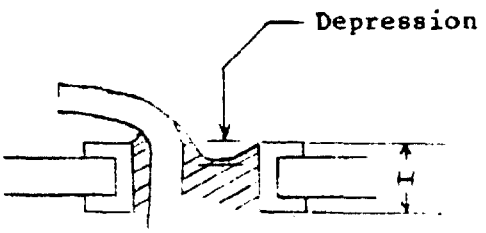

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

30.3.3 Component alignment.

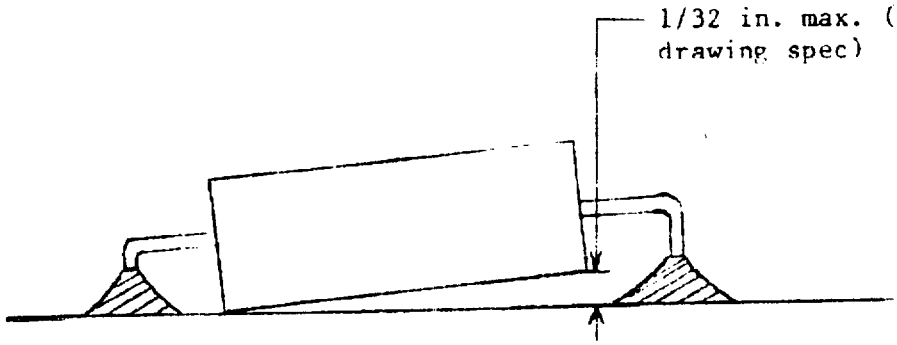


Vertical misalignment of component and printed wiring board is not in excess of 1/32 in. (or as specified on engineering drawing).

30.3.4 Scratches.

1. Scratch does not reduce cross-sectional area of conductor more than 23%


2. Does not visibly expose base metal.

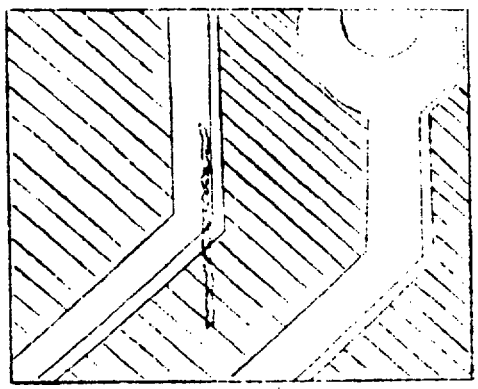

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

APPENDIX

30.3.5 Shorting bar soldering. This section described the acceptance criteria for solder connections of terminal to pad on ceramic substrate. All examinations shall be performed with 10x magnification (Microscope).

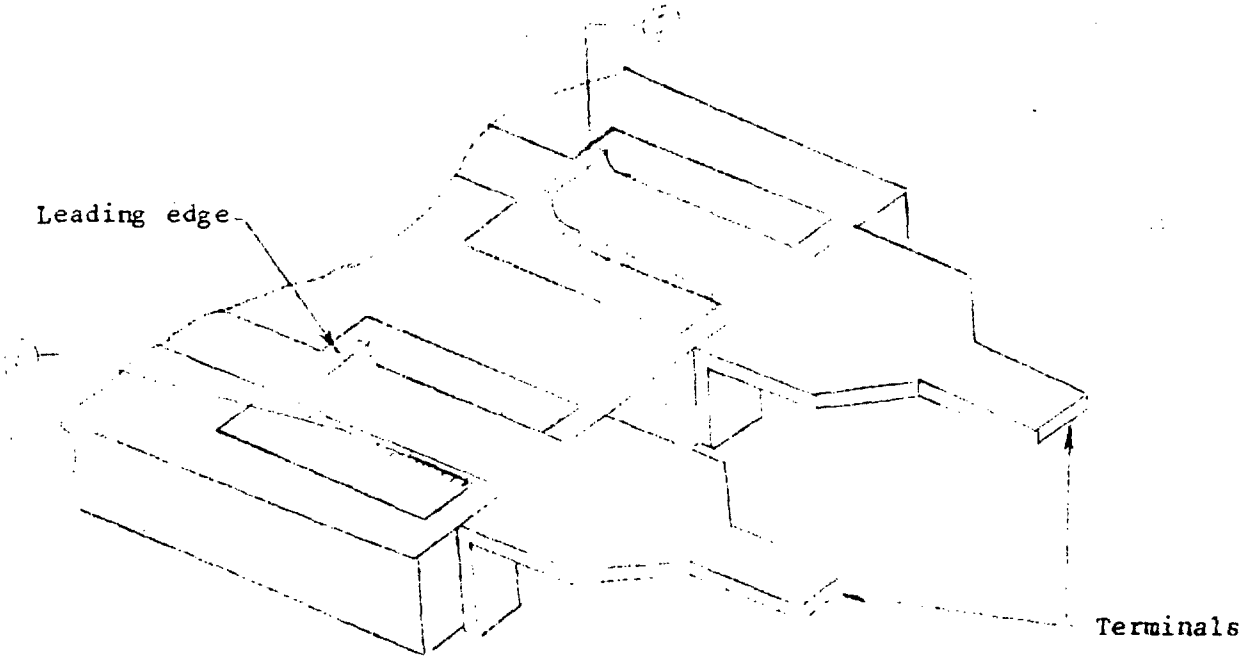

PREFERRED


1. Terminals are straight, paralled to and centered on solder pad.
2. Solder fillets are continuous on all edges for the entire length of terminal/pad interface without voids.
3. Solder wetting is evident on terminal edges and solder pad.

ACCEPTABLE

4. Solder is continuous and wetted on the entire leading edge and along both sides for 50% of the terminal/pad interface. No cracks or voids may appear between terminal and solder pad in the solder area.
5. Solder is continuous and wetted on the leading edge and one (1) of two (2) edges of terminal for the entire length of the solder pad/terminal interface. No cracks or voids may appear between terminal and solder pad in solder area. There must be evidence of some solder wetting on opposite edge.
6. Solder fillet, 3/4 thickness of terminal, minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.


APPENDIX

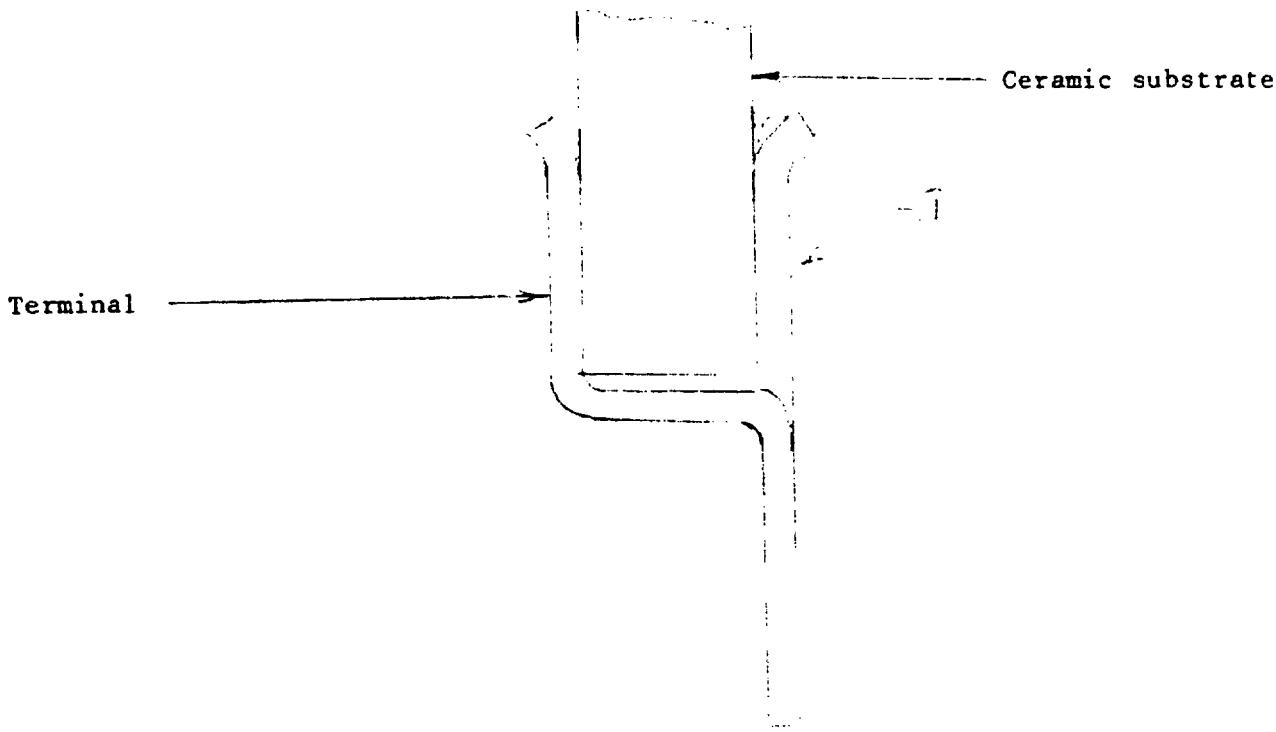

ACCEPTABLE


1. Solder buildup is not greater then one (1) terminal thickness.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

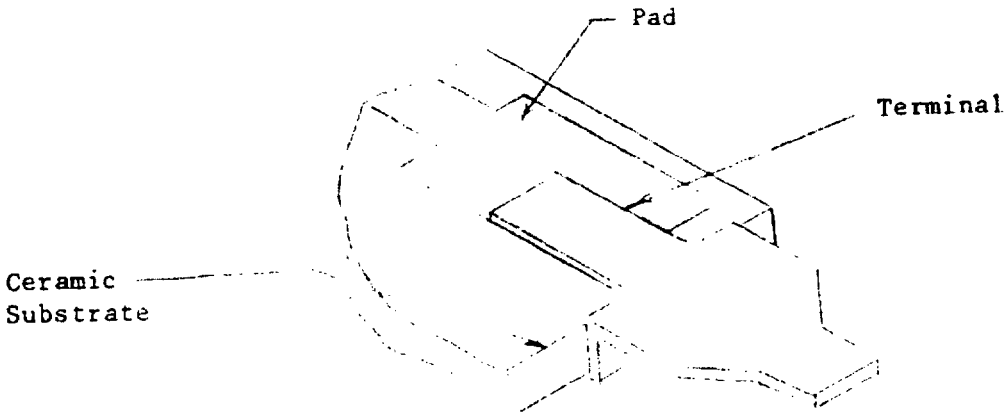

ACCEPTABLE MINIMUM

Terminal edge coincident with pad edge

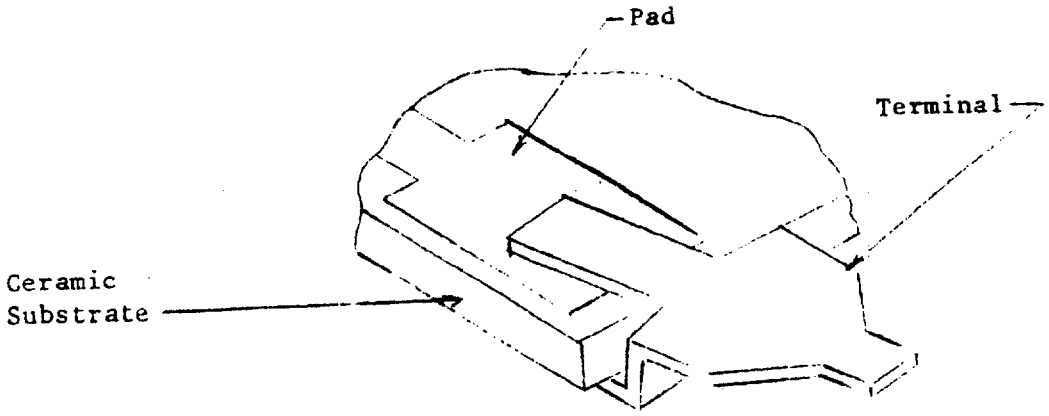


ACCEPTABLE MINIMUM

Terminal slightly skewed, but does not extend beyond pad edge.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

APPENDIX

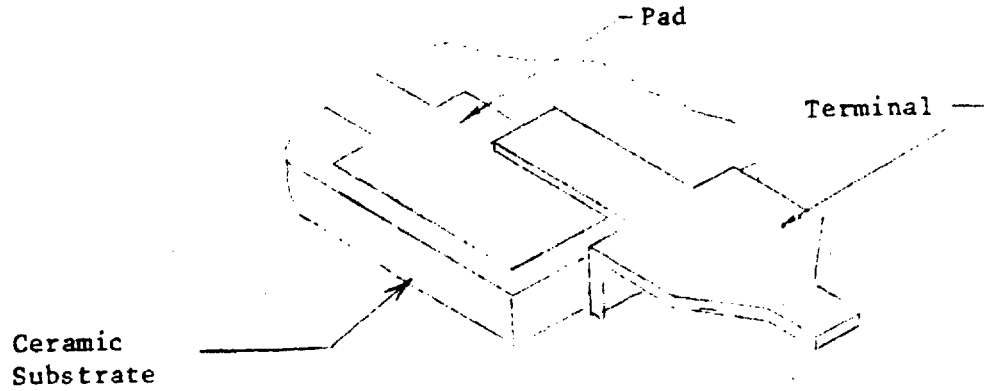

UNACCEPTABLE

TERMINAL OVERLAPS PAD

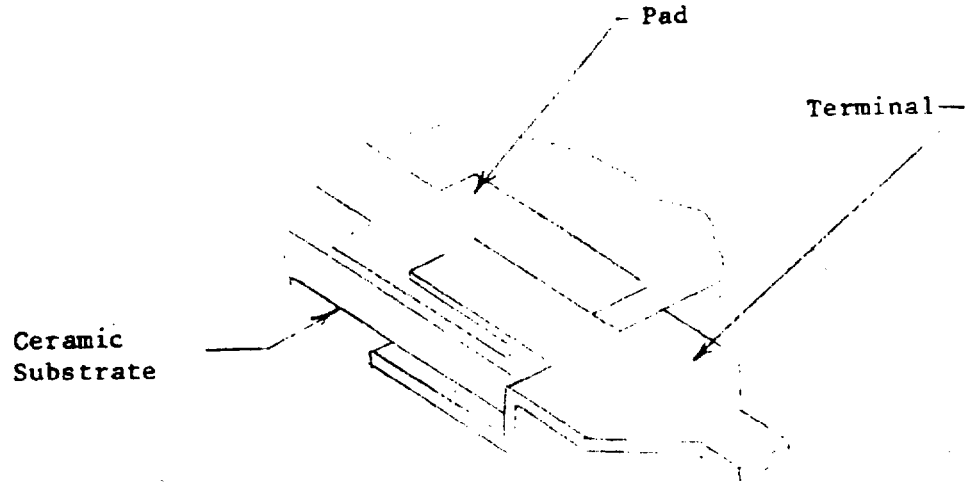


UNACCEPTABLE

Terminal overlaps ceramic substrate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

APPENDIX

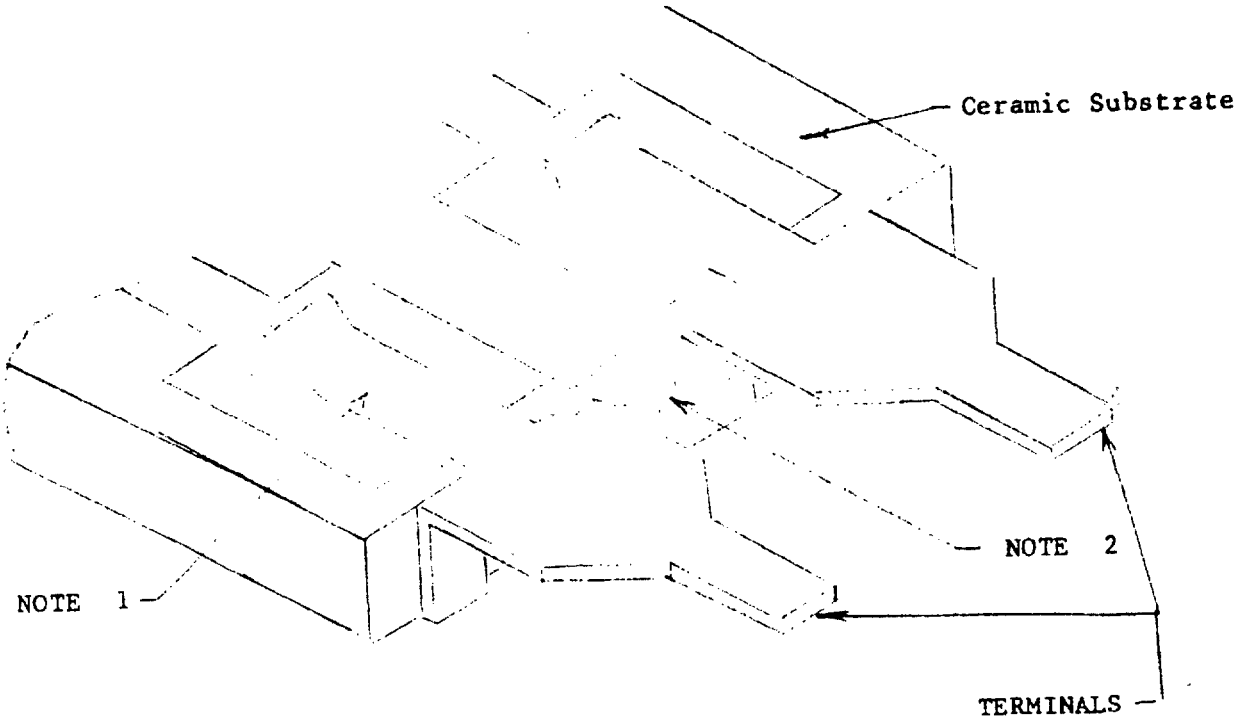

UNACCEPTABLE

NOTES:

1. Gaps in solder fillet exceed Note 4 of figure showing perferred assembly.
2. Bridging between terminals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

APPENDIX

40 QUALITY ASSURANCE PROVISIONS

40.1 Exceptions/clarifications to quality assurance provisions of MIL-S-45743. The following exceptions/clarifications to reference MIL-S-45743 paragraph titles shall apply.

a. One hundred percent inspection. Delete and substitute the following: "Level of inspection. Inspection of soldered connections and associated wiring and leads shall be performed to the level specified in the classification of defects in the product specification. Table II of MIL-S-45743 provides a list of defects with reference to the applicable requirements."

b. Visual inspection. Change to read "... a clear incandescent or fluorescent light should be used for detection of uncovered copper."

40.2 Exceptions/clarifications to quality assurance provisions of MIL-S-46844. The following exceptions/clarifications to reference MIL-S-46844 paragraph titles shall apply.

a. One hundred percent inspection. Delete and substitute the following: "Level of inspection. Inspection of soldered connections and associated wiring and leads shall be performed to the level specified in the classification of defects in the product specification. Table II of MIL-S-45743 provides a list of defects with reference to the applicable requirements."

b. Visual inspection. Change to read "... a clear incandescent or fluorescent light should be used for detection of uncovered copper."

40.3 Supplemental quality assurance provisions.

40.3.1 General. The following quality assurance provisions supplement the provisions contained in MIL-S-45743 and MIL-S-46844 and are provided as additional aids in establishing the minimum acceptance standards for soldering. All examinations will be performed using a minimum 5 diopter lens. Suspect connections may be examined using 10x magnifications to determine acceptability.

40.3.1.1 Major defect inspection.2

a. A board will be defined as defective during inspection if:

(1) The bottom contains any joints defined as unacceptable by MIL-S-45743, MIL-S-46844, or sections 30 and 40 of this appendix.

(2) The top contains any joint defined as unacceptable by the documentation listed in 1 above except twelve (12) joints are allowed to be dewetted. A dewetted joint on the top must have evidence of solder in the hole when viewed from the top.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

APPENDIX

40.3.1.2 Minor defect inspection.

a. Inspection shall be on the sample size inspected for major defects.

b. A board will be defined as defective if it contains three (3) or more minor defects.

c. Accept/reject criteria for the lot shall be to a 4.0% AQL, MIL-STD-105, Level II, normal sampling plan.

d. Minor defects are defined as the following:

(1) Conductive surfaces closer than .010" but greater than .005" assembly characteristics only, not relative to the printed wire board construction.

(2) Copper showing.

(a) Clipped lead - evidence of good wetting and reflow must be present.

(b) Non-clipped lead - characteristic of good solder joint, i.e., wetting, etc., must be present.

(3) Solder splash (attached and not shorted).

(4) Solder balls less than .005".

50 PACKAGING

This section is not applicable to this appendix.

60 NOTES

60.1 Definitions.

60.1.1 Voids. All holes, pits, and voids regardless of size are defined as voids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.