INCH-POUND

MIL-C-82111A(MC)
31 OCTOBER 1990
SUPERSEDING
MIL-C-82111(MC)
5 January 1966

MILITARY SPECIFICATION

COVER, PURSE: WOMEN'S (OFFICER'S)

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a women's purse cover.

1.2 Classification. The purse cover shall be of one type in black shade 2606.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: The Commandant of the Marine Corps (PSE), Headquarters, U.S. Marine Corps, Washington, D.C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC-N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Governments documents.

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
DDD-L-20	-	Label; For Clothing, Equipage, and Tentage, (General Use)

MILITARY

MIL-C-21115	-	Cloth, Tropical: Wool, Polyester/Wool

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables For Inspection By Attributes
MIL-STD-129	-	Marking For Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents order desk, Bldg 4D, 700 Robins Avenue, Philadelphia, PA 19111-5094).

2.2 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issue of the document which is DoD adopted is that listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issue of a document not listed in the DODISS is the issue of the document cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification takes precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the contractor (see 6.4). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article approval. Unless otherwise specified (see 6.2), before production is commenced, a finished cover shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with applicable provisions of the specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, tropical, polyester/wool blend, conforming to type III of MIL-C-21115. The color of the cloth shall be black shade 2606, except the colorfastness to perspiration shall not apply.

3.3.2 Cotton thread. The cotton thread shall conform to V-T-276, type IC2, mercerized finish, ticket No. A, 3-ply for seaming, overedge, and stitching. The thread for basting shall be a good commercial grade.

3.3.2.1 Color and colorfastness. The color of the thread shall be black to match the basic material. The colored thread, shall show good fastness to wet (dry) cleaning when tested as specified in the applicable thread specification.

3.3.3 Label. Each cover shall have an identification label conforming to Type I, class 1 of DDD-L-20, and shall measure not less than 3 by 1 inches. Fastness to wet (dry) cleaning shall apply. The content and format shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Nomenclature (item description)
Name of contractor
Wool Products Act information
Stock number

3.4 Design. The cover shall be the U.S. Marine Corps design shown on the attached figure 1.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 3/8 inch seam allowance.

3.5.1 List of pattern parts. Covers shall be cut from the specified material in accordance with the pattern parts indicated:

Item	Pattern nomenclature	No. of cut parts
	Material: Cloth, tropical, polyester/wool blend	
1.	Body piece (pocket and flap)	1

3.6 Construction.

3.6.1 Manufacturing requirements. The covers shall be manufactured in strict accordance with the operations and the stitch, seam, and stitching types specified in table I.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in table I but all operations specified shall be used to manufacture the cover.

3.6.1.2 Stitches, seams, and stitching. The stitch, seam, and stitching types specified in table I shall conform to FED-STD-751. The number of stitches per inch as specified in table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Serge stitching. Serge stitching shall be done on serging machines having a knife attachment properly set to trim the raveled edges without cutting the material.

3.6.1.2.2 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements.

	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
1. Cutting.					
a. Cut covers in strict accordance with patterns furnished by the Government.					
b. Cut material in the direction indicated by directional lines on the pattern.					
2. Replacement of damaged parts.					
a. Replace, at time of cutting, the component parts containing damages, such as holes; or serious weakening defects, such as smashes, multiple floats, and slubs likely to develop into holes.					
b. Replace component parts damaged during the manufacturing process by needle chews, which may be expected to develop into holes; scissors or knife cuts; tears; mends; or burns.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
3. Serge stitch ends. (See figure 1, Folding and stitching details)					
Finished appearance. The ends of the body piece shall be properly serge stitched.					
a. Serge stitch top and bottom ends of body piece. When a serging machine having a knife attachment is used, care shall be exercised in setting the gage so that only the raveled edge of the material is trimmed off.	503 or 505	EFd-1 EFd-1	6-8 6-8	A A	A A
4. Stitch identification label to pocket.					
a. Center the identification label horizontally at the bottom serged end of the pocket (see figure 1). Stitch 1/16 inch from each edge of the label.	301	SSa-1	6-8	A	A
5. Make cover. (See figure 1, Folding and stitching details)					
Finished appearance. The cover shall finish with the facing of the material on the outside.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
Make cover. (cont'd)					
a. Fold the body piece widthwise matching the second and third notches from the bottom end.					
b. Turn the folded edge at the notch towards the top end of the cover to form the bellows pleat. Seam and overedge stitch, with a 3/8 inch seam from the raw side edges for a distance of approximately 3 inches from the folded edge. Turn the serged edge of the pocket opening at the notch towards the bottom of pocket. Fold the body piece widthwise at the notches for the flap. Lap the serged edge of the flap over the folded serged edge of pocket opening. Continue the stitching to the folded edge of the flap.	301 and 506 (combined)	SSa-2	10-14	A	A
6. Finish cover.					
a. Turn the cover right side out, completely working out the corners and folding bellows pleat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

		Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Finish cover. (cont'd)					
	b. Baste along the folded edge of the bellows pleat, and the side, and top edges of the cover.	301 or Hand				
	c. Press the cover smooth and flat with a heated pressing machine.					
7.	Clean cover.					
	a. Pull any basting thread, trim and remove any loose ends of thread, and remove any spots or stains.					
8.	Press cover.					
	a. Press the cover smooth and flat with a heated pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Finish measurements. The finished cover shall conform to the measurements shown in figure 1.

3.8 Workmanship. The finished cover shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the contractor may use his own or any other facilities acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and service conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (4.4)
b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with MIL-STD-105 or applicable paragraphs of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.4 First article inspections. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.5.2.1 and 4.5.2.2. The presence of any defect or failure to pass any test shall be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer (see 6.2).

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be made in accordance with applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing specified in MIL-STD-105 and FED-STD-191, wherever applicable, shall be followed. All requirements are applicable to the sample unit. The unit for expressing lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specifications.

4.5.2 Examination of the end item. The end item shall be examined for defects listed in 4.5.2.1 and 4.5.2.2. The sample unit for the examination shall be one purse cover. The inspection level shall be II (see 6.5).

4.5.2.1 Classification of defects. All defects shall be classified as indicated below.

Examine	Defect	Classification Major	Classification Minor
Material defects and workmanship damages	a. Any hole, needle chew, cut, tear, mend, or burn.	101	
	b. Any weakening defect, such as a smash, multiple float, or loose slub.	102	
	c. Unsightly slub or shade bar.		201

Note: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Non-weakening conditions which are inconspicuous shall not be classified as defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Cleanness	a. Any spot or stain on outside.		202
	b. Thread ends not trimmed or loose threads not removed.		203
Components and assembly	a. Any component not as specified; or any component part omitted.	103	
	b. Any required operation omitted.		204
Cutting	Cover not cut in accordance with directional lines on pattern or specification requirements.		
Seams and stitching	a. Accuracy of seaming:		
	1. Seam twisted, puckered, or pleated, affecting appearance.		205
	2. End of seam, when not caught in other seam or stitching, backtacked less than 1/4 inch.		206
	3. Thread break (all stitch types) stitched less than 1/2 inch beyond each end of break.		207
	b. Open seams - over 1/4 inch to 1 inch inclusive	104	
Note:	One or more broken, or two or more continuous skipped, or runoff stitches, constitute an open seam. Raw edges not caught in stitching shall be classified as an open seam.		
	c. Runoffs: on joining seams, when resulting in an open seam, score as open seam.		208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
	d. Seam and stitch type: not specified seam or stitch type.		209
	e. Stitch tension:		
	1. Loose tension, resulting in a loose seam.	105	
	2. Loose tension, resulting in a loosely exposed lower or top thread.	106	
	3. Tight tension, stitches break when normal strain is applied to the seam or stitching.	107	
Note:	Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting a pull in the lengthwise direction of seam of stitching.		
	f. Stitches per inch:		
	1. Less than minimum specified -one or two stitches.		210
	2. More than maximum specified.		211

Note: To be scored only when the condition exists on a major portion (i.e., over one half or more) of seam.

4.5.2.2 Size measurements. Any measurement deviating from nominal dimensions (± 1/4 inch) on each measurement given in figure 1 will be considered a size measurement defect. The inspection level shall be S-3 (see 6.5).

4.5.2.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking comply with section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of bundles is more or less than required. Number of covers per bundle is more or less than required (see 1/). Class shown on one or more covers not as specified on container (see 1/).

1/ For this defect, one bundle from each container in the sample shall be examined.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each cover shall be folded widthwise and placed in an individual polyethylene bag measuring approximately 6-1/2 inches wide by 10 inches long with a one inch lip at the open end along the 6-1/2 inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Prior to or during final heat sealing operations, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. The covers shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be commercial.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

5.2.1 Commercial. Covers, packaged as specified in 5.1.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers shall be marked in accordance with requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification.

Nomenclature
Stock Number
Contract Number
Name of Contractor

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The purse cover described herein is intended for use by female officers of the U.S. Marine Corps to cover an evening dress purse.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Whether first article is required (see 3.2).
c. Acceptance criteria (see 6.5).

6.3 Samples and shade samples. For information regarding the availability of sample of cover, and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first article, preproduction samples, first production of sample(s) taken from the first lot depending on the contractor's history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instruction in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 1.5 for major defects, 4.0 for major and minor A combined is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.6 Subject term (key word) listing.

Black
Evening dress

Preparing Activity
Navy-MC
Project No. 8445-N111

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

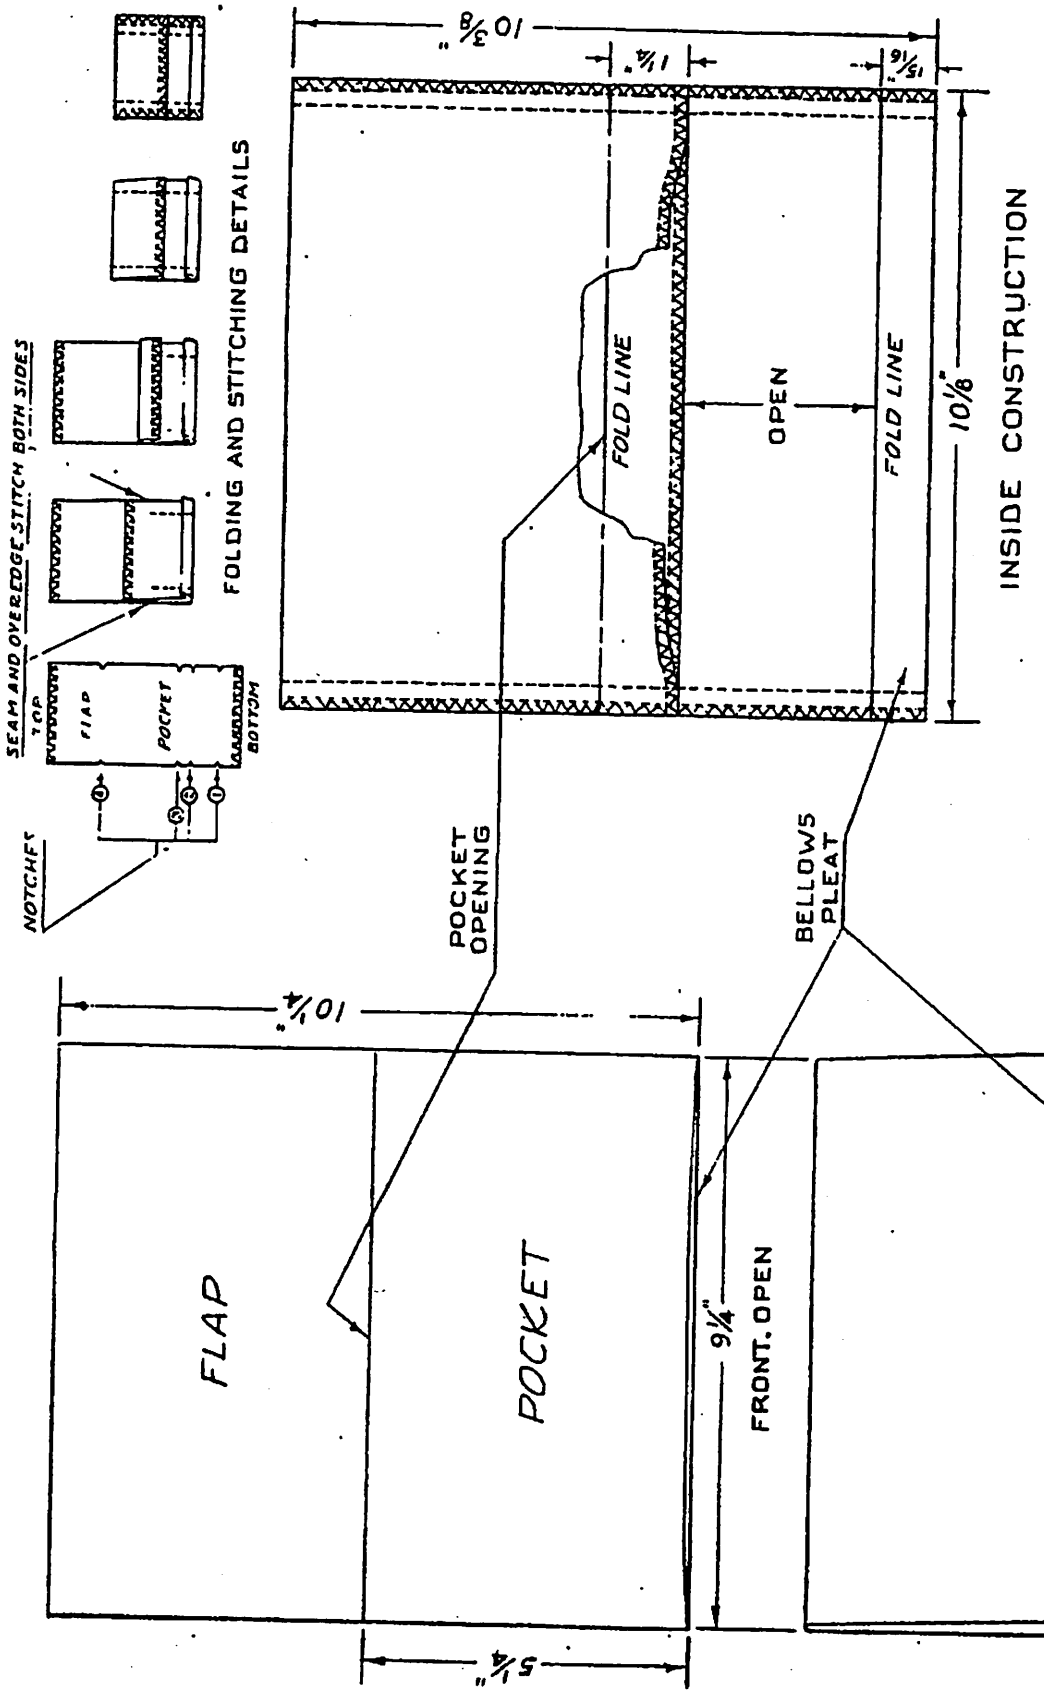


FIGURE 1. COVER, PURSE: WOMAN'S, OFFICER'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-82111A(MC)	31 OCTOBER 1990

3. DOCUMENT TITLE

COVER, PURSE: WOMEN'S (OFFICERS)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(1) Commercial (202) 696-1186/87/88	(2) AUTOVON 226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.