INCH-POUND

MIL-C-82114B(MC)

16 December 1994

SUPERSEDING
MIL-C-82114A(MC)
22 May 1981

MILITARY SPECIFICATION
COAT FRONT: FOR COATS, MUSICIANS

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for coat fronts designed to be used in the manufacture of coats worn by U. S. Marine Corps musicians.

1.2 Classification. Coat fronts shall be of one type and shall be furnished in the following classes and sizes (see 6.2).

Class 1 - For Coat, Man's, Musician's
Class 2 - For Coat, Woman's, Dress Blue (Ceremonial)
Class 3 - For Coat, Woman's, Full Dress (Musician's)
Class 4 - For Jacket, Woman's Full Dress and Jacket, Woman's Special Full Dress (Musician's)

Schedule of Sizes

Men's

Short	Regular	Long	Extra Long
34, 35, 36, 37, 38, 39,	40, 41, 42,	44, 46	

Women's

XO, 2, 4, 6, 8, 10, 12, 14, 16, 18

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50129	- Cloth, Flannel, Lightweight
A-A-52094	- Thread, Cotton
C-F-206	- Felt, Sheet, Cloth Felt, Wool, Pressed
UU-P-268	- Paper, Kraft, Wrapping
DDD-L-20	- Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	- Box, Shipping, Fiberboard

MILITARY

A-A-52105	- Cloth, Interlining, Cotton or Synthetic and Spun Hair-Wool or Rayon Filling
A-A-52106	- Cloth, Twill or Plain Weave, Polyester, or Polyester Blend

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents and publications. The following government document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issues of the documents cited in the solicitation (see 6.2).

Department of Defense (DoD) Standard Shades for Buttons, 1966

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads, 1968

(Copies may be obtained from the Color Association of the United States, Inc., 200 Lexington Avenue, New York, NY 10016.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples are furnished solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article consisting of the number of finished coat fronts specified by the procuring activity (see 6.2) shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of the specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material for coat fronts shall be cotton warp and spun hair-wool filling interlining cloth conforming to type I of A-A-52105.

3.3.2 Haircloth. The chest piece and the reinforcement piece for the top front corner of the left and right coat fronts shall be haircloth made with natural color, 2-ply cotton yarn in the warp and natural horsehair in the filling. The finished cloth shall have a minimum thread count of 60 per inch in the warp and 40 per inch in the filling, shall weigh not less than 4.5 ounces per square yard, and shall contain not more than 1.0 percent of non-fibrous material (see Section 4, Table II). The horsehair shall meet current quarantine laws and pertinent regulations of the U. S. Department of Agriculture as set forth in the Code of Federal Regulations.

3.3.3 Padding. The padding shall be flannel or felt conforming to the following.

3.3.3.1 Flannel. The material shall be cloth, cotton flannel, unbleached, double napped, conforming to A-A-50129.

3.3.3.2 Felt. The felt shall be pressed wool conforming to the requirements for type III (roll felt), classification 11A2 of C-F-206, 3.5 ounce.

3.3.4 Polyester twill. The pieces to cover the exposed bottom edge of the haircloth chest piece and to cover the haircloth reinforcement piece at the top front corner of coat fronts and front edge of chest piece (see Figure 1) shall be cloth, twill, polyester and cotton 2.9 ounce, lightweight conforming to class 2 of A-A-52106, in natural shade.

3.3.5 Thread. The thread shall be cotton, soft finish, unbleached or white, ticket No. 70, 2-ply, conforming to type I of A-A-52094.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.6 Labels. Each coat front shall have an identification label (applicable only when coat fronts are purchased directly by the Government), and a size marking conforming to the requirements of DDD-L-20. The label shall show fastness to dry cleaning.

3.3.6.1 Identification. The identification label shall conform to type IV, class 1 of DDD-L-20, except that the characters of the inscription shall be not less than 1/4 inch in height, and shall be applied directly above the size label.

3.3.6.2 Size. The size label shall conform to type IV, class 2, of DDD-L-20, except that the characters of the inscription shall not be less than 1/2 inch in height and shall be applied to the bottom end of each front. The size marking shall include the numerical designation followed by S for Short, R for Regular, L for Long, and XL for Extra Long. Each coat front shall be marked to indicate the left front and the right front preceding the size designation with the letters LT for left and RT for right as shown in the following examples:

LT 37-38-39R RT-37-38-39L

3.4 Design. The coat fronts shall be as shown in Figures 1 through 4. Classes 1, 2, 3, and 4 are designed for coats with stand-up collars worn by the U. S. Marine Corps Band, and Drum and Bugle Corps and Ceremonial personnel.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size and directional lines for cutting, and are marked or notched for proper placement and assembly of component parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.5.1 List of pattern parts. The coat fronts shall be cut from the specified materials in accordance with the number of pattern parts indicated.

Item	Pattern Nomenclature	No. of cut parts
	Material: Basic	
1.	Body part	2
2.	Shoulder dart stay	2
3.	Waist dart stay	2
	Material: Haircloth	
4.	Chest piece	2
5.	Top front corner reinforcement	2
	Material: Felt or Flannel	
6.	Chest padding	2
	Material: Cloth, Twill, Polyester/Cotton	
7.	Top front corner reinforcement and chest piece front edge covering	2
8.	Chest piece bottom edge covering	2

3.6 Construction.

3.6.1 Manufacturing requirements. The coat fronts shall be manufactured in accordance with the operations and the stitch type specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the coat fronts.

3.6.1.1 Stitches and stitchings. The stitch type specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2 Pressing. Steam shrinkage and dry pressing operations specified in Table III shall be performed on steam pressing machines shaped for right and left fronts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting.					
	a. Cut coat fronts in strict accordance with patterns furnished.					
	b. Cut the material in the directions indicated by directional lines on pattern.					
2	Replacement of damaged parts.					
	a. Replacement at time of cutting any part containing damages, such as holes or seriously weakening defects, such as smashes, multiple floats and slubs likely to develop into holes.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns and large exposed drill holes.					
3	Make coat fronts.					
	a. Abut or overlap (1/8 inch) the edges of the shoulder and waist darts on the front sections and stitch together through the polyester/cotton dart stay.	304	FSa-1 or Lsa-1	4-8	70/2	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3	Make coat fronts. (cont'd) The abutted or overlapped edges may be stitched together prior to stitching through stay.					
	b. Abut or overlap (1/8 inch) the edges of the shoulder and waist darts on the chest piece and stitch together.	304	FSa-1 or LSa-1	4-8	70/2	70/2
	c. Position the haircloth reinforcement piece at the top front corner of the coat front on the inner side of the body sections. Place the chest piece on top of the haircloth reinforcement; place the padding and the polyester/ cotton covering for the front edge on top of the chest piece. Quilt all parts together with vertical rows of stitching 3/8 to 3/4 inch apart, and with curved rows toward the armhole. The padding shall extend beyond the armhole, and the shoulder portion shall be left open to accommodate the shoulder pads.	304	FSa-1 or LSa-1	4-8	70/2	70/2
	d. Place the polyester/ cotton covering over bottom edge of chest piece and stitch both edges of cover to fronts.	304	FSa-1 or LSa-1	4-8	70/2	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3	Make coat fronts. (cont'd) e. Steam shrink fronts and press dry to conform to shape of body. f. Pair one right front with one left front of the same size.					
4	Labels. a. Each finished coat front shall have the identification and size labels applied as indicated (see 3.3.6) on the respective figures.					

3.7 Workmanship. The coat front shall conform to the quality and grade of product established by this specification. The number of defects shall not exceed the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105 except where otherwise indicated.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated coat front for conformance to all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be made in accordance with subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. In addition to testing provisions contained in subsidiary specifications and standards, testing shall be performed on components in Table II for characteristics noted. When the data in the "Determinations per sample unit" and the "Results reported as" columns are not specified in Table II, they shall be as required by the referenced test method. The method of testing shall be as specified in FED-STD-191, wherever applicable.

4.5.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling for testing shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample unit for testing the haircloth shall be 1 yard full width. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 to 22,000	3
22,001 and up	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II - Test Methods

Component	Characteristics	Rqmt. para.	Test method	Det. per S/unit	Results reported as
Haircloth	Material identification -warp 1/	3.3.2	1200	1	Pass or Fail
	-filling	3.3.2	Std. Comm'l		
	Yarn ply, warp	3.3.2	Visual	1	Pass or Fail
	Yarns per inch	3.3.2	5050		
	Weight oz. per sq. yd.	3.3.2	5041		
	Non-fibrous material	3.3.2	2611		

1/ A certificate of compliance will be acceptable for this requirement.

4.5.2 Examination of end item. The end item shall be examined for defects listed in 4.5.2.1. The sample unit shall consist of a pair of coat fronts.

4.5.2.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Material defects	a. Any weakening defect such as a hole, smash, multiple float or loose slub.	101		
	b. Cut, tear, needle chew or burn.	102		
	c. Permanent crease on lapel part.	103		
Cleanness	a. Ink, oil, grease spot or stain.		201	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Component and assembly	Any component part or required operation omitted. (Unless otherwise indicated herein.)	104		
Cutting	Any component part not cut in accordance with directional lines indicated on pattern or in accordance with specification requirements.		202	
Pressing	Omitted on one or both fronts, or not pressed to conform to shape of body.	105		
Seams and Stitching	a. Part of front caught in an unrelated operation or stitching.	106		
	b. Any part badly pleated or puckered in stitching.		203	
Stitches missing or broken	More than 1 inch in length in one or more places.		204	
Seam or stitch type	Wrong seam or stitch type.	107		
Stitch tension	a. Loose tension resulting in a loose seam on major portion of seam.		205	
	b. Tight tension on major portion of seam (stitches break when normal strain is applied to seam or stitching.		206	

NOTE: Puckering is an indication of tight tension. When puckering is evident, the seam shall be tested by exerting pull on lengthwise direction of seam.

Stitches per inc	Less than minimum or more than maximum specified. (To be scored only when condition exists on major portion of seam).		207	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Size label	a. Missing, incorrect or illegible on one or both fronts.		208	
	b. Not located on lower end of each left and right front.			209
	c. Lettering and numerals less than 1/2 inch in height.			210
Identification labels (applicable when coat fronts are purchased directly by the Government)	a. Missing, incorrect or illegible on one or both fronts.		211	
	b. Not located directly above size marking.			212
	c. Lettering and numerals less than 1/4 inch in height.			213
Pairing	a. Two rights or two lefts paired.	108		
	b. Different sizes paired.		214	
Shoulder and waist dart	a. Edges not abutted or overlapped as specified.		215	
	b. Not stitched through polyester/cotton dart stays.		216	
Chest piece and chest padding	a. Chest piece omitted.	109		
	b. Haircloth reinforcement at top front of body sections omitted.	110		
	c. Polyester/cotton covering at top front edge of body section omitted.		217	
	d. Rows of stitching less than 3/8 inch or more than 3/4 inch apart.	111		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Chest piece and chest padding (cont'd)	e. Polyester/cotton covering at bottom edges of chest piece omitted.		218	
	f. Padding not extending beyond the armhole.	112		
	g. Shoulder portion not left open to accommodate shoulder pad.	113		

4.5.3 Examination of packaging requirements. An examination shall be made to determine that the packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers in the end item inspection lot. The inspection level shall be as stated in the contract or purchase order.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Weight or content (exterior and interior)	Net weight exceeds requirement. Number of pairs per bundle is more or less than required. 1/ Size shown on one or more coat fronts not as specified on container. 1/

1/ For this defect, one bundle from each container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Twenty pairs of coat fronts, of one class and size only, shall be neatly stacked, with every five pairs reversed and securely tied with cotton tape or twine.

5.1.2 Commercial. Coat fronts shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level B or commercial as specified (see 6.2).

5.2.1 Level B. Coat fronts of one class and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container, conforming to style RSC-L, type CP or type SP class domestic, grade 275 of PPP-B-636. Each container shall be fitted with a one-piece liner conforming to type CP, class domestic, grade 275 of PPP-B-636. The ends of the liner shall abut at the opposite corner from the manufacturer's joint. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The net weight of the contents of each shipping container shall not exceed 65 pounds.
Towards the end of the contract, or when there is less than the required amount per container of the same class and size, mixed classes and sizes may be packed within the same shipping container (see 5.3.1).

5.2.2 Level C. Coat fronts, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Mixed sizes. Each shipping container packed with mixed classes, mixed sizes, or both, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words designating the combination plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

6.1 Intended use. Coat fronts covered by this specification are intended to be used in the manufacture of coats for the U. S. Marine Corps Band (except the enlisted man's Blue Dress Coat), the Drum and Bugle Corps and Ceremonial personnel.

6.2 Ordering data. Procurement documents should exercise any desired options offered herein, and should specify the following:

6.2.1 Acquisition data.

(a) Title, number and date of this specification.
(b) Class and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of coat fronts in first article (see 3.2).
(e) Level of packaging and packing required (see 5.1 and 5.2).

6.3 Samples and patterns. For information regarding the availability of standard sample and patterns, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1 through 4 are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.


6.7 Subject term (key word) listing.

Coat
Front
Musicians

Preparing Activity:
Navy - MC
Project No. 8315-N375

Custodian:
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

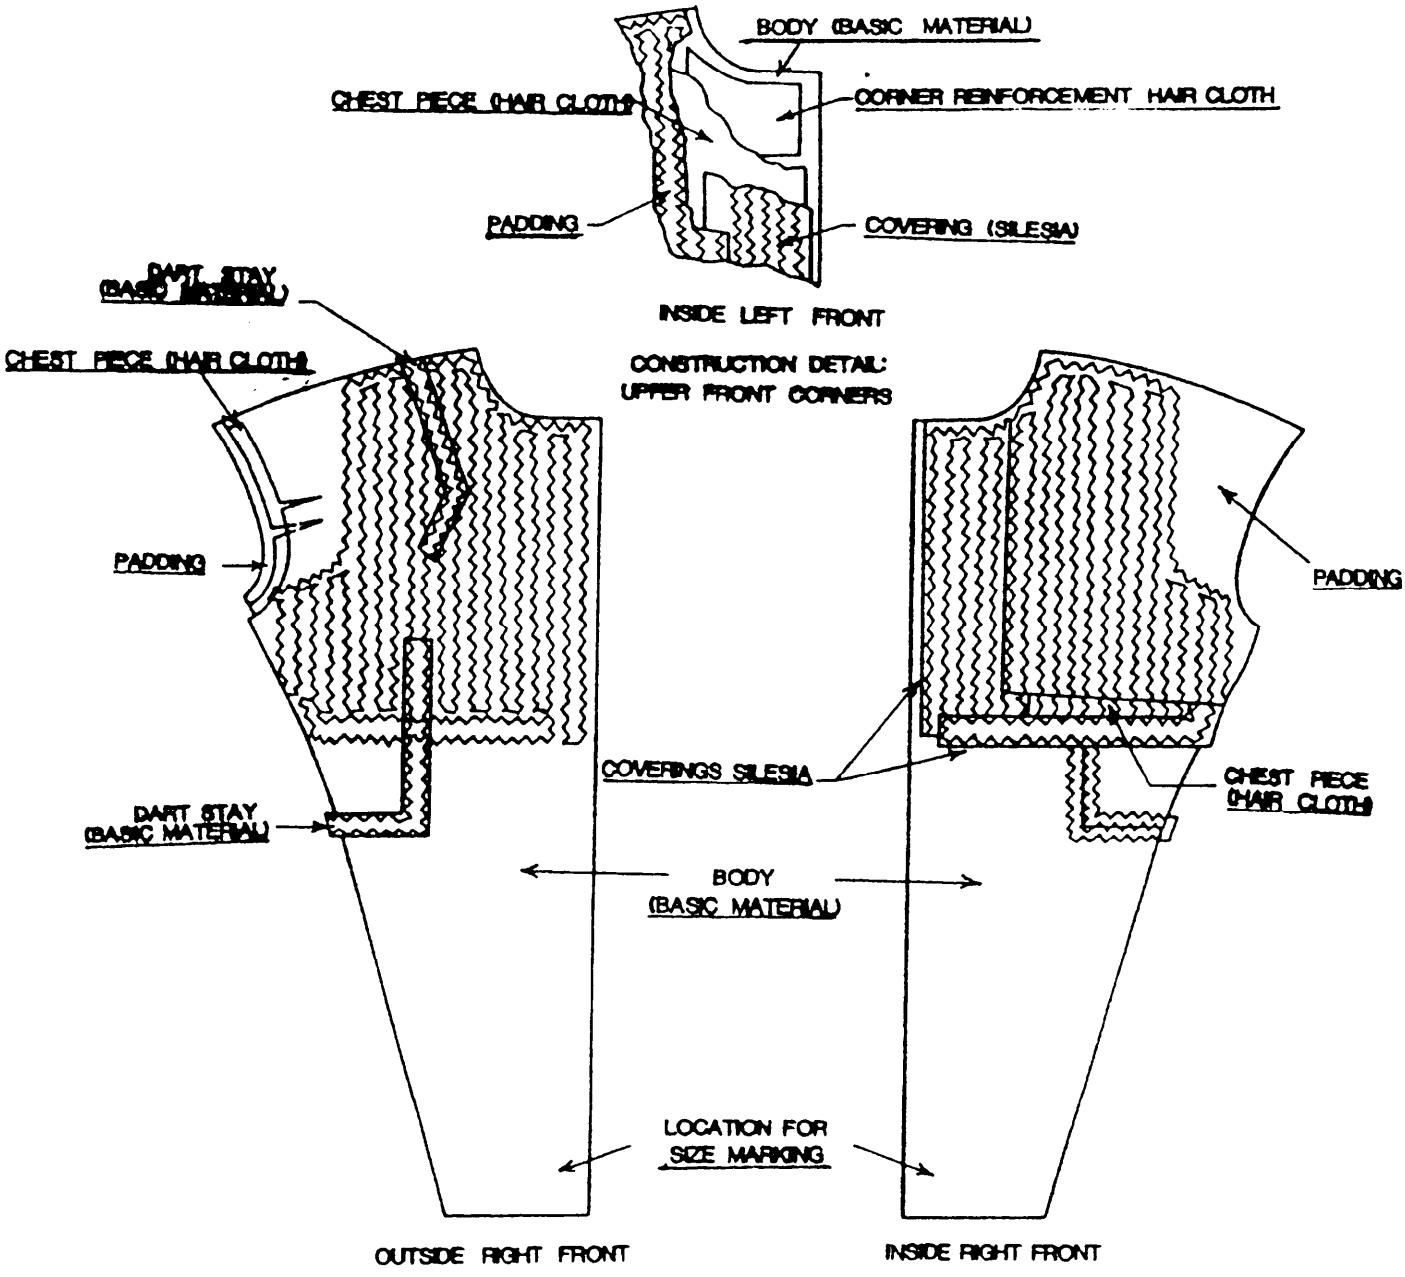

NOTE: RIGHT FRONT ONLY SHOWN (EXCEPT CUT-THRU VIEW AT TOP)

FIG 1: COAT FRONT FOR COAT, MAN'S MUSICIAN

CLASS 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

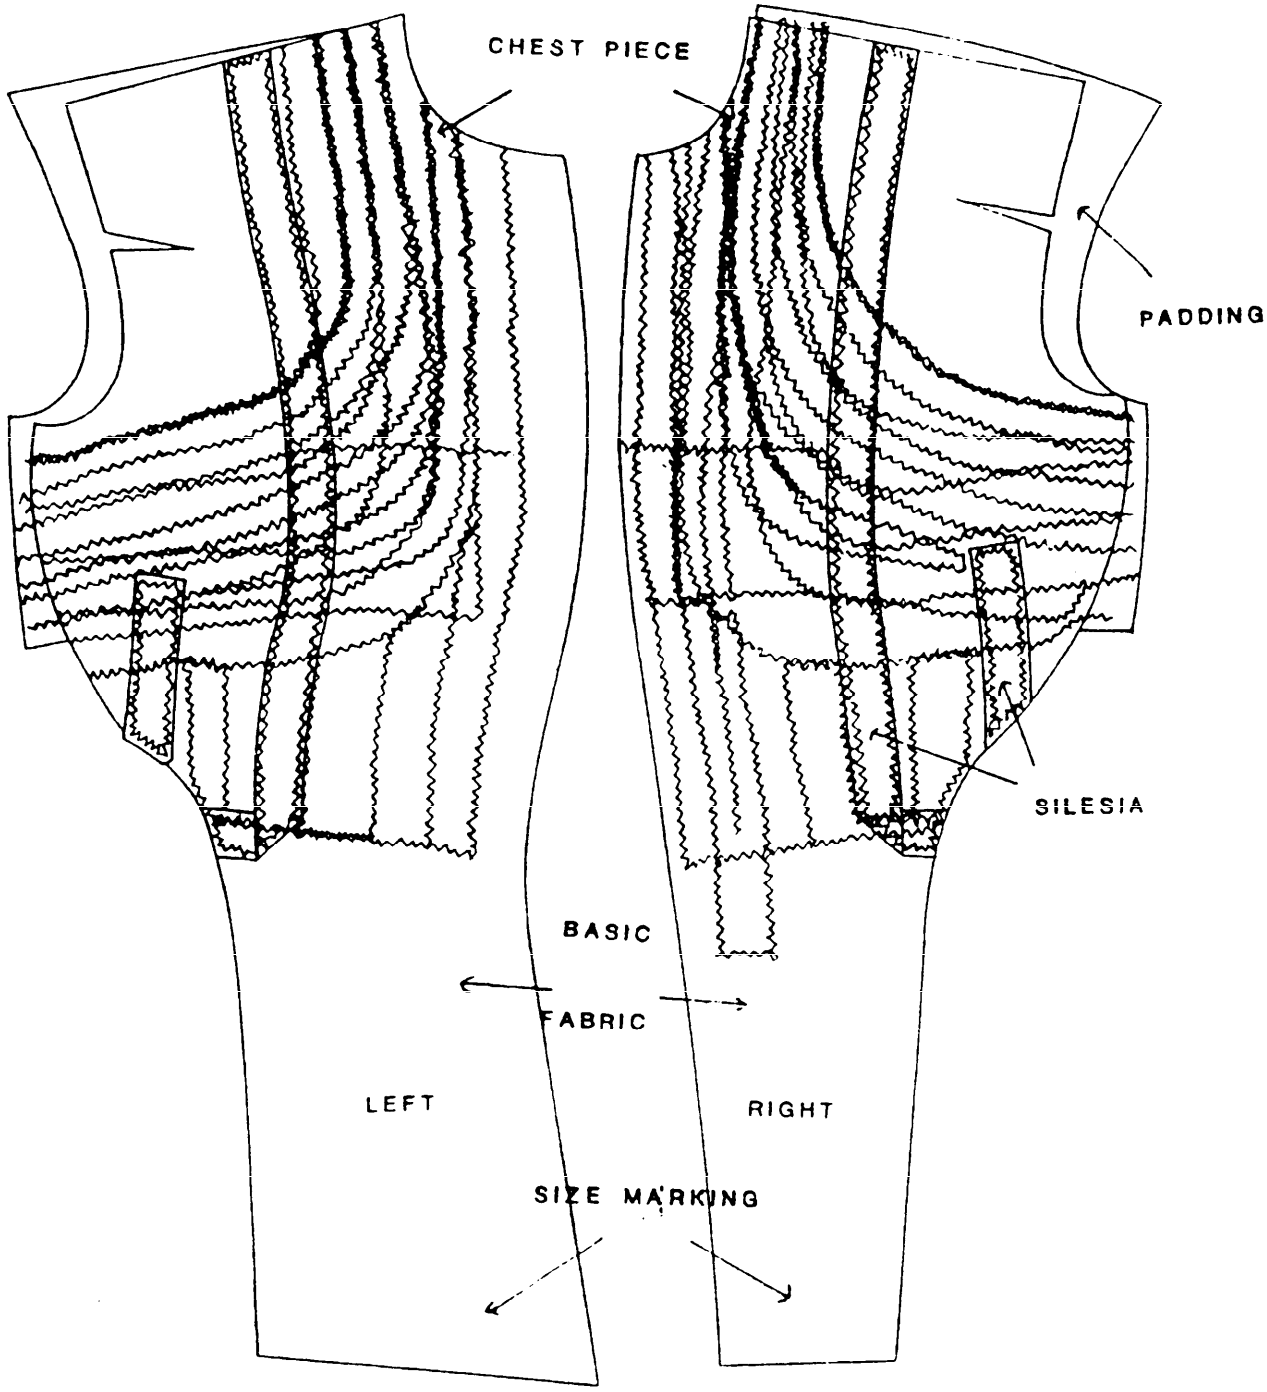


FIG 2:

COAT FRONT FOR COAT, WOMAN'S, DRESS BLUE (CEREMONIAL) CLASS 2

COAT FRONT FOR COAT, WOMAN'S FULL DRESS (MUSICIAN) CLASS 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

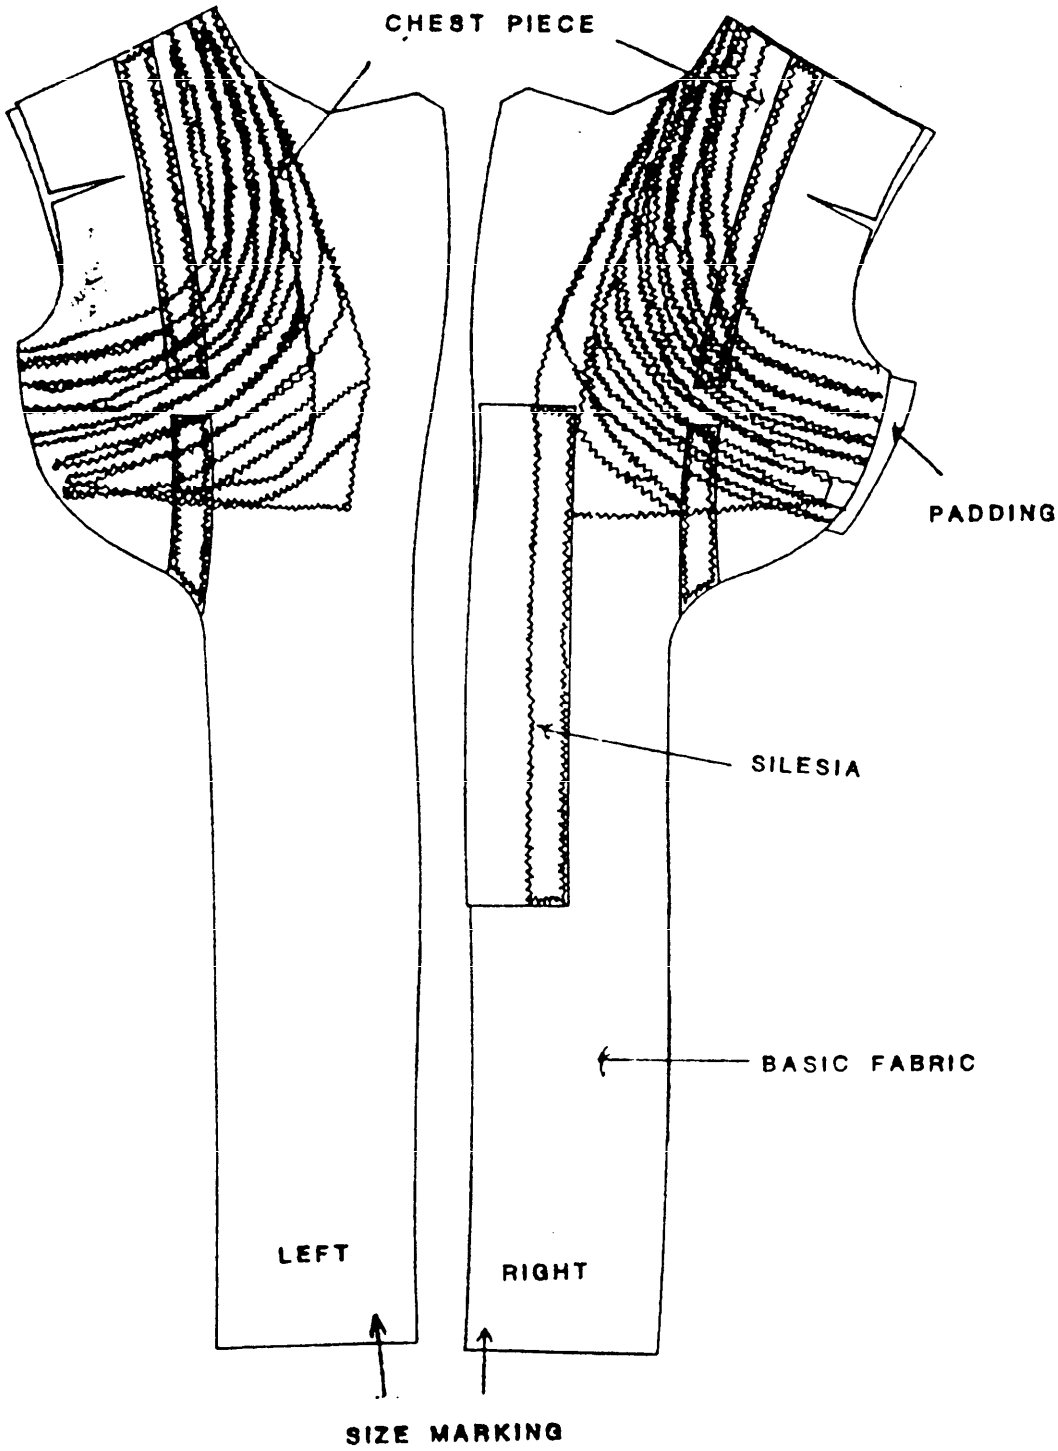


FIG3: COAT FRONT FOR OVERCOAT, WOMAN'S WOOL GABARDINE BLUE

CLASS 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

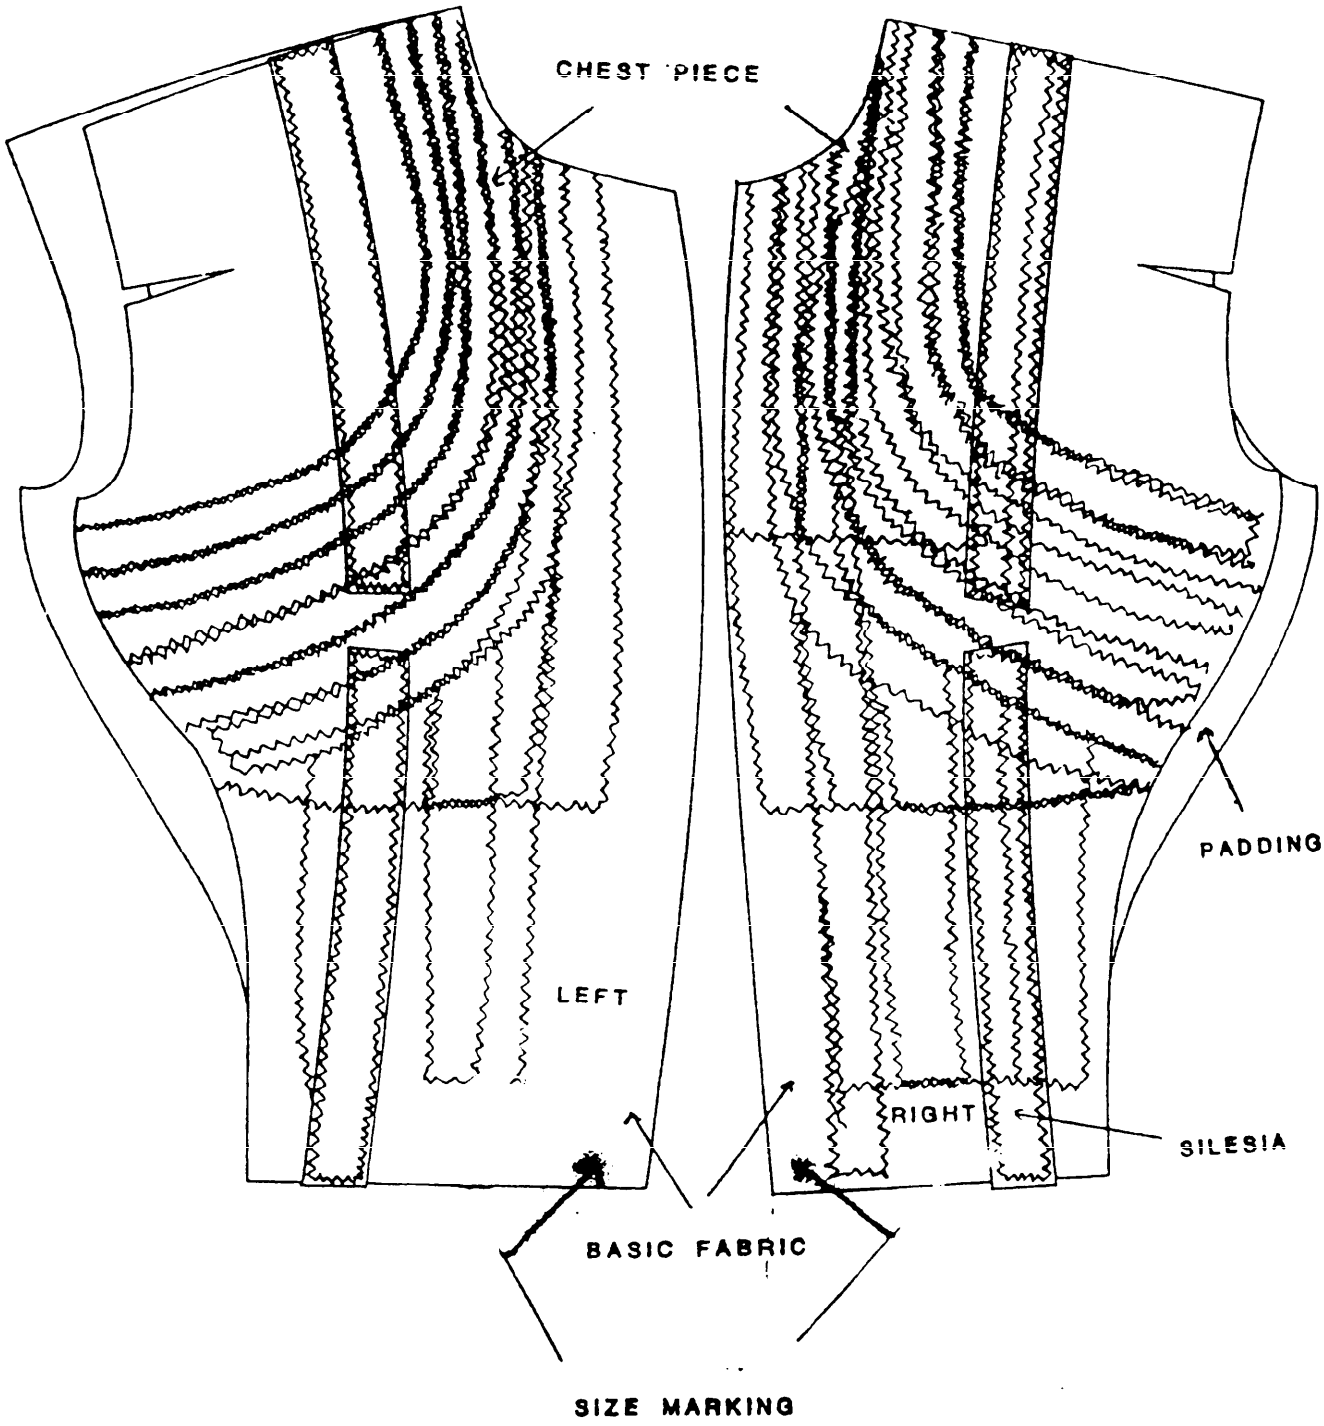


FIG 4:

COAT FRONT FOR JACKET, WOMAN'S FULL DRESS AND JACKET, WOMAN'S SPECIAL FULL DRESS (MUSICIAN)

CLASS 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-82114B(MC)	2. DOCUMENT DATE (YYMMDD) 16 December 1994

3. DOCUMENT TITLE
COAT FRONT: FOR COATS, MUSICIANS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)
	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
COMMANDER, PROGRAM SUPPORT DIRECTORATE	(703)640-4584	278-4584
c. ADDRESS (Include Zip Code) MARCORSYSCOM, 2033 BARNETT AVENUE, SUITE 315 QUANTICO VA 22134-5010	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 Previous editions are obsolete 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:39Z
Check the source to verify that this is the current version before use.