INCH-POUND

MIL-C-82125A(MC)
3 DECEMBER 1990
SUPERSEDING
MIL-C-82125(MC)
1 June 1966

MILITARY SPECIFICATION

CAPE, WOMAN'S: EVENING DRESS (OFFICER'S)

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a woman's evening dress cape.

1.2 Classification. The cape shall be of one type in the following sizes (see 6.2).

Schedule of sizes

Small
Medium
Large

1.3 Individual orders. When cape is custom tailored to an individual order, this specification shall govern, except the detail requirements of table II may be modified to the extent necessary for good custom tailoring practice.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
V-T-301	-	Thread, Silk
DDD-L-20	-	Label; For Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	-	Tape, Textile; Cotton General Purpose (Unbleached, Bleached, Or Dyed)

MILITARY

MIL-C-297	-	Cloth, Interlining, Cotton or Synthetic Warp, and Spun Hair-Wool or Rayon Filling
MIL-B-3461	-	Button, Insignia, Metal, Uniform And Cap
MIL-C-21115	-	Cloth, Tropical: Wool, Polyester/Wool
MIL-C-82128	-	Cloth, Satin, Rayon: Cuprammonium, Scarlet

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables For Inspection By Attributes
MIL-STD-129	-	Marking For Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents order desk, Bldg 4D, 700 Robins Avenue, Philadelphia, PA 19111-5094).

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense (DoD) Standard Color Card for Serving Threads

(Application for copies should be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard Samples. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4), in accordance with 4.4.

3.3 Materials

3.3.1 Basic material. The basic material shall be cloth, tropical, polyester/wool blend, Marine Corps black 2607 (see 6.4), 8.5 to 9.5 ounces, conforming to type III of MIL-C-21115.

3.3.2 Lining. The material for lining cape shall be cloth, satin, rayon, cuprammonium, Marine Corps scarlet 2504 (see 6.4), 4.2 to 5.0 ounces, conforming to MIL-C-82128.

3.3.3 Coat fronts and collar interlining. The material for the body of the coat front, collar, and collar stand shall be cloth, warp, spun hair-wool filling, plain weave, conforming to type I of MIL-C-297.

3.3.4 Hanger braid. The braid for cape hanger shall be cotton or rayon tubular flat braid 1/8 to 3/16 inch wide, and shall have a breaking strength of not less than 75 pounds in the warp direction, when tested as specified in table IV. The color shall be black and shall show good fastness to crocking and wet (dry) cleaning when tested as specified in table IV.

3.3.5 Tape 1/4 inch. The tape for the front and arm slit edges of the cape shall be 1/4 inch wide, conforming to type III, class 1 of DDD-T-86.

3.3.6 Thread

3.3.6.1 Silk thread. The silk thread shall conform to V-T-301. The thread for machine sewing shall conform to type I, size A for all outside seaming and stitching, inside seaming, and stitching for body lining. The thread for hand sewing shall be type III, class 3, size C, 2 ply.

3.3.6.2 Cotton thread. The cotton thread shall conform to V-T-276, type IC2, mercerized finish, ticket No. A, 3-ply for all inside seaming and stitching except body lining; type IB3, glazed finish, 16, 4-ply for sewing on buttons and snap fasteners. The thread for basting shall be a good commercial grade.

3.3.6.3 Color and colorfastness. The thread shall be black, except the silk thread for seaming and stitching the body lining shall be scarlet. The cotton thread for basting may be white. The colored threads, when tested as specified in the applicable thread

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

specification, shall show good fastness to wet (dry) cleaning and, in addition, the silk thread shall show good fastness to light.

3.3.7 Insignia button. The insignia button shall be metal, gold plated, officer design, 40-line, conforming to type I, style 4, class A, sub-class 1, short shank, of MIL-B-3461. One insignia button per cape is required.

3.3.8 Labels. Each cape shall have an identification label and a size label conforming to DDD-L-20 and the following. Colorfastness for dry cleaning shall apply.

3.3.8.1 Identification Label. The identification label shall be type I, class 1. The content and format shall be as follows:

Nomenclature (item description)
Contract number
Name of contractor
Wool Products Act information

Note: Size of characters for "Name of contractor" shall be minimum 8 point (approximately 3/32 inch).

3.3.8.2 Size label. - The size label shall be type I, class 2. The label shall consist of the cape size (see 2.1) indicated by letters S (Small), M (Medium), or L (Large), and the stock number, as shown in the following example:

M
Stock Number

The stock number may be omitted from the size label but when omitted, it shall be incorporated in the identification label.

3.3.9 Finishing tape. The tape for finishing the bottom of the cape shall be rayon woven tape with selvages. The tape shall be woven of first quality, continuous filament, rayon yarn and the finished tape shall conform to the following requirements when tested as specified in table IV.

Width	- 1/2 + 1/16 inch
Weight per gross yds (min)	- 5.0 ounces
Thread count, total ends (min)	- 66
Picks per inch (min)	- 52
Weave	- plain

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

for delivery and information to the contractor (see 6.3).

3.3.9.1 Color and colorfastness. The tape shall be dyed a shade approximately the color of the basic material and showing good fastness to crocking and wet (dry) cleaning when tested as specified in table IV.

3.3.10 Fasteners, snap. The snap fasteners for the front edge of cape shall be brass, black, japanned finish, round style, rolled edge, size 15-line, sew-on type (see table IV).

3.4 Design. The cape shall be the U.S. Marine Corps design shown on the attached figures; fully-lined cape, arm slits, snap fasteners on the fronts, one button, ornamentation piece at the fronts; having a two piece back with a center pleat and roll rounded collar.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 3/16 inch allowance for seams at the top and front edges of cape and joining top collar to under collar, 1/4 inch allowance for collar and collar stand, 3/4 inch allowance for side seams, and 3/8 inch for all other seams. These patterns show size, seam allowance, directional lines for cutting, and are marked or notched for proper placement and assembly of component parts.

3.5.1 List of pattern parts. Capes shall be cut from the specified materials in table I in accordance with the pattern parts indicated:

TABLE I. Pattern parts.

Material	Pattern nomenclature	Cut parts
Cloth, tropical, polyester wool/blend	Front	2
	Back	2
	Front facing	2
	Top collar	1
	Under collar	1
	Neck facing	1
	Ornamental right front	2
	Ornamental left front	2
	Collar stand	2
Cloth, satin, rayon	Front	2
	Back	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Pattern parts - Continued.

Material	Pattern nomenclature	Cut parts
Cloth, cotton or synthetic warp, spun hair-wool filling interlining (coat front)	Front	2
	Under collar	1
	Collar stand	1
	Markers	
	Ornamentation--Front marker	-

3.6 Construction

3.6.1 Manufacturing requirements. The capes shall be manufactured in strict accordance with the operations and the stitch, seam, and stitching types specified in table II.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in table II, but all operations specified shall be used to manufacture the cape.

3.6.1.2 Stitches, seams, and stitching. The stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. The number of stitches per inch as specified in table II indicates the minimum and maximum number permitted.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitching, produced with 301 type stitch, when not caught in other seams or stitching (except ends of continuous line of stitching) shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Ends of a continuous line of stitching shall overlap not less than 1/2 inch.

3.6.1.3 Shade marking. The component parts of cape cut from one piece of basic and lining materials, shall be marked to insure a uniform shade and size throughout the garment. The use of tickets with metal fastening devices is prohibited on rayon lining. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive-type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
1.	Cutting a. Cut capes in strict accordance with patterns furnished by the Government. b. Cut all parts in the direction of warp as indicated by directional lines on pattern. The back part may be out with the center edge on the selvage. c. Cut all wool parts from one piece of basic material including the right and left ornamentation piece. d. Cut the body lining from one piece of rayon lining material. The back part may be cut with the center edge on the selvage. e. Cut the interlining cloth for undercollar and collar stand in accordance with pattern furnished.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Cutting. (cont'd) f. Cut coat fronts in strict accordance with pattern furnished. g. The use of drill holes is prohibited.					
2.	Replacement of damaged parts. a. Replace at time of cutting all parts containing damages, such as holes or serious weakening defects, such as smashes, multiple floats, and slubs likely to develop into holes. b. Replace all parts damaged during the manufacturing process by needle chews which may be expected to develop into holes, scissors or knife cuts, tears, holes, mends, or burns.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
3.	Shade marking. a. Mark or ticket all component parts (see 3.6.1.3) cut from one piece of basic and lining materials to insure uniform shade and size throughout the cape. b. The use of tickets with metal fastening devices is prohibited on rayon lining.					
4.	Make collar. Finished appearance. The edges of collar shall be neatly and completely worked out. The collar shall be uniform in appearance and the edges shall be smooth and flat, without twists, gathers, puckers, or raw edges (top and sides). a. The collar and collar stand shall be made of					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Make collar. (cont'd)					
	two plies of basic material and one ply of interlining.					
	b. Position the interlining to the undercollar and quilt the interlining and undercollar with a minimum of six rows of blind-stitching. Trim excess interlining along edges, where necessary.	103	SSm-6	4-6	A	
	c. Seam interlining and undercollar stand together, 1/8 inch from top and lower edge. Trim excess interlining along edges, where necessary.	301	SSa-1 (each edge)	10-14	A	A
	d. Position undercollar stand on outside of undercollar with notches matching. Join together at the lower edge with a 1/4 inch seam.	301	SSz-3 (a)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Make collar. (cont'd)					
	e. Spread open the seam and topstitch, each side 1/16 inch from the seam.	301	SSz-3 (b)	10-14	A (silk)	A
	f. Position top-collar stand on outside of top-collar with notches matching and join together at the lower edge with a 1/4 inch seam.	301	SSz-3 (a)	10-14	A	A
	g. Spread open the seam and topstitch, each side 1/16 inch from the seam.	301	SSz-3 (b)	10-14	A (silk)	A
	h. Position the topcollar and undercollar with edges even and seam together at the top and side edges, 3/16 inch from the edges.	301	SSe-2 (a)	10-14	A	A
	i. Turn collar completely, working out the edges and top-stitch 3/16 inch from the seamed edges.	301	SSe-2 (b)	10-14	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Make collar. (cont'd)					
	j. Seam collar and undercollar together 1/8 inch from the bottom raw edges.	301	SSa-1	10-14	A (silk)	A
5.	Make left front ornamental piece.					
	Finished appearance. The left front ornamental piece shall finish smooth and flat, without twists, gathers, puckers, pleats, or raw edges.					
	a. The ornamental piece shal l be made of two pieces of basic material.					
	b. Stitch the two pieces together from front square end to notch with a 3/8 inch seam.	301	SSa-1	10-14	A	A
	c. Spread open the seam and press flat with a heated pressing iron.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Make left front ornamental piece.	(cont'd)				
	d. Notch along the curved raw edges for proper turning. Turn all raw edges 3/8 inch to the inside and baste along the turned edges.	Hand				
6.	Make right front ornamental piece.					
	Finished appearance. The right front ornamental piece shall finish smooth and flat, without twists, gathers, puckers, pleats, or raw edges.					
	a. The ornamental piece shall be made of two pieces of basic material.					
	b. Stitch the two pieces together with a 3/8 inch seam from end to end.	301	SSa-1	10-14	A	A
	c. Spread open the seam and press flat with a heated pressing iron.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Make right front ornamental piece. (cont'd)					
	d. Fold the ornamental piece in half lengthwise to the outside and stitch across the width at one end 1/8 inch from the raw edge. Spread open the seam and turn ornamental piece completely, working out the point.	301	SSa-1	10-14	A	A
	e. Turn all raw edges 3/8 inch to the inside and baste along the turned edges, closing the end, forming a point at the center of the finished end.	Hand				
7.	Make center pleat in body lining.					
	a. Position left and right back lining with edges even and join together at the center with a 3/8 inch seam.	301	SSa-1	10-14	A (silk)	A
	b. Fold the lining in accordance with notches on pat-					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Make center pleat in body lining. (cont'd) tern to form a 1 inch wide pleat, at center back. c. Press the pleat smooth and flat from top to bottom edge of lining with a heated pressing iron. The folded edge of the pleat on the outside of the lining shall be towards the left side.					
8.	Join back and front lining at sides. Finished appearance. The side seams of the lining shall be carefully joined without twists, gathers, puckers, or pleats. Seams shall start and finish evenly. a. Position the back and fronts with edges even and join together at the sides with a 3/4 inch seam;	301	SSa-1	10-14	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Join back and front lining at sides. (cont'd) leaving an opening for arm slit from notch to notch. b. Spread open the side seams, including the arm slit opening, and press flat with a heated pressing iron. c. Neatly and evenly pink the seam allowance of side and center back 1/8 inch in depth. When the center back is cut on the selvage, pinking is not required.					
9.	Join lining at shoulders. Finished appearance. The shoulder seam shall be uniformly stitched without a distorted appearance.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Join lining at shoulders. (cont'd)					
	a. Join the fronts and back together at the shoulders with a 3/8 inch seam.	301	SSa-1	10-14	A (silk)	A
	b. Spread open the shoulder seam and press flat with a heated pressing iron or pressing machine.					
10.	Stitch darts in front and back lining.					
	Finished appearance. The darts shall be tapered to a point at each end and shall finish without gathers, puckers, or pleats.					
	a. Fold the front and back lining, matching the cut edges of the front and back darts. Stitch the entire length of the dart, catching the shoulder and side seams in the stitching 3/8	301	SSa-1	10-14	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Stitch darts in front and back lining. (cont'd) inch from cut edge at the front and back lining and tapering to zero at both ends. b. Spread open the dart seams and press flat with a heated pressing iron or pressing machine.					
11.	Hem body lining. Finished appearance. The hem shall be uniformly stitched, uniform in width, and shall finish smooth and flat without twists, gathers, puckers, or pleats. The hem shall finish 1 inch wide. a. Hem the bottom edge of the body lining, with the raw edges turned under 1/2 inch and stitch 1/16 inch from folded upper edge of the hem.	301	EFb-1	10-14	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
12.	Join neck and front facing at shoulders. Finished appearance. The neck facing shall be carefully and properly aligned, and seamed to the respective front facing so that in the finished cape, the neck facing shall be smooth and flat without creases, bulges, or other defect or distortion.					
	a. Join the front and neck facing together at the shoulder with a 3/8 inch seam.	301	SSa-1	10-14	A	A
	b. Spread open the shoulder seam and press flat with a heated pressing iron or pressing machine.					
13.	Seam front and neck facing to lining; sew on labels. Finished appearance. The lining shall be					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Seam front and neck facing to lining; sew on labels. (cont'd) carefully seamed to the neck facing so that in the finished cape, the lining shall be smooth and flat along the front and neck facing without creases, bulges, overlapping of excess material, or other defect or distortion. a. Position body lining on the wool facing with notches matched to insure proper seaming, and with the hemmed bottom edge of the lining aligned with the upper notch in the facing, as indicated by pattern.					
	b. Join front edge of lining to the back edge of facing with a 3/8 inch seam, turning up the lower end of	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Seam front and neck facing to lining; sew on labels. (cont'd)					
	facing at the notch for the bottom turn-up, as indicated by the mark on patterns, and catching the turned portion in the seam.					
	c. Continue to join the top edge of the center back lining to the back edge of neck facing with a 3/8 in. seam, and with the upper edge of the size label positioned and caught in the stitching at the inside center back pleat.	301	SSa-1	10-14	A	A
	d. Press the facing and yoke lining seam smooth and flat with a heated pressing iron.					
	e. Sew the identification label to the left front facing with a single row of	301	SSa-1 (each edge)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Seam front and neck facing to lining; sew on labels. (cont'd) stitching 1/16 inch from each edge of label. The label shall be positioned vertically with one end even with the facing-lining seam and the lower edge approximately 4 inches above the finished bottom edge of cape.					
14.	Assemble back-parts. Finished appear-ance. Backs shall be joined without gathers, puckers, or pleats. The folded edge of the center pleat on the outside of back shall be towards the right side.					
	a. Position backparts with edges even and join at the cen-ter with a 3/8 inch seam from top to bottom edge of back.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Assemble back-parts. (cont'd)					
	b. Neatly and evenly pink the seam allowance of center back 1/8 inch in depth. When cut on the selvage, pinking is not required.					
	c. To form a pleat at center back, mark and baste on the inside from the top edge down to the bottom in line with the top and bottom notches as indicated by pattern.	Hand or 301	Hopper			
	d. Turn the center pleat flat against the cape towards the left side. Secure top and bottom ends of pleat with a row of stitches 1/8 inch from the raw edges.	301	SSa-1	10-14	A	A
	e. Turn the cape to right side and topstitch the pleat through all plies 1-7/8 ± 1/8 inches from the folded edge of pleat.	301	SSa-1	10-14	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Assemble backparts (cont'd)					
	f. Press the pleat smooth and flat from top to bottom edges with a heated pressing iron or pressing machine.					
15.	Tape-arm slit opening.					
	a. Position the 1/4 inch wide stay tape to the inside of front and back-part of arm slit opening and with the edge of tape in line with upper and lower notches.					
	b. Stitch the front edge of tape 1/16 inch from edge.	301	SSaa-1	10-14	A	A
16.	Join back and fronts at sides.					
	Finished appearance. The back and fronts shall be carefully joined at the sides without twists, gathers, puckers, or pleats. Seams shall start and finish evenly.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Join back and fronts at sides. (cont'd)					
	a. Position the back and fronts with edges even and join together at the sides with a 3/4 inch seam, leaving an opening for arm slit from notch to notch.	301	SSa-1	10-14	A	A
	b. Spread open side seams, including arm slit opening and press flat with a heated pressing iron.					
	c. Neatly and evenly pink the side seam allowance 1/8 inch in depth.					
17.	Seam shoulders.					
	Finished appearance. The shoulder seams shall be uniformly stitched without a distorted appearance.					
	a. Join fronts and back together at shoulders with a 3/8 inch seam.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Seam shoulders. (cont'd)					
	b. Spread open the shoulder seam and press flat with a heated pressing iron or pressing machine.					
18.	Stitch darts in front and back.					
	Finished appearance. The darts shall be tapered to a point at each end and shall finish without gathers, puckers, or pleats.					
	a. Fold the front and back parts, matching the cut edges of the front and back darts. Stitch the entire length of the dart, catching the shoulder and side seams in the stitching 3/8 inch from cut edges at the front and back darts and tapering to zero at both ends.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Stitch darts in front and back. (cont'd)					
	b. Spread open the dart seams and press flat with a heated pressing iron or pressing machine.					
19.	Mark cape for bottom turn-up.					
	a. Mark the cape, including the center back pleat, 1-1/2 inches from the bottom edge for the turn-up.					
20.	Stitch tape to bottom edge.					
	a. Place the 1/2 inch wide rayon tape on the outside of the cape at the bottom edge, with the lower edge of the tape extending approximately 1/4 inch beyond the bottom edge of the cape, and stitch to the fronts and back 1/16 inch from the upper edge of the tape catching the center pleat in the stitching.	301	LSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
21.	Interline fronts.					
	a. Position the left and right fronts on the respective coat front interlinings and baste along the center, distributing the fullness over the breast area. The basting shall extend from shoulder edge of fronts to approximately 1-1/2 inches from bottom edge.	301 or Hand	Hopper			
	b. Baste across the shoulder in line with the center basting. Continue to baste along the gorge and front edge of cape.	301 or Hand	Hopper			
	c. Baste along the front dart seam and continue basting down the back edge of the interlining.	301 or Hand	Hopper			
	d. Trim the top corner edge of the coat front interlining diagonally 1/2 inch.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
22.	Set collar. Finished appearance. The collar shall be carefully joined to the cape without distortion of the collar stand or collar. a. Position collar on outside of cape with lower edge of collar and collar stand even with top edge of fronts and backpart, and with the collar notch and lower corners of collar matching.					
	b. Join collar to fronts and backpart with a 1/4 inch seam, from collar notch to collar notch with center notches matching.	301	SSa-1	10-14	A	A
23.	Baste facing-lining assembly to fronts. a. Position the right and left facing-lining assemblies on the	301 or Hand	Hopper			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Baste facing-lining assembly to fronts. (cont'd) outside of the respective fronts and baste along the neck, gorge, and front, continuing the basting along the bottom edge. The facing shall be held slightly taut across the bottom edge of the front while basting.					
24.	Join facing and fronts with tape. a. Join facings to fronts, 3/16 inch from top and front edges of the cape, with the 1/4 inch wide stay tape positioned on the interlining side of fronts and caught in the stitching. Continue the stitching along the gorge and neck with a 3/8 inch seam, from collar notch to collar notch, catching all	301	SSad-1 and SSe-2 (a)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Join facing and fronts with tape. (cont'd) plies of fronts, facing, collar, and neck facing, and with the ends of the hanger properly positioned and caught in the stitching. The tape shall be sewn with slight tension and shall extend from the collar notch to approximately 1-1/2 inches above the bottom edge of the cape. b. Remove all basting stitches, trim upper front corner of facings for proper turning. c. Press open the front edges smooth and flat with a heated pressing iron or pressing machine, removing the fullness.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
25.	Baste neck, front edges and bottom turn-up.					
	a. Turn the facing-lining assemblies to the inside of fronts, completely working out the corners.					
	b. Baste along top and front edges and along the gorge and neck facing, working the seam to the edges. The basting shall extend approximately 3 inches from the bottom edge of facing.	101 and 301 or Hand	Hopper			
	c. Baste the entire bottom turn-up along the top edge of the rayon tape, including the facing turn-up.	301 or 101 or Hand	Hopper			
26.	Second baste facing.					
	a. Baste the facing to fronts as close as possible to the facing-lining seam, placing the	301 or Hand	Hopper			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Second baste facing. (cont'd)					
	fullness towards the chest. The basting shall extend from the shoulder seam down to approximately 3 inches from the bottom of facing. Place a second row of basting along top edge of rayon tape at bottom.					
27.	Fell facing to interlining.					
	a. Turn back the lining and fell the right and left facing-lining seam allowance to the respective front interlining. The felling shall extend from the shoulder seam down to approximately 4 inches from the bottom of facing.	Hand or 103	SSm-1	4-6 4-6	C (silk) A (silk)	.
28.	Fell bottom turnup					
	Finished appearance. In the finished cape, the lining shall					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Fell bottom turnup. (cont'd)					
	not be visible below the bottom edge of cape.					
	a. Fell the edge of the tape at the bottom turn-up including the front facing to the body of the cape with blind-stitching.	103	EF1-1	4-6	A (silk)	
29.	Baste body lining to cape.					
	a. Match side seams of cape and lining. Baste the front lining to the cape, starting at the top end of side seam and as close to the side seam as possible, to approximately 3 inches from bottom finished edge of cape. Baste the front and back lining along the arm slit opening with the back lining and back part lying smooth and flat. The front and back lining	301 or Hand	Hopper			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Baste body lining to cape. (cont'd) at the arm slit opening shall not be exposed to the outside of cape. b. Fell the folded edges of the front and back lining of the arm slit opening.	Hand		4-6	C (silk)	
30.	Join ornamental pieces to fronts. Finished appearance. The ornamental pieces shall be uniformly hand felled to the fronts without twists, gathers, puckers, pleats, or raw edges. The position of the right and left ornamental piece shall be as shown on figure 4. a. Mark the left and right front with ornamentation marker for positioning the ornamental piece (see figure 4).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Join ornamental pieces to fronts. (cont'd)					
	b. Position the ornamental front piece on the right and left front with marks matching and with front edge of the ornamental piece even with the front edge of cape. Baste the ornamental piece to the fronts.	Hand				
	c. Fell the folded edges of the ornamental piece through the fronts and interlining only.	Hand		8-10	C (silk)	
31.	Edgestitch fronts and neck facing.					
	Finished appearance. The cape shall be uniformly edgestitched.					
	a. Topstitch the left and right front uniformly 3/16 inch from the top and front edges. The stitching shall extend from collar notch to	301	SSe-2 (b)	10-14	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Edgestitch fronts and neck facing. (cont'd)					
	bottom front edge of cape.					
	b. Raise stitch the length of collar at the neck facing 1/8 inch from the seamed edge.	301	SSe-2 (b)	10-14	A (silk)	A
32.	Edgestitch arm slit opening.					
	Finished appearance. The edges shall be uniformly edgestitched.					
	a. The length of the arm slit opening shall be topstitched on each side 3/16 inch from the folded edge; continue the stitching at the ends of opening forming a triangle (see figure 3). The base of the triangle shall be stitched with two rows of stitching 1/16 inch from the edge of the opening end.	301	SSc-1 (each side)	10-14	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
33.	Fell facings.					
	a. Fell the lower back edge of facing to the bottom edge of cape.	Hand		8-10	C (silk)	
34.	Clean cape.					
	a. Pull all basting thread; trim and remove any loose ends of thread; and remove any spots, stains, and tickets without injury to the material.					
35.	Press cape.					
	Finished appearance. The cape shall be well pressed throughout with a heated pressing iron or pressing machine of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing practice.					
	a. Press the fronts smooth and flat, straightening and shaping the front edges,					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Press cape. (cont'd) and working the fullness towards the chest. Care shall be exercised in pressing the fronts so that the bottom edges are even. b. Press the entire collar smooth and flat. c. Press the upper fronts on a body machine, shrinking in and properly shaping the chest. d. Press the lower fronts smooth and flat. e. Press the sides and arm slit opening smooth and flat. f. Press the back and center pleat smooth and flat. g. Press lower edge of cape smooth, flat, and even.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Press cape. (cont'd) h. Remove all wrinkles and impressions from under the back center pleat. Press body lining throughout, removing all wrinkles and creases. Press the back center pleat smooth and flat.					
36.	Mark for stud snap fasteners. a. Mark the underside of the right facing at the upper corner edge, 1/2 inch back from the top front and front edge for the location of one stud part of the fastener (see figure 4). b. Mark the underside of the right facing at the center seam of the ornamental piece 1/2 inch from the front edge (see figure 4).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
37.	Sew stud snap fastener to cape.					
	Finished appearance. The studs shall be securely sewn to cape on the underside of right facing with the top stud in vertical alignment with the lower stud.					
	a. Sew one stud part of the fastener at each of the marks on the underside of right facing, through facing and interlining material only.	Hand		3-4 (double thread)	C (silk)	
38.	Mark for socket snap fastener.					
	a. Lap the right front on the outside of the left front with the front edge of the right front ornamental piece even with the point of the "V" shape on the left front ornamental piece.					
	b. Mark the left front for location of two socket parts of					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
	Mark for socket snap fastner. (cont'd) the fastener to properly engage with the underside stud of the right front facing.					
39.	Sew socket snap fastener to cape. Finished appearance. The sockets shall be securely sewn to the cape on the outside of the left front with the top socket in vertical alignment with the lower socket.					
	a. Sew one socket part of the fastener at each of the marks on the outside of the left front, through front and interlining material only.	Hand		3-4 (double thread)	C (silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing requirements - Continued.

Opn No.	Operation	Stch Type	Seam/ Stch Type	Stch per Inch	Thread Ndl	Thread Bob/ Lpr
40.	Mark for button.					
	a. Mark the right front at the center seam of the ornamental piece 1 inch from the front edge.					
41.	Sew on button.					
	Finished appearance. The button shall be securely sewn to the cape. The insignia button on the front shall finish with the eagle upright.					
	a. Sew on 40-line insignia button at the mark on the right front, through front and interlining material only.	Hand		6-8 per button	16/4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished cape shall conform to the measurements shown in table III.

TABLE III. Cape measurements. 1/

Size	Back length 2/
Small	30-3/4
Medium	31-1/2
Large	32-1/4

1/ Tolerance on back measurements: ± 1/2 inch

2/ Back length measurement shall be taken along center back pleat from lower edge of collar stand to the finished bottom edge of cape.

3.8 Workmanship. The finished capes shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in table IV.

4.4 First article inspection. When specified in the contract or purchase order, a first article inspection shall be performed on a completely fabricated cape for conformance to all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Except as otherwise required by this specification, the quality assurance provisions for components and materials shall be in accordance with applicable specifications, standards, and figures referenced herein. When there is a conflict in quality assurance provisions, this specification shall govern. In addition to the quality assurance provisions of the subsidiary specification, standard, and figures, testing shall be performed on components and materials listed in table IV for test characteristics shown. Wherever applicable, tests shall be conducted in accordance with methods prescribed in MIL-STD-105 and FED-STD-191. When the data in the "Determination per sample unit" and the "Results reported as" column are not specified in table IV, they shall be reported as required by the referenced test method.

TABLE IV. - Test Methods.

Component	Characteristics	Rqmt para.	Test method	Det per S/unit	Results reported as:
Hanger, braid	Material indentification	3.3.4	1/		
	Color	3.3.4	Visual	1	Pass or fail
	Breaking strength - warp-lbs.	3.3.4	5100		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE IV. - Test Methods.

Component	Characteristics	Rqmt para.	Test method	Det per S/unit	Results reported as:
	Colorfastness to:				
	- crocking	3.3.4	5650		
	- wet (dry) cleaning	3.3.4	5622		
Finishing tape	Material Identification 1/	3.3.9	1500 or 1510 or 1520	1	Pass or fail
	Width	3.3.9	Visual	1	Pass or fail
	Weight per gross yards	3.3.9	5041	5	Avg of 5 det to 0.01 oz.
	Thread count - ends - picks/inch	3.3.9	5050	-	Avg of 5 det each direction to nearest whole number
	Weave	3.3.9	Visual	1	Pass or fail
	Color	3.3.9.1	Visual	1	Pass or fail
	Colorfastness to:	3.3.9.1	-	-	Excellent
	- crocking		5650	1	Good, fair
	- wet (dry) cleaning		5622	1	or poor
Fasteners snap	Material identification	3.3.10	Std Comm'l		Pass or fail
	Finish	3.3.10	Std Comm'l		Pass or fail
	Size and type	3.3.10	Std Comm'l		Pass or fail

1/ Certificate of compliance acceptable for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, the testing shall be in accordance with MIL-STD-105. The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Lining	yards	2 yds full width
Hanger braid	yards	2 yds
Tape	yards	1/2 yd
Fastener, snap	1,000 sets	15 complete sets
Buttons, (insignia)	gross	20 each
Thread (all types) 1/	bobbins (when used)	Sufficient number of bobbins to total a minimum of 360 yds

1/When threads are purchased in form of cones, spools, tubes, or bobbins, thread from each shall be tested.

4.5.1.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or sub-assemblies.

4.5.2 Examination of the end item. The classification of defects found during examination shall be in accordance with list shown in 4.5.2.2 through 4.5.2.4. The sample unit for these examinations shall be one cap. The inspection level shall be II (see 6.5).

4.5.2.1 Classification of defects. All defects shall be classified as indicated below, except those with an asterisk (*) in the classification column, which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.

Minor A defect - When not seriously affecting appearance or serviceability.

4.5.2.2 General defects. General defects shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	B
Cleanness	a. One or more spots or stains of an obvious permanent nature.				
	- on outside.	101			
	- on inside.			201	
	b. One or more removable spots or stains, clearly noticeable:				
	- on the outside.		(*)		
	- on the inside.				301
	c. Thread ends not trimmed or loose threads not removed on major portion of cape.				302
	d. Two or more shade tickets not removed.				303
Components and assembly	a. Any defective component or defect of assembly (not herein classified).		(*)		
	b. Any component part or required operation omitted (not herein classified).		(*)		
Cutting	a. Any component part of polyester/wool material not cut in accordance with directional lines on patterns or specification requirements.	102			
	b. Any component part other than poly/wool material not cut in accordance with directional lines on patterns or specification requirements.				304

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Material defects and damages	a. Any weakening defect, such as smash, multiple float, loose slub, etc., that may develop into a hole.	(*)		
	b. Any hole.	(*)		
	c. Shade bar, slub, knot, etc., affecting appearance: - on outside. - on inside.	(*)	202	
	d. Scissors or knife out, tear, mend or burn.	(*)		
	e. Needle chew that may develop into a hole.	(*)		
	f. Exposed drill hole.	(*)		
Note:	Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the material or garment, or affects appearance. Weakening or non-weakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows: Material defect - No defect Workmanship damages - Minor B defect			
Pressing	a. Burned or scorched.	(*)		
	b. Poorly pressed (unless otherwise classified).		203	
	c. Basting or pressing impressions not removed on major portion of cape, affecting appearance.			305

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	d. Gloss not removed on major portion of cape.			306
	e. Edges bulky, i.e., not pressed solid, affecting appearance.		204	
	f. Body lining not smoothly pressed.			307
	g. Seams on cape not pressed opened as required.		205	
Seams and stitching	a. Accuracy of seaming:			
	1. Seam twisted, puckered, or pleated, affecting appearance.		206	
	2. Part of garment caught in any unrelated operation or stitching.	(*)		
	3. Unsightly hand felling or blindstitching exposed and visible on outside of cape, affecting appearance.		207	
	4. Thread break or ends of seam or stitching, when not caught in other seams or stitchings, except ends of continuous row of stitching, not securely backtacked.		208	
	5. Ends of a continuous line of stitching overlapped less than 1/2 inch.		209	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	6. Not specified color of thread or various shades of thread used on outside of cape.		(*)		
	b. Gage of stitching:				
	1. Beyond range of gage specified or varies from gage specified more than 1/16 inch when no range is specified.				308
	2. Irregular, i.e., unevenly gaged or various stitchings not uniform, affecting appearance, (to be scored only when the condition exists on major portion of seam).			210	
	3. Edge or raise stitching too close to edge, resulting in damage to cloth.		(*)		
	c. Open seams. Broken, missing, skipped stitches (except on top), raise, or edge stitching not resulting in an open seam:				
	1. On outside of cape (except hand felling): - not more than 1/8 inch. - more than 1/8 inch but not more than 1/2 inch. - more than 1/2 inch.	103		211	309
	2. Inside of cape (except hand or machine felling): - not more than 1/4 inch. - more than 1/4 inch.			212	310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Major (*)	Minor A	Minor B
	3. Hand or machine felling:				
	- not more than 3/8 inch.				311
	- more than 3/8 inch.			213	
	d. Stitches skipped, missing or broken on top, edge, or stitching, not resulting in an open seam:				
	- 1/4 inch or more, but not more than 1/2 inch.				312
	- more than 1/2 inch.			214	
	1. On outside:				
	- less than 1/8 inch.				313
	- 1/8 inch or more, but not more than 3/8 inch.			215	
	- more than 3/8 inch.	104			
	2. On inside:				
	- 1/8 inch or more, but not more than 3/8 inch.				314
	- more than 3/8 inch.			216	
Note:	Raw edges (when they occur at places where an edge is required to be turned under) which are not securely caught in the stitching shall be classified as an open seam.				
	e. Run-offs:				
	1. Joining seams - when resulting in an open seam use "Open seam" classification.				
	2. Top edge or raised stitching (when not resulting in an open seam):				
	- 1/4 inch or more, but not more than 1/2 inch.				315
	- more than 1/2 inch.			217	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Major (*)	Minor A	Minor B
	f. Seam and stitch type not type specified.			218	
	g. Stitch tension:				
	1. Loose tension, resulting in a loose seam.	105			
	2. Loose tension on edge or raised stitchings, resulting in loosely exposed bobbin thread or top thread.			219	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching), classify as open seam.	106			
Note:	Puckering is evidence of tight tension; when puckering is evident, the seam shall be tested by exerting pull in the lengthwise direction of the seam or stitching.				
	h. Stitches per inch, (to be scored only if the condition exists on major portion of seam):				
	1. Less than the minimum specified:				
	(a) Except on label:				
	- 1 or 2 stitches.				316
	- 3 stitches.			220	
	- 4 or more stitches.	107			
	(b) On label:				
	- 1 or more stitches on label.				317

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	B
Shaded parts	a. Any outside part shaded.		(*)		
	b. Any body lining parts badly shaded.			221	
4.5.2.3 classified as follows:	Detailed defects. Detailed defects shall be				
4.5.2.3.1	Outside of cape.				
Alignment of front snap fasteners	Not aligned, causing a noticeable bulge or twist on fronts when engaged, affecting appearance.			222	
Length of front when snaps are engaged	a. Right front shorter than left front at bottom corner by: - 1/4 inch or more, but not more than 3/8 inch. - more than 3/8 inch.	108		223	
	b. Right front longer than left front at bottom corner by: - more than 3/8 inch, but not more than 3/4 inch. - more than 3/4 inch.	109			318
	c. Left front at bottom corner exposed beyond bottom edge of right front by more than 1/4 inch.			224	
	d. Right front longer than left front at neck by more than 1/4 inch.			225	
Collar (construction and setting)	a. Tight, i.e., causing puckers on back or fronts.		(*)		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	B
	b. Loose i.e., setting away from neck.		(*)		
	c. Collar edge:				
	1. Crooked, affecting appearance.			226	
	2. Undercollar exposed along collar edge, affecting appearance.			227	
	d. Topcollar:				
	1. Tight, i.e., causing edges to curl or bulge on undercollar, affecting appearance.		(*)		
	2. Twisted, i.e., having a diagonal twist, affecting appearance.		(*)		
	3. Full, i.e., having excessive puckers or fullness, affecting appearance.		(*)		
	e. Undercollar:				
	1. Interlining pleated, affecting smoothness of topcollar, affecting appearance.		(*)		
	2. Interlining tight or twisted, causing puckers on undercollar.			228	
	3. Interlining omitted.	110			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	f. Collar shape:			
	1. Not uniform, i.e., ends of collar vary in length by 1/4 inch or more.		229	
	2. Pointed ends poorly shaped or not of uniform shape or size.	(*)		
Front facing	a. Short, tight, or twisted, causing fullness or twists on fronts, affecting appearance.	(*)		
	b. Front facing exposed beyond bottom edge of cape, affecting appearance.		230	
Body	a. Fitting of lining:			
	1. Tight, short, or twisted, causing fullness or twist on outside of cape affecting appearance.	(*)		
	2. Lining too long, i.e., exposed beyond bottom edge of cape, affecting appearance.		231	
	b. Fitting of interlining:			
	1. Tight, short, or twisted, causing fullness or twist on outside of cape, affecting appearance.	(*)		
	2. Too full, causing cape front to have a wavy appearance.	(*)		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Front and bottom edges	a. Front edges stretched, affecting appearance.		232	
	b. Tape set on tight, causing puckering on front, affecting appearance.		233	
	c. Front edges irregular, causing curved or crooked edges, affecting appearance.		234	
	d. Front edges bulky or not properly forced out.			319
	e. Facing exposed on right front edge, affecting appearance.			320
	f. Bottom corner of right front poorly shaped, affecting appearance.		235	
	g. Bottom edge stretched or uneven, affecting appearance.		.	321
	h. Front rolling outward below bottom snap fastener, affecting appearance.	(*)		
	i. Bottom tape set on too tight, causing puckers or pleats on outside of cape, affecting appearance.		236	
	j. Right front edge not hanging in a perpendicular position, affecting appearance.	(*)		
	k. Top edge of fronts:			

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	1. Less than 2 inches or more than 2-1/4 inches in length.		237	
	2. Not uniform, i.e., left and right sides varying in length more than 1/4 inch.		238	
Arm slit alignment and construction	a. Lining tight, causing fullness at edge of opening, affecting appearance.		239	
	b. Lining exposed on edge of opening, affecting appearance.		240	
	c. Stay tape on edge of opening set on tight, causing puckering on edge of opening, affecting appearance.		241	
	d. One or more triangular stitchings or row of stitching at base of triangle missing, insecurely stitched, or misplaced.		242	
	e. Top ends of arm slit out of horizontal alignment by more than 3/8 inch.		243	
	f. Opening uneven in length by more than 1/2 inch.		244	
Ornamental pieces (position alignment and construction)	a. Center seam on left and right sides not spread open.		245	
	b. Felling not caught through front interlining.		246	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	c. Felling catching through front facing.		247	
	d. Center seam line of ornamental piece less than 6-5/8 inches or more than 6-7/8 inches from top edge of finished front.		248	
	e. Cut of horizontal alignment by more than 1/8 inch.		249	
	f. Poorly shaped, affecting appearance.		250	
	g. Set on crooked, affecting appearance.		251	
Front button	a. Missing, insecurely sewn, broken, or defective.		252	
	b. Type, size, or color other than specified.		253	
Note:	Button shall be considered defective if it has a sharp, rough, cracked, or split edge; scratches; dent; blemishes; embedded foreign matter; loose shank; or shell poorly plated or badly shaded.			
	c. Button not sewn with eagle in an upright position.			322
	d. Stitching not caught through front interlining.		254	
	e. Position:			
	1. Shank less than 1-1/8 inch or more than 1-1/4 inches from front edge of cape.			323

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	2. Shank more than 1/8 inch from center seam line of ornamental piece.				324
Center back pleat	a. Folded edge of pleat towards left side of back as worn.	111			
	b. Less than 1-7/8 inches or more than 2 inches wide.			255	
Snap fasteners	a. Any snap fasteners missing, insecurely sewn, broken, defective, or mismated.			256	
	b. Not specified type, size, or finish.				325
	c. Stitching not caught through interlining on one or more snaps.			257	
	d. Snap fasteners sewn in a reversed position, i.e., stud sewn to left front or socket sewn to underside of right facing.			258	
	e. Position (measured from center of snaps)				
	1. Top stud less than 3/8 inch or more than 1/2 inch from top edge of front.			259	
	2. One or both studs less than 3/8 inch or more than 5/8 inch from front edge.			260	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	3. Lower stud more than 1/8 inch from either side of center seam line of ornamental piece.		261	
	4. Studs or sockets out of vertical alignment by 1/8 inch or more.		262	
4.5.2.3.2	Inside of cape.			
Front facings	a. Fullness on facing between front and back edges.			326
	b. Tacking on back edge of facing to interlining omitted on one or both facings.		263	
	c. Tacking on back edge of facing to interlining insecure or incomplete for a distance of more than 1 inch below shoulder seam or more than 4 inches from bottom edge of cape.			327
	d. Tacking on back edge of one or both facings to bottom hem of cape omitted or insecure.		264	
Hanger loop	a. Missing, or ends not securely caught in collar neck facing joining seam.		265	
Identification label	a. Missing, incorrect or illegible.		266	
	b. Not stitched on all four sides.			328

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
	c. Less than 3-1/2 inches, or more than 4-1/2 inches, from finish bottom edge of cape.				329
	d. Top edge of label not placed along facing-lining seam or placed on the right front facing.				330
Size label	a. Omitted, incorrect, or illegible.			267	
	b. Not securely caught in neck facing-lining joining seam.			268	
	c. Size shown on the item label not in conformance with size shown on intermediate or outer containers, as applicable.			269	
Body linings	a. Excessive fullness or twist not affecting smoothness on outside of cape.				331
	b. One or more seams not pressed open.				332
	c. Seam joining wool facing to lining not turned to one side and pressed.				333
	d. Folded edge of center pleat on outside of lining not facing toward left side.			270	
	e. Bottom hem:				
	1. Puckered or twisted.				334
	2. Less than 3/4 inch or more than 1-1/4 inches.				335

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Bottom hem (cape)	a. Width of hem including tape: - less than 1-1/2 inches but not less than 1-1/4 inches, or more than 1-3/4 inches but not more than 2 inches.			336
	- less than 1-1/4 inches or more than 2 inches.		271	
	b. Irregular in width by more than 1/4 inch.			337
	c. Twisted, not affecting smoothness on outside of cape.			338
Pinking (wool or lining)	a. One or more seam allowances not pinked.			339

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.2.4 Size measurements. Any measurement deviating from the dimensions and tolerances in table III shall be classified as a measurement defect. The inspection level shall be S-3 (see 6.5).

4.5.3 Examination of preparation for compliance with delivery requirements. An examination shall be made to determine packaging, packing, and marking requirements of section 5 of this speci-fication. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or of improper size, location, sequence, or method of application.
Materials	Any component damaged or otherwise defective, affecting serviceability.
Workmanship	Inadequate application of com-ponents, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling, bulging, or distortion of containers.
Content	Improper number of capes per intermediate packages per container (see 1/). Improper number of intermediate packages per container.

1/ For this defect, one intermediate package from each container in the sample shall be examined.

5. PACKAGING

5.1 Packaging. Packaging shall be commercial.

5.2 Packing. Packing shall be commercial and packed in a manner to insure carrier acceptance and safe delivery at

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

destination. Containers shall be in accordance with Uniform Classification Rules, National Motor Freight Classification Rule, and U.S. Postal Service Manual, or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The capes described herein are intended for wear by women officers of the U. S. Marine Corps.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).
c. Size required (1.2).
d. Whether first article is required (3.2).
e. Acceptance criteria (6.5).

6.3 Standard samples and shade samples. - For information regarding the availability of sample cape, and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids (see 3.1, and 3.3).

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first article, preproduction samples, first production of sample(s) taken from the first lot depending on the contractor's history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instruction in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 1.5 for major defects, 4.0 for major and minor A combined and 6.5 for major, minor A and B combined is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.6 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.


6.7 Subject (Key word) listing.

Female
Night
Wrap

6.9 Marginal notations. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensive changes.

Preparing activity:
Navy-MC
Project No. 8410-N747

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

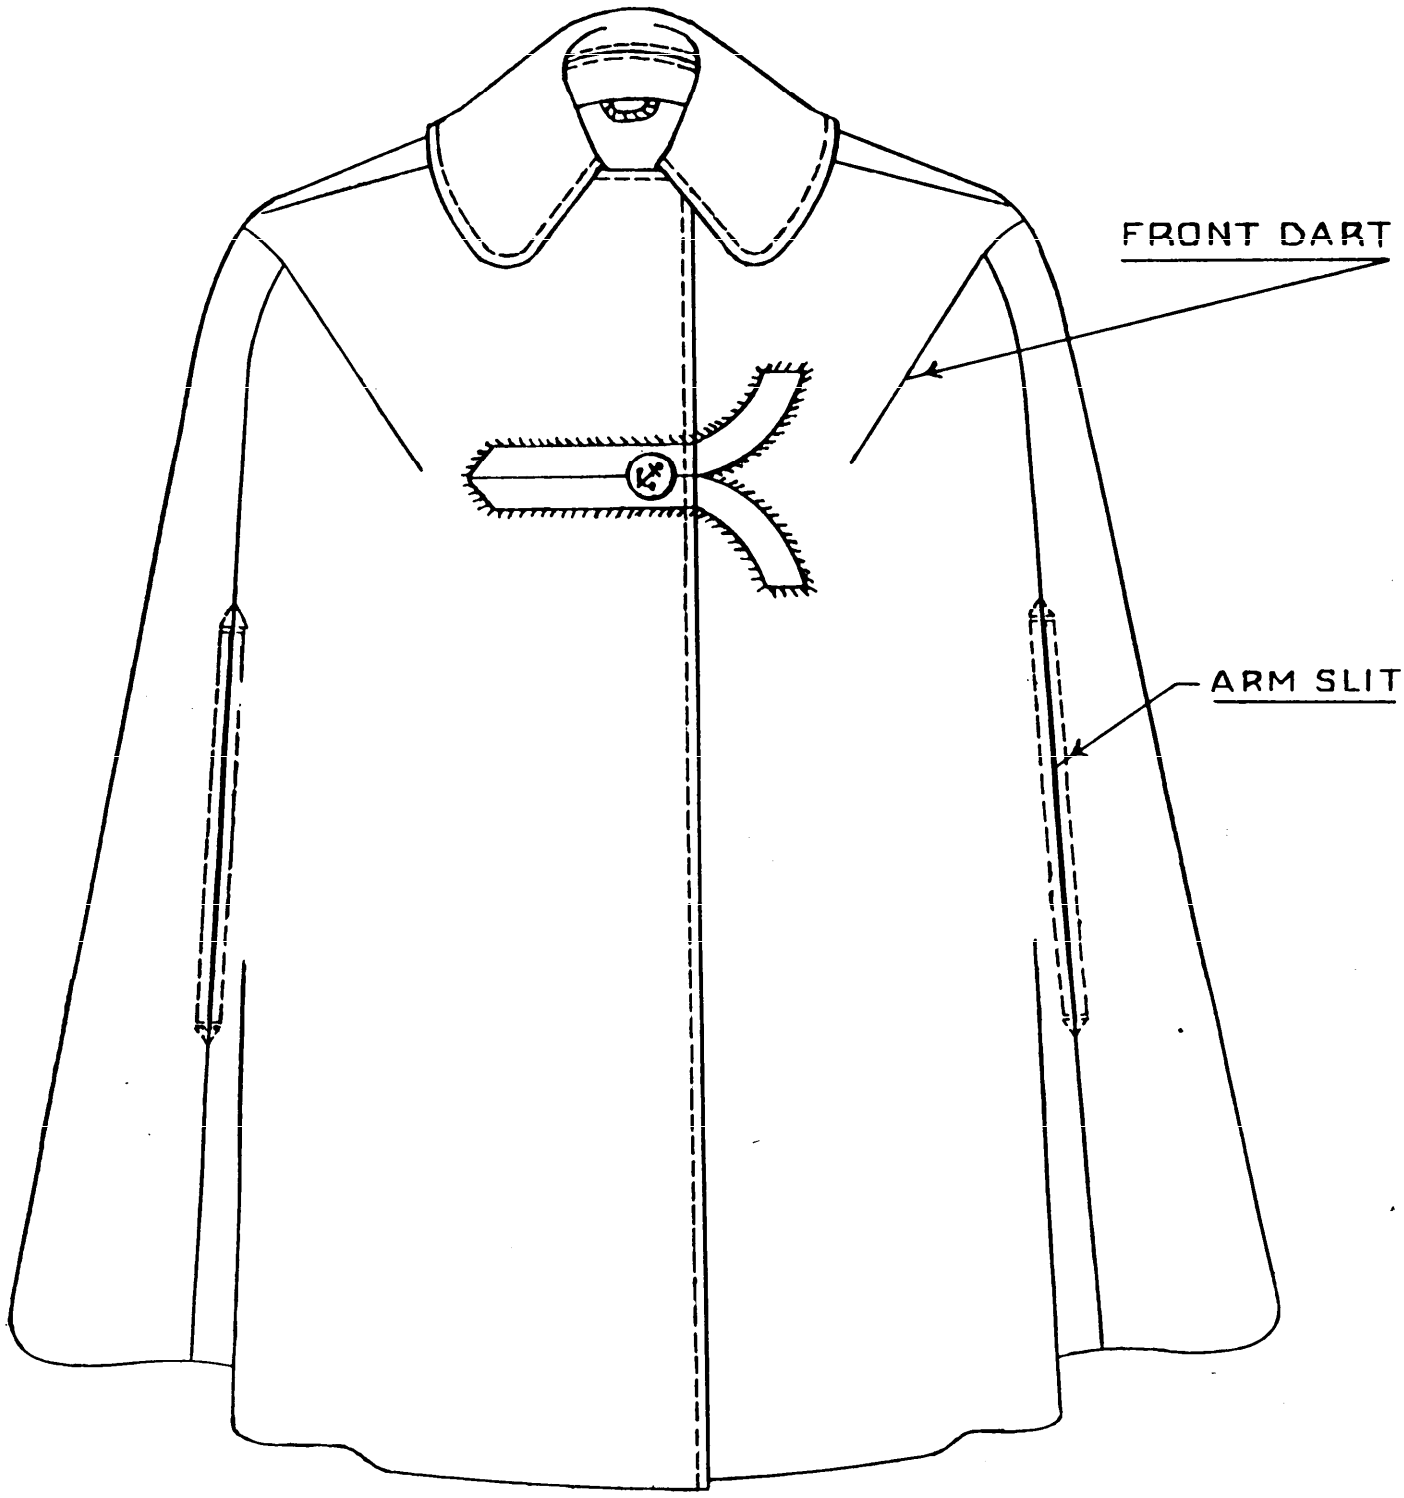

FRONT VIEW

FIGURE 1. CAPE, WOMAN'S: EVENING DRESS, OFFICER'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.


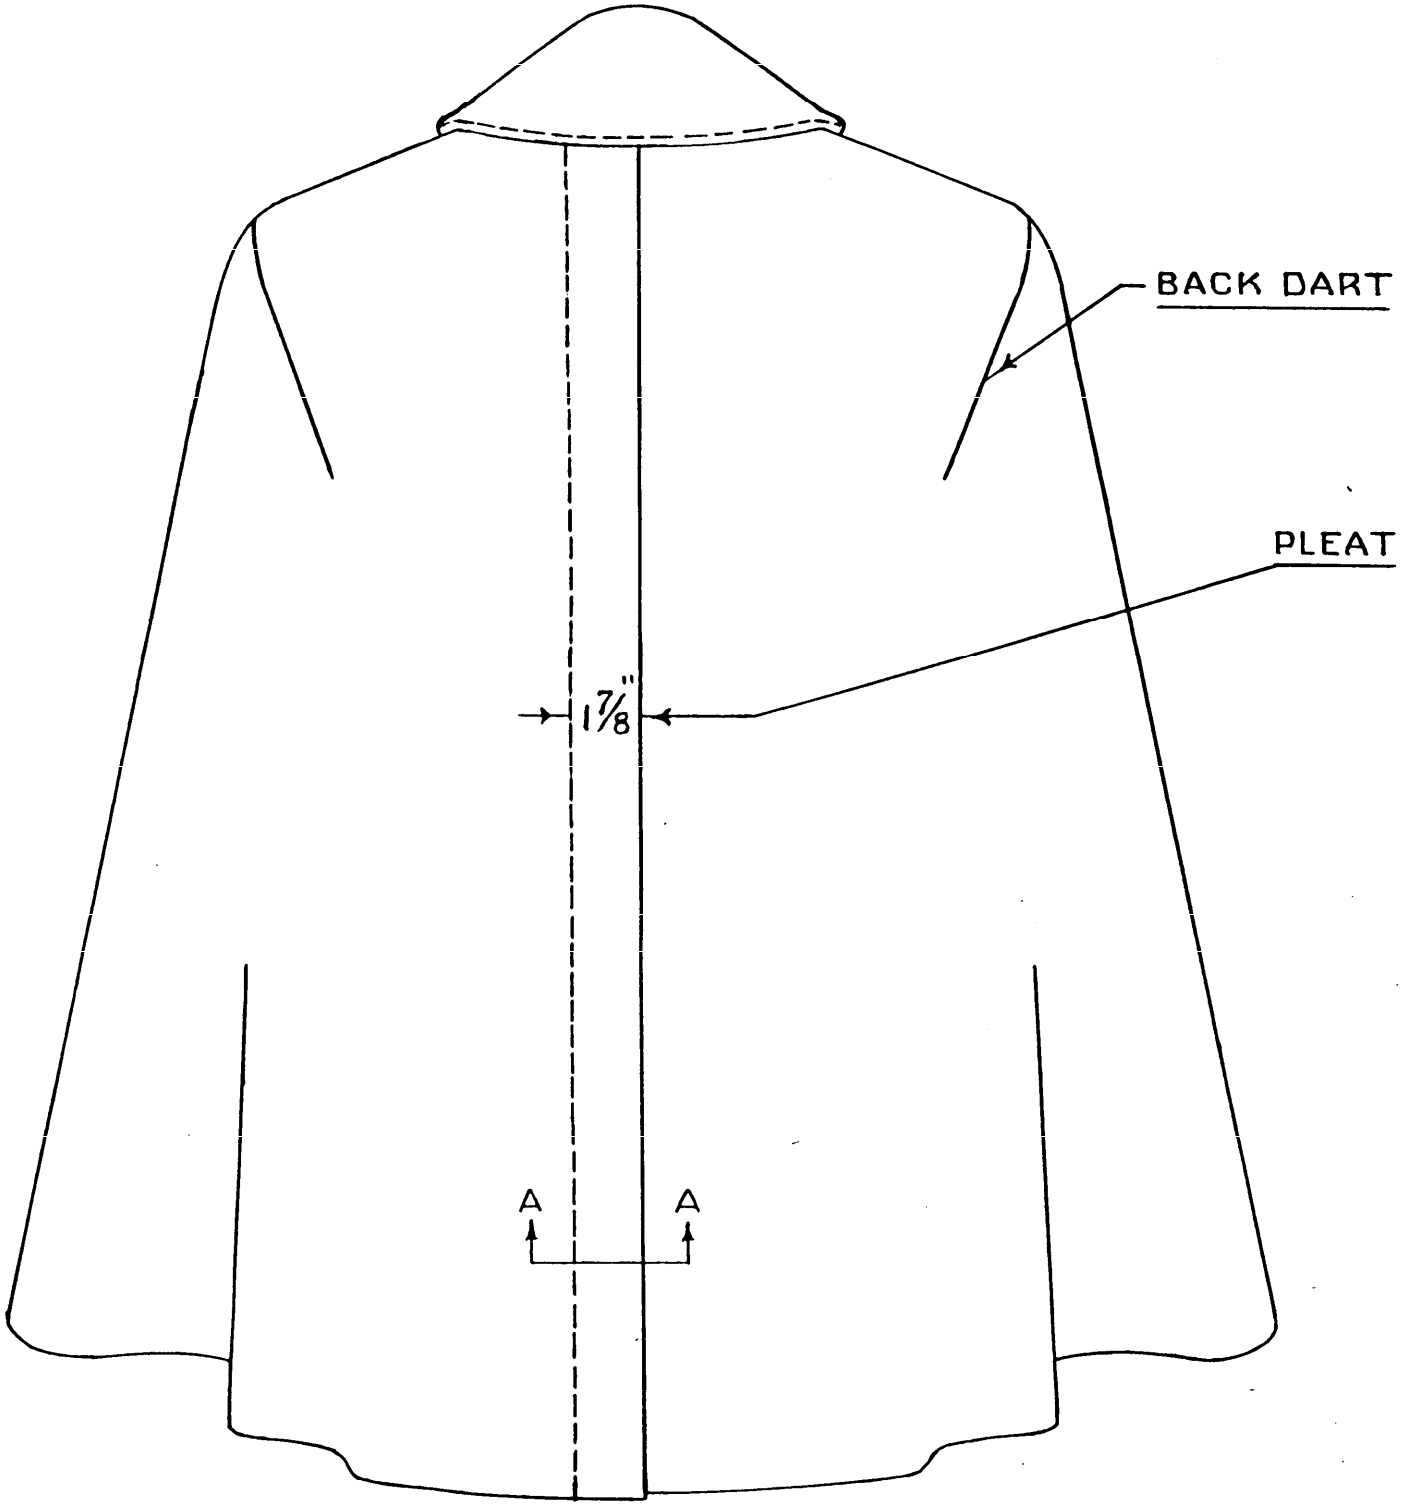


FIGURE 2. CAPE, WOMAN'S; EVENING DRESS, OFFICER'S


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

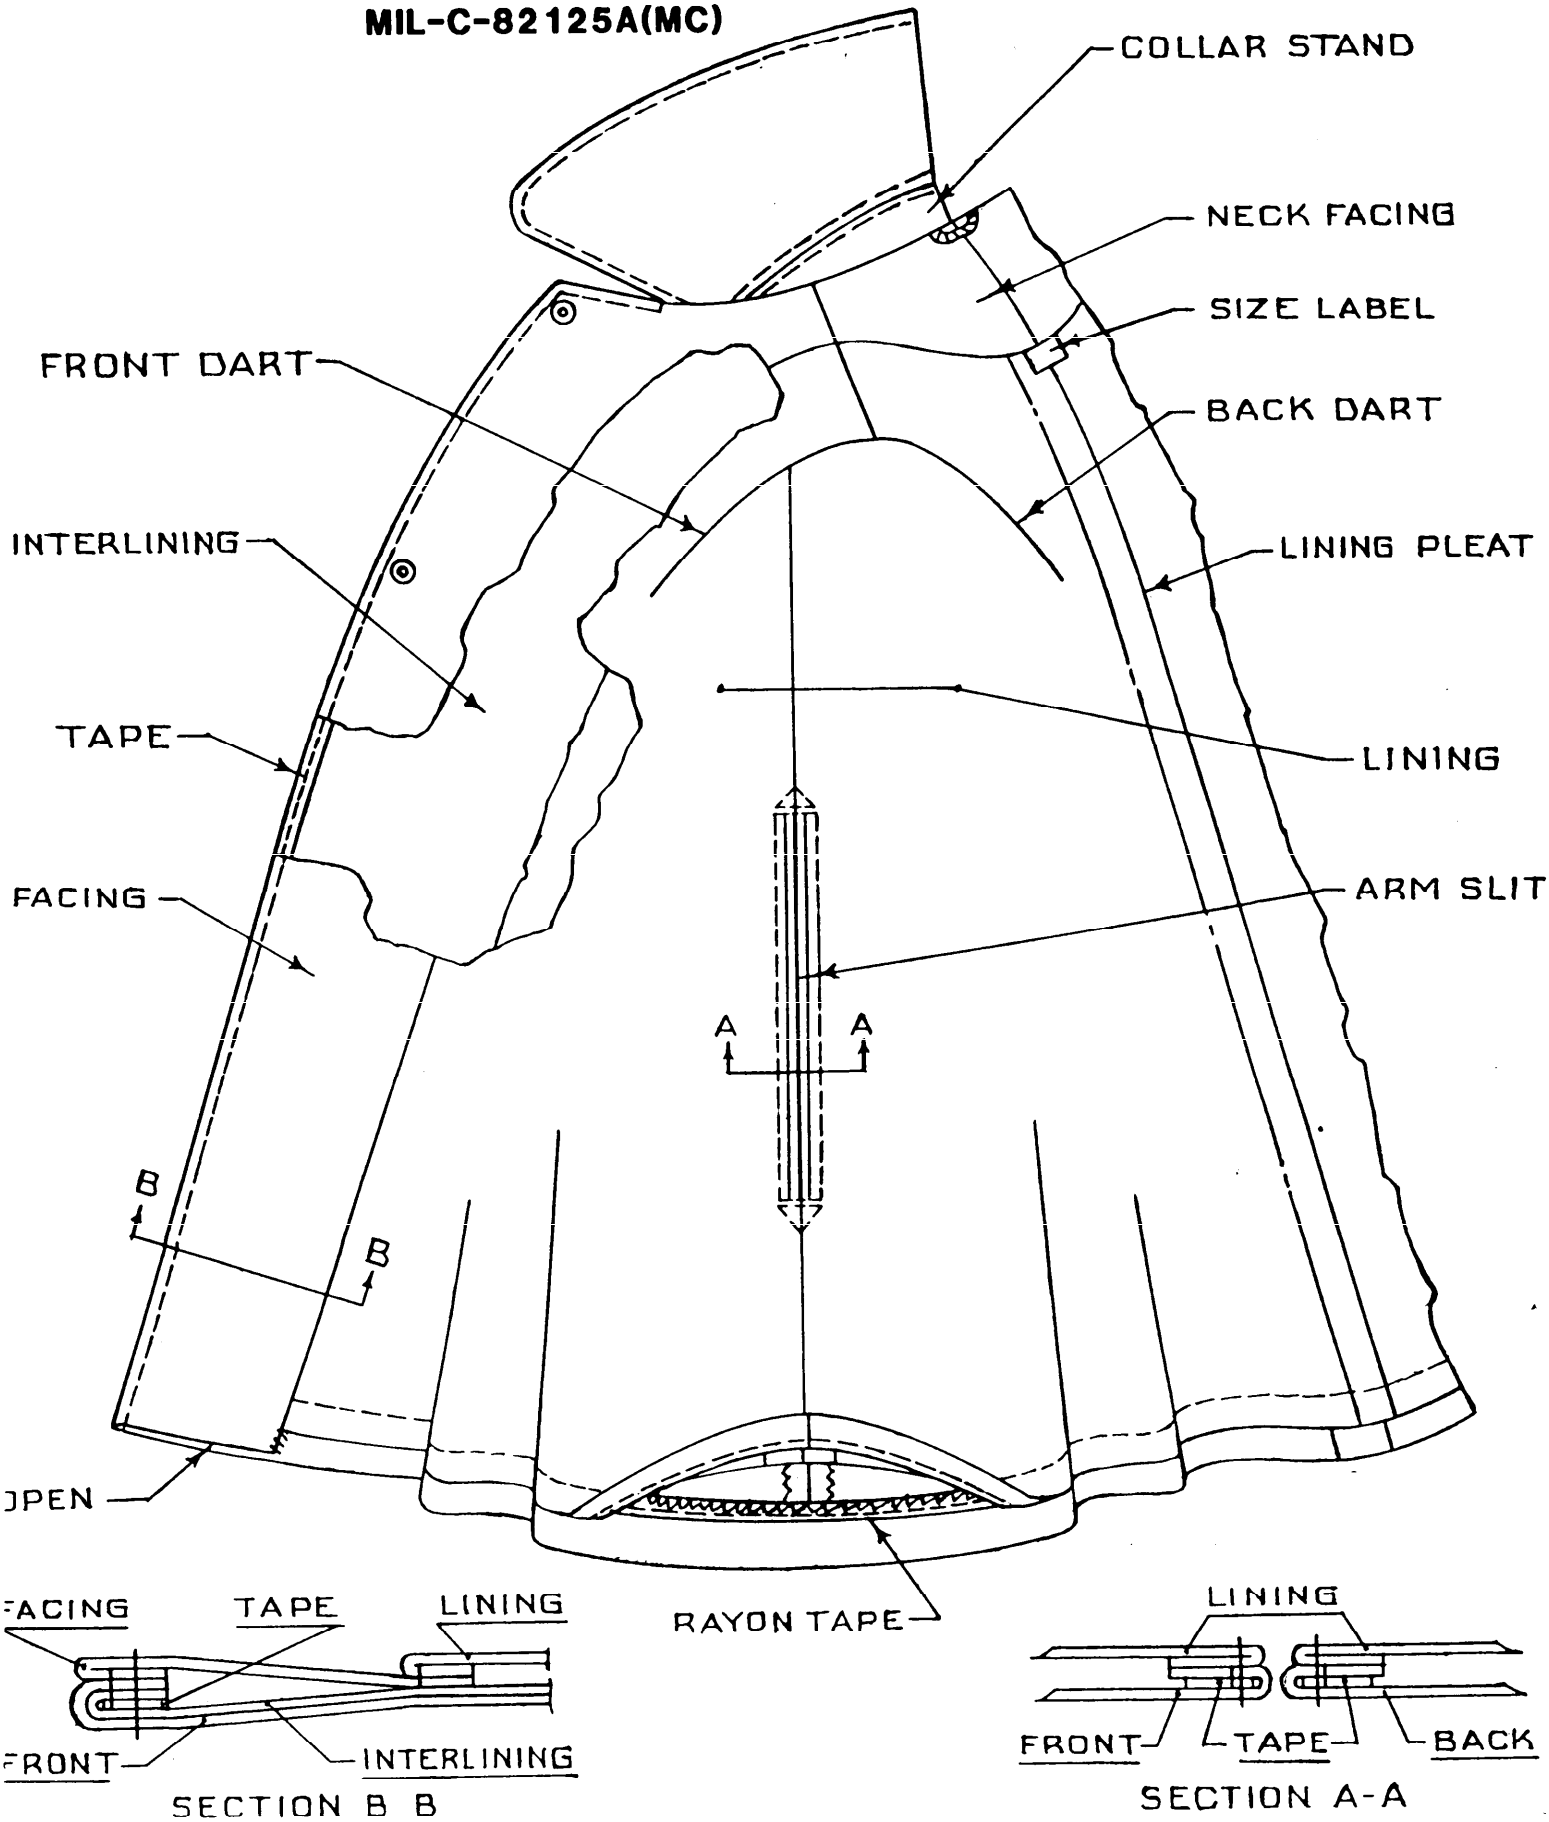

DETAIL: INSIDE RIGHT, FRONT

FIGURE 3. CAP, WOMAN'S, EVENING DRESS, OFFICER'S

Source: https://assist.dla.mil -- Downloaded: 2025-10-26T04:39Z
Check the source to verify that this is the current version before use.

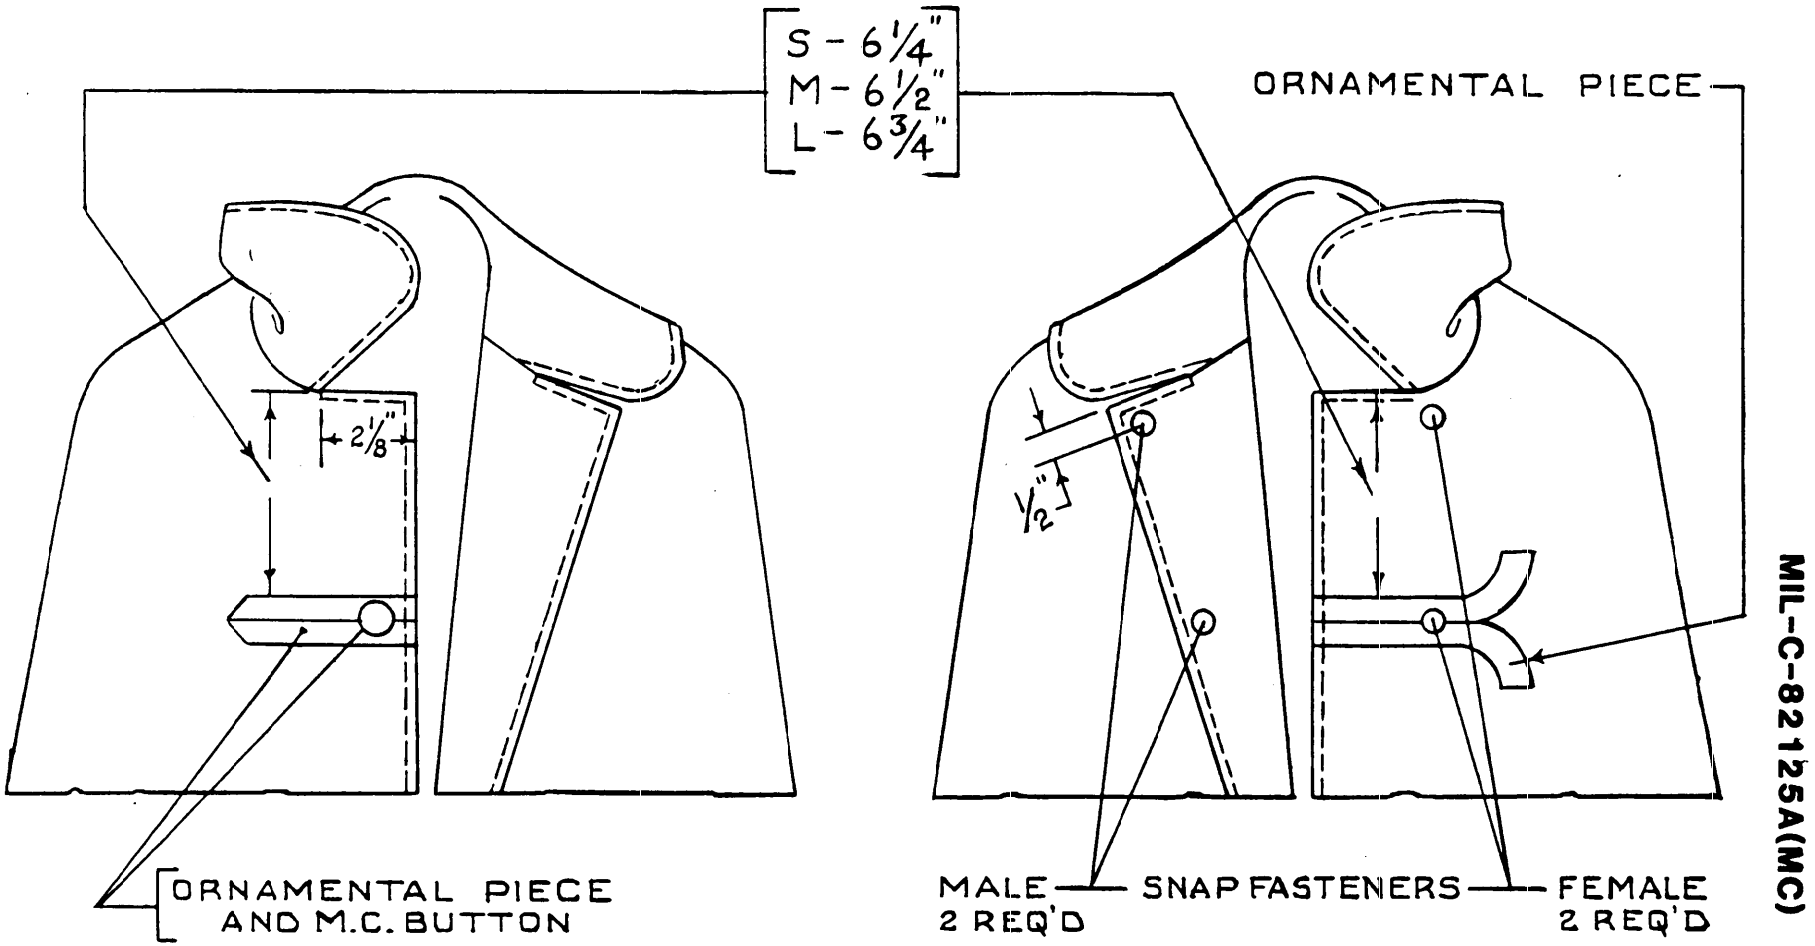

MIL-C-82125A(MC)

LOCATION OF ORNAMENTAL PIECE, MARINE CORPS BUTTON AND SNAP FASTENERS

FIGURE 4. CAPE, WOMAN'S: EVENING DRESS, OFFICER'S

Source: https://assist.dla.mil/ - Downloaded: 2026/10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-82125A(MC)	3 DECEMBER 1990

3. DOCUMENT TITLE

CAPE, WOMAN'S: EVENING DRESS (OFFICER'S)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(1) Commercial (202) 696-1186/87/88	(2) AUTOVON 226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.