INCH-POUND

MIL-S-82126C(MC)

28 March 1994

SUPERSEDING
MIL-S-82126B(MC)
6 October 1982

MILITARY SPECIFICATION

SKIRTS, WOMEN'S: EVENING DRESS

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for black polyester/wool skirts.

1.2 Classification. The skirts shall be of two types in the following sizes as specified (see 6.2):

Type I - Skirt, Women's: Evening Dress, (Staff Noncommissioned Officer's) (short)

Type II - Skirt, Women's: Evening Dress, (Officer's) (long)

Schedule of Sizes

Short	Regular	Long
4	4	4
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16

1.3 Individual orders. When skirts are custom tailored to an individual order, this specification shall govern, except that detail requirements of Section 3, Table I, may be modified to the extent necessary for good custom tailoring practice.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSC), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50196	- Thread, Silk
A-A-50198	- Thread, Cotton, Gimp, Buttonhole
A-A-52094	- Thread, Cotton
A-A-52106	- Cloth, Twill, or Plain Weave, Polyester and Polyester Blend
V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	- Fastener, Slide, Interlocking
UU-P-268	- Paper, Kraft, Wrapping
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill Rayon
MIL-B-371	- Braid, Textile, Tubular
MIL-T-5237	- Tape, Textile; Webbing, Textile; Rayon
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-984	- Provisions for Size Labeling of Women's Uniform Clothing
MIL-STD-1609	- Provisions for Evaluating Quality of Women's Skirts

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government publications. The following other Government publication forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Department of Defense (DoD) Standard Color Card for Sewing Threads 1968

Department of Defense (DoD) Standard Shades for Buttons 1966

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Lexington Avenue, New York, NY 10016.)

(Copies of specifications, standards and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF TESTING AND MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA. 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents may also be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article, consisting of the number of finished skirts specified by the procuring activity (see 6.2), shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of the responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic materials. The basic material shall be cloth, polyester/wool, black, shade 2607 (see 6.3) conforming to type III, class 1, of MIL-C-21115.

3.3.2 Lining. The material for lining the skirts shall be cloth, twill, rayon, black, shade 2604 (see 6.3), 3.7 ounce, conforming to class 1 of MIL-C-368.

3.3.3 Finishing tape. The tape for finishing the opening of the back center vent and bottom of the skirt shall be tape, textile, rayon conforming to type 1 of MIL-T-5237. The color shall black.

3.3.4 Hanger braid. The braid for the skirt hangers shall be rayon, tubular, flat braid, 1/8 to 3/16 inch wide, conforming to type IX, class 1 of MIL-B-371 and shall be black.

3.3.5 Thread.

3.3.5.1 Silk thread. The silk thread for machine sewing shall conform to type I, ticket No. A, 3-ply of A-A-50196 for outside seaming and stitching and type III, ticket No. C, 2-ply of A-A-50196 for hand sewing.

3.3.5.2 Cotton thread. The cotton thread shall conform to type III, mercerized finish, ticket No. A, 3-ply of A-A-52094 for all inside seaming and stitching.

As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to A-A-50199, ticket No. 50, 3 ply or ticket No. 70, 2 ply may be used.

3.3.5.3 Color and colorfastness. The silk and cotton thread shall be black, shade AA, Cable No. 66043. The dyed thread shall show fastness to light and wet dry cleaning equal to or better than the standard sample. When no standard sample is available, the colored thread shall show "good" fastness to light and wet dry cleaning.

3.3.6 Gimp. The gimp for reinforcing the buttonholes shall be cotton, No. 8, conforming to type I or II of A-A-50198. The color shall be black.

3.3.7 Slide fasteners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.7.1 Slide fasteners, metal. The slide fasteners shall conform to type I, style 3, short tab pull, cam lock size LS (commercial No. 4), of V-F-106, except that the salt spray test shall not be required. All the components of the slide fastener shall be brass and from the same supplier (see 4.5.1). The color of the tape shall be black, shade G, Cable No. 66507. The tape shall be cotton or synthetic or a combination. The length of the slide fastener shall be 7 inches long for all sizes.

3.3.7.2 Plastic coil slide fasteners. The slide fasteners shall be manufactured of polyester of nylon consisting of an automatic or cam lock and shall be equal to commercial size No. 2. The tape shall be a blend of nylon and cotton or polyester and cotton or polyester. The length of the slide fastener shall be 7 inches long for all sizes.

3.3.7.3 Colorfastness. The dyed slide fastener tape shall show colorfastness to laundering equal to or better than the standard sample when tested as specified in V-F-106. When no standard sample is available, the tape shall show "good" colorfastness when tested as specified in V-F-106.

3.3.8 Buttons. The buttons for the waistband shall be 27-line conforming to type II, class D, style 4 of V-B-871. The color shall be black, shade BT, Cable No. 62001 (See DoD Standard Shades for Buttons, 1966).

3.3.8.1 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monochord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards. This thread shall be tested for these requirements and for colorfastness (see 3.3.6.3) in accordance with test methods in V-T-295.

3.3.9 Labels.

3.3.9.1 Label. Each skirt shall have an identification label conforming to type VI, class 1 and 2 of DDD-L-20. The skirts are intended to be dry cleaned and the label shall show fastness to dry cleaning. The content and format shall be as follows:

NOMENCLATURE (item description)
NAME OF CONTRACTOR:
WOOL PRODUCTS ACT information

3.3.9.2 Size label. The size label shall conform to type VI, Class 2 of DDD-L-20 except the stock number is not required. The inscription on the size label shall conform to MIL-STD-984; Table II Body Dimensions for Marine Corps, Table III Height Ranges and Figure 2. Examples of labels are as follows:

Hip Circ	36"	
Waist Circ	25-1/2"	
Height	63-1/2 to 67"	(R)
	(Size Code 6)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.10 Waistband interlining. The waistband interlining material shall be twill, polyester and cotton conforming to class I, of A-A-52106. A fusible waistband interlining of suitable material may be substituted for the polyester and cotton twill.

3.4 Design. The skirt shall be the U. S. Marine Corps design shown in Figures 1 and 2, a gore style made with a three piece front, two piece back panels, fully lined, and an opening at the top of the center back with a slide fastener closure, and a one piece set-on waistband with both ends to fasten with buttons and buttonholes at the back opening. The skirt shall have a center back kick pleat and the hem shall be pinked. A watch pocket shall be placed on the right side at the waistband seam.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government (see 6.3). The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, seam allowances, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts. The patterns provide an allowance of 3 inches for hemming the bottom of skirt.

3.5.1 Pattern parts. The skirts shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature	No. of Cut Parts
	Material: Basic	
1.	Center front	1
2.	Side front	2
3.	Back	2
4.	Waistband	1
5.	Placket	1
6.	Watch pocket (bottom ply)	1
	Material: Cloth, Rayon Lining	
7.	Front lining (cut on fold)	1
8.	Back lining	2
	Material: Twill, Polyester and Cotton or Fusible	
9.	Waistband-interlining	1
10.	Watch pocket (top ply)	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.6 Construction. The skirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operation as listed in Table I, but all operations specified shall be used to manufacture the skirts.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. The minimum and maximum number of stitches per inch shall be specified in Table I.

3.6.1.1 Thread breaks and ends of seams. The ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches may be repaired by using 301 stitch type. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread ends of darts shall be trimmed to a length of 1/2 inch. When an automatic dart machine is used, the ends shall be backstitched not less than 3 stitches.

3.6.2 Buttonhole. The buttonhole shall be eyelet end, taper bar type. The finished cut length of buttonhole shall be 3/4 inch.

3.6.3 Pressing. Pressing as required in Table I shall be accomplished with a heated pressing iron or machine.

3.6.4 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the skirt. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on shade tickets
(c) Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting. a. Cut the skirt in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by directional lines on pattern. The directional line shall be placed in the warp direction of the cloth unless otherwise indicated on the pattern. c. Cut component parts of skirt from one piece of basic material, except placket, and watch pocket which may be cut from ends. d. Cut front and back lining parts of the skirt from one piece of lining material. e. Cut braid for skirt hangers in lengths of 4 ± 1/8 inches. Each skirt shall be provided with two hangers. f. Cut hem tapes not less than 65 inches long. g. Cut waistband interlining of polyester and cotton twill or fusible material (see 3.3.10) in accordance with pattern to reinforce the underside of the waistband.					
2	Replacement of damaged parts. a. Replace at time of cutting any part of the skirt containing holes or seriously weakening defects such as smashes, multiple floats, loose weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2	Replacement of damaged parts. (cont'd)					
	b. Replace any part damaged during manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.					
3	Shade marking.					
	a. Mark, ticket or bundle all component parts (see 3.6.4) cut from one piece of basic material, except those parts cut from ends, to ensure uniform shade and size throughout the skirt. All lining parts shall be marked, bundled or ticketed to insure uniform shade and size throughout the garment.					
4	Make watch pocket.					
	a. The watch pocket shall be made of one ply of basic material and one ply of poly/cotton twill and shall finish not less than 4 inches wide and 4 inches deep.					
	b. Position both plies of watch pocket face up and with sides and bottom edges even. Join both plies together 3/8 inch from raw edges, 1/2 inch down from top raw edges at each side.	301	SSa-1	10-14	50	50
5	Make waistband.					
	Finished appearance. On the finished skirt, the outside end of the waistband shall be pointed and the inside end shall be squared.					
	a. The waistband shall be made of a single ply of basic material and a single ply of interlining (twill or fusible).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5	Make waistband. (cont'd)					
	b. Position the interlining on the inside of waistband with bottom edges even. Stitch the interlining to the underside of waistband along the top and bottom edges of inter lining with a 1/8 inch seam. The line of stitching shall extend the entire length of waistband but the stitching shall not show on the front of the waistband. -or- When fusing the interlining to the waistband, position the interlining on the inside of waistband with bottom edges even. Stay stitch is not required.	301	SSa-1	10-14	A	A
	c. Overedge stitch the inside raw edge of waistband.	503 or 504	EFd-1	8-12	70	70
	d. Fold the waistband in half lengthwise face to face with notches matching. Join the two plies together, at the pointed end, with 3/16 inch seam, starting at the folded edge.	301	SSe-2	12-16	A	A
	e. Close the squared end by seaming the two plies together 3/16 inch from the bottom raw edges, starting approximately midway between the notches and the end of the waistband, then seam straight across the width of the waistband to close the end.	301	SSe-2 (a)	12-16	A	A
	f. Trim the excess material at both ends to 1/8 inch from the seams. Turn the waistband, forcing out the corners and point completely, and edgestitch 1/16 inch from the seamed edges at the pointed and squared ends.	301	SSe-2	12-16	A	A (Silk)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5	Make waistband. (cont'd)					
	g. Continue to edgestitch along the length of the waistband 1/16 inch from the folded edge.	301	OSf-1	12-16	A (Silk)	A
	h. The edgestitching may be performed continuously with the top stitching on the outside of the waistband in operation 19.a.					
6	Assemble placket and slide fastener (see Figure 3).					
	Finished appearance. The placket shall be smooth and flat. The folds of the skirt shall completely cover the slide fastener when slide fastener is closed. The stitching shall not interfere with the operation of the slider.					
	a. The side and bottom edges of the material for the placket shall be neatly and evenly overedge stitched.	503 or 504	EFd-1	8-12	70	70
	b. Form the placket by folding the material lengthwise with the side edges offset 1/4 inch, and baste the two plies of material together along the folded edge or the folded edge may be pressed.	101	OSf-1			
	c. Place the closed slide fastener on the narrow side of the placket with the top end of the chain 1/2 inch below the top raw edge of the placket, and with the center of the chain 5/8 to 3/4 inch from the folded edge of placket.					
	d. Join the right half of the fastener to the placket with a single row of stitches 3/16 to 1/4 inch from the chain edge through the tape and both plies of the placket.	301	SSe-2	12-16	A (Silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7	Sew lining darts. Finished appearance. The lining darts shall finish smooth and flat without distortion.					
	a. Sew front and back lining darts in accordance with notches and marks provided on the patterns.	301	SSa-1	12-16	A	A
	b. Join the back lining parts with a 1 inch seam from the bottom, up to within 8 inches from top of waist to allow for slide fastener opening.	301	SSa-1	12-16	A	A
8	Join back and front linings. Finished appearance. The side seams of the lining shall be carefully joined without twists, puckers, or pleats. The seams shall start and finish evenly. The seam allowances in the lining shall not be exposed on the inside of the finished skirt. The contour of the waist and hipline shall be maintained in the seaming.					
	a. Position the back and front linings with notches matching and join together at the side with a 1 inch seam from the bottom to the top edge.	301	SSa-1	10-14	A	A
	b. The back opening shall be folded and edgestitched 1/8 inch on each side. Folded edges of lining shall be stitched under the placket and left side of zipper tape.	301	EFb-1	12-14	50	50
9	Pink seams and bottom edge of lining. a. The raw edge of the seam allowances and raw edges at the bottom of the front and back lining shall be neatly and evenly pinked with the points of the pinking 1/8 inch in depth.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Make back panel darts, form center back pleat and seam skirt panels.					
	Finished appearance. The seams and darts shall start and finish evenly without twists, puckers, pleats or other distortions.					
	a. Join the side fronts and center front panels, with a 3/4 inch seam with notches matching.	301	SSa-1	12-16	A	A
	b. Join the center back seam with a 1/2 inch seam from the mark on the pattern, approximately 17 - 18 inches from bottom raw edge, to the bottom of the center back zipper (approximately 7-1/2 inches) from top of waist.	301	SSa-1	12-16	A	A
	c. From the mark on the pattern for the center back pleat to the bottom edge of skirt, seam the inside edges of the left and right edges with a 5/8 inch tape.	301	SSa-1	12-16	A	A
	d. Turn the tape to the inside of fabric and blindstitch the unsewn edge to the underside of pleat opening and press flat.	301	EFm-1	12-16	A	A
	e. Sew the back darts in accordance with notches and marks provided on patterns.	301	SSa-1	12-16	50/3	50/3
11	Attach watch pocket.					
	a. Position the top inside ply of the poly/cotton twill side of pocket to the top raw edge of the right front of skirt waistband. The notch of the pocket shall be 1 inch in from the side seam. Join the pocket to the skirt waist with a 3/8 inch seam, from notch to notch, forming a 4 inch wide opening at the top of the waistseam. Turn the pocket up and raise stitch, 1/16 inch through twill and front of skirt catching all plies.	301	SSa-1	12-16	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
11	Attach watch pocket. (cont'd)					
	b. Notch and turn pocket to the inside and bartack each edge of opening. NOTE: Watch pocket shall finish between the basic fabric and the lining.	Bartack		21-28 per bartack	0	0
12	Join skirt back and front at sides.					
	Finished appearance. The side seams shall be carefully joined without twists, puckers, or pleats. The seams shall start and finish evenly. The contour of the waist and hipline shall be maintained in the seaming.					
	a. Join the front and back parts of skirt at the side seams with a 1 inch seam from bottom to top edge with notches matching.	301	SSa-1	10-14	A	A
13	Overedge seams.					
	a. The raw edges of the seam allowances on the front and back parts shall be neatly overedge stitched. NOTE: Care shall be exercised during the overedging operation to ensure that no seam allowance is reduced by more than 1/16 inch.	501 or 503	SSa-1	8-10	70	70
14	Press seams.					
	Finished appearance. The seams in the skirt and the lining shall be well pressed without distortion of the seams or the side openings.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14	Press seams. (cont'd) a. Spread open all seams and press smooth and flat with a heated pressing iron or pressing machine. The edges of the center back opening of the skirt shall be folded back straight and even with the back seam allowance, and the opening pressed smooth and flat with the folded edges of the opening well creased.					
	b. Both plies of the center back seam shall be pressed to the wearers' left and the center back pleat shall fall left over right and shall be top stitched across the top from the center back seam for 2-1/2 inches toward the edge of the inner pleat at a slight downward angle.	301	SSa-1	12-16	A (Silk)	A
15	Pink bottom edge of skirt. a. The raw edge of the bottom of the front and back skirt shall be neatly and evenly pinked with the points of the pinking 1/8 inch in depth. NOTE: Care shall be exercised during the pinking operation to assure that no seam allowance is reduced by more than 1/16 inch.					
16	Join placket assembly to skirt (see Figure 3). a. Open the slide fastener and place the front half of it on the inside of the right part of the skirt at the back opening, with the top end of the chain positioned 1/2 inch below the top raw edge and with the edge of the chain positioned 1/4 to 3/8 inch from the creased front edge of the back opening.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16	Join placket assembly to skirt (see Figure 3). (cont'd)					
	b. Join the left half of the slide fastener to the skirt with a single row of stitches through the tape and left back panel of the skirt. The row of stitches shall extend from the top edge of the left back panel to 1/4 to 3/8 inch below the bottom end of the chain, and shall be uniformly 5/16 inch from the center edge of the back opening.	301	SSak-1	12-16	A	A
	c. Close the slide fastener and turn the skirt right side out. Position the right back part of the skirt on the placket, holding the right edge of the opening as close as possible to the chain of the slide fastener so that in the finished skirt, the edge of the opening conceals the zipper when the skirt is worn. Continue to topstitch along the folded edge of the right back opening, 5/16 inch from the folded edge, across the bottom through the slide fastener tape and the placket and up the left back edge of the opening.	301	LSah-1	12-16	A (Silk)	A
	d. Topstitch across the bottom end of the opening through the slide fastener tape and the placket with a single row of stitches. The stitching shall not pass the finished stitching of each side opening.	301	SSv-1	12-16	A (Silk)	A
17	Joining lining to skirt.					
	Finished appearance. The lining shall be joined to the skirt at the waist. The seam shall be smooth, flat and without distortion.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17	Join lining to skirt. (cont'd)					
	a. Position the lining over the skirt with the top raw edges even and side seams matching, and the left front and back lining panels at the center back opening turned under as specified in operation 8.b. Stitch the lining to skirt at the waist 1/4 inch from the raw edge.	301	SSa-1	10-14	A	A
18	Join waistband to skirt, with hangers and labels.					
	a. Position the waistband on the inside of the skirt, with notches at the pointed end of waistband even with the left side edge of skirt, with the bottom raw edge of the waistband even with the top raw waist edge of skirt, and with the notches at the square end of waistband matching the back folded edge of skirt.					
	b. Join the outside part of the waistband to the skirt with a 3/8 inch seam, with the braid for the hangers folded in half to form a loop and with the ends of the loops placed on the inside of the skirt.	301	LSa-1	12-16	A	A
	c. The hangers shall be positioned at the side seams. The size label shall be out the back on either side of the zipper opening.					
	d. In the finished skirt, the length of the hanger loop shall be 1-5/8 ± 1/8 inches, measured from the bottom edge of the waistband to the end of the loop.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
19	Topstitch waistband. Finished appearance. The waistband shall be sewn on smoothly and evenly and shall have a flat appearance throughout without gathers, puckers, pleats or other distortions either in the waistband, front part or back part, and shall be even width along the entire length. The waistband shall be 1-1/4 ± 1/8 inches wide. The pointed end shall extend 1-1/2 ± 1/8 inches beyond the center back edge of the back opening, and the squared end shall extend 1-1/2 ± 1/8 inches beyond the back edge of the inside zipper placket.					
	a. Turn back the waistband and topstitch the waistband to the skirt 1/16 inch from the raised edge, catching the overedge stitched portion in the stitching, and with the stitching extending the entire length of the waistband.	301	BSr-2	10-14	A (Silk)	A
20	Make buttonholes. Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The stitching shall be securely caught in the basic material. The buttonholes shall be well worked over gimp to fit 27-line buttons. The purling of the buttonholes shall be on the outside of the waistband.					
	a. Make a 3/4-inch-long horizontal, eyelet-end, taper-bar type buttonhole through the center of the pointed and squared ends of waistband with the inside purled edge of the eyelet 1/2 to 5/8 inch from the finished ends to waistband.	Buttonhole		52-54 per buttonhole including tack	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
21	Clean skirt. a. All ends of stitching shall be trimmed and the loose threads removed from skirt. Pull and remove any basting threads. b. Any spots, stains and shade tickets or markings shall be removed without injury to the material.					
22	Press skirt. a. The entire skirt shall be pressed smooth with a heated pressing iron or steam pressing machine. Remove all press marks, wrinkles, gloss marks, impressions and creases.					
23	Sew on buttons. a. Close the slide fastener and mark the inside and outside ends of waistband with the location for sewing on the buttons to correspond with the eyelet of buttonholes. b. The buttons shall be positioned to engage with the eyelet end of buttonholes, so that on the finished skirt, the ends of the waistband lie smooth and flat without twisting, bulging, or other distortion. c. Securely sew a 27-line button at each mark. The thread ends of hand sewn buttons shall be securely tacked. The button on the outside of waistband shall be sewn through all plies of waistband. The stitches for the button sewn to the inside of the waistband shall not be visible on the outside.	Hand or 101 or 301		4-6 buttonhole (double thread) 14-16	16/4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
24	Prepare for packing. a. Examine skirt. b. An envelope containing the tape for the skirt hem shall be attached by string to the left hanger loop.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

37 Finished measurements. The finished skirt shall conform to the measurements shown in Table II. The skirt shall have hooks and eyes fastened and slide fastener closed and be placed flat upon a table for measuring, except as otherwise specified herein.

TABLE II - Finished Measurements

Size	Waist 1/ (Short, Regular, Long) inches	Seat 2/ (Short, Regular, Long)
4	24-1/2	36-1/2
6	25-1/2	37-1/2
8	27	38
10	28-1/2	40-1/2
12	30	42
14	31-1/2	43-1/2
16	33	45
Tolerances:	± 1/2	± 1/2

	Length3/					
	Type I			Type II		
	Short	Regular	Long	Short	Regular	Long
4	28-1/4	29-3/4	31-1/4	42-3/4	44-1/4	45-3/4
6	28-1/4	29-3/4	31-1/4	42-3/4	44-1/4	45-3/4
8	28-1/4	29-3/4	31-1/4	42-3/4	44-1/4	45-3/4
10	28-1/4	29-3/4	31-1/4	42-3/4	44-1/4	45-3/4
12	28-1/4	29-3/4	31-1/4	42-3/4	44-1/4	45-3/4
14	28-1/4	29-3/4	31-1/4	42-3/4	44-1/4	45-3/4
16	28-1/4	29-3/4	31-1/4	42-3/4	44-1/4	45-3/4
Tolerances:	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

1/ Waist measurement taken along center of waistband from folded edge to folded edge. Multiply by 2. The ± 1/2 inch tolerance is on the full measurement.

2/ Seat measurement taken from folded edge to folded edge 7 inches down from lower edge of waistband. Multiply by 2. The ± 1/2 inch tolerance is on the full measurement.

3/ Length measurement taken at center back from lower edge of waistband to bottom edge of unfinished skirt.

3.8 Workmanship. The finished skirts shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Responsibility of compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified all inspections shall be performed in accordance with the test conditions specified in MIL-STD-1609.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated skirt for all provisions of this specification.

4.5 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1609.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.1 Components and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. A certificate or compliance will be acceptable for the plastic coil slide fastener requirements of 3.3.9.2. In addition, the requirements that all components of the slide fastener have been furnished by one supplier shall be accepted on a certificate of compliance (see 3.3.9.1).

4.5.2 End item examination. Samplings and examination of the end item shall be performed for dress (D) skirts in accordance with the provisions of MIL-STD-1609.

4.5.3 Dimensional examination. The dimensional examination provisions for the finished skirts shall be as listed in 3.7 and as specified in MIL-STD-1609.

4.5.4 Examination of packaging requirements. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-1609.

4.5.5 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial (see 6.2).

5.1.1 Level A. Fold skirts in half lengthwise, with the slide fastener closed and waistband buttoned, and then fold again in half lengthwise. Skirts shall then be folded in half in the width, with bottom edge even with top edge, to form a length of approximately 15 inches, or bottom edge of skirt may be turned under and folded edge placed even with top edge. The length of the completed fold shall be approximately 15 inches. Stack 10 folded skirts of one size in a bundle, placing the top of the first five skirts at one end of the bundle and the top of the second five at the other end. Tie the bundle securely, approximately 3 inches from each end, with cotton tape or twine.

5.1.2 Commercial. Skirts shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A or commercial (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the currentversion before use.

5.2.1 Level A. Thirty (30) skirts of one size and class only, folded as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to class weather resistant, size 2A of MIL-B-17757. In addition, each container shall have the contents completely covered on top and bottom with a sheet of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled, closed and reinforced as specified in the appendix to the box specification. Toward the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Commercial. Skirts, preserved as specified in 5.1, shall be packaged in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The skirts described herein are intended for wear by female personnel of the U. S. Marine Corps.

6.2 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Classes and sizes required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of skirts in first article (see 3.2).
(e) Levels of packaging and packing required (see 5.1 and 5.2).

6.3 Guide sample and patterns. For information regarding the availability of guide sample and patterns, address inquiry to the acquiring activity issuing the invitation for bids.

6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1 through 3 are furnished for information purposes only. To the extent of conflict between these figures and the text of this specification, the text of this specification shall govern.

6.6 Subject term (key word) listing.

Evening Dress
Skirts

PreparingActivity:
Navy - MC
Project No 8410-N833

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

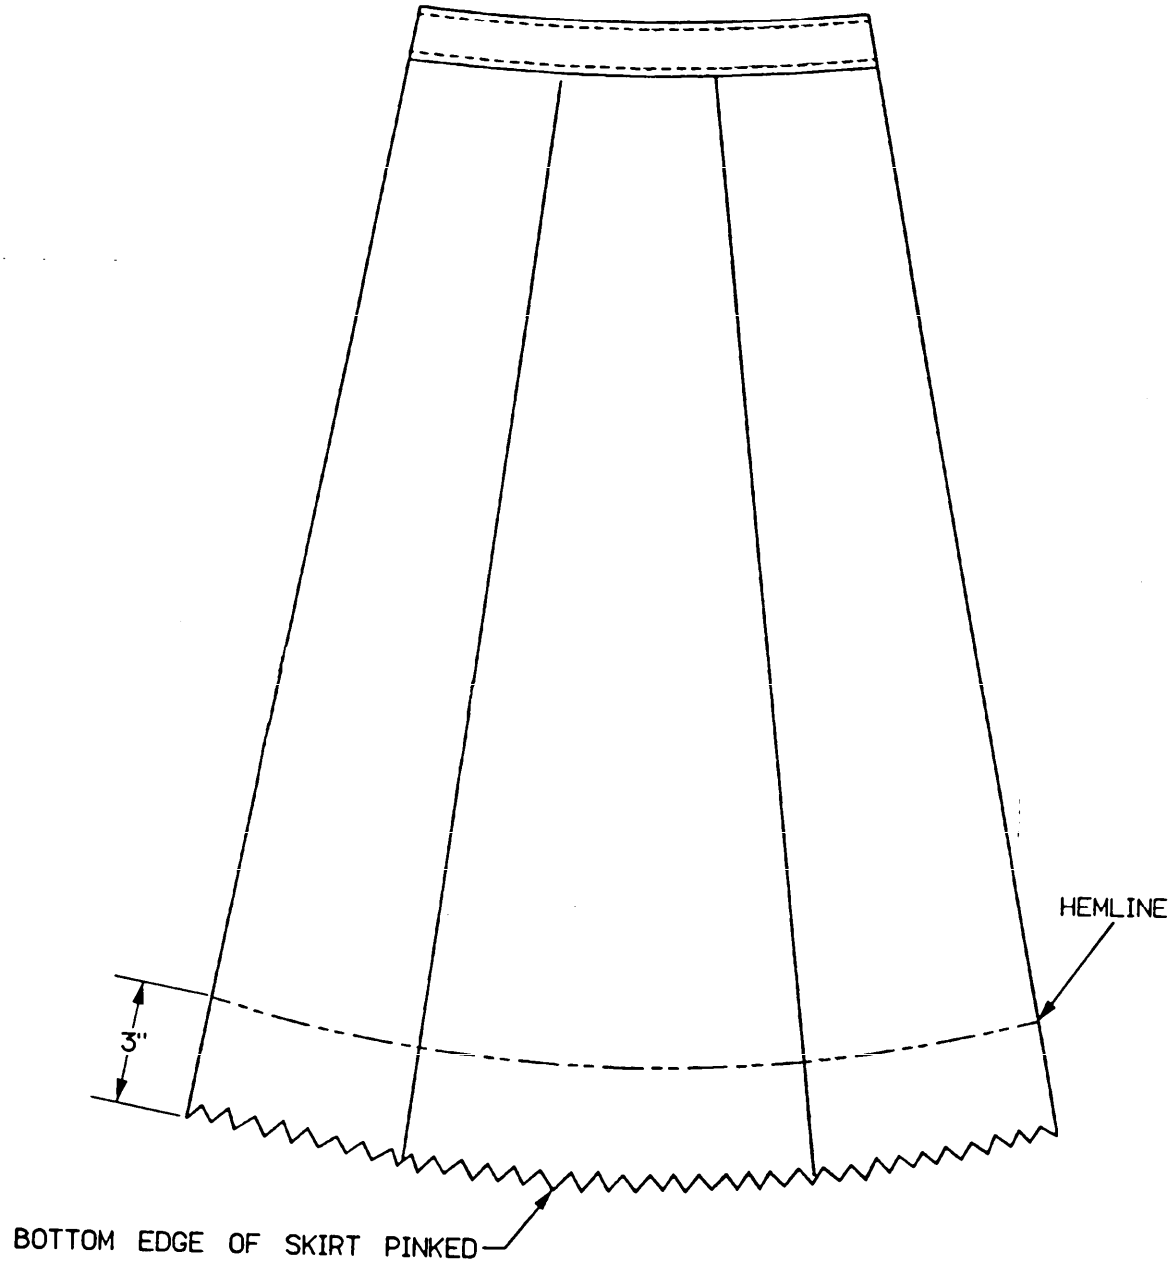


FIGURE 1: SKIRT, WOMEN'S, EVENING DRESS

//AGW_71/PALMER/11-CLOTHING/SKT1-EVE.G4
27-SEP-1993 10:44

True Size: 42 x 51 picas = 7.0" x 8.5"
Plot Scale Factor: 1.00

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.


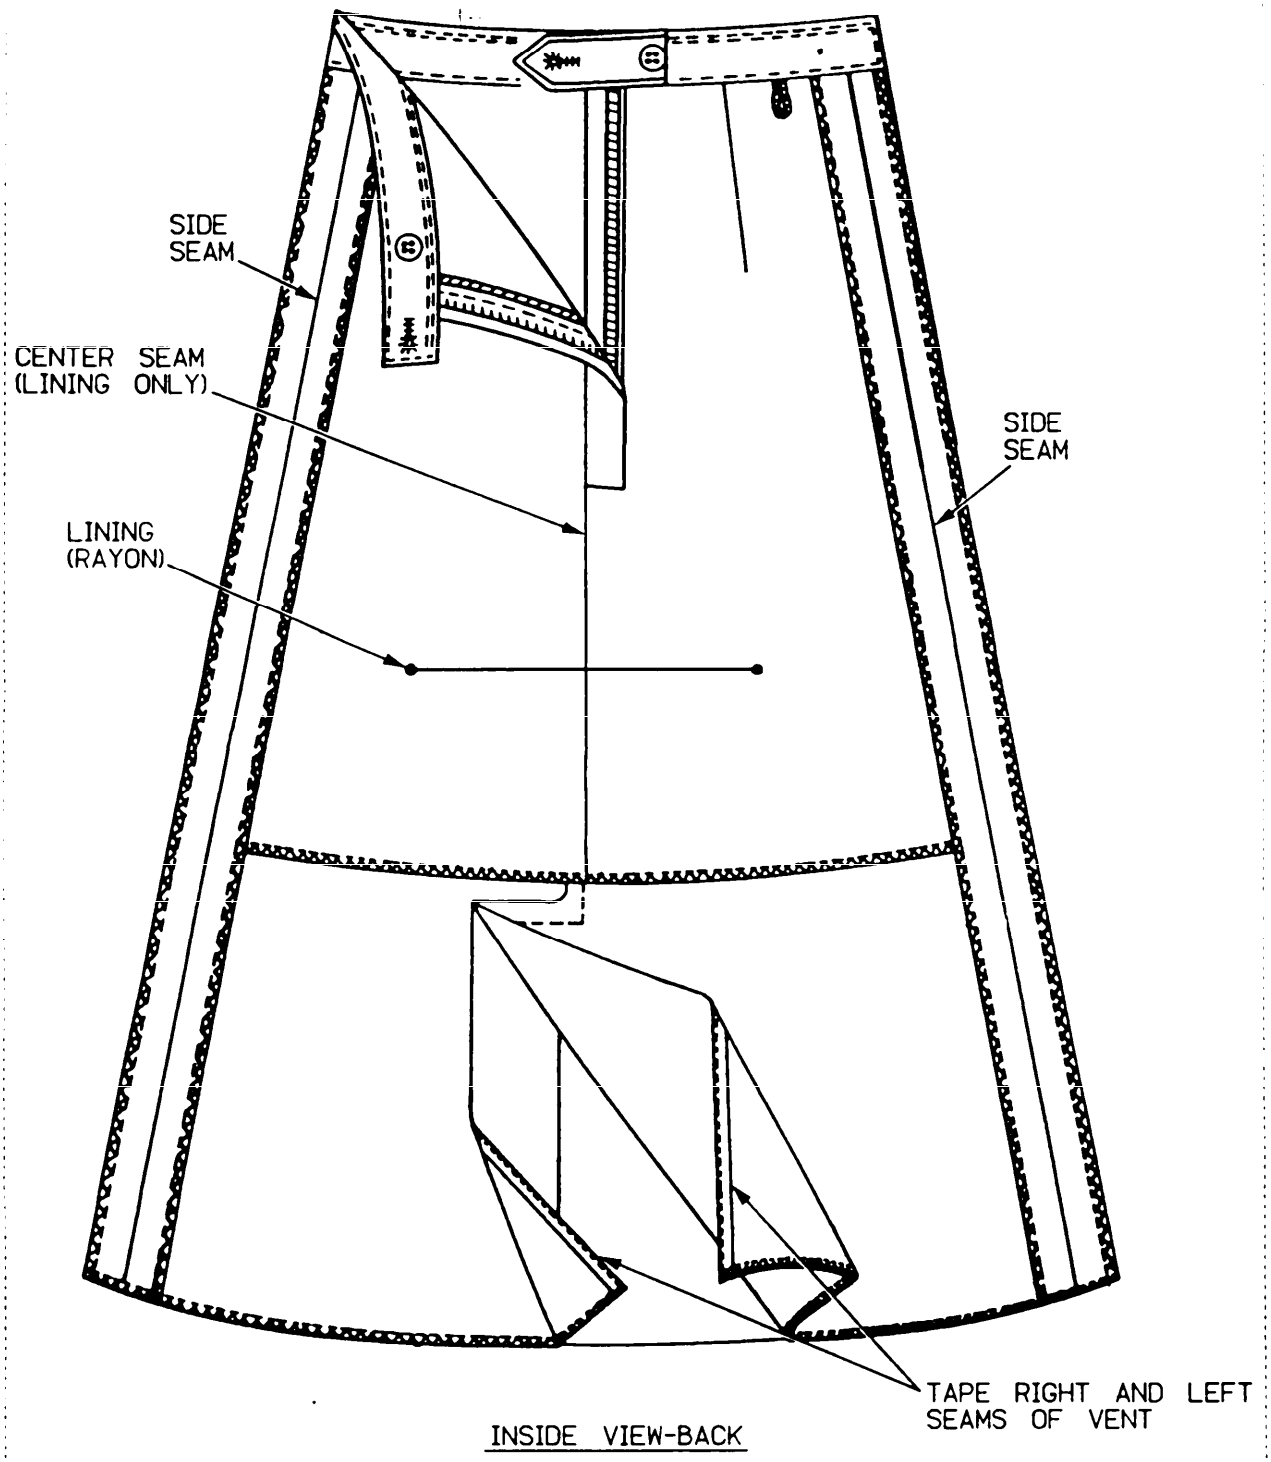


FIGURE 2: SKIRT, WOMEN'S, EVENING DRESS


//AGW_71/PALMER/11-CLOTHING/SKT2_EVE.G4
27-SEP-1993 12:21

True Size: 42 x 51 picas = 7.0" x 8.5"
Plot Scale Factor: 1.00


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

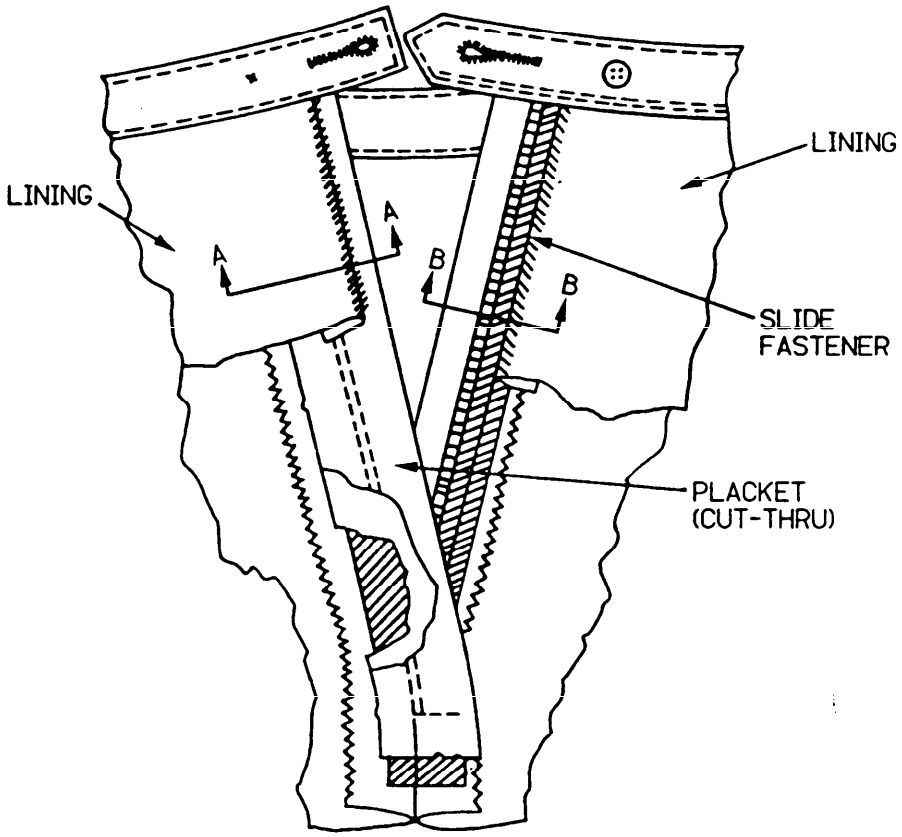

INSIDE VIEW

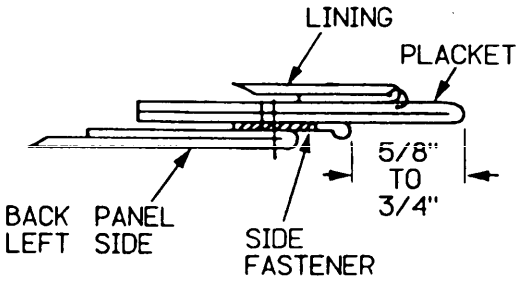

VIEW "A-A"

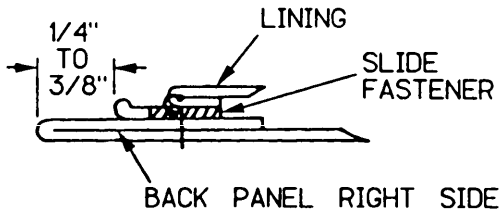

VIEW "B-B"

DETAIL: PLACKET OPENING

FIGURE 3: SKIRT, WOMEN'S, EVENING DRESS

//AGW_71/PALMER/11-CLOTHING/SKT3-EVE.G4
27-SEP-1993 10:44

True Size: 42 x 51 picas = 7.0" x 8.5"
Plot Scale Factor: 1.00

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2. 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-82126 C	940328

3. DOCUMENT TITLE
SKIRTS, WOMEN'S; EVENING DRESS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
COMMANDER	(912) 439-6560	567-6560
c. ADDRESS (Include Zip Code) MARINE CORPS LOGISTICS BASES CODE 855, 814 RADFORD BOULEVARD ALBANY, GA 31704-1128	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.