INCH-POUND

MIL-C-82156C(MC)
13 June 1995
SUPERSEDED
MIL-C-82156B(MC)
4 May 1990

MILITARY SPECIFICATION

COAT, MAN'S: SCARLET, DRUM AND BUGLE CORPS, MUSICIANS

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for musician's scarlet wool drum and bugle corps coats.

1.2 Classification. The coats shall be one type in the following sizes as specified (see 6.2):

Schedule of Sizes
(Short, Regular, Long, Extra Long)

34 35 36 37 38 39 40 41 42 44 46

1.3 Individual orders. When the coat is custom tailored to an individual order, this specification shall govern except that the detail requirements of section 3, table I, may be modified to the extent necessary for good custom tailoring practices.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A PSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-50196	- Thread, Silk
A-A-50198	- Thread, Gimp, Cotton, Buttonhole
A-A-50199	- Thread, Polyester Core, Cotton or Polyester Covered
A-A-52071	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)
A-A-52094	- Thread, Cotton
A-A-52097	- Cloth, Wigan, Cotton
A-A-52106	- Cloth, Twill or Plain Weave, Polyester and Polyester Blend
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use).

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon.
MIL-B-3461	- Button, Insignia, Metal, Uniform and Cap.
MIL-P-15064	- Pads, Shoulder and Sleeve-Head.
MIL-E-20652	- Eyelets, Metallic and Eyelet Washers (General Specification for)
MIL-C-21115	- Cloth, Tropical: Wool, Polyester/Wool.
MIL-C-82114	- Coat Front For Coats, Musicians.

STANDARDS

FEDERAL

FED-STD-151	- Metals: Test Methods.
FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitches, Seam and Stitching.

MILITARY

MIL-STD-105	- Sampling procedures and Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robins Avenue, Philadelphia, PA 1911-5094)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Department of Defense (DoD) Standard Color Card of Standardized Shades for Sewing Threads 1968

(Applications for copies should be addressed to the Color Association of the United States, 409 W. 44th Street, New York, NY 10016-0927.)

AMERICAN SOCIETY OF TESTING MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples are furnished solely for guidance and information to the contractor (see 6.4). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, wool, tropical, scarlet shade 2502 (see 6.4), 10.5 ounce, conforming to type I, class 1 of MIL-C-21115.

3.3.2 Lining. The material for lining the coat and collar and for making the underarm shields, collar eyelet covers, coat hanger, straps to secure the lining to the bottom edge of the coat, and the front eyelet cover shall be cloth, satin rayon twill, scarlet shade 2506 (see 6.4), conforming to class 1 of MIL-C-368.

3.3.3 Cloth, twill or plain weave. The stays for the armhole and shoulder seams; the reinforcement pieces for the collar eyelets; and the binding for the neck edge of the coat front interlining and the lower edge of the collar interlining shall be cut from cloth, twill or plain weave,polyester or polyester blend conforming to A-A-52106, except the requirement for non-fibrous material and seam efficiency shall not apply. The color of the cloth shall be natural, for the armhole and shoulder seam stays, the collar eyelet reinforcement pieces, and the binding for the neck edge of the coat front interlining; and black for the binding for the lower edge of the collar interlining.

3.3.4 Collar interlining. The material for interlining the collar shall be cloth, cotton buckram, double texture, laminated starch finish, natural color, conforming to type IV of A-A-50186. The weight of the laminated cloth shall be 21 to 23 ounces per square yard.

3.3.5 Reinforcement discs. The reinforcement discs for the buttons secured to the back side seam, with ring toggles, shall be punched from cloth, cotton, buckram specified in 3.3.4. The reinforcement discs shall be 7/8 inch in diameter with a 1/8 inch diameter hole at the center.

3.3.6 Padding for collar. The material for padding the collar shall be suitable cotton felt, white, weight 4.25 to 4.75 ounces per square yard, when tested as specified in section 4, table III.

3.3.7 Coat fronts. The coat fronts shall conform to class 1 of MIL-C-82114.

3.3.8 Shoulder pads. The shoulder pads shall conform to the requirements of type I, class 2 of MIL-P-15064.

3.3.9 Sleeve-head pads. The sleeve-head pads shall conform to type IV of MIL-P-15064.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.10 Stay tape. The stay tape for armholes shall be cotton, unbleached 1/4 inch wide conforming to type II, class 1 of A-A-52071, except the requirements for non-fibrous material shall not apply.

3.3.11 Piping. The material for piping shall be cloth, polyester/wool blend, black, shade 2607 (see 6.4), conforming to type III of MIL-C-21115, cut 5/8 to 3/4 inch wide for the piping for shoulder straps,lower edge of collar, and ornamental sleeve patches; and 1 inch wide for piping the front and bottom edges of the coat.

3.3.11.1 Vinyl piping. The white vinyl piping for the upper edge of the collar shall be tubular, with 7/16 inch wide welt and serrated edges as manufactured by Thielex Plastics Company, or equal.

3.3.12 Bias binding. The binding for the underarm shields shall be bias cut out of the material specified in 3.3.2. The binding shall be 5/8 to 7/8 inch wide and have sized edges.

3.3.13 Wigan. The material for reinforcing the bottom edge of the sleeves shall be cloth, cotton wigan, 2.5 ounces, conforming to type I of A-A-52097.

3.3.14 Thread.

3.3.14.1 Silk thread. The silk thread shall conform to A-A-50196 as follows, except the requirements for extractable matter shall not apply:

Use	Type	Class	Ticket No.	Ply
Bartacks and all outside seaming and stitching.	I	-	A	-
Machine felling.	-	-	O	-
Making buttonholes in coat.	I	-	B and F	3
Hand felling and hand sewing .	III	3	C	2

3.3.14.2 Cotton thread. The cotton thread shall conform to A-A-52094 as follows:

Use	Type	Ticket No.	Ply
All inside seaming and stitching.	III	A	3
Serging and overedge stitching.	I	70	2
Machine tacking armholes.	I	40	3

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

The thread for basting shall be good commercial grade cotton. As an alternate to the cotton thread, a polyester core, cotton or polyester covered thread conforming to A-A-50199, ticket No. 70, 2 ply or ticket No. 50, 2 ply may be used.

3.3.14.3 Color and colorfastness. All thread shall be dyed scarlet shade W, cable No. 66040, except the cotton thread for basting and machine tacking armholes may be white, and the cotton thread for overedge stitching the piping at the bottom edge of coats shall be black. The colored threads shall show the following colorfastness when tested as specified in the applicable thread specification: (see DoD Standard Color Card of Standardized Shades for Sewing Threads)

Thread	Color	Wet (dry) Cleaning	Light
Cotton	Scarlet	Good	--
Silk	Scarlet	Fair	Fair
Silk	Black	Good	Good

3.3.15 Gimp. The buttonhole gimp shall be cotton, No. 8, soft or glazed finish, conforming to type I or II of A-A-50198. The color of the gimp shall be scarlet W, cable No. 66040, and shall show good fastness to wet (dry) cleaning.

3.3.16 Buttons.

3.3.16.1 Insignia buttons. The insignia buttons shall be metal, gold plated, 27-line for shoulders, belt loops and ornamental sleeve patches and 40-line for fronts, conforming to type I , style 3, class A, subclass 1 of MIL-B-3461.

3.3.16.2 Ring toggles. Ring toggles for securing the 27-line insignia buttons to the coat, belt loops, and ornamental sleeve patches shall conform to MIL-B-3461.

3.3.17 Hook and eye. The hook and eye for closing the collar shall be brass, black japanned finish or black chemical finish conforming to MIL-F-495, followed by a clear lacquer coating and conform to the requirements of figure 6. The dry lacquer film shall be continuous, level, adherent, free from lint, dust or other foreign inclusions that may affect appearance or serviceability, and shall withstand the test for tackiness specified in section 4, table III.

3.3.17.1 Eyelets. The eyelets for the collar shall be brass, rolled flange type with the barrel scored with 6 to 8 scores. The eyelets shall conform to MIL-E-20652, sheet 1A-BE108 and be enameled a black shade.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.18 Labels. Each coat shall have a combination identification/instruction label and a size label as follows. The coat is intended to be dry cleaned and the label shall show fastness to dry cleaning.

3.3.18.1 Combination identification/instruction label. The combination identification/instruction label shall conform to type VI, classes 1 and 3 (combined) of DDD-L-20, except all printing and the space between lines of printing shall be minimum 10 point (approximately 1/8 inch). The content and format shall be as follows:

NOMENCLATURE_____
CONTRACT NO._____DATE_____
NAME OF CONTRACTOR_____
WOOL PRODUCTS ACT INFORMATION

_____
DRY CLEAN ONLY

3.3.18.2 Size label. The size label shall conform to type VI, class 2, of DDD-L-20. The label shall consist of the applicable numerical size designation specified in 1.2 followed by the letter S (short), R (regular), L (long), or XL (extra long), as shown by the following example:

40R

3.4 Design. The coat shall be the U.S. Marine Corps design shown on figures 1 through 3. The coat shall be seven button, single breasted, form-fitting, fully lined having a one-piece front; waist and chest darts; a four-piece back without a center vent; belt loops to button; ornamented at sleeve ends; shoulder straps to button; and a stand up collar with hook and eye for front closure and a metal eyelet at each end for removable branch of service insignia.

The top and bottom edges of the collar; the front and bottom edges of the coat; the top, bottom, and scalloped back edges of the ornamental sleeve patches; and the edges of shoulder straps shall be piped with the material specified in 3.3.11.

3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as guide for cutting the supplier's working patterns. The supplier's working pattern shall be identical to the standard pattern. The standard pattern shall provide 5/8 inch allowance for center back, 3/4 inch allowance for side seams, and 3/8 inch allowance for all other seams except as otherwise specified in table I. Standard patterns show size and they are marked and notched for proper cutting, placement and assembly of component parts.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:39Z
Check the source to verify that this is the current version before use.

3.5.1 List of pattern parts. Coats shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern nomenclature	No. of cut parts
	Material basic: Cloth, wool, tropical	
1.	Front	2
2.	Front facing, right	1
3.	Front facing, left	1
4.	Side back	2
5.	Center back	2
6.	Top sleeve	2
7.	Under sleeve	2
8.	Collar, outer ply	2
9.	Shoulder straps, top ply	2
10.	Shoulder straps, under ply	2
11.	Ornamental sleeve patch, top ply	2
12.	Ornamental sleeve patch, under ply	2
13.	Belt loops	2
14.	Underarm shields	2
	Material: Cloth rayon lining	
15.	Front	2
16.	Side back	2
17.	Center back	2
18.	Top sleeve	2
19.	Under sleeve	2
20.	Collar lining	1
21.	Collar eyelet cover	2
22.	Underarm shield	4
23.	Front eyelet cover	1
	Material: Cloth, cotton buckram	
24.	Collar interlining	1
	Markers	
25.	Sleeve turnup and sleeve ornamentation marker	-

3.6 Construction.

3.6.1 Manufacturing requirements. The coat shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the currentversion before use.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of the operations as listed in table I, but all operations specified shall be used to manufacture the coats.

3.6.1.2 Stitches, seams, and stitching. The stitch, seam, and stitching types specified in table I shall conform to FED-STD-751. The number of stitches per inch as specified in table I indicates the minimum and maximum number permitted. All overedge stitching shall be done on serging machine with a knife attachment properly set to trim the raveled edge without cutting the material.

3.6.1.2.1 Tacking and backstitching. End all seams and stitching (stitch type 301), except ends of a continuous line of stitching, when not caught in other seams or stitchings, shall be backstitched not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks shall be secured back of the break not less than 1/2 inch.

3.6.1.3 Shade marking. The component parts of the coat cut from one piece of wool and lining materials, including pairs of sleeve linings and underarm shields when cut from ends, shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting. a. Cut coats in strict accordance with the patterns furnished by the Government. b. Cut all materials in the direction of the warp as indicated by the directional lines on the patterns. c. Cut all scarlet wool parts of the coat from one piece of basic material, except the following parts may be cut from ends: underply of shoulder straps and underply of ornamental sleeve patch. Parts cut from ends shall harmonize with the shade of the coat. d. Cut the body and collar linings, the front eyelet covers, and the top ply of the underarm shields from one piece of rayon lining material. All other rayon lining parts may be cut from ends. When pairs of sleeve linings are cut from ends, the shade of the sleeve linings shall match. Cut the strips for coat hanger and lining securing straps 1-1/8 inches wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting. (cont'd) e. Cut twill or plain weave stays for the armhole and shoulder seams on the bias 3/4 inch wide and 4 ± 1/4 inches long. Cut the twill or plain weave for binding the neck edge of the coat front interlining on the bias, 3/4 inch wide and approximately 5 inches long. Cut the twill or plain weave reinforcement pieces for collar eyelets not less than 2 inches long by 1-3/4 inches wide. f. Cut the cotton buckram for interlining the collar on the straight in accordance with the pattern furnished. g. Cut the cotton felt, for padding the collar, 1-1/4 inches wide and of sufficient length to fold over the ends of the interlining for each size collar. h. Cut the piping material (see 3.3.11) for piping the front and bottom edges of coats, the edges of the shoulder straps, lower edge of collar, and ornamental sleeve patch, on the straight. The piping shall be cut 5/8 to 3/4 inch wide for shoulder straps, and ornamental					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting. (cont'd) sleeve patches, and 1 inch wide for front and bottom edges of coat. Cut the binding material specified in 3.3.12 for the top and bottom edges of the collar interlining 1-1/8 inches wide on the straight. i. Cut the wigan for reinforcing the bottom of the sleeves on the bias in accordance with the pattern. j. Punch the reinforcement discs for buttons secured to the side seam from cloth, cotton, buckram. The reinforcement discs shall be 7/8 inch in diameter with a 1/8 inch diameter hole at the center.					
2	Replacement of damaged parts. a. At the time of cutting replace any part, of coat containing holes; seriously weakening defects, such as smashes, multiple floats, loose or weakening slubs, etc. expected to develop into holes; shade bars and dye streaks; or unsightly slubs etc., affecting appearance.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2	Replacement of damaged parts. (cont'd) b. Replace any part damaged during the manufacturing process by needle chews, which may be expected to develop into holes, scissor or knife cuts; tears, holes, mends or burns, in the material, affecting appearance.					
3	Shade marking. a. Mark or ticket (see 3.6.1.3) all component parts cut from one piece of basic and lining materials, and pairs of sleeve linings when cut from ends, to insure uniform shade and size throughout the coat. b. The use of tickets with any metal fastening devices is prohibited on the rayon lining.					
4	Make coat hanger and lining securing straps. Finished appearance. The coat hanger and lining securing straps shall finish 1/4 to 3/8 inch wide. a. Fold the 1-1/8 inch wide strip of lining material in half lengthwise, turn the edges to the inside and seam 1/16 inch from the turned	301	EFp-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4	Make coat hanger and lining securing straps. (cont'd)					
	edges.					
	b. Cut the coat hanger 3-3/4 ± 1/4 inches long.					
	c. Cut the lining securing straps 4-1/2 ± 1/4 inches long.					
5	Make collar eyelet covers.					
	Finished appearance. The collar eyelet covers shall finish 1-3/4 ± 1/8 inches wide.					
	a. Turn under the side edges of the collar eyelet cover and stitch 1/16 to 1/8 inch from folded edges, catching the turned under portions in the stitching.	301	EFa-1 (each side edge)	12-16	A	A
	b. Fold each cover in half across the width and seam 1/16 to 1/8 inch from the folded side edges.	301	SSa-1	12-16	A	A
6	Make underarm shields.					
	Finished appearance. The shields shall be made from one ply of basic material and shall finish smooth and flat without puckers, pleats, gathers, or other distortions.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Make underarm shields. (cont'd)					
	a. Bind the rounded edge of shield with bias binding, turning under the outside raw edge of the binding only, and catching the turned under portion in the stitching 1/16 inch from the folded edge.	301	SSa-1	12-16	A	A
7	Make front eyelet cover.					
	a. Fold front eyelet cover in half lengthwise, turn in the raw top and bottom edges, and seam 1/16 to 1/8 inch from the raw edge and folded top and bottom edges.	301	SSa-1 (raw edge) SSc-1 (top and bottom edges)	12-16	A	A
8	Make belt loops.					
	Finished appearance. The belt loops shall be uniform in appearance and shall finish smooth and flat without puckers, pleats, gathers, or other distortions. The buttonholes shall be clean cut, well made and well worked over gimp to fit a 27-line insignia button. The gimp and thread shall be pulled through to the underside of the loops. The purling of the buttonholes shall be on the outside.					
	a. Fold the belt loops in half lengthwise, face to face, forming two plies.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8	Make belt loops. (cont'd)					
	b. Seam the two plies together along the side and pointed edges, 3/16 inch from the raw edges.	301	SSe-2 (a)	12-16	A (Silk)	A
	c. Trim the corners and point for proper turning. Turn loops, working out completely the point and seamed edges.					
	d. Edge stitch the loops uniformly 1/16 to 1/8 inch from folded and seamed edges.	301	SSe-2 (b) (seamed edges) OSf-1 (folded edges)	12-16	A (Silk)	A
	e. Make a horizontal, eyelet end, square-bar type buttonhole, cut 3/4 inch long, in each loop midway between the back and front edges, with the inside edge of the eyelet end of the buttonhole finishing 5/8 inch from pointed end of the loop.	Buttonhole		60 per buttonhole (not including bartack)	B (Silk)	F
	f. Securely bartack the end of the buttonholes, catching the ends of the gimp and thread in the bartack. Trim the ends of the gimp and thread.	Bartack		21 per bartack	A (Silk)	A
9	Make shoulder straps.					
	Finished appearance. The shoulder straps shall be uniform in appearance and shall finish smooth and					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Make shoulder straps. (cont'd) flat, without twists, gathers, puckers, pleats, or other distortions. The piping shall be evenly worked out and shall extend uniformly 1/8 inch beyond the seamed edges of the shoulder straps. The buttonholes shall be clean cut, well made and well worked over the gimp to fit a 27-line insignia button. The gimp and thread shall be pulled through to the underside of the straps. The purling of the buttonholes shall be on the outside. a. The shoulder straps shall be made of two plies of basic material, piped with a 5/8 to 3/4 inch wide strip of piping material specified in 3.3.11. b. Turn under one edge of the piping 5/16 inch and seam the turned under portion to the body of the piping 1/8 inch from the turned raw edge. c. Position the right side of the top ply of the shoulder strap on the hemmed piping with the raw edges of shoulder strap in line with the piping stitching line.	301	EFa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Make shoulder straps. (cont'd)					
	d. Join shoulder strap to piping along the back, front and collar end, 1/8 inch from the inner edge of piping.	301	SSe-2 (a)	10-14	A (Silk)	A
	e. Trim and notch the piping in accordance with good manufacturing practices in order to prevent pulling and to eliminate gathers and bulges around the collar end.					
	f. Position the top ply on the underply face to face, with the outer edge of piping and raw edge of the underply even and back notches matching.	301	SSk-1 (a) (without cord)	10-14	A (Silk)	A
	g. Stitch along the back, front, and collar end through all plies 3/16 inch from the inner raw edge of the piping. Trim any excess material if necessary.	301	SSk-1 (a) (without cord)	10-14	A (Silk)	A
	h. Turn the straps, completely working out the piped edges.					
	i. Topstitch the straps uniformly, 3/16 inch from the folded edge of the piping.	301	SSk-1 (b) (without cord and topstitched)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Make shoulder straps. (cont'd)					
	j. Press the shoulder straps smooth and flat with a heated pressing iron or pressing machine.					
	k. Make a horizontal, eyelet end, square-bar type buttonhole cut 3/4 inch long, in each strap, midway between the back and front edges, and with the inside edge of the eyelet end of the buttonhole finishing 5/8 inch from outer edge of piping at the collar end of strap.	Buttonhole		60 per button-hole	B (Silk)	F
	l. Securely bartack the end of the buttonhole, catching the ends of the gimp and thread in the bartack. Trim the ends of the gimp and thread.	Bartack		21 per bartack	A (Silk)	A
10	Make ornamental sleeve patches.					
	Finished appearance. The ornamental sleeve patch shall be uniform in appearance and shall finish smooth and flat, without twists, gathers, puckers, or other distortions. The piping shall be evenly worked out and shall extend uniformly 1/8 inch beyond the seamed edges of the sleeve patch. The eyelet shall be well worked with the purling on					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Make ornamental sleeve patches. (cont'd) the outside of the sleeve patch and shall finish with a 1/8 to 3/16 inch diameter opening. a. The ornamental sleeve patch shall be made of two plies of basic material, piped with a 5/8 to 3/4 inch wide strip of piping material specified in 3.3.11.					
	b. Turn under one edge of the piping 5/16 inch. Seam the turned under portion to the body of the piping 1/8 inch from the folded edge.	301	EFa-1	12-16	A	A
	c. Position the right side of the top ply of sleeve patch on the hemmed piping, with the raw edges of the sleeve patch in line with the piping stitching line.					
	d. Join sleeve patch to the piping along the top, bottom and scalloped edge 1/8 inch from the inner edge of the piping.	301	SSe-2 (a)	12-16	A (Silk)	A
	e. Trim and notch the outer edge of piping along the scalloped edge in order to prevent pulling and bulges on the edges.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Make ornamental sleeve patches. (cont'd)					
	f. Position the top ply of sleeve patch on the underply, face to face, with the outer edge of piping and the raw edge of the underply even.					
	g. Stitch along the top, bottom and scalloped edge, through all plies, 3/16 inch from the inner raw edge of the piping. Trim any excess material if necessary.	301	SSk-1 (a) (without cord)	12-16	A (Silk)	A
	h. Turn the sleeve patches, working the piping out completely and forming smooth corners and point at the scalloped side edge.					
	i. Topstitch the sleeve patches uniformly, 3/16 inch from the folded edge of the piping.	301	SSk-1 (b) (without cord and topstitched)	12-16	A (Silk)	A
	j. Press the sleeve patches smooth and flat with a heated pressing iron or pressing machine.					
	k. Mark each sleeve patch as indicated by the marks on pattern, for the location of three eyelets.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Make ornamental sleeve patches. (cont'd)					
	1. Make one eyelet at each mark through all plies of the sleeve patch for attaching insignia button.	Eyelet		22 per eyelet	A (Silk)	A
11	Stitch and press dart in under sleeves.					
	a. Fold the under sleeve, matching the cut edges of the sleeve dart. Stitch the entire length of the dart 1/4 inch from the cut edges of the armhole, tapering the line of stitching to zero at the lower folded edge.	301	SSa-1 (cut edges) OSf-1 (folded edge)	12-16	A	A
	b. Turn the cut edges of the dart toward the forearm edge and press the entire dart smooth and flat with a heated pressing iron.					
12	Seam sleeves at forearm.					
	Finished appearance. The forearm seam shall finish smooth and flat without twists, gathers, puckers, or pleats and shall start and finish evenly.					
	a. Position the top sleeve with the upper forearm edge in line with the notch in the armhole edge of the undersleeve and with the notches in the lower forearm edge of	301	SSbd-1 and SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12	Seam sleeves at forearm. (cont'd) top and under sleeves matching. Seam the top and under sleeves together 3/8 inch from forearm edge of the top sleeve, forming a tapered outlet on the under sleeve. b. Spread open the seam and press flat with a heated pressing iron. c. Mark the sleeve end for turnup and mark the top sleeve for positioning the ornamental sleeve patch with pattern marker.					
13	Baste wigan reinforcement to sleeve. a. Position the sleeve on the wigan reinforcement piece with marks and notches matching. b. Baste the sleeve and wigan piece together at the mark for the bottom turnup.	Hand or 101				
14	Join ornamental sleeve patches to top sleeves. Finished appearance. The ornamental sleeve patch shall be uniformly stitched to the top sleeve without twists, gathers, puckers, pleats or raw edges. The folded front edge of the patch shall					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14	Join ornamental sleeve patches to top sleeves. (cont'd) not be topstitched. The dimensions and position of the ornamental sleeve patch shall be as shown in Figure 4. The scalloped edge of sleeve patch shall be stitched to the sleeve at the corners and point only, in order to facilitate removal of insignia buttons when pressing coat. a. Mark the ornamental sleeve patch on the under ply 1/4 inch from the raw edge. Position the sleeve patch on the sleeve with marks matching and with the bottom edge of the sleeve patch even with the mark for the bottom turnup of the sleeve.					
	b. Seam the sleeve patch to the sleeve at the mark.	301	LSa-1	12-16	A (Silk)	A
	c. Turn back the sleeve patch at the seamline and stitch through the sleeve and wigan along the upper and bottom piped edges. The line of stitching shall be adjacent to the stitching line of the sleeve patch piped edge and shall extend from the turned edge to approximately 1/2 inch over the pointed ends.	301	LSbj-1	12-16	A (Silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14	Join ornamental sleeve patches to top sleeves. (cont'd) At the center point, the stitching shall extend approximately 1/2 inch on each side of the point.					
15	Seam sleeves at backarm. Finished appearance. The backarm seam shall finish smooth and flat without twists, gathers, puckers, or pleats and shall start and finish evenly.					
	a. Join the top and under sleeves together at the backarm with a 3/8 inch seam, catching the ends of the wigan reinforcement piece in the stitching.	301	SSa-1	12-16	A	A
	b. Spread open the seam and press smooth and flat with a heated pressing iron.					
16	Baste and tack sleeve turnup to reinforcement. a. Turn up the bottom edge of the sleeve to the inside at the mark. Baste along the turned edge.					
	b. Tack the raw edge of the turned-up portion to the reinforcement wigan piece with blind stitching.	Hand or 101 or 301 or Hand	EFc-1	4-6 4-6	A (Silk)	C

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17	Stitch and press dart in under sleeve linings.					
	a. Fold the under sleeve lining, matching the cut edge of the under sleeve dart. Stitch the entire length of the dart, 1/4 inch from the cut edges of the armhole, tapering the line of stitching to zero at the lower folded edge.	301	SSa-1 (cut edges) OSf-1 (folded edge)	12-16	A	A
	b. Turn the cut edges of the dart toward the forearm edge and press the entire dart smooth and flat with a heated pressing iron.					
18	Seam sleeve lining at forearm.					
	Finished appearance. The forearm seam shall finish smooth and flat without twists, gathers, puckers, or pleats and shall start and finish evenly.					
	a. Position the top sleeve lining with upper forearm edge in line with the notch in the armhole edge of undersleeve lining. With the notches at lower forearm edge of top and undersleeve lining matching, seam the top and undersleeve lining together, 3/8 inch from the forearm edge of top-sleeve lining, forming a tapered outlet on the undersleeve lining.	301	SSbd-1 and SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
19	Seam sleeve lining at backarm. Finished appearance. The backarm shall finish smooth and flat without twists, gathers, puckers, or pleats and shall start and finish evenly.					
	a. Join the top and undersleeve linings at the backarm with a 3/8 inch seam.	301 S	a-1	12-16	A	A
20	Assemble sleeve and sleeve lining. Finished appearance. The lining shall be seamed to the sleeve without twists, gathers, puckers, or pleats.					
	a. Position the sleeve lining on the sleeve with the upper edge of the lining extending approximately 1 inch beyond the armhole edge of the sleeve.					
	b. Tack the sleeve lining to the forearm and backarm seam allowance, respectively, of the top sleeve, commencing at the top edge of the wigan reinforcement piece and extending to approximately 6 inches from armhole edge at backarm and approximately 4-1/2 inches from armhole edge at the forearm.	301 or Hand	SSa-1	6-8 4-6	A (Silk) A	C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
20	Assemble sleeve and sleeve lining. (cont'd)					
	c. Pull sleeve through lining.					
21	Fell turnup of sleeve lining; press sleeve.					
	Finished appearance. The sleeve lining shall not be short, tight, or twisted at the bottom of the sleeve.					
	a. Turn under the bottom edge of sleeve lining to finish 1 to 1-1/4 inches above the finished end of sleeve. Baste to turnup of the sleeve, or, the sleeve lining may be felled to bottom sleeve without basting.	Hand or 101				
	b. Fell the folded edge of the sleeve lining to the turnup of the sleeve with blind stitching.	Hand or 301	EFc-1 (b)	8-10 6-8	C (Silk) O (Silk)	 O
22	Press sleeve.					
	a. Turn the sleeves right side out and assemble in pairs. Press the lower half of the sleeves smooth and flat, creasing at the forearm and backarm. The backarm crease shall be on the backarm seam. Remove the basting at lower end of the sleeve.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
23	Assemble collar interlining. Finished appearance. The interlining is made of one ply of plastic (mylar), one ply of laminated buckram and one ply of polyester twill or plain weave cloth. The interlining shall be constructed without twists, pleats or distortions.					
	a. Position the plastic, buckram and twill or plain cloth together and join with a 1/8 inch seam on the upper and lower edges. The interlining shall finish with the twill cloth on the inside and the plastic on the outside (see Figure 5).	301	BSa-1 (each edge)	12-16	A	A
	b. Lap the raw edge of the collar eyelet cover 1/2 to 5/8 inch on the top inside edge of collar interlining. Seam the covers to the interlining 1/4 inch from the raw edge of the cover. In the finished coat, the collar eyelet covers shall be centered over the collar eyelet.					
24	Pipe outer ply of collar. Finished appearance. The piping shall extend at upper, lower, and side edges of the outer ply.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
24	Pipe outer ply of collar. (cont'd) It shall be uniformly stitched without twists, gathers, puckers or pleats. a. The outer ply of the collar shall consist of two plies of basic material, piped at the upper edge with the vinyl cord and lower edge with 5/8 to 3/4 inch wide strip of the piping material specified in 3.3.11. b. Position the two plies of the collar face up and edges even. Stitch them together from end to end, 1/8 inch from the upper and lower edges.					
	c. Seam the 5/8 to 3/4 inch wide strip of piping to the lower edge of the two plies of collar from end to end, 1/8 inch from the upper and lower edges. Seam the vinyl cord to the upper collar edge.	301	SSe-2	12-16	A (Silk)	A
	d. Turn back the piping and outer ply at upper and lower edges, uniformly working the folded edge of the piping beyond the edges. Topstitch the outer ply uniformly 3/16 inch from the folded edge of piping.	301	BSm-3 (b)	12-16	A (Silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
25	Assemble collar. Finished appearance. The collar shall be assembled without twists, gathers, puckers or pleats. In the finished collar, the end of the lining shall extend approximately one half inch beyond the right end of collar and approximately 2-1/2 inches beyond the left end of the collar for the extension tab. The eyelet cover shall not be caught in the eyelet. a. Position the upper piped edge of collar 1/8 inch below the upper bound edge of collar interlining with lower edges of collar and collar interlining even. The collar shall extend approximately 1 inch beyond each end of collar interlining.					
	b. Stitch collar to interlining along the upper and lower piped edge from edge to end. The line of stitching shall be adjacent to stitching of the piped collar edge, catching the eyelet cover in the stitching.	301	SSa-1	12-16	A (Silk)	A
	c. Lap the upper piped edge of collar assembly over the upper raw edge of lining, approximately in half, with the lining facing up. Stitch collar	301	LSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
25	Assemble collar. (cont'd) to lining and eyelet cover along piped edge adjacent to stitching line of the collar piped edge. The stitching shall extend from center to center of the eyelet covers. d. Smoothly fold the ends of the collar padding and outer ply to the inside, over the ends of the interlining assembly, and press smooth and flat with a heated pressing iron or pressing machine. e. Turn the collar lining at the seam to the inside of the collar and press smooth and flat with a heated pressing iron or pressing machine.					
26	Make collar extension tab. Finished appearance. The collar extension tab shall extend 3/4 to 7/8 inch beyond the folded edge of the left end of the collar. a. Turn the top and bottom edges and the end of the collar lining at the left end of the collar to the inside of the lining. Baste the turned portion along the top, front, and bottom edges to the body of the lining, forming the collar	Hand				

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
26	Make collar extension tab. (cont'd)					
	extension tab.					
	b. Stitch the collar extension tab 1/16 inch from the top, front, and bottom edges. Continue the stitching at the back of the tab to top row, forming a 1-3/8 to 1-1/2 inch wide box stitch.	301	SSc-1 (top and bottom edges) OSf-1 (front) SSa-1 (back edge)	12-16	A (Silk)	A
27	Fell ends of collar.					
	Finished appearance. The upper and lower piped edges of the collar at each end shall not be visible on the outside of the finished collar.					
	a. Fold the ends of collar to the inside, against the end of interlining. Tack the collar to reinforcement pieces and eyelet covers with overcast stitching.	Hand		2-3	C (Silk)	
	b. Insert one metal eyelet, through all plies of the collar, midway between the upper and bottom edge and 1-1/2 ± 1/8 inches from the folded edge of either end of the collar.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
28	Fold and stitch dart in front lining. Finished appearance. The darts shall finish without gathers, puckers or pleats. The stitching shall be 3/8 inch from the folded edge at the center.					
	a. Fold the front lining and stitch waist darts in accordance with marks indicated on the pattern. Taper the upper and lower ends to a flat point, and securely tack the points.	301	OSf-1	12-16	A	A
29	Sew on identification label. Finished appearance. The identification label shall be positioned so that, in the finished coat, the label shall be midway between front and back edges of the right facing, with the bottom edge of the label approximately 4 inches from the bottom finished edge of coat.					
	a. Sew the identification label to the outside of the right facing with a single row of stitches, 1/16 from each edge.	301	SSa-1 (each edge)	12-16	A	A
30	Join front lining to wool facing. Finished appearance. The lining shall be carefully joined to the facing so					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
30	Join front lining to wool facing. (cont'd) that, in the finished coat, the lining shall be smooth and flat along the facing without creases, bulges, overlapping of excess material, or other distortion. a. Position the lining on the wool facing with the top edges even.					
	b. Seam front edges of the lining to the back edge of the facing 3/8 inch from the edge. The stitching shall extend from top edge of facing to approximately 1-1/4 inches from the bottom edge.	301	SSa-1	12-16	A	A
31	Assemble back lining. Finished appearance. The side back lining shall be carefully joined without gathers, puckers or pleats. The seams shall start and finish evenly.					
	a. Position and join the left and right side back linings to the respective center backs lining with a 3/8 inch seam.	301	SSa-1	12-16	A	A
	b. Position the backs and join them together at the center with a 3/8 inch seam.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
32	Join side back and front linings.					
	Finished appearance. The side back and front linings shall be carefully joined without gathers, puckers or pleats. The seams shall start and finish evenly.					
	a. Position and join the front and side back linings at the sides with a 3/4-inch seam.	301	SSa-1	12-16	A	A
33	Overedge stitch lining and facing seams.					
	a. Overedge stitch together the raw edges of the facing lining, side, side back, and center back seam allowance.	503 or 504	SSa-1	6-8 6-8	70/2 70/2	70/2 70/2
34	Press lining seams and waist darts.					
	a. Turn the edge of facing-lining seam, the side seams, and side back seams toward the back and press smooth and flat.					
	b. Turn the waist darts toward the side seam and press smooth and flat.					
35	Assemble fronts.					
	Finished appearance. The chest and waist darts shall finish without gathers, puckers or pleats. The stitching for					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
35	Assemble fronts. (cont'd)					
	the waist darts shall be 3/8 inch from the folded edge at the center.					
	a. Fold the fronts, matching the notches of the chest darts. Stitch the entire length of the darts 3/8 inch from the notches at the upper end, tapering the line of stitching to zero at the lower end.	301	SSa-1 (cut edge) OSf-1 (folded edge)	12-16	A	A
	b. Fold the fronts and stitch the waist dart in accordance with the marks indicated on the pattern. Taper the upper and lower ends to a flat point and securely tack the points.	301	OSf-1	12-16	A	A
36	Press darts on fronts.					
	a. Turn the folded edge of the chest darts towards the armhole and press smooth and flat.					
	b. Turn the folded edge of the waist darts towards the armhole and press smooth and flat.					
37	Assemble back.					
	Finished appearance. The side and center backs shall be joined without gathers, puckers or pleats. The seams shall start and finish evenly.					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
37	Assemble back. (cont'd)					
	a. Position the center back with notches matching and join with a 5/8 inch seam.	301	SSa-1	12-16	A	A
	b. Position and join the left and right side backs to the respective center back with a 3/8 inch seam.	301	SSa-1	12-16	A	A
38	Join fronts and back.					
	Finished appearance. The fronts and back shall be joined without gathers, puckers or pleats. The seam shall start and finish evenly.					
	a. Position and join the fronts to the back at the sides with a 3/4 inch seam.	301	SSa-1	12-16	A	A
39	Overedge stitch front and back seams.					
	a. Overedge stitch all raw edges of the joining seams for fronts and back.	503 or 504	EFd-1 EFd-1	6-8 6-8	70/2 70/2	70/2 70/2
	b. Spread open the side and back seams and press smooth and flat with a heated pressing iron.					
40	Seam reinforcement stay to armhole and shoulder.					
	Finished appearance. The polyester and cotton reinforcement stays shall be sewn to the armhole and					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
40	Seam reinforcement stay to armhole and shoulder. (cont'd)					
	shoulder edges of the fronts without gathers, puckers or pleats. The top end of the armhole stay and lower edge of the shoulder stay shall form a right angle at the armhole without the stays overlapping each other.					
	a. Seam the 3/4 inch wide stay to the shoulder edges and upper front edges of the armhole, 1/8 inch from the outer edges. The stay at the armhole shall extend from 1/2 inch below the shoulder seam down the front edge of the armhole approximately 4-1/2 inches; the stay at the shoulder shall extend approximately 1/2 inch from armhole and neck.	301	SSaa-1	12-16	A	A
41	Tape armholes.					
	a. Sew the cotton tape to the armhole. Start with one end approximately 1 inch above the notch in the fronts and continue along the lower and back edge of the armhole to approximately 1/2 inch from the shoulder edge.	301	SSaa-1	12-16	A	A
	b. The tape shall be stitched with slight tension along the lower front edges of the armhole					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
41	Tape armholes. and shall be held taut while stitching along the back edge.					
42	Press shoulder blades and armholes tapes. a. Press the shoulder blades and the armhole tape smooth and flat with a heated pressing iron or suitable type pressing machine.					
43	Mark and dress left front. a. Mark and shape the left front edge from the top notch to the bottom front notch. b. The mark line shall be 1 inch from the upper edge to 1-1/8 inches at the waist line. Continue on a straight line from the waist line to the notch at the bottom edge. Note: The dressing and shaping shall be performed in the sewing room. c. Where necessary, trim any frayed edges along the right front and bottom edges.					
44	Stitch piping to coat. Finished appearance. The piping shall be uniformly stitched to the coat					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
44	Stitch piping to coat. (cont'd) without twists, gathers, puckers or pleats. The piping shall extend from the collar notch at top edge of the right front, along the bottom and up to the collar notch at the top edge of the left front.					
	a. Position the 1 inch wide strip of piping material on the outside of left and right fronts, with edges even with top, front, and bottom edges of coat. Stitch piping to coat 1/8 inch from edge. The piping shall extend from the bottom right front edge to the collar notch at the top edge of left front.	301	SSa-1	12-16	A (Silk)	A
	b. Turn the piping to the inside, folding the corners smooth and flat, and working out the folded edge of piping uniformly, 1/8 inch beyond the edges of the coat. Top stitch the piped edges of the coat uniformly 3/16 inch from the folded edge of the piping, catching the turned under portion of the piping in the stitching.	301	SSe-2 (b)	12-16	A (Silk)	A
	c. Cut out any excess piping material at the top and bottom front corners					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
44	Stitch piping to coat. (cont'd)					
	to eliminate bulkiness. Trim the inner edge of piping on the left front only, from the upper front down to approximately 1-1/2 to 2 inches below the waistline, so that the piping will not interfere with front the buttonholes.					
	d. Serge stitch the raw edge of the piping at the bottom edge of the coat.	503 or 504	EFd-1 EFd-1	6-8 6-8	70/2 70/2	70/2 70/2
	e. Press the piped edge of the coat smooth and flat with a heated pressing iron or pressing machine.					
45	Interline fronts.					
	a. Position the left and right fronts on the respective coat front interlinings. Baste the interlinings and fronts together from approximately 3-1/2 inches down from the shoulder edge to approximately 2 inches up from the bottom edge of the front.	Hand or 301	Hopper			
	b. Baste along the shoulder, allowing room for setting the shoulder pad, working the fullness in the front towards the armhole. Baste along the front of the armhole	Hand or 301	Hopper			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
45	Interline fronts. (cont'd) approximately 1 inch from the edge. Continue to baste down the back edge of interlining, across the waist dart, to approximately 2 inches from the bottom edge of fronts. Baste along the top edge from the basting stitches for the shoulder to approximately 1-1/2 inches from the front edge. Continue to baste approximately 1-1/2 inches from the front edge to the bottom edge of fronts.					
46	Trim coat front interlining. a. Trim the top edge of coat interlining even with the top edge of fronts, from the point of the shoulder to the collar notch. b. Notch the top edge of the interlining in line with the collar notch. c. Remove the stitches joining the front edge of polyester and cotton cloth to coat front interlining, approximately 1/2 inch back from front and top edge of the fronts. d. Trim the interlining only, even with the front and bottom edges of the					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
46	Trim coat front interlining. (cont'd) fronts. e. Turn the fronts inside out and trim the interlining only, approximately 1/4 inch back from the front and top edge of fronts. f. Trim the shoulder edge of the coat front interlining to approximately 3/4 inch from shoulder at armhole edge of fronts; taper the trimming to 3/8 inch at the neck.					
47	Bind front and top edge of interlining. a. Smoothly fold the polyester and cotton, at the top and front edge of the interlining, over the respective raw edges to the underside. Secure the front turned under portion of the polyester and cotton to the body of the interlining with three rows of stitches 1/4 inch apart. Place the first row 1/8 inch from folded front edge and catch the upper turned under portion in the stitching.	301	EFa-1	12-16	A	A
48	Bind top neck edge of interlining. Finished appearance. The					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
48	Bind top neck edge of interlining. (cont'd)					
	polyester and cotton binding shall be uniformly stitched to the top edge of the coat front interlining from the collar notch to the shoulder point.					
	a. Lap the 3/4 inch wide binding on the outside of the coat front interlining, from the collar notch to the shoulder point, approximately 1/4 inch. Stitch the binding to the interlining, 1/8 inch from the raw edge of the binding.	301	LSa-1	12-16	A	A
	b. Smoothly fold the free edge of the binding over the top edge and to the underside of the interlining. Secure the free edge of binding to the interlining with a row of stitches 1/8 inch from the raw edge of the binding.	301	BSa-1	12-16	A	A
49	Fell piping to coat front interlining.					
	a. Place the inner edge of the piping on the outside of the interlining at the top, front, and bottom edges. Baste piping to the interlining through the fronts.	101				

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
49	Fell piping to coat front interlining. (cont'd)					
	b. Fell the upper front and lower inner edge of the piping to the coat front interlining.	301 or Hand	EFc-1	4-6 4-6	A (Silk) A	C
	c. Pull tab and remove basting stitches from the piping.					
	d. Press the left and right fronts on a suitable type pressing machine. The chest to conform to the shape of the body.					
50	Set belt loops.					
	Finished appearance. The belt loops shall finish vertically straight.					
	a. Center the belt loops vertically on the side seam with the pointed end towards the bottom of the coat and with the raw edge of the loop in horizontal alignment with the mark for the bottom buttonhole as indicated by the pattern.					
	b. Seam loops to the coat 1/4 inch from the raw edge.	301	LSq-2 (a)	12-16	A (Silk)	A
	c. Turn the loop at the seam, with the pointed end towards the top edge of coat, and secure the loop to the coat with a row of	301	LSq-2 (b)	12-16	A (Silk)	A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
50	Set belt loops. (cont'd) stitches 1/4 inch from the raised edge.					
51	Join facing to fronts. a. Position the left and right fronts to the respective front facings (face to face) with the waistline notch of the front in line with the notch on the facing and with the front piped edge approximately 3/8 inch from the front edge of facing. Mark the facing along the top, front, and bottom edge of the coat.					
	b. Lap the front edge of the right and left fronts on the outside of the facing at the respective marks. Join the front and facing as close as possible to, but not on top of, the stitching, joining the piping to the front. The stitching shall extend from top to bottom edge of coat front edge only.	301	LSa-1	12-16	A (Silk)	A
	c. Trim excess facing material where necessary.					
52	Join front eyelet cover to right facing. a. Mark the outside of the right facing 1/2 inch from the seam joining facing to the front. Mark					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
52	Join front eyelet cover to right facing. (cont'd)					
	the upper edge of facing in such a manner that the front corner of the eyelet cover shall finish approximately 1/4 inch down from the folded edge of piping.					
	b. Lap the front raw edge of the eyelet cover on the outside of the right facing at the marks. Seam the eyelet cover to the facing only, 1/4 inch from raw edge of eyelet cover.	301	LSq-1 (a)	12-16	A (Silk)	A
	c. Turn back the eyelet cover at the seam and top stitch the cover through the facing only, 1/8 to 3/16 inch from the raised edge.	301	LSq-2 (a)	12-16	A (Silk)	A
53	Baste front edges.					
	a. Turn the facing-lining assemblies to the inside of fronts. Baste along the front edge of the left and right fronts, working the facing back from the folded edge of the piping.	101				
54	Baste facing (second time).					
	a. Baste the facing to the fronts approximately 1-1/4 inches from the top, front, and bottom edges of the coat, holding the lower corner of the coat	Hand or 301	Hopper			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
54	Baste facing (second time). (cont'd)					
	in such a manner as to cause the lower front edge of the fronts to roll inward towards the back edge of the facing.					
	b. Turn under and baste the top edge of the facing to the fronts from the collar notch to the front edge, catching the turned under portion of the facing in the basting.	Hand or 301	Hopper			
	c. Baste the facing to the fronts as close as possible to the facing-lining seam, placing the fullness over the chest and distributing the fullness in the facing in accordance with good commercial practice. The basting shall extend approximately 3 inches from shoulder edge of the facings to approximately 1-1/4 inches from the lower edge of the facing.	Hand or 301	Hopper			
	d. Turn under the bottom edge of the facing at the mark and baste along the folded edge.	Hand or 301	Hopper			
55	Tack facings to interlining.					
	a. Tack the right and left facing-lining seam allowance to the respective coat front	Hand or 103	SSm-1	2-6 4-6	C (Silk) A (Silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
55	Tack facings to interlining. (cont'd) interlining from approximately 2-1/2 inches from bottom edge of coat to approximately 3 inches from the shoulder edge.					
56	Baste linings to coat.					
	a. Fold the front lining in accordance with the notches, forming the chest pleat, and baste along the entire center of the pleat. The folded edge of the pleat on the outside of the lining shall be towards the armhole.	Hand or 301	Hopper			
	b. Baste the front lining to the coat, starting at the lower end of chest pleat, continuing along the lower edge of armhole approximately 2 inches from the edge, and ending at the side seam. Match the side seams of coat and lining. Continue basting as close as possible to the side seam and then across the bottom towards the front, approximately 4 inches from piped bottom edge of coat.	Hand or 301	Hopper			
	c. Fold the back lining, forming an approximately 1 inch wide pleat at the center back. Baste the back lining to the coat along the center pleat from the top end to	Hand or 301	Hopper			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
56	Baste linings to coat. (cont'd)					
	approximately 4 inches from the bottom finished edge of coat.					
	d. Baste back lining to coat. Start at side seam and continue approximately 3 inches from the armhole and shoulder edges.	Hand or 301	Hopper			
57	Hem bottom edge of lining.					
	Finished appearance. The hem shall be uniformly stitched and shall finish smooth and flat without twists, gathers, puckers or pleats. The hem shall be 3/4 ± 1/8 inch wide. The lining securing straps shall be positioned on the side seam outlets of the lining with one edge even with the serged edge.					
	a. Hem the bottom edge of body lining with the raw edge turned under and with one end of the securing straps positioned and caught in the stitching, 1/16 inch from the upper folded edge of hem.	301	EFb-1	12-16	A	A
58	Tack the lining securing straps to bottom of coat.					
	Finished appearance. The lining securing straps when tacked to the bottom edge of coat shall not cause twists or other					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
58	Tack the lining securing straps to bottom of coat. (cont'd)					
	distortions to either the coat or the lining. The end of the securing straps shall finish between the piping at bottom edge of coat and side seam allowance. In the finished coat, the lining shall not be visible below the bottom edge of coat.					
	a. Position and securely tack the free end of the securing straps to the piping at the bottom edge of coat through the side seam allowance.	301	SSbh-3	12-16	A	A
	b. Position the bottom edge of the lining so that, in the finished coat, the lining shall not be visible below the bottom edge of the coat. Fold the lining securing straps across the width and stitch approximately 1/4 inch from the folded end in order to hold the lining in position.	301	OSf-1	6-10	A	A
59	Fell facings.					
	a. Fell the facing to the piping at the bottom edge of the coat. Start at the bottom edge of the lining and continue along the back and bottom edges of the facing to the front edge of the coat.	Hand		8-10	C (Silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
59	Fell facings. (cont'd)					
	b. Fell the folded edge of the facings to the piping along the top edge from the collar notch to front edge of the coat.	Hand		8-10	C (Silk)	
60	Trim lining and interlining.					
	a. Trim the excess coat front interlining and front lining at the armhole.					
	b. Trim back lining even at the neck.					
	c. Trim the shoulder edge of the front and back lining to approximately 3/4 inch from shoulder at the armhole edge and taper the trimming to 3/8 inch at the neck.					
61	Baste shoulder pad to coat.					
	a. Insert shoulder pads between interlining and chest padding of coat fronts. Securely tack the pads to the interlining and chest padding only.	Hand or 301	Hopper			
62	Seam shoulders.					
	Finished appearance. The shoulder seam shall finish without a distorted appearance.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
62	Seam shoulders. (cont'd)					
	a. Join the back to the fronts at the shoulders with a 3/8 inch seam, working in the fullness on the back in accordance with good manufacturing practice.	301	SSa-1	12-16	A	A
	b. Spread open the shoulder seam and press flat, holding the shoulders short and exercising much care in pressing in order not to effect a distorted appearance in the finished seam. The pressing shall be accomplished with a heated pressing iron or pressing machine over a suitable block.					
	c. Position the front lining and coat front interlining at the neck, shoulder and armhole edges of the fronts. Baste all plies together along the front edge of armhole. Continue along the shoulder seam and gorge, catching the shoulder pad in the basting.	Hand or 301	Hopper			
63	Set shoulder straps.					
	Finished appearance. The shoulder straps shall be uniformly stitched to the coat without twists, puckers, pleats or other distortion. On the finished coat, the straps,					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
63	Set shoulder straps. (cont'd) including the piping, shall be 2-3/8 ± 1/8 inches wide at the armhole seam and shall taper to 1-3/4 ± 1/8 inches wide at the buttonhole eyelet end. a. Position the shoulder straps with the back edge 1/4 to 1/2 inch to the back of the shoulder seam at the armhole and with the rounded end of the straps, on the finished coat, 1/4 to 3/8 inch from lower edge of the collar. b. Seam the shoulder straps to the coat 3/8 inch from the armhole edge. Trim the shoulder straps even with the armhole where necessary. Turn the coat on the inside.	301	SSa-1	12-16	A (Silk)	A
64	Baste back lining and facing-lining assembly at shoulders. a. Turn under and lap the shoulder edge of the back lining on the facing-lining assembly. Baste the lining to the coat along the folded edge of the back lining with the top end of the chest pleat caught in the basting.	Hand				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
65	Seam neckline with size label and coat hanger. Finished appearance. The neckline shall finish smooth and flat, without twists, pleats or puckers. The size label shall be positioned between the ends of the coat hanger and the ends of the coat hanger shall be positioned so that, in the finished coat, the hanger opening shall be 2 ± 1/8 inches long when measured along the lower edge of the collar lining.					
	a. Join the facings and back lining to coat at the neckline, from collar notch to collar notch, with a 1/4 inch seam and with the upper edge of the size label and the ends of the hanger positioned and caught in the stitching at the inside center back.	301	SSa-1	12-16	A	A
	b. Press the neckline of the coat smooth and flat with a heated pressing iron or pressing machine.					
66	Set collar with lining. Finished appearance. The collar shall be carefully joined to the coat without distortion of the collar.					
	a. Mark the neckline on the inside, 3/8 to 1/2 inch from top edge, for					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
66	Set collar with lining. (cont'd) proper positioning of collar. b. Position the collar with the lower edge lapped on the outside top edge of the coat at the mark. c. Seam the collar, from end to end, to the coat as close as possible to, but not on top of, the stitching for the piping at the lower edge of the collar. The stitching shall not be through the collar lining.	301	LSa-1	12-16	A	A
67	Make buttonholes. Finished appearance. The buttonholes shall be clean cut, well made, well worked over gimp to fit 40-line insignia buttons. The stitching of the buttonholes shall be securely caught in the basic material. The gimp and thread shall be pulled through to the underside of the front. The purling of the buttonholes shall be on the outside of the fronts. The inside edge of the eyelet end of the buttonhole shall be 5/8 inch from the front edge of coat. The buttonholes shall be cut-first type.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
67	Make buttonholes. (cont'd)					
	a. Mark the left front for the location of seven buttonholes. The marks for the top and bottom buttonholes shall be in accordance with the patterns. The marks for the remaining five buttonholes shall be evenly spaced.					
	b. Make one horizontal, eyelet end, square-bar type buttonhole, cut 1-1/4 inches long, at each of the marks.	Buttonhole		60 per button-hole (not including bartack)	B (Silk)	F
	c. Securely bartack the end of each buttonhole, catching the ends of the gimp and thread in the bartack. Trim the ends of the gimp and thread.	Bartack		21 per bartack	A (Silk)	A
68	Set sleeves.					
	Finished appearance. The armhole-sleeve seam shall finish without twists, gathers, puckers or pleats.					
	a. Position the sleeve on outside of coat at the armhole, with backarm seam of sleeve matching the side back seam, and with notch in the top sleeve and the front matching.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
68	Set sleeves. (cont'd)					
	b. Join the sleeve to the coat with a 3/8 inch seam, catching the end of the shoulder straps in the stitching.	301	SSa-1	12-16	A	A
	c. Press the entire armhole smooth and flat with a heated pressing iron. Exercise care not to stretch the armhole. Spread open upper part of the armhole-sleeve seam from the backarm seam of sleeve to approximately midway between shoulder seam and notch at front edge of armhole. Press smooth and flat with a heated pressing iron.					
	d. Fold the excess material at the armhole pit up to the line of the stitching of the armhole sleeve seam, forming a hinge effect. The fold shall extend from the armhole notch to approximately 4 inches from the backarm seam.					
	e. Press the fold smooth and flat with a heated pressing iron.					
69	Baste armhole.					
	a. Baste around the entire armhole on the inside, holding the back lining, shoulder pad and front lining in place and	Hand				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
69	Baste armhole. (cont'd)					
	distributing fullness evenly. Turn the coat on the outside.					
	b. Baste around the outside armhole adjacent to the armhole seam, forcing out the armhole in the basting. The basting shall extend from the backarm seam of the sleeve to the front notch of coat.	Hand				
70	Set underarm shields.					
	a. Baste or tack underarm shields at the base of the armhole.	Hand or 301				
71	Stitch sleeve-head pads and linings at armhole.					
	Finished appearance. The armhole shall not be distorted or puckered due to stitching the sleeve-head pads and linings at the armhole.					
	a. Position the sleeve-head pad on the sleeve with the folded edge of the pad approximately 1/8 inch back from the raw edge of the armhole-sleeve seam and with the one end of the pad matching the notch in the fronts.	Hand or 301				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
71	Stitch sleeve-head pads and linings at armhole. (cont'd)					
	b. Stitch the sleeve-head pad to the sleeve front, end to end, through the armhole-sleeve seam allowance, 1/8 inch from the folded edge of the pad, catching the front and back linings and the shoulder pad in the stitching. Continue stitching the linings around the remainder of the armhole, catching the underarm shields in the stitching and trimming away the excess material.	301	SSa-1	4-6	A	A
	c. The underarm shield may be basted to the armhole prior to stitching.	301	SSa-1	4-6	24/4	24/4
72	Tack underarm shield to lining.					
	Finished appearance. The tacking for the underarm shield shall finish approximately 1/2 inch from the seamed edges.					
	a. Tack the underside of the underarm shields to the body lining along the side and bottom edges.	Hand		4-6	C (Silk)	
73	Fell back lining and facing-lining assembly at shoulders.					
	a. Fell the back lining	Hand		8-10	C	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
73	Fell back lining and facing-lining assembly at shoulders. (cont'd)					
	and facing-lining assembly together at the shoulders. Place the stitching over the folded edge of back lining and secure the top end of the chest pleat in the felling.				(Silk)	
	b. Fell the folded edge of facing to the piping along the top edge from collar notch to front edge of coat.	Hand		8-10	C (Silk)	
74	Fell sleeve lining at armhole.					
	a. Position the sleeve lining at the armhole with the back and forearm seams of the sleeve and sleeve lining matching.					
	b. Turn under the armhole edge of the sleeve lining. Lap the lining on the outside of the front and back lining and the top edge of the underarm shield. Fell the sleeve lining to the coat around the entire armhole. Place the stitching over the folded edge of the sleeve lining, catching the underarm shield in the filling, and distribute the fullness in accordance with good commercial practice. Backstitch the lower armhole edge from	Hand		8-10	C (Silk)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
74	Fell sleeve lining at armhole. (cont'd)					
	the backarm seam of sleeve to the front edge of the shield.					
	-or-					
	c. Machine stitch the lower edge of the sleeve lining at the armhole, on the inside from forearm seam to backarm seam. Hand fell the remaining portion as specified in operations 74.b above.	301	SSa-1	12-16	A	A
	-or-					
	d. Machine stitch the lower edge of the sleeve lining at the armhole, on the inside, from forearm seam to backarm seam. Stitch the remaining portion of the sleeve lining at the armhole with machine simulated hand felling.	Machine		8-10	C (Silk)	
	Note: It is required that the simulated hand felling produced by machine shall be equal to or better than the hand felling.					
75	Mark for eyelets in right front and shoulders.					
	a. Mark the right front for the location of seven eyelets for the removable insignia buttons to align with the buttonholes in					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
75	Mark for eyelets in right front and shoulders. (cont'd) left front. The mark for top eyelet shall be in line with right end of collar and the remaining eyelets shall be in vertical alignment with the top mark. b. Mark each shoulder for the location of one eyelet for removable insignia buttons to align with the eyelet of buttonhole in the shoulder strap. On the finished coat, the shoulder strap shall lie smooth and flat without twisting or bulging.					
76	Make eyelets. Finished appearance. The eyelet shall be well worked with purling of the eyelet on the outside of the shoulder. The eyelets shall finish with a 1/8 to 3/16 inch diameter opening.					
	a. Make one eyelet at the mark on the right front through the facing, but not through front eyelet cover.	Eyelet		22 per eyelet	A (Silk)	A
	b. Make one eyelet at the mark on each shoulder through all plies.	Eyelet		22 per eyelet	A (Silk)	A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
77	Sew hook and eye to collar. Finished appearance. The hook and eye shall by positioned to properly engage each other, effecting a flat, smooth closure at the front of the collar without misalignment.					
	a. Position and securely sew the hook to the right end and the eye to the left end of the collar. The hook and eye shall be positioned with their front edges even with the respective front ends of the collar and securely sewn to the collar at the top and bottom edge of the hook and eye. The stitching on each side shall not be more than 3/8 inch from the front end of the collar through the individual holes at the rear of the hook and eye.	Hand		12 per hook and 12 per eye	C (Silk) (double thread)	
78	Finish collar.					
	a. Securely tack the lower corners of the collar to the coat.	Hand		8-10	C	
	b. Turn under the end and top edge of the lining at the right end of the collar. Position the folded edge of the lining under the hook and fell it to the end of the collar. Continue felling along the	Hand		8-10	C (Silk)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
78	Finish collar. (cont'd)					
	top folded edge to the end of the stitching joining the lining to the collar.					
	c. Turn under and fell the lower edge of the collar lining to the coat from end to end, catching the turned under portion of the lining at the right end in the felling.	Hand		8-10	C (Silk)	
	Note: The lower edge of the collar lining may be basted to the coat prior to felling.					
	d. Fell the collar extension tab to the left end of the collar and continue along the folded top edge to the end of the stitching joining the lining to the collar.	Hand		8-10	C (Silk)	
	e. Turn the collar eyelet covers to the inside of the collar and fell the front edge, from top to bottom edge. Continue the felling along the bottom edge for a distance of 1/2 inch from the front edge.	Hand		8-10	C (Silk)	
79	Fell front eyelet cover.					
	a. Turn the front eyelet cover to inside. Securely fell the upper and lower seamed edges of the cover to the facing, placing stitching over the folded edges of the cover.	Hand		6-8	C (Silk)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
80	Clean coat. a. Pull any basting thread and trim and remove any loose ends of thread. Remove any spots, stains and tickets without injury to the material.					
81	Press coat. a. The coat shall be well pressed throughout with a heated pressing iron or pressing machine of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing practices. b. Press the fronts smooth and flat, straightening and shaping the front edges and working fullness towards the chest. Care shall be exercised in pressing the fronts so that the bottom edges are even. c. Press the entire collar smooth and flat. d. Press the fronts on a body machine, shrinking and properly shaping the chest. e. Press the sides, working the fullness towards the back.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
81	Press coat. (cont'd) f. Press the back smooth and flat, removing all fullness. g. Press the sleeves smooth and flat, creasing at the backarm and forearm seam. The backarm crease shall be on the backarm seam. The forearm and backarm crease shall extend uniformly to a point approximately 3 to 3-1/2 inches below the base of the armhole. h. Block the shoulders to remove the fullness and press shoulders smooth on a shoulder shaping machine. Press the shoulder strap flat. i. Press the armholes solid from the inside, creasing the armhole at the front, and creasing the excess material at the armpit. The armpit and back of the armhole shall be held short while pressing. j. Block the armholes on a pressing buck, shrinking the top sleeves. k. Press the lower edge of the coat smooth, flat, and even.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
81	Press coat. (cont'd) l. Remove all wrinkles and impressions from under shoulder straps. m. Press body lining throughout, removing all back wrinkles and creases. Press the front and back lining pleats smooth and flat. n. Remove all gloss marks. o. Remove any wrinkles and creases missed by previous pressing operations.					
82	Mark for belt loop button. a. Mark each side seam for the location of one removable 27-line insignia button to properly align with the eyelet buttonhole in the belt loop.					
83	Cut opening for belt loop buttons. a. Cut a vertical opening, approximately 1/4 inch long, at the mark on each side seam. The opening shall be made through the side seam of the wool parts of the coat only.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
83	Cut opening for belt loop buttons. (cont'd)					
	b. Securely tack or bartack each end of the opening.	Hand or 301		2-4 4-6	C (Silk) A (Silk)	A
84	Attach buttons.					
	a. Insert the shank of one 40-line insignia button through each eyelet on right front. Secure buttons to front on the inside with metal ring toggles.					
	b. Insert the shank on one 27-line insignia button through each eyelet on shoulders, ornamental sleeve patch, and through the openings at the side seams.					
	c. Attach a reinforcement disc (see 3.3.5) over the shank of the button on each side seam. Secure buttons to shoulders, side seam and ornamental sleeve patch with metal ring toggles.					
	d. Button belt loops.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished coat shall conform to the measurements shown in Table II.

Table II. Coat measurements 1/

Size	Breast 2/	Back Length 3/	Sleeve Length 4/
		Short	
	inches	inches	inches
34	35	28-3/4	17-1/2
35	36	28-7/8	17-1/2
36	37	29	17-1/2
37	38	29-1/8	17-1/2
38	39	29-1/4	17-1/2
39	40	29-3/8	17-1/2
40	41	29-1/2	17-1/2
41	42	29-5/8	17-1/2
42	43	29-3/4	17-1/2
44	45	30	17-1/2
46	47	30-1/4	17-1/2
		Regular	
	inches	inches	inches
34	35	29-3/4	18-1/2
35	36	29-7/8	18-1/2
36	37	30	18-1/2
37	38	30-1/8	18-1/2
38	39	30-1/4	18-1/2
39	40	30-3/8	18/1/2
40	41	30-1/2	18-1/2
41	42	30-5/8	18-1/2
42	43	30-3/4	18-1/2
44	45	31	18-1/2
46	47	31-1/4	18-1/2

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

Table II. Coat measurements 1/ Continued

Size	Breast 2/	Back Length 3/	Sleeve Length 4/
		Long	
	inches	inches	inches
34	35	30-3/4	19-1/2
35	36	30-7/8	19-1/2
36	37	31	19-1/2
37	38	31-1/8	19-1/2
38	39	31-1/4	19-1/2
39	40	31-3/8	19-1/2
40	41	31-1/2	19-1/2
41	42	31-5/8	19-1/2
42	43	31-3/4	19-1/2
44	45	32	19-1/2
46	47	31-1/4	19-1/2
		Extra Long	
	inches	inches	inches
34	35	32-1/4	20-1/2
35	36	32-3/8	20-1/2
36	37	32-1/2	20-1/2
37	38	32-5/8	20-1/2
38	39	32-3/4	20-1/2
39	40	32-7/8	20-1/2
40	41	33	20-1/2
41	42	33-1/8	20-1/2
42	43	33-1/4	20-1/2
44	45	33-1/2	20-1/2
46	47	33-3/4	20-1/2

1/ Tolerance for all measurements ± 3/8 inch.

2/ Breast measurements shall be taken with coat buttoned, from folded edge to folded edge, in a line with the pit of the armhole; multiply by two.

3/ Back length measurement shall be taken along the center back seam, from lower edge of collar to piped bottom edge of coat.

4/ Sleeve length measurement shall be taken along the forearm seam, from the pit of the armhole to bottom edge of sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished coats shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspection set forth in the specification where inspections are deemed necessary to ensure supplies and services conform to prescribe requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility for ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.5)

b. Quality conformance inspection (see 4.5).

4.3 Inspection condition. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in table III.

4.4 First article inspections. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.5.2.1 and 4.5.2.2. The presence of any defect or failure to pass any test shall be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, figures, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to the testing provisions contained in subsidiary specifications, figures, and standards, testing shall be performed on the components listed in table III for the characteristics noted. Wherever applicable, tests shall be conducted in accordance with FED-STD-151 and FED-STD-191. When the "Results reported as" columns are not indicated, they shall be reported as required by the referenced test method. All test reports contain individual values utilized in expressing the final results.

4.5.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with MIL-STD-105. The unit for expressing lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Component	Lot sizes expressed as	Sample unit for testing
Hook and eye	100 each	2 each, hook and eye
Padding for collar	yards	1/4 yd-full width

4.5.1.2 In-process inspection. An inspection shall be performed during manufacture of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with the specified requirements for operations or subassemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para	Test method	No. Det per S/unit	Results reported as:
Hook and Eye	Tackiness	3.3.17	4.6.2 1/	1	Pass or fail
Padding felt (for collar)	Material identification 1/	3.3.6	1200	1	Pass or fail
	Weight, oz per sq yd	3.3.6	5041	5	Avg. of the 5 det. to nearest 0.1 oz.
	Color	3.3.6	Visual	1	Pass or fail

1/ A certificate of compliance will be acceptable for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

MIL-C-82156C(MC)

4.5.2 Examination of end item. The defects found during examination of the end item shall be classified in accordance with 4.5.2.1 through 4.5.2.4. The sample unit shall be one coat. All defects shall be as indicated below except those numbered 1-21 in classification column which shall be classified as listed below.

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When not seriously affecting appearance or serviceability.

4.5.2.1 General defects. General defects shall be classified as follows:

Examine	Defects	Classification Major	Minor A	Minor B
Buttonholes (construction)	a. One or more omitted or added.	101		
	b. Wrong type or uncut.		201	
	c. Not corresponding to size of button:			
	- too small, not permitting button to enter buttonhole.	102		
	- too large, 3/8 inch or more longer than the diameter of button (measured at inside of purling).		202	
	d. Buttonhole not securely caught on fabric, causing stitching to pull away from fabric.	103		
	e. Bartack missing or loose on:			
	- one buttonhole.		203	
	- two or more buttonholes.	104		
	f. Bartack misplaced not serving intended purpose on:			
	- one buttonhole.			301
	- two or more buttonholes.		204	
	g. One or more broken stitches in:			
	- one buttonhole.		205	
	- two or more buttonholes.	105		
	h. More than 2 skipped stitches in:			
	- one buttonhole.			302
	- two or more buttonholes.		206	
	i. Ragged edges, affecting appearance.			303
	j. Gimp omitted in one or more buttonholes.		207	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Buttonholes (construction) (cont'd)	k. Stitches per buttonhole (not including bartack) less than the minimum specified):			
	- one or two stitches.			304
	- three or more stitches.		208	
	l. One or more buttonholes finished with purling on the underside.	106		
	m. Ends of gimp not pulled through the underside on one or more buttonholes.			305
Buttons or ring toggles	a. Missing, loose, broken, or defective:			
	1 button or ring toggle.		209	
	2 or more buttons or 2 or more ring toggles.	107		
	b. Not specified type, size, color or finish.		210	
	c. One or more buttons right front sewn with the head of the eagle in other than upright position.			30

Note: Buttons shall be considered defective if they have sharp, rough, cracked, or split edges; unsound soldering, scratches; dents blemishes or imbedded foreign matter on face side of button; loose shanks; or are badly shaded.

Cleanness	a. One or more removable spots or stains clearly noticeable outside of the coat.		211	
	b. One or more removable spots clearly noticeable on the inside of the coat.			307
	c. One or more spots or stains of an obvious permanent nature.	1		
	d. Threads ends not trimmed, loose thread ends, 2 or more shade markings, or bastings not removed throughout garment (to be scored when the condition exists on major portion of coat).		212	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Components and assembly	a. Any defective component or defect of assembly (not herein classified).	2		
	b. Any component part or required operation omitted (not herein classified).	3		
Cutting	a. Any component part of basic wool material not cut in accordance with directional lines on patterns or in accordance with the specification requirements.	108		
	b. Piping or binding material cut on the bias.		213	
	c. Any lining part not cut in accordance with directional lines on patterns.		214	
Eyelet (construction)	a. One or more omitted or added.	109		
	b. Wrong type.		215	
	c. Eyelet not securely caught on fabric, causing stitching to pull away from fabric.	110		
	d. Diameter of inside opening less than 1/8 inch or more than 1/4 inch.			308
	e. One or more eyelets uncut.		216	
	f. One or more broken stitches in:			
	- one eyelet.			309
	- two or more eyelets.		217	
	g. More than two skipped stitches in one or more eyelets.			310
	h. One or more eyelets finished with the purling on the underside.		218	
Metal Eyelet (collar)	a. Any omitted.		219	
	b. Defective eyelet.		220	
	c. Not specified type or size.		221	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Hook and eye	a. Not specified type or size.		222	
	b. Not aligned, causing collar ends to be uneven by 1/4 inch or more when front is buttoned and hook and eye are fastened.		223	
	c. Hook or eye not securely tacked to ends of collar.		224	
	d. Hook or eye misplaced, i.e., hook positioned on left end, eye positioned on right end of the collar.		225	
Material defects and damages	a. Any weakening defects, such as smash, multiple float, and loose slub, etc., that may develop into a hole.	4		
	b. Any hole (including drill holes).	5		
	c. Shade bar, unsightly slub, etc.:			
	- on outside.	6		
	- on inside.		226	
	d. Needle chews which may develop into a hole.	7		
	e. Scissors or knife cut, tear, mend, or burn.	8		

Note: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:

Material defect - No defect
Workmanship damages - Minor B defect

Examine	Defects	Classification Major	Minor A	Minor B
Pressing	a. Burned or scorched.	9		
	b. Pressing omitted (entire garment).		227	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Pressing (cont'd)	c. Poorly pressed (unless otherwise indicated).		228	
	d. Armhole stretched, affecting appearance.		229	
	e. Basting or pressing impressions not removed on major portion of the coat.			311
	f. Gloss not removed throughout coat, affecting appearance.			312
	g. Armholes not blocked or blocked poorly.		230	
	h. Inside of armholes not pressed solid.		231	
	i. Edges bulky, i.e., not pressed solid, affecting appearance.			313
	j. Sleeve not creased as required on forearm and backarm seam.			314
	k. Armhole sleeve seam not pressed open from backarm seam of sleeve and across top as specified.		232	
	l. Linings not pressed smooth.			315
Seams and stitching	a. Accuracy of seaming:			
	1. Any seam twisted, puckered or pleated, affecting appearance.		233	
	2. Part of garment caught in any unrelated operation or stitching.	10		
	3. Unsightly hand felling or blindstitching exposed on outside of coat, affecting appearance.		234	
	4. Ends of all stitching (when not caught in other seams or stitching) not backtacked or backstitching as required.			316
	5. Wrong color of thread or two shades of thread used on outside of coat, affecting appearance.	11		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	b. Gage of stitching (edge or raised stitching):			
	1. Irregular, i.e., unevenly gaged; or various stitching not uniform, affecting appearance.		235	
	2. Beyond range of width specified; or varies more than 1/16 inch when no range is specified.			317
	c. Open seams:			
	1. On outside:			
	- up to 1/4 inch inclusive.			318
	- more than 1/4 inch but not more than 1/2 inch.		236	
	- more than 1/2 inch.	111		
	2. On inside:			
	- more than 1/2 inch (except machine felling).		237	
	- up to 1/2 inch inclusive (except machine felling).			319
	- up to 1 inch inclusive (machine felling).			320
	- more than 1 inch (machine felling).		238	

Note: One or more broken stitches or two or more continuous skipped or runoff stitches constitute an open seam.

	d. Raw edges:			
	1. On outside:			
	- up to 1/8 inch inclusive.			321
	- more than 1/8 inch but not more than 1/4 inch.		239	
	- more than 1/4 inch.	112		
	2. On inside:			
	- more than 1/8 inch but not more than 1/4 inch.			322
	- more than 1/4 inch.		240	

Note: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under. Raw edges not caught in stitching shall be classified as open seams.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	e. Runoffs (see classification of open seams).			
	f. Stitch tension:			
	1. Loose tension resulting in loose seam.	113		
	2. Loose tension on raised or edge stitching, resulting in loosely exposed bobbin or top thread.		241	
	3. Tight tension (stitches break when normal strain is applied).	114		

Note: Puckering is evidence of tight tension. When puckering is evident, the inspector shall test the seam by exerting pull in lengthwise direction of seam.

	g. Stitches per inch (excluding labels)			
	1. Less than minimum specified:			
	- one or more stitches.			323
	- three stitches.		242	
	- four stitches or more.	115		

Note: To be scored only if condition exists on a major portion of seam.

	h. Wrong stitch and seam type:		243	
	i. Stitching skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched):			
	- 1/4 inch or more but not more than 1/2 inch.			324
	- more than 1/2 inch.		244	
Shaded parts	a. On outside.	12		
	b. On inside:			
	1. Any lining part badly shaded (except sleeve lining).		245	
	2. Any lining part badly shaded; or pairs not matching each other.			325

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.2.2 Detailed defects (outside of coat). Detailed defects on outside of coat with coat buttoned on form shall be classified as follows:

Examine	Defects	Classification Major	Minor A	Minor B
Collar (construction and setting)	a. Interlining omitted.	116		
	b. Interlining tight or twisted, causing puckers on collar, affecting appearance.		246	
	c. Tight at joining to front or back, causing puckers or pleats at neck of coat, affecting appearance.	13		
	d. Piping irregular, affecting appearance.		247	
	e. Collar ends overlapping when fastened.		248	
	f. Collar ends spread open more than 3/8 inch when fastened.		249	
	g. One ply of outer basic material.	117		
	h. Binding strip at top or bottom edge of interlining omitted.		250	
	i. Binding strip at top or bottom edge of interlining other than material specified.		251	
	j. Center of eyelets from finished ends of collar:			
	- less than 1-3/8 inches but not less than 1-1/4 inches.			326
	- more than 1-5/8 inches but not more than 1-3/4 inches.			327
	- less than 1-1/4 inches or more than 1-3/4 inches.		252	
	k. One or both eyelets off-center with top and bottom edges of collar by more than 1/4 inch.		253	
	l. Collar off-center by more than 3/8 inch.			328
	m. Binding strip at top edge of interlining positioned more than 1/8 inch beyond top edge of piping on outer ply of collar.		254	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Collar (construction and setting) (cont'd)	n. Binding strip at top edge of interlining irregular in width, affecting appearance; or not exposed beyond top edge on outer ply of collar.		255	
	o. Collar irregular in width by 1/4 inch or more.	118		
	p. Front finished ends of collar uneven in width by 3/16 inch or more.	119		
Alignment of front buttons and buttonholes	a. Not aligned, causing a noticeable bulge or twist on fronts when buttoned, affecting appearance.		256	
Length of fronts	a. Left front at corner shorter than right front at bottom by:			
	- more than 1/8 inch but not more than 1/4 inch.		257	
	- more than 1/4 inch.	120		
	b. Left front at corner longer than right front by:			
	- more than 1/4 inch but not more than 3/8 inch.			329
	- more than 3/8 inch.		258	
	c. Right front at corner exposed beyond edge of left front by more than 1/8 inch.		259	
Shoulder (construction)	a. Improperly joined or set, causing shoulder or back to twist.	14		
Shoulder pads	a. Not completely caught in armhole tacking.		260	
	b. Misplaced not serving the intended purpose; i.e., too far back or too far forward.		261	
	c. One or both pads omitted.		262	
Shoulder straps (construction and setting)	a. Misplaced; i.e., one strap further forward or back from position of other strap, affecting appearance.		263	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Shoulder straps (construction and setting) (cont'd)	b. Misplaced; so that it will not lie flat when buttoned, causing bulge or twist on strap.	15		
	c. Poorly shaped.			330
	d. Shoulder seam exposed beyond back edge of shoulder strap (except rounded end).		264	
	e. Width of shoulder strap at armhole seam (including piping):			
	- less than 2-1/4 inches but not less than 2-1/8 inches.			331
	- more than 2-1/2 inches but not more than 2-5/8 inches.			332
	- less than 2-1/8 inches or more than 2-5/8 inches.		265	
	f. Width of shoulder strap across center of buttonhole eyelet (including piping):			
	- less than 1-5/8 inches but not less than 1-1/2 inches.			333
	- more than 1-3/8 inches but not more than 2 inches.			334
	- less than 1-1/2 inches or more than 2 inches.		266	
	g. Rounded end of shoulder strap positioned less than 1/4 inch or more than 3/8 inch from collar edge.			335
	h. Piping irregular in width, affecting appearance.		267	
	i. Upper side of strap full or twisted, affecting appearance.			336
	j. Back edge of strap less than 1/4 inch or more than 1/2 inch from shoulder seam at armhole.			337
Shoulder strap buttonhole and button	a. Button not aligned with buttonhole, causing a bulge or twist on strap or puckers on shoulders, affecting appearance.		268	
	b. Buttons not uniformly set by more than 1/4 inch.		269	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Shoulder strap buttonhole and button (cont'd)	c. Buttonhole 1/4 inch or more off center.		270	
	d. Buttonhole from outer edge of piping at the collar end of the strap:			
	- less than 5/8 inch but not less than 1/2 inch, or more than 3/4 inch.			338
	- less than 1/2 inch.		271	
Armholes (construction)	a. Badly stretched, affecting appearance.	16		
	b. Taped too tight, causing puckering around armhole seam, affecting appearance.	17		
	c. Crooked seam, affecting appearance.		272	
	d. Tape stitching exposed and visible to outside surface.			339
	e. Sleeve-head pads not completely tacked to armholes; or misplaced, not serving intended purpose.		273	
	f. One or both sleeve-head pads omitted.		274	
Sleeves	a. Setting and hang:			
	1. Sleeve fullness misplaced, affecting appearance.		275	
	2. Backarm seam of sleeve not matching side back seam by:			
	- more than 1/4 inch but not more than 1/2 inch.		276	
	- more than 1/2 inch.	121		
	3. Hang of sleeves on the same coat in opposite direction by more than 2 inches.		277	
	4. Sleeve tight in armhole; i.e., roll effect not present.		278	
	b. Sleeve lining:			
	1. Twisted, tight, or short, causing bulge, twist, or puckering on outside of sleeve.	18		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Sleeves (cont'd)	2. Sleeve lining too long, causing lining to sag at bottom more than 1/2 inch.			340
	3. Sleeve lining seams out of alignment more than 3/4 inch with sleeve seams at armhole or at bottom of sleeve.			341
	4. Cut dart on lining undersleeve omitted.			342
	5. One or both lining darts not pressed flat.			343
	c. Construction of sleeves:			
	1. Wigan twisted, tight or pleated, causing ridges or puckering on outside of bottom of sleeves, affecting appearance.		279	
	2. Tacking on bottom turnup to wigan omitted or insecure.		280	
	3. Sleeve bottom edge uneven by more than 1/4 inch.			344
	4. Tacking on 1 or both sleeve lining seams to sleeve seams omitted, or insecure.			345
	5. Bottom edge of sleeve lining turnup less than 1 inch or more than 1-1/2 inches up from bottom edge of sleeve.			346
	6. Cut dart on wool undersleeve omitted.		281	
	7. One or both wool sleeve darts not pressed open, smooth and flat.			347
	d. Ornamental sleeve pieces:			
	1. Piping irregular, affecting appearance.		282	
	2. Ornamental piece stitched to sleeve too full or twisted, affecting appearance.		283	
	3. Length of ornamental piece (including piping): - less than 5-7/8 inches but not less then 5-5/8 inches.			348

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Sleeves (cont'd)	- more than 6-1/8 inches but not more than 6-3/8 inches.			349
	- less than 5-5/8 inches or more than 6-3/8 inches.		284	
	4. Width at top and bottom points (including piping):			
	- less than 2-3/8 inches but not less than 2-1/8 inches.			350
	- more than 2-5/8 inches but not more than 2-7/8 inches.			351
	- less than 2-1/8 inches or more than 2-7/8 inches.		285	
	5. Width at center point (including piping):			
	- less than 2-5/8 inches but not less than 2-3/8 inches.			352
	- more than 2-7/8 inches but not more than 3-1/8 inches.			353
	- less than 2-3/8 inches or more than 3-1/8 inches.		286	
	6. Poorly shaped, affecting appearance.		287	
	7. Set on crookedly, affecting appearance.		288	
	8. Misplaced; i.e., one piece further forward or back from position of other piece, affecting appearance.		289	
	9. Bottom edge not horizontal with bottom edge of sleeve by more than 1/8 inch.		290	
	10. Ornamental piece stitched to sleeve with pointed ends toward forearm seam of sleeve.	122		
e.	Position of buttons on ornamental pieces (measurements made from center of button):			
	1. Front top and bottom edges (including piped edges):			
	- less than 3/4 inch but not less than 1/2 inch.			354
	more than 1 inch but not more than 1-1/4 inches.			355
	- less than 1/2 inch or more than 1-1/4 inches.		291	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Sleeves (cont'd)	2. Top or bottom button from scalloped edge (including piped edge):			
	- less than 5/8 inch but not less than 3/8 inch.			356
	- more than 7/8 inch but not more than 1-1/8 inches.			357
	- less than 3/8 inch or more than 1-1/8 inches.		292	
	3. Center button from pointed edge (including piped edge):			
	- less than 7/8 inch but not less than 5/8 inch.			358
	- more than 1-1/8 inches but not more than 1-3/8 inches.			359
	- less than 5/8 inch or more than 1-3/8 inches.		293	
	4. Center button not in line with pointed edge by more than 1/4 inch.		294	
Body (outside)	a. Fitting of body linings tight, short, or twisted, causing fullness or twist on outside of coat, affecting appearance.	19		
	b. Fitting of front interlining:			
	1. Tight, short, or twisted, causing fullness or twist on outside of coat, affecting appearance.	20		
	2. Too full, causing coat front to have a wavy appearance.	21		
Chest darts	a. One or both omitted.	123		
	b. End of one or both darts not properly tapered, causing bulge of fullness, affecting appearance.		295	
	c. Equal length of darts not uniform by 1/4 inch or more.			360
	d. Cut edges of dart not turned towards armhole.			361
	e. Not pressed smooth and flat.		296	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Waist darts	a. One or both omitted.	124		
	b. Top or lower end of one or both darts not properly tapered, causing bulge or fullness, affecting appearance.		297	
	c. Equal length of darts not uniform in length by 1/4 inch or more.			362
	d. Alignment of both waist darts: - top or bottom end out of horizontal alignment by 1/4 inch or more.			363
	e. Folded edge not pressed toward side seam.			364
	f. Not pressed smooth and flat.		298	
	g. Top or lower end of one or both darts not securely backstitched.		299	
Front and bottom edges	a. Front edges stretched, affecting appearance.		201a	
	b. Piping set on tight, causing puckering on front, affecting appearance.		202a	
	c. Front or bottom piping irregular, affecting appearance.		203a	
	d. Bottom edge stretching, puckered, or uneven, affecting appearance.			365
	e. Bottom corner of left front poorly shaped, affecting appearance.		204a	
	f .Left front rolling outward below bottom button.	22		
	g. Front edge irregular, affecting appearance.		205a	
	h. Piping tight on front or bottom edge, causing puckering outside of coat, affecting appearance.		206a	
	i. Left front not dressed as specified.		207a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Front facings	a. Short, tight or twisted, causing fullness or twists on fronts, affecting appearance.	23		
Back side panel seams	a. Curved panel seam on back of coat stretched or distorted, affecting appearance.		208a	
Belt loops (construction and position)	a. Poorly shaped or not of uniform shape, affecting appearance.		209a	
	b. Bottom end of one or both loops out of horizontal alignment with bottom front buttonhole by:			
	- more than 3/4 inch below or more than 3/8 inch above.		210a	
	c. Pointed end of one or both loops not toward top of coat.		211a	
	d. One or both not stitched on the side seam.		212a	
	e. One or both not vertically straight; i.e., set on an angle, affecting appearance.		213a	
	f. Alignment of both loops:			
	- top or bottom end out of horizontal alignment by more than 1/4 inch.		214a	
	g. One or more edges not properly forced out; i.e., having a fold or lip of 1/8 inch or more.			366
	h. Bottom of loop not centered on side seam by more than 1/4 inch.		215a	
Belt loop buttonhole and button (position and buttonhole attachment)	a. Button not aligned with buttonhole, causing a bulge or twist on loop or puckers on coat, affecting appearance.		216a	
	b. Buttons not uniformly set by more than 1/4 inch.			367
	c. Buttonhole 1/4 inch or more off center.		217a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Belt loop buttonhole and button (position and buttonhole attachment)	d. Buttonhole less than 1/2 inch or more than 3/4 inch from pointed end of loop.			368
	e. Reinforcement disc beneath one or both buttons omitted.			369
Openings cut for belt loop buttons	a. One or both omitted.	125		
	b. Opening not constructed vertically.		218a	
	c. One or more ends on one or both openings not securely tacked.		219a	
	d. Opening constructed through body lining.	126		
	e. Misplaced; i.e., more than 1/4 inch from marks indicated by patterns, or not positioned on side seam.		220a	
Front buttonholes (position)	a. Position from front edge (including piped edge):			
	- less than 1/2 inch but not less than 3/8 inch			370
	- more than 3/4 inch but not more than 7/8 inch.			371
	- less than 3/8 inch or more than 7/8 inch.		221a	
	b. More than 1/4 from equal spacing.		222a	
	c. Top or bottom buttonhole positioned more than 1/2 inch from pattern marks.		223a	
	d. Unevenly spaced from front edge by more than 3/16 inch.		224a	
Front eyelets (position)	a. Center of top eyelet not in vertical alignment with right end of collar by 1/4 inch or more.		225a	
	b. Lower eyelets not in vertical alignment with top eyelet by 1/4 inch or more.		226a	
	c. More than 1/4 inch from equal spacing.		227a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Front buttons (position)	a. Out of vertical alignment by 1/4 inch or more.		228a	

4.5.2.3 Detailed defects (inside of coat). Detailed defects on inside of coat shall be classified as follows:

Examine	Defects	Classification Major	Minor A	Minor B
Right front eyelet cover	a. Front raw edges not stitched together prior to seaming to right facing.		229a	
	b. Upper or lower seamed edge not hand felled to facing.		230a	
	c. Upper or lower seam edge not securely hand stitched to facing.			372
	d. Omitted.	127		
	e. Front corner of eyelet cover exposed beyond upper edge of right front.			373
	f. Front edge of cover positioned less than 1/4 inch or more than 3/4 inch in from front edge of right front.		231a	
Labels	a. Any required label missing, incorrect, or illegible; or size label not securely caught in stitching.	128		
	b. Identification label not stitched on all four sides.		232a	
	c. Bottom edge of identification label less than 3 inches or more than 5 inches from the bottom finished edge of the coat.			374
	d. Identification label not stitched to outside of right facing.			375

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Hanger	a. Hanger omitted or ends not securely stitched.	129		
	b. Less than 1-7/8 inches or more than 2-1/8 inches long measured along the lower edge of collar lining.		233a	
	c. Hanger not stitched to neck of coat prior to seaming collar to neck of coat.		234a	
	d. Finished width less than 1/4 inch or more than 3/8 inch wide.			376
Front facings	a. Fullness or pleats on facings between eyelets; buttonholes; or between front edge and eyelet or buttonholes.		235a	
	b. Tacking on back edge to 1 or both interlinings:			
	- omitted.		236a	
	- insecure or incomplete for a distance of more than 4-1/2 inches below shoulder seams, or more than 4 inches above bottom edge of coat.			377
	c. Felling at bottom or back edge of front facings omitted or insecure on one or both facings.		237a	
	d. Felling along folded edge of one or both facings at collar notch omitted or insecure.		238a	
Body linings	a. Excessive puckering or pleating.			378
	b. Twisted, not affecting smoothness on outside of coat.			379
	c. One or both chest pleats on shoulder omitted.		239a	
	d. Folded edge of 1 or both chest pleats facing front edge of coat.			380
	e. Pleat omitted at center of back lining.		240a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Body linings (cont'd)	f. Pleat less than 1/2 inch in depth at center of back lining.			381
	g. Bottom hem less than 5/8 inch or more than 7/8 inch wide.			382
	h. Lining too long, i.e., exposed beyond bottom edge of coat.		241a	
	i. Facing-lining seam, side seams, and side back seams not towards back or not pressed smooth and flat.		242a	
	j. Waist darts not towards the side seams or not pressed smooth and flat.		243a	
Lining-securing straps	a. One or both omitted or insecure.		244a	
	b. Less than 1/4 inch or more than 3/8 inch wide.			383
	c. One or both positioned more than 1 inch from side seam.			384
	d. End of one or both straps not finished between the piping at the bottom edge of the coat and the side seam allowance.			385
	e. One or both not folded and stitched across width.			386
	f. One or both not properly attached to lining hem or coat, causing twist or distortion to either the lining or the coat.		245a	
	g. One or both exposed beyond the bottom edge of the coat.		246a	
Serge or overedge stitching	a. Omitted where specified on one or more raw edges for seams joining fronts and back.		247a	
Serge or overedge stitching (lining joined seams)	a. Omitted where specified on one or more seams.		248a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Underarm shields	a. One or both omitted.		249a	
	b. Not two-piece lining construction.		250a	
	c. Tacking on one or both shields, along side or bottom edge to body lining, omitted or insecure.			387
	d. Top edge not caught in armhole tacking or stitching when tacked by hand.			388
	e. Puckered, pleated, or twisted.			389
	f. One or both shields misplaced, not serving intended purpose.			390
Inside of armhole	a. Backstitching at armpit of armhole from backarm seam of sleeve to front edge of shield omitted.			391
Collar lining extension piece	a. Omitted.	130		
	b. Extended less than 1/2 inch or more than 1 inch beyond left end of collar.			392
	c. Felling omitted or insecure at end or top edges.		251a	
	d. Stitching at top, front and bottom edges or across width of collar tab (forming box stitch) omitted.		252a	
Collar lining and eyelet covers	a. Ends of collar lining not securely tacked.		253a	
	b. One or both eyelet covers omitted.		254a	
	c. One or both eyelet covers not covering eyelet.		255a	
	d. Width of collar eyelet less than 1-5/8 inches or more than 1-7/8 inches.			393
	e. Felling on front edge and along lower corner of one or both eyelet covers omitted.		256a	
	f. Felling along lower corners of one of both eyelet covers extending for a distance of more than 3/4 inch.			394

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.2.4 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in table II shall be classified as a size measurement defect. Sleeve lengths uneven by more than 1/2 inch shall be scored as a size measurement defect.

4.5.3 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, or inadequate stapling. Bulging or distortion of containers.
Contents	Number of coats per container is more or less than required.

4.6 Tests.

4.6.1 Metal composition. Chemical composition shall be determined in accordance with test method III of FED-STD-151.

4.6.2 Test for tackiness. At room temperature (60°F to 80°F), press a piece of tissue paper against the lacquered surface for 30 seconds, using any pressure capable of being exerted by the thumb and two fingers. The tissue shall not adhere to the lacquered surface, but shall fall free when pressure is released.

5. PACKAGING

5.1 Preservation. Preservation shall be in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

5.2 Packing. Coats preserved in accordance with 5.1 shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The coat described herein is intended for wear by enlisted male personnel of the U.S. Marine Corps Drum and Bugle Corps (Drum Major).

6.2. Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Sizes required (see 1.2).
c. Whether first article is required (see 3.2).
d. Number of coats in first article (see 4.4).

6.3 Standard samples and shade samples. For information regarding the availability of sample coats and standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a pre-production sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

6.7 Subject term (key word) listing.

Dress
Enlisted
Music

Preparing Activity:
Navy - MC
Project No. 8405-N287

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

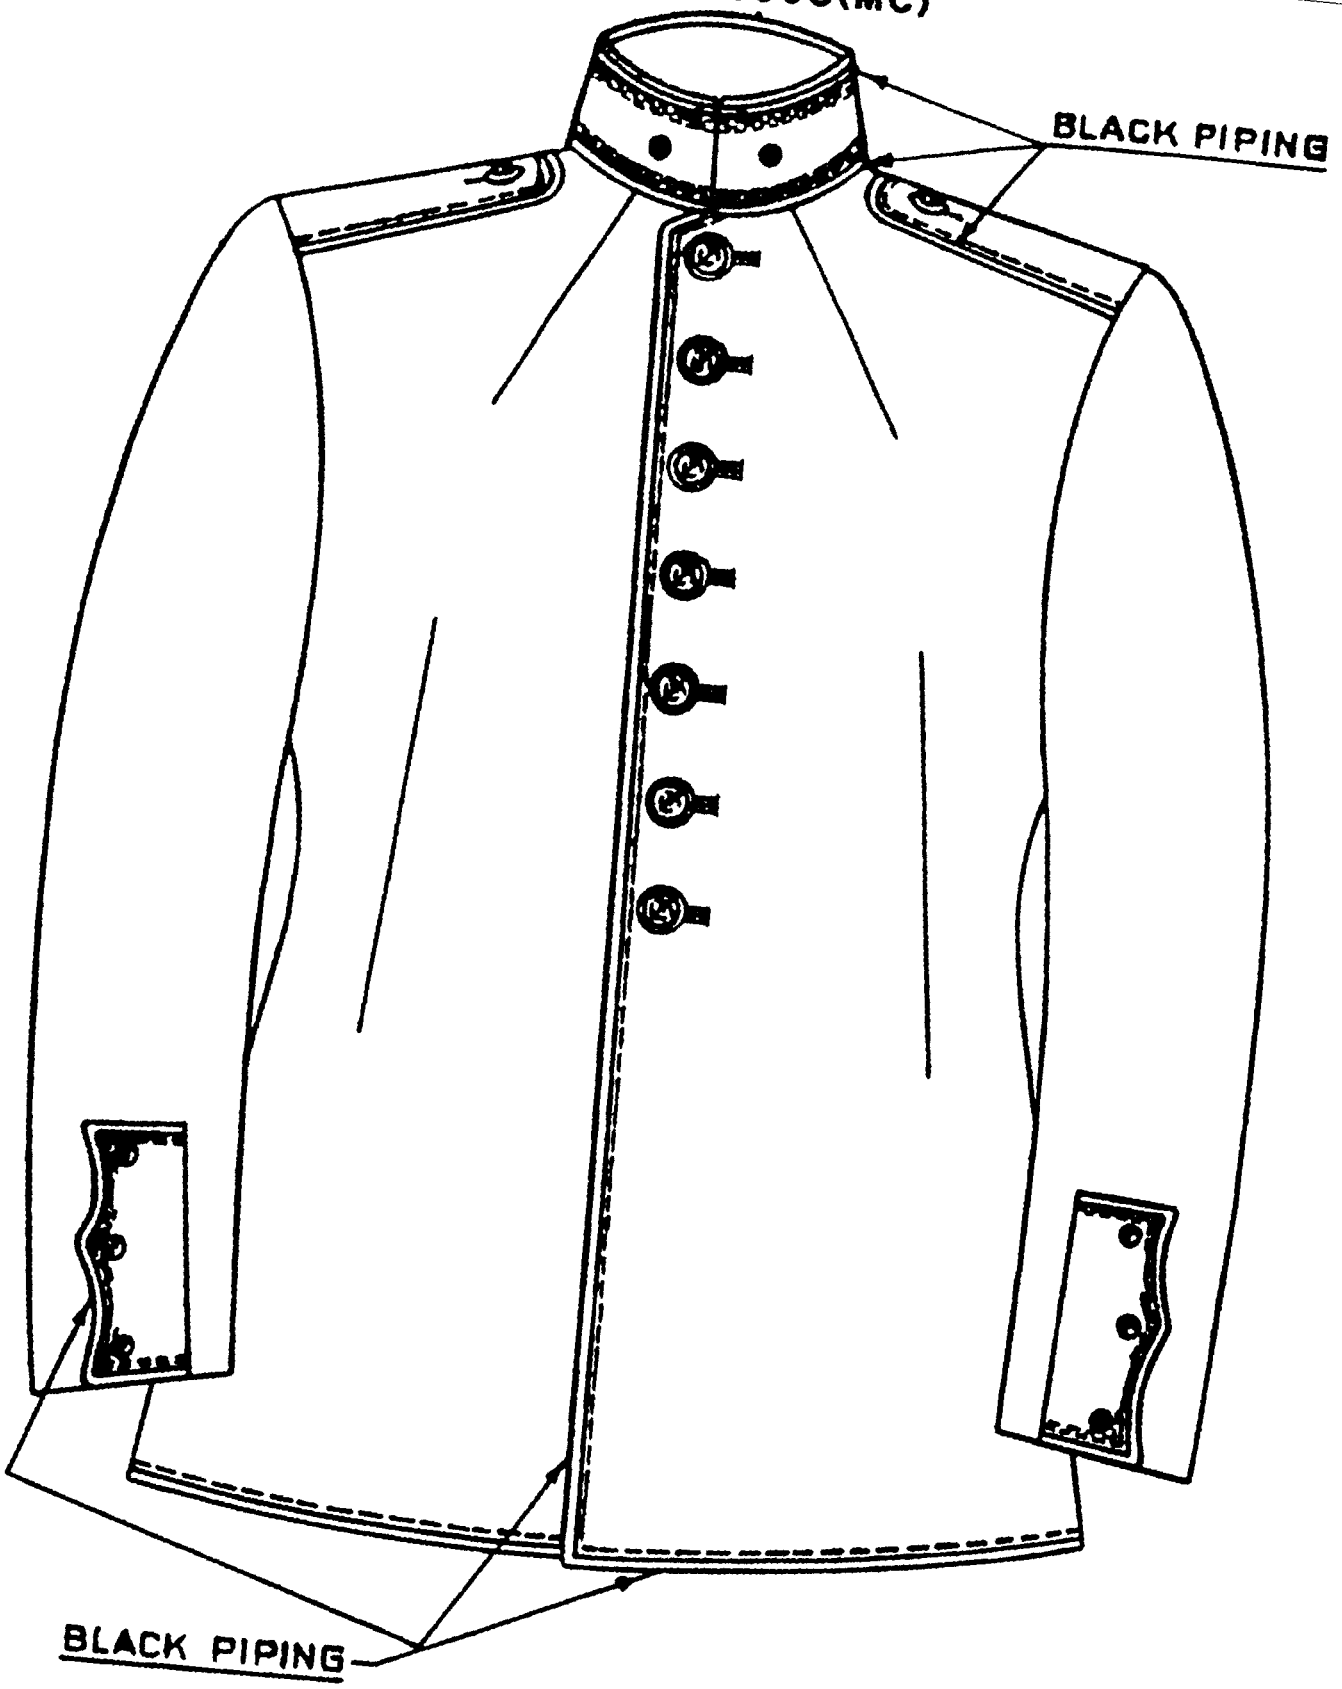


FIG. 1. COAT, MAN'S: SCARLET, DRUM AND BUGLE CORPS; MUSICIANS

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.


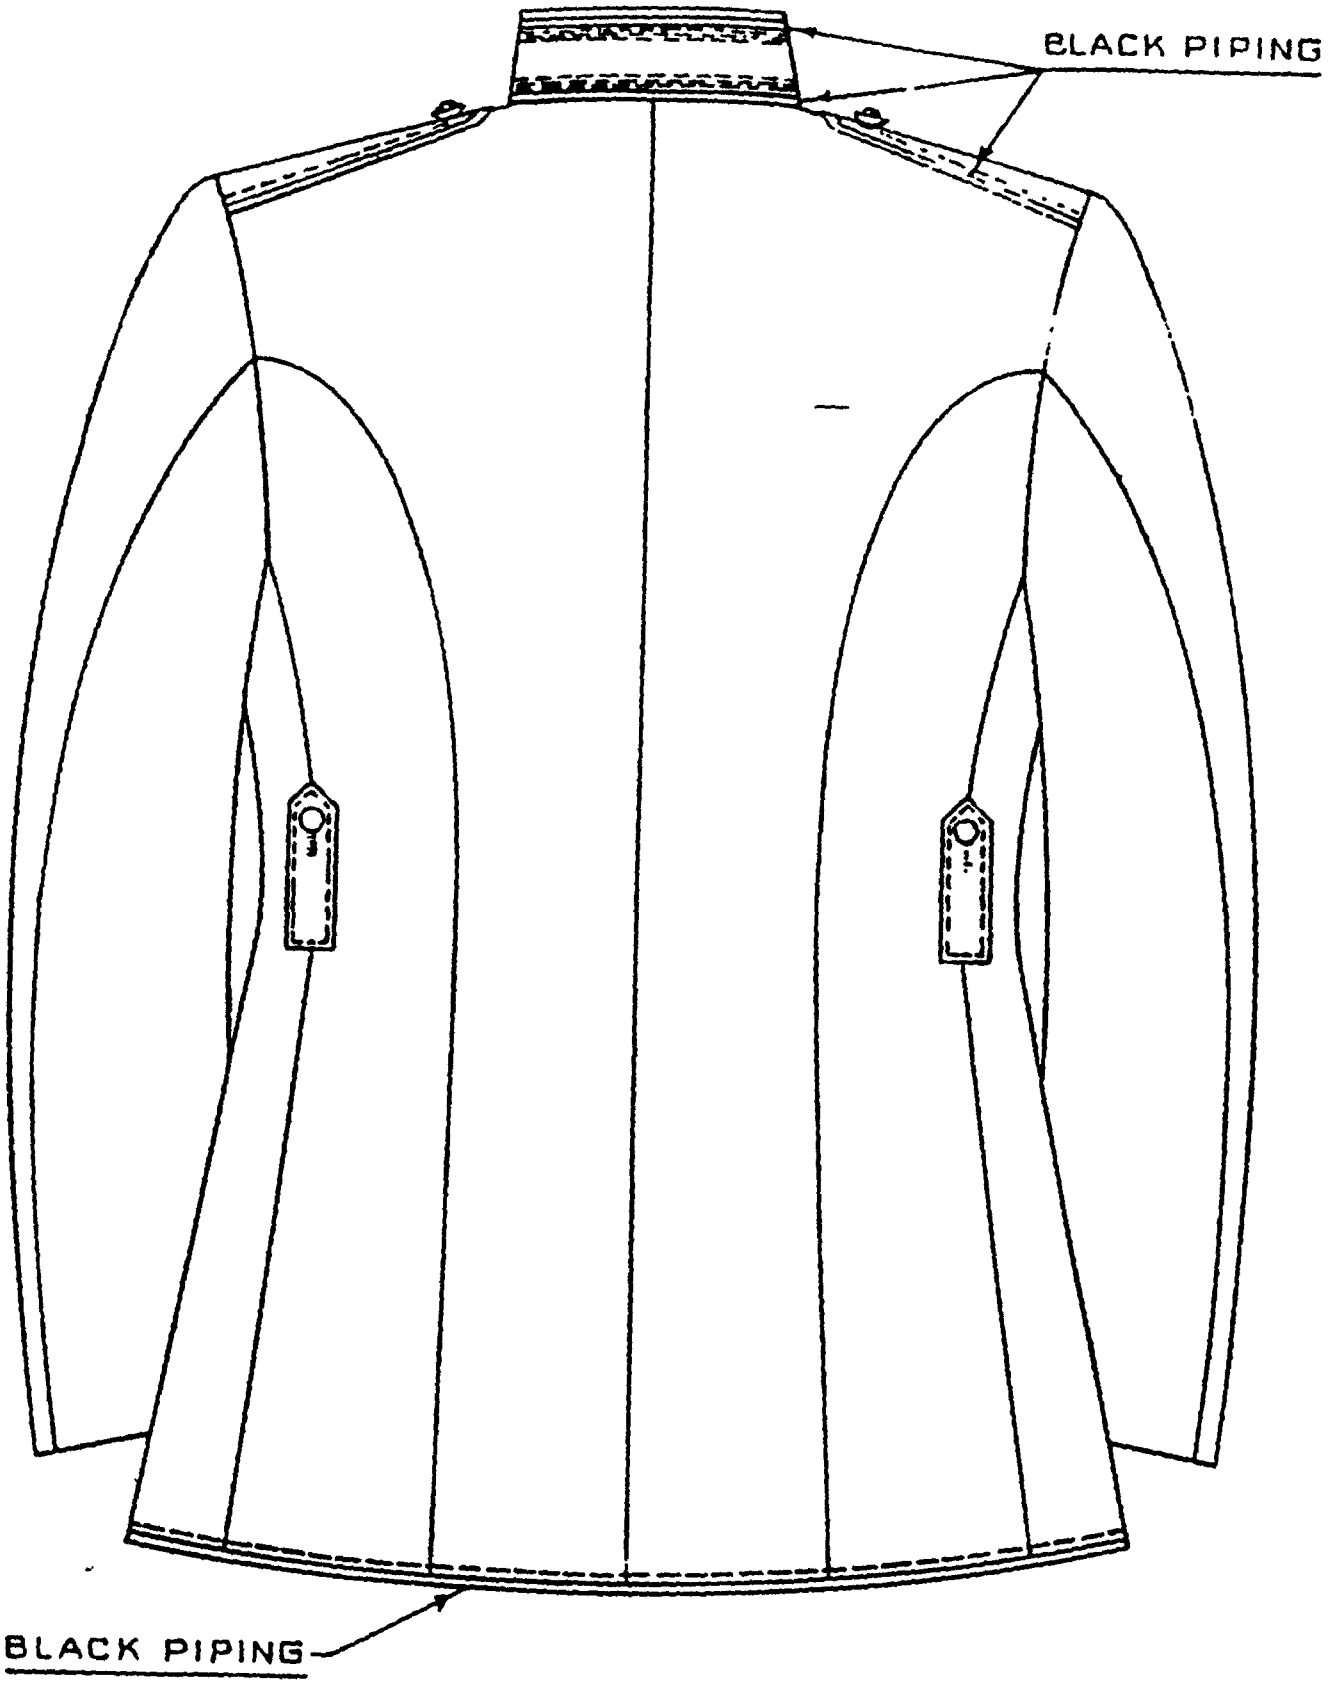


FIG. 2. COAT, MAN'S: SCARLET, DRUM AND BUGLE CORPS; MUSICIANS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

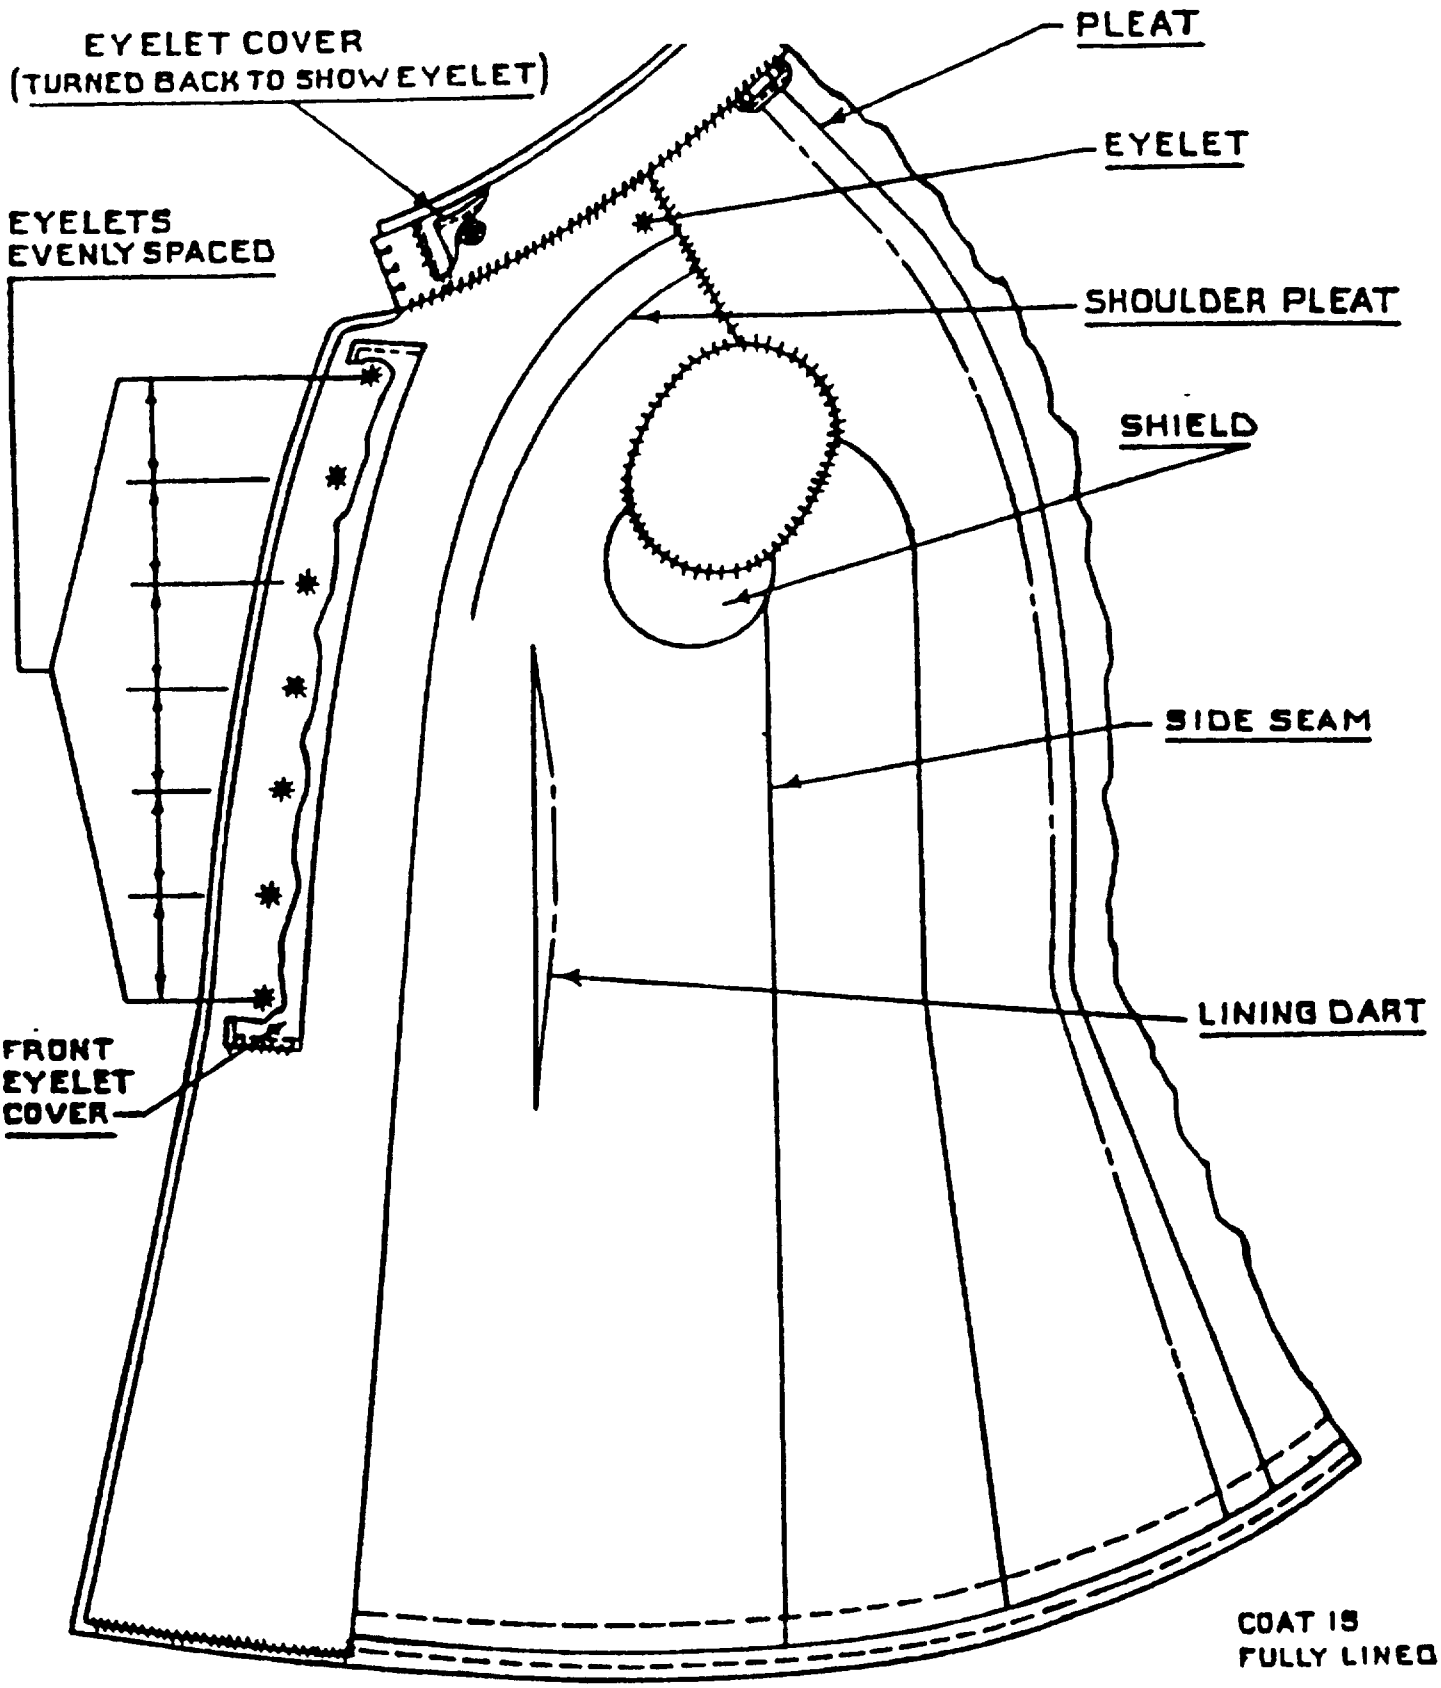


RIGHT-INSIDE VIEW

FIG. 3. COAT, MAN'S: SCARLET, DRUM AND BUGLE CORPS; MUSICIANS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

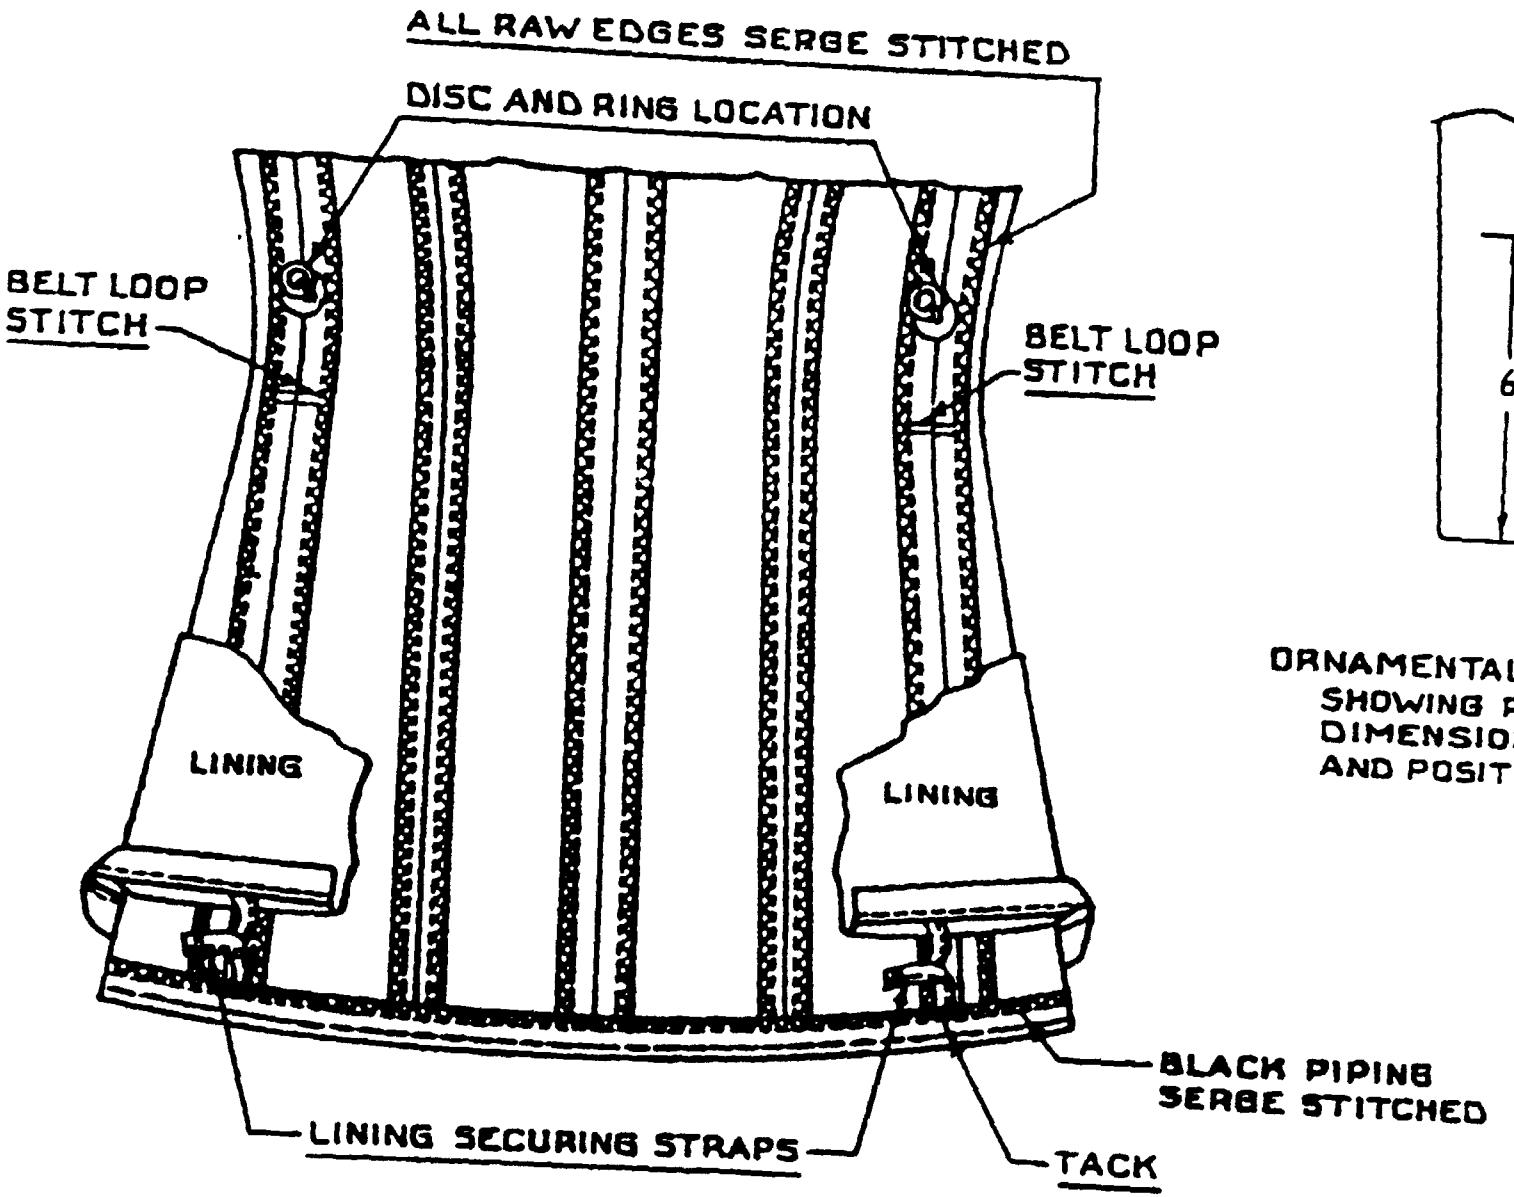

BACK INSIDE — CUT THROUGH VIEW

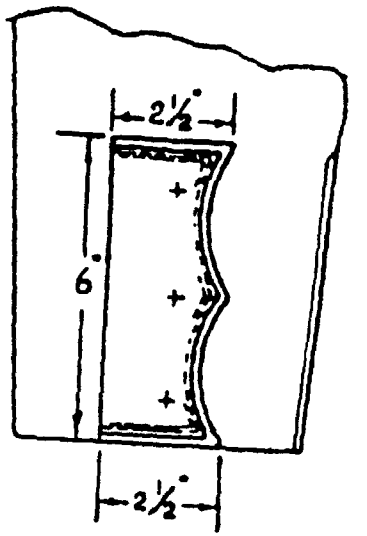

ORNAMENTAL SLEEVE PATCH SHOWING POSITION AND DIMENSIONS OF PATCH AND POSITION OF EYELETS

MIL-C-82156C(MC)

FIG. 4. COAT, MAN'S: SCARLET, DRUM AND BUGLE CORPS; MUSICIANS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

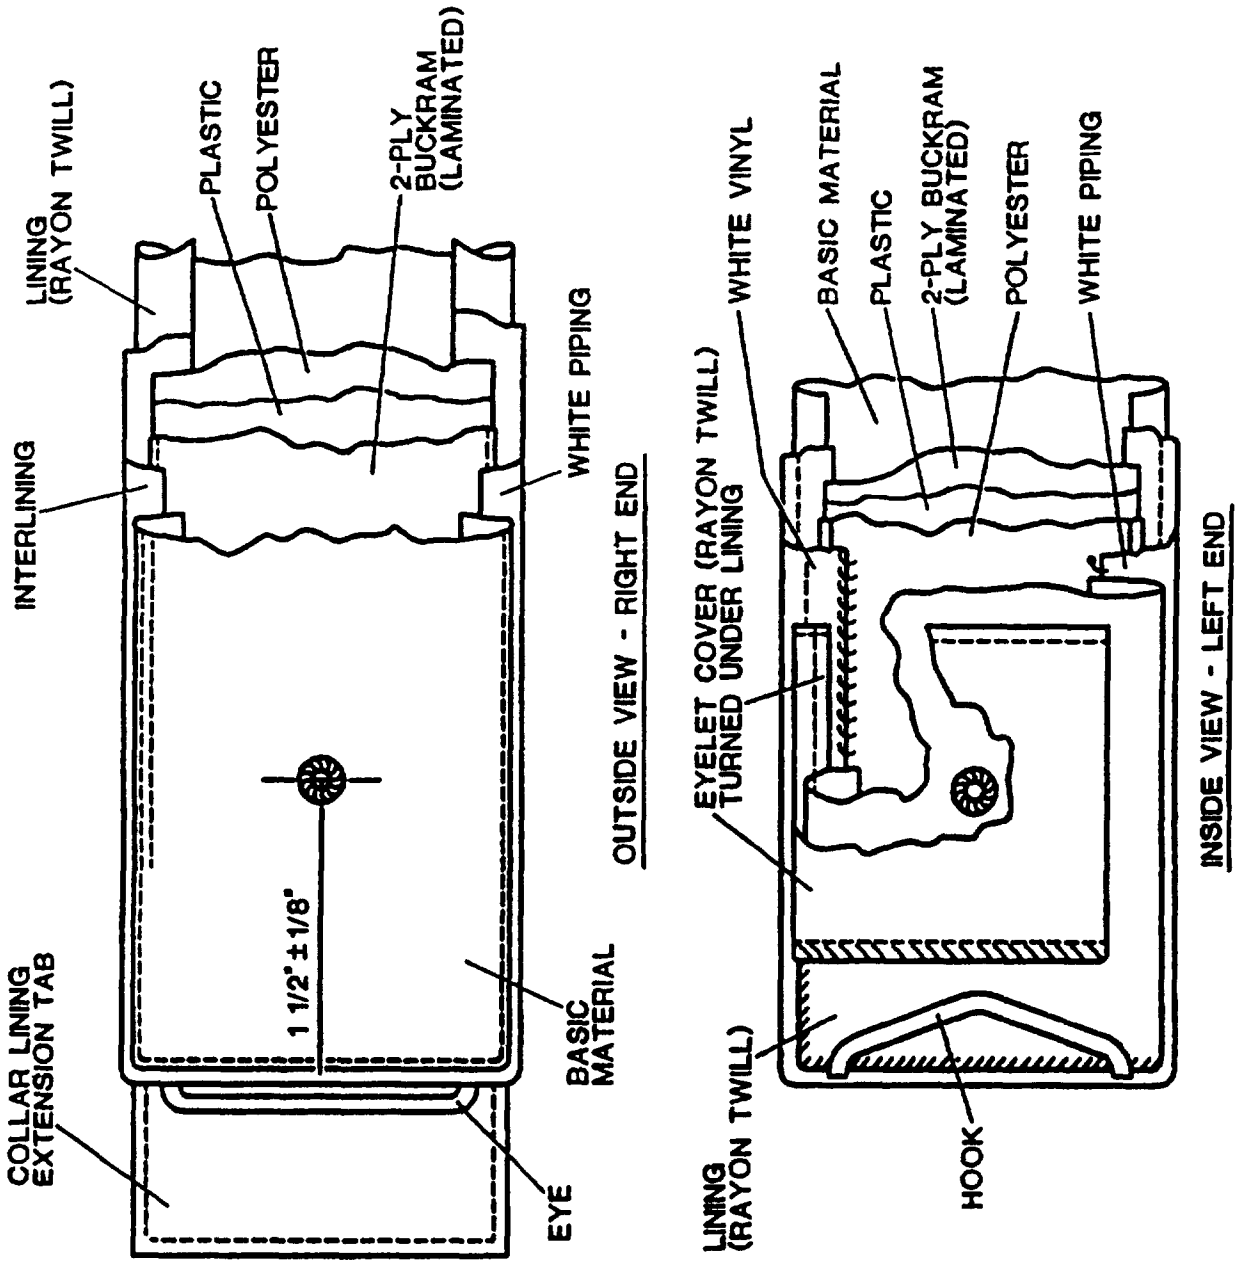


FIG.5. COAT, MAN'S: SCARLET, DRUM AND BUGLE CORPS; MUSICIAN'S

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

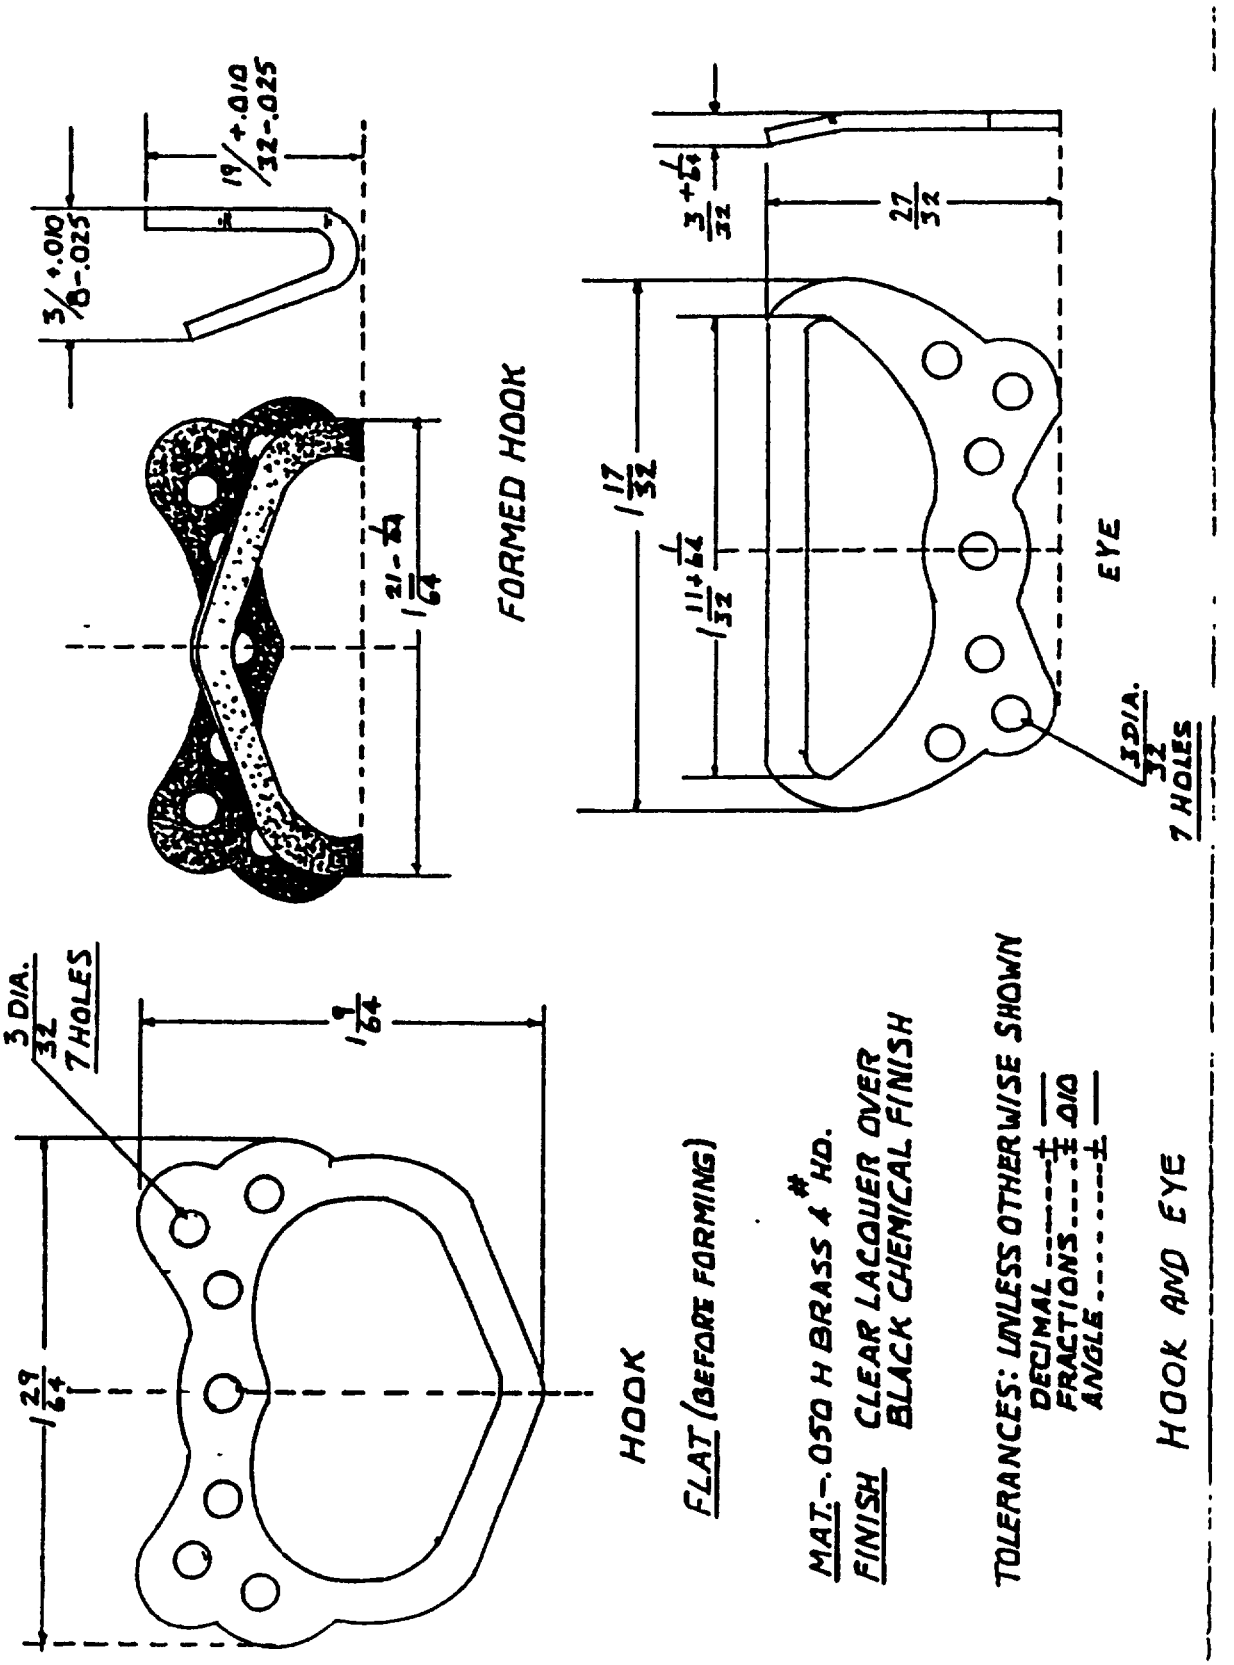


Fig 6: Coat, Man's, Scarlet, Drum & Bugle Corps, Musician

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2 3, and 8 In block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER MIL-C-82156C(MC)	2 DOCUMENT DATE (YYMMDD) 13 Junw 1995

3 DOCUMENT TITLE

COAT, MAN'S: SCARLET, DRUM AND BUGLE CORPS, MUSICIANS

4 NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)*

5 REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME COMMANDER	b TELEPHONE (Include Area Code) (1) Commercial: (703) 784-4584 (2) AUTOVON: 278-4584
c ADDRESS (Include Zip Code) PSE-C/S, MARCORSYSCOM 2033 BARNETT AVENUE SUITE 315 QUANTICO VA 22134-5010	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26 04:39Z
Check the source to verify that this is the current version before use.