MIL-C-82162A(MC)
19 September 1973
SUPERSEDING
MIL-C-82162(MC)
28 August 1967

MILITARY SPECIFICATION

CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a scarlet cummerbund.

*1.2 Classification. The cummerbund shall be of one type in the following classes and sizes as specified (see 6.2):

Class 1 - Scarlet with five horizontal pleats.

Class 2 - Scarlet with six horizontal pleats.

Sizes

28-30 31-34 35-38 39-42

*1.3 Individual orders. When cummerbunds are custom tailored to an individual order, this specification shall govern, except the detail requirements of Table I may be modified to the extent necessary for good custom tailoring practice.

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
V-T-301	- Thread, Silk.
CCC-C-426	- Cloth, Cotton, Drill.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage, (General Use).
PPP-B-676	- Box, Setup.

FSC 8440

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).
MIL-C-82128	- Cloth, Satin, Rayon: Cuprammonium, Scarlet.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitch, Seam, And Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished cummerbunds specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of the specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3. Materials.

*3.3.1 Basic material. The basic material for classes 1 and 2 shall be cloth, rayon, satin, cuprammonium, conforming to MIL-C-82128.

*3.3.2 Cotton drill. The body of the cummerbund shall be interlined with cloth, cotton drill, 7.0 ounces per square yard, unbleached, conforming to type I, class 2 of CCC-C-426.

3.3.3 Elastic webbing. The elastic webbing shall be made of rayon yarn of suitable grade and denier to meet the requirements specified below, and natural or synthetic rubber strands of a suitable gage to meet the requirements specified below. The webbing shall be composed of two ground warps (one face and one back), one elastic warp, and one filling. The ground warps shall weave in a 3 up and 1 down order, with one continuous filling so as to produce a right twill effect on the face and back of the fabric. The elastic strands shall weave in such a manner as to be over all the back picks and under all the face picks. The finished webbing shall conform to the following when tested as specified in Section 4, Table III:

Width-inches	1-1/8 ±1/16
Weight per linear yd-ozs	0.96 minimum
Total warp	170 minimum
Elastic strands	22 minimum
Picks per inch	56 minimum

The color of the webbing shall be scarlet, showing good fastness to laundering, wet (dry) cleaning, crocking and perspiration when tested as specified in Section 4, Table III.

3.3.4 Thread.

*3.3.4.1 Silk thread. The silk thread for machine sewing shall conform to type I, size A, 3-ply of V-T-301 for all outside seaming and stitching. The thread for hand sewing shall conform to type III, class C, 2-ply of V-T-301.

3.3.4.2 Cotton thread. Thread for inside seaming and stitching shall be cotton, mercerized finish, ticket No. A, 3-ply, conforming to type IC2 of V-T-276. Basting thread shall be a good commercial grade.

*3.3.4.3 Color and colorfastness. The cotton and silk thread, except thread for basting, shall be scarlet, shade W, Cable No. 66040. The thread shall show good fastness to wet (dry) cleaning, laundry and light when tested as specified in the applicable thread specification.

3.3.5 Hardware. The buckle and slide shall be made of brass or bronze, nickel plated, and shall conform to the design and dimensions shown on Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.6 Label. Each cummerbund shall be provided with a combined identification-size label, conforming to type I, classes 1 and 2 combined, of DDD-L-20. The label shall measure not less than 2-1/2 by 1-1/2 inches. The content and format shall be as follows:

Nomenclature (item description)
Contract number
Name of contractor
Fiber Products Identification Act information
Size
Stock number

Note: Size of characters for "Name of contractor" shall be minimum 6 point (approximately 1/16 inch).

The size of the cummerbund shall consist of the size designation specified in 1.2. Fastness for laundering and dry cleaning shall apply.

*3.4 Design. The cummerbund shall be the U.S. Marine Corps design shown on Figures 2 through 4, having a one-piece front with five or six horizontal pleats and an interlining, a plain extension piece, two pockets, a plain one-piece back provided with elastic webbing straps at each end, a clasp type metal buckle at the end of the elastic straps, and a metal adjusting slide on the left strap.

*3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The standard patterns provide a 1/4-inch allowance for front and interlining seams and 3/8-inch allowance for front and lining seams and pockets, unless otherwise specified in Table I. Standard patterns shall show size, seam allowances and directional lines for cutting, and shall be marked or notched for proper placement and assembly of the component parts.

*3.5.1 List of pattern parts. The cummerbunds shall be cut from the materials specified in accordance with the pattern parts indicated below:

Item	Pattern nomenclature	No. of cut parts
	Material: Cloth, rayon, satin	
1.	Front, center	1
2.	Front, extensions	2
3.	Back, lining	1
4.	Pocket, right side	1
5.	Pocket, left side	1
	Material: Cloth, cotton, drill	
6.	Front, interlining	1
	Marker	
7.	Front	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Manufacturing requirements. The cummerbunds shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the cummerbunds.

3.6.1.2 Stitches, seams and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitchings produced with 301 type stitch, when not caught in other seams or stitchings, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

*3.6.1.3 Shade marking. The component parts of the cummerbund shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive-type tickets whose adhesive shows discloration and which leave a residue of the adhesive material after removal of the tickets.
(d) Any marking medium that would tend to leave a permanent mark.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut cummerbund in strict accordance with patterns furnished. b. Cut all materials in the direction indicated by directional lines on pattern. c. Cut all component parts of the cummerbund from one piece of basic material. d. Cut the elastic webbing for the left side of the cummerbund 2 inches long and for the right side cut as follows for each size cummerbund: Size — Cut length (inches) 28-30 — 8-1/2 31-34 — 10 35-38 — 13-1/2 39-42 — 16-1/2 e. The use of drill holes is prohibited.					
2.	Replacement of damaged parts. a. Replace at time of cutting any part containing damages, such as holes or seriously weakening defects such as smashes, multiple floats, and slubs likely to develop into holes. b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends and burns.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Shade marking. a. Mark or ticket (see 3.6.1.3) all component parts cut from basic material in order to insure proper assembly and a uniform shade and size throughout the cummerbund. b. Adhesive tickets when used shall be adhered to the inside of the cummerbund.					
4.	Sew on identification-size label. Finished appearance. The label shall be properly positioned and sewn to the back of the cummerbund. a. Position the identification-size label at the center of the back lining, with the top edge 1 inch from the top edge of the back. Sew the label to the back lining with a single row of stitches 1/16 inch from each edge.	301	SSa-1	10-14	A	A
5.	Make center front. Finished appearance. All pleats and joining seams shall finish smooth and flat without distortions. The seams shall start and finish evenly. The pleats shall finish with the outside folded edge towards the top of the front. a. The front shall be made of one ply of rayon satin material and one ply of interlining material. b. Fold the center front lengthwise, inside out, in accordance with notches on the	301	OSf-1	6-10	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
5.	Make center front. (cont'd)					
	patterns, forming the pleats. Stitch each pleat from end to end with a continuous row of stitches. The stitching at the ends of each pleat shall be 1 inch from the lower folded edge and shall extend for a distance of approximately 2 inches from each end. The stitching for the remainder of the pleat shall be 1/2 inch from the folded edge.					
	c. Press front with the outside folded edge of each pleat towards the top of the cummerbund.					
	d. Position the front over the interlining with the upper raw edges even. Stitch each pleat on the underside of front through the interlining, end to end, 3/8 inch above the lower folded edge.	301	LSae-1	8-10	A	A
	e. Seam the front and interlining together on each edge with a 1/4-inch-seam.	301	SSa-1	8-10	A	A
	f. Mark and trim the front in accordance with the pattern marker. Mark the upper edge for the position of two pockets.					
6.	Make pockets.					
	Finished appearance. The pockets shall be uniformly stitched and finish smooth and flat without causing distortion.					
	a. Each pocket shall be made of one ply of basic material.					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	Make pockets. (cont'd)					
	b. Position the end of each pocket on the outside of the front at the mark, with edges even and with notches matching. Stitch the pocket to the front and interlining 3/8 inch from top edge, from notch to notch.	301	LSq-2 (a)	10-14	A	A
	c. Extend depth of notches to the seam, turn the pocket and raise stitch 1/16 to 1/8 inch from the seamed edge.	301	LSq-2 (b)	10-14	A	A
	d. Turn up bottom end of pocket even at the upper and side edges. Stitch the two plies of pocket together at the sides and bottom folded edge with a 1/4-inch seam. Tack the upper ends of pocket opening to the front of cummerbund to complete the pocket.	301	SSa-1 (Sides) OSf-1 (Bottom)	10-14	A	A
7.	Make right buckle strap.					
	Finished appearance. The buckle and adjustment slide shall be positioned and secured to the buckle strap.					
	a. The buckle strap shall consist of one elastic webbing each for right and left ends of cummerbund. The male half of the buckle and the adjustment slide shall be secured to the right buckle strap.					
	b. Insert one end of the elastic webbing for the right side through the adjustment slide. Pull enough webbing through the slide to form a 1-1/4 to 1-1/2 inch loop. Turn under the end of the webbing 1/4 to 3/8 inch and stitch to the body of the webbing 1/16 to 1/8 inch from folded edge, catching the turned under portion in the	301	SSb-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make right buckle strap.(cont'd)					
	stitching.					
	c. Insert the loose end of the webbing through the male half of the buckle and through the adjustment slide as shown on Figure 2.					
8.	Join extensions to center front.					
	a. Position the center front and extensions face to face, even at the side edges and seam together 1/4 inch from the raw edge.	301	LSq-2 (a)	10-14	A	A
	b. Turn the extension and raise stitch 1/16 to 1/8 inch from seamed edge.	301	LSq-2 (b)	10-14	A	A
9.	Assemble cummerbund.					
	Finished appearance. The assembled cummerbund shall be uniform in appearance and finish and shall be smooth and flat. Seams shall be without puckers, pleats or distortions. The buckles shall be properly aligned.					
	a. Position the right and left buckle strap assembl i as indicated in Figure 2 on the outside of the cummerbund, with the ends even with the corresponding end of the cummerbund. Join the webbing to the front 1/8 to 3/16 inch from the ends.	301	SSa-1	10-14	A	A
	b. Position the lining on the outside of the cummerbund and seam to the front through the interlining and back of the pocket only, 3/8 inch from the top edge.	301	LSq-2 (a)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
9.	Assemble cummerbund. (cont'd)					
	c. Turn the lining and top-stitch 1/16 to 1/8 inch from the seamed edge.	301	LSq-2 (b)	10-14	A	A (silk)
	d. Seam the lining to the front at the bottom the length of the cummerbund with a 3/8-inch seam except for a distance of approximately 3-1/2 inches which is left open for turning.	301	SSa-1	10-14	A	A
	e. Turn the seamed edges of the extensions inward as close as possible to the elastic webbing. Stitch each end of the extension with a 3/8-inch-seam, catching the webbing in the stitching.	301	SSj-1	10-14	A	A
	f. Trim the corners and raw edges of seams for proper turning.					
	g. Turn cummerbund right side out, forcing out all corners and seamed edges.					
	h. Baste edges to hold desired shape.	301	Hopper			
	i. Close the opening with felling. The lining shall not be exposed on the outside of the cummerbund.	Hand		2-3	C (silk)	
10.	Press cummerbund.					
	Finished appearance. Pressing shall be done on a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance in accordance with good manufacturing practice.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
10.	Press cummerbund. (cont'd) a. Press the entire cummerbund, removing all wrinkles. b. Finish press.					
11.	Clean cummerbund. a. Remove bastings, trim all ends of stitchings and remove all loose threads from the cummerbund. Remove all spots, shade tickets, markers and stains from the cummerbund without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. Finished measurements of the cummerbund shall be as shown in Figure 2. The finished length (dimension "A" in Figure 2) shall be as shown in Table II.

Table II. Finished length (inches) 1/

Size	28-30	31-34	35-38	39-42
Length	22-1/2	24	25-1/4	26-3/4

1/ Tolerance shall be ±1/4 inch

*3.8 Workmanship. The finished cummerbunds shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such item to determine the validity of the certification.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be made of a completely fabricated cummerbund for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table III for characteristics noted. Wherever applicable, tests shall be conducted in accordance with FED-STD-191. All test reports shall contain the individual values utilized in expressing the final results.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

*4.2.2.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified herein.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Elastic webbing	yard	2 continuous yards
Buckle	Buckle and slide (each)	1 buckle and 1 slide

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Table III. Test methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as:
Elastic webbing	Width	3.3.3	Visual	1	Pass or fail
	Weight/linear yd.	3.3.3	5041 1/	5	Avg. of 5 det. to the nearest 0.01 oz.
	Total warp	3.3.3	Visual	1	Pass or fail
	Elastic strands	3.3.3	Visual	1	Pass or fail
	Pick per inch	3.3.3	Visual	1	Pass or fail
	Weave	3.3.3	Visual	1	Pass or fail
	Material identification 2/	3.3.3			
	Colorfastness to:	3.3.3			
	-laundering	3.3.3	5614	1	Good, fair or poor
	-wet (dry) cleaning	3.3.3	5622	1	Good, fair or poor
	-crocking	3.3.3	5651	1	Good, fair or poor
	-perspiration	3.3.3	5680	1	Good, fair or poor
Buckle and slide	Material identification 2/	3.3.5			
	Plating identification 2/	3.3.5			

1/ Except that a full width specimen 4 inches in length shall be used.
2/ Acceptable under certification of compliance procedure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

*4.2.2.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.2 through 4.2.3.4. The sample unit shall be one cummerbund.

*4.2.3.1 Classification of defects. All defects shall be classified as indicated below except those with an asterisk (*) in the classification column which shall be classified as:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance or serviceability but not seriously.

*4.2.3.2 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Major (*)	Minor A	Minor B
Material defects and damages	a. Any hole.	X			
	b. Any weakening defect such as a smash, multiple float, or loose slub.		*		
	c. Shade bar or unsightly slub:				
	- on outside.		*		
	- on inside.				X
	d. Needle chew, cut, tear or mend.		*		

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or garment or when it is so conspicuously located as to be clearly noticeable. Nonweakening conditions which are inconspicuous shall not be classified as defects.

Shaded parts	a. Rayon satin.	X			
Cleanness	a. Basting thread not removed.			X	
	b. Two or more shade tickets not removed.				X
	c. Any spot or stain clearly noticeable:				
	- on outside of cummerbund.	X			
	- on inside of cummerbund.				X
	d. Thread end or loose threads not removed throughout.				X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Major (*)	Minor A	Minor B
Component and assembly	a. Any part or required operation omitted (unless otherwise classified herein).	X			
	b. Any component not as specified.	X			
Cutting	a. Any component part not cut in accordance with specification requirements.	X			
Pressing	a. Burned or scorched.	X			
	b. Omitted over entire cummerbund			X	
	c. Poorly pressed.				X
Seams and stitching	a. Accuracy of seaming.				
	1. Seams twisted, puckered or pleated (unless otherwise classified herein).				X
	2. Part of material caught in unrelated operation or stitching: - up to a distance of 1/4 inch inclusive. - for a distance greater than 1/4 inch.	X		X	
	3. Ends of stitching when not caught in other seams or stitching backtacked less than 1/4 inch.			X	
	4. Stitching overlapping the ends of thread break less than 1/2 inch.				X
	b. Gage of stitching.				
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniform (to be scored only when the condition exists on major portion of seam).			X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	2. Not within range of gage specified, or varies more than 1/16 inch when no range is specified.			X
	c. Stitches broken or missing in joining seams, edge stitching and top stitching:			
	- up to 1/4 inch inclusive.			X
	- more than 1/4 inch but not more than 1/2 inch.		X	
	- more than 1/2 inch.	X		
	d. Skipped stitches:			
	- 1/4 inch to 1/2 inch long.			X
	- more than 1/2 inch.		X	
	e. Runoff:			
	- 1/4 inch to 1/2 inch long.			X
	- more than 1/2 inch long.		X	
	f. Raw edge:			
	- 1/8 inch up to 1/4 inch inclusive.			X
	- 1/4 inch up to 3/4 inch inclusive.		X	
	- more than 3/4 inch.	X		
	g. Seam type or stitch type not as specified		X	
	h. Stitch tension.			
	1. Loose tension, resulting in a loose seam.	X		
	2. Loose tension on edge or raised stitching, resulting in loosely exposed bobbin or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in lengthwise direction of seam.				
	i. Stitches per inch - to be scored only if the condition exists on major portion (i.e., over one half or more) of seam.			
	1. Less than specified:			
	- one stitch			X
	- two stitches.		X	
	- three or more stitches.	X		
	2. More than maximum specified.			X
Buckle and slide	a. Missing, broken, bent, cracked, or otherwise defective, affecting appearance and function.	X		
	b. Type, size, color, or finish other than specified.	X		

*4.2.3.3 Detailed defects. Detailed defects applicable to specific parts shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Fronts	a. Pleats			
	1. Outside folded edge of one pleat or more not toward top of finished cummerbund.		X	
	2. One pleat or more set on crookedly, affecting appearance.		X	
	3. One pleat or more uneven in width by 1/4 inch or more.		X	
	4. One pleat or more twisted, affecting appearance.		X	
	b. Interlining tight, short, or twisted, causing fullness or twist on front.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Fitting of back lining	a. Back lining tight or short, causing fullness on outside of cummerbund.		X	
	b. Back lining exposed on outside for a distance of:			
	- more than 1 inch but not more than 2 inches.			X
	- more than 2 inches.		X	
Pockets	a. Pockets not stitched through front and interlining at top joining seam.		X	
	b. Notches exposed at pocket openings.		X	
	c. Left pocket:			
	- less than 3-1/4 inches or more than 3-1/2 inches wide at opening.		X	
	- pocket depth less than 3 inches or more than 3-1/4 inches.		X	
	d. Right pocket:			
	- less than 3-1/4 inches or more than 3-1/2 inches wide at opening.		X	
	- pocket depth less than 4 inches or more than 4-1/4 inches.		X	
	e. Pockets not placed in accordance with marks on pattern.		X	
Buckle strap assembly	a. Improperly threaded, i.e., the male half of the buckle placed on the left buckle strap and the female half of the buckle placed on the right buckle strap.		X	
	b. Improperly threaded, i.e., causing buckle to finish on reverse side or to function improperly.	X		

*4.2.3.4 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in Table II and Figure 2 shall be classified as a size measurement defect.

*4.2.3.5 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

4.2.3.2 through 4.2.3.3

Inspection Level II of MIL-STD-105

AQL's	Major	2.5 DHU
	Major and Minor A (combined)	10.0 DHU
	Total Major, Minor A and Minor B (combined)	25.0 DHU

4.2.3.4

Inspection Level S-3 of MIL-STD-105

One class	4.0 DHU

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of cummerbunds per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each cummerbund shall be neatly folded to approximately 11 inches in length around a piece of smooth finish chipboard. The chipboard dimensions shall be approximately 1-1/2 by 4-3/4 inches and shall caliper not less than 0.022 inch in thickness. It is important that the chipboard not contain any ingredient that will discolor the cummerbund fabric. The folded cummerbund shall be placed in a set-up paperboard box conforming to type I, variety 1, class A, style 4, finish No. 2 of PPP-B-676. Outside dimensions of the set-up box shall be 11-1/4 inches in length, 7 inches in width and 1 inch in depth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. The cummerbunds shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Fifteen (15) cummerbunds of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to weather resistant class, size 1A of MIL-B-17757. Shipping containers shall be assembled, closed and reinforced as specified in the appendix to the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers shall be overpacked in a fiberboard shipping container conforming to weather resistant class, size 4 of MIL-B-17757, and assembled, closed and reinforced as specified in the appendix to the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Fifteen (15) cummerbunds of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to domestic class, size 1A of MIL-B-17757. The fiberboard used in fabricating the boxes shall be grade 200. Shipping containers shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Cummerbunds, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Label. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling a white paper label with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quality of each contained therein.

6. NOTES

*6.1 Intended use. The cummerbund covered by this specification is intended to be worn by officers of the Marine Corps.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the currentversion before use.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.
(b) Class and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of cummerbunds in first article (see 3.2).
(e) Level of packaging and packing required (see 5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Samples and shade samples. For information regarding availability of samples of the cummerbund and of standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8440-N107

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.


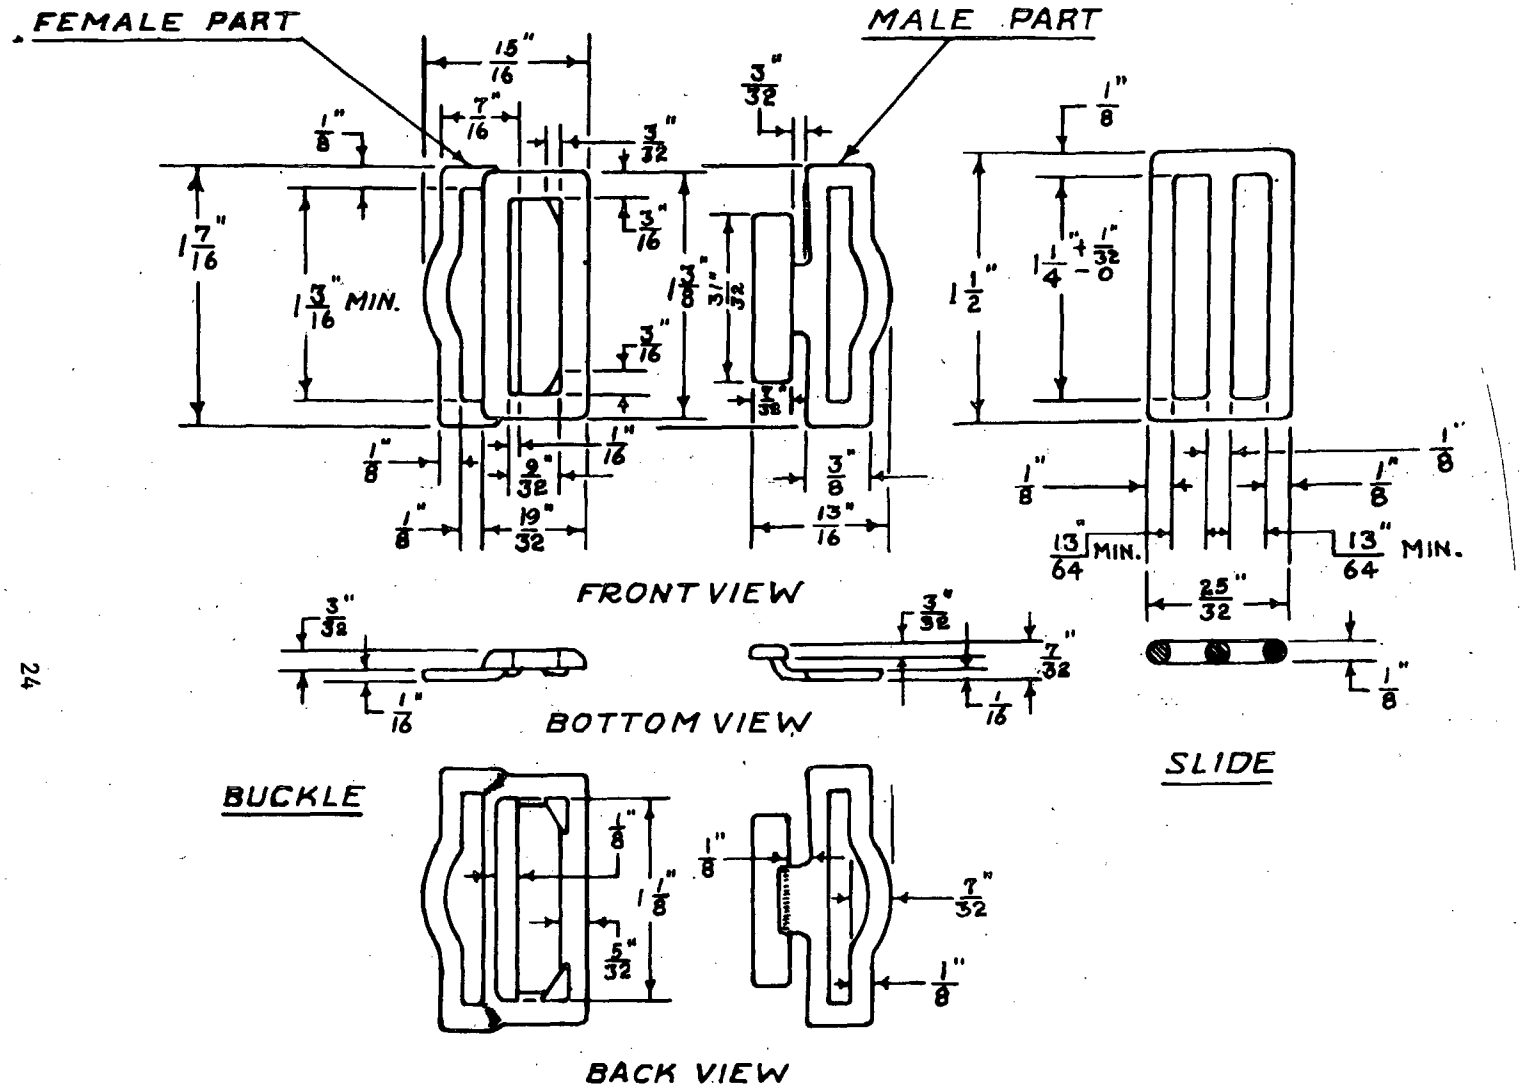


FIGURE 1. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

M.C.S.A. 826:R.G.F. 19 Sep '73

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

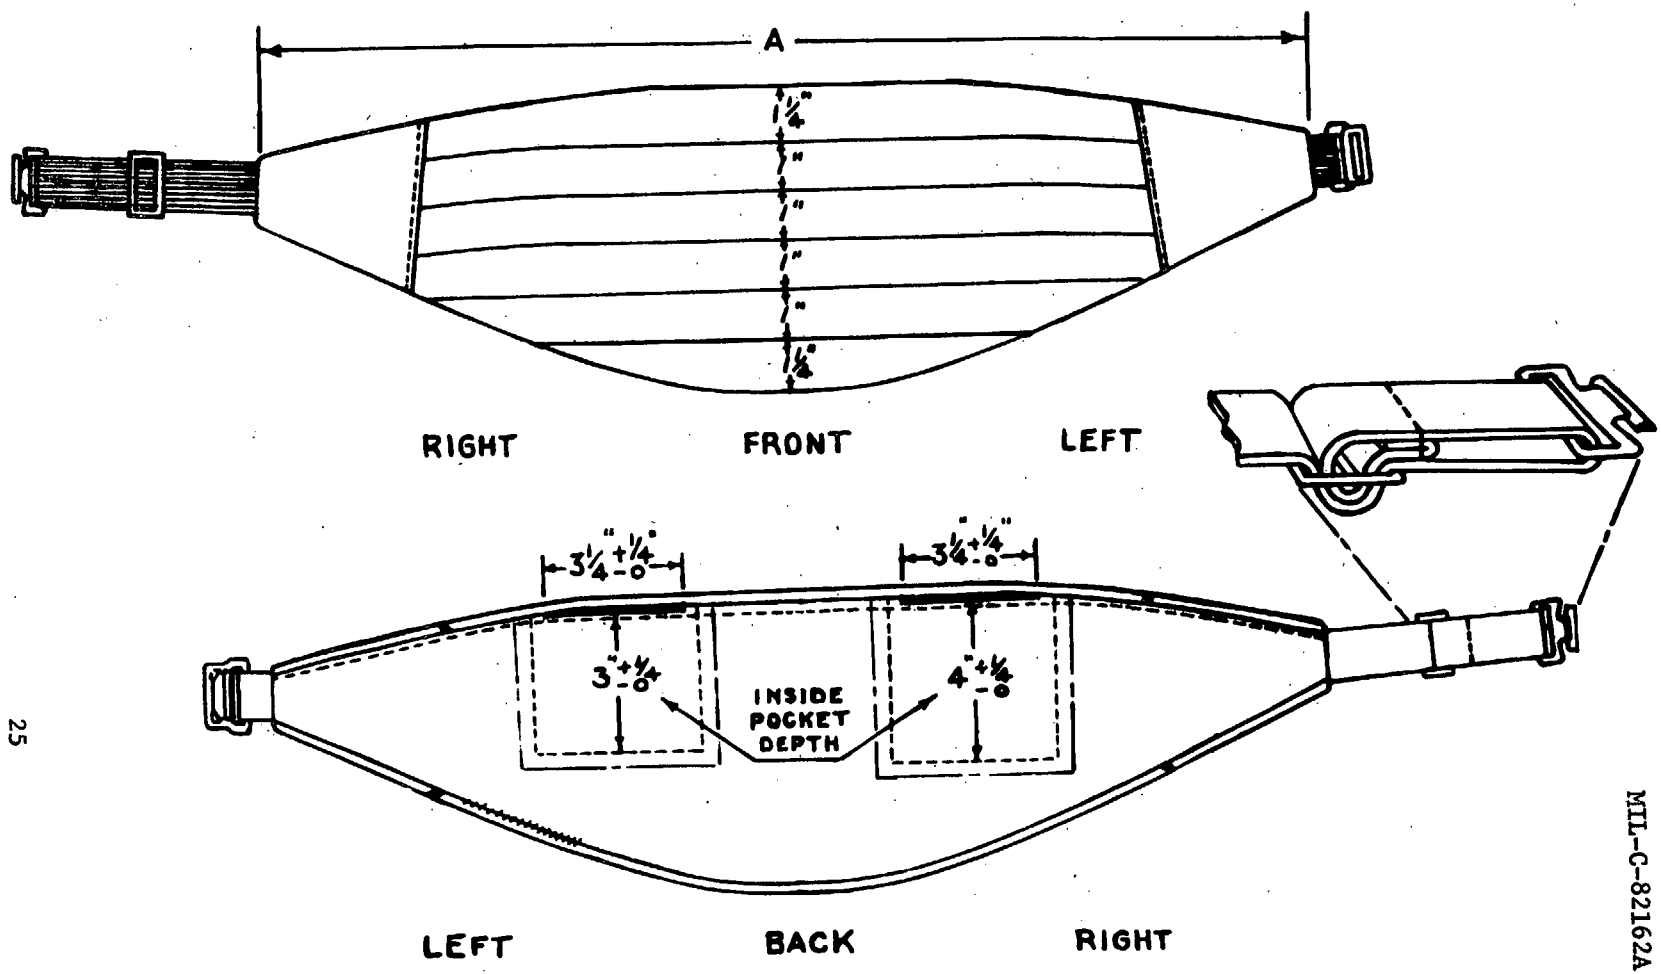


TOLERANCE ON LENGTH A: ± 3/8 INCH

FIGURE 2. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)


MIL-C-82162A(MC)

M.C.S.A.
826. R.E.F.
19 Sep '73


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

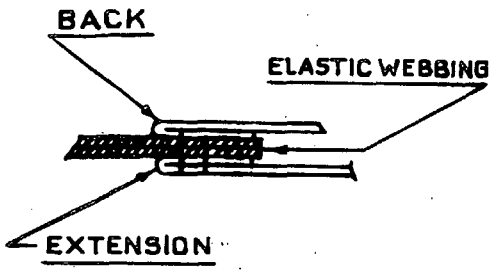

SECTION A-A

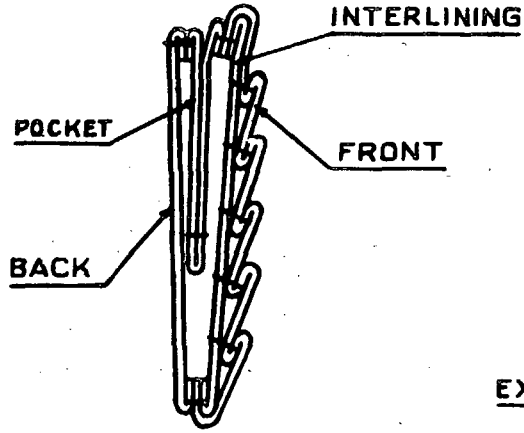

SECTION B-B

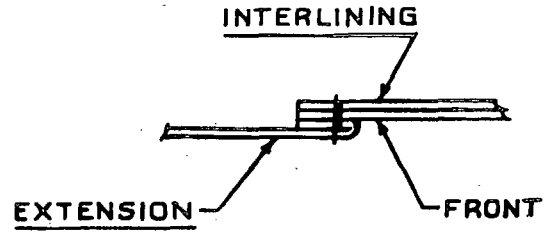

SECTION C-C


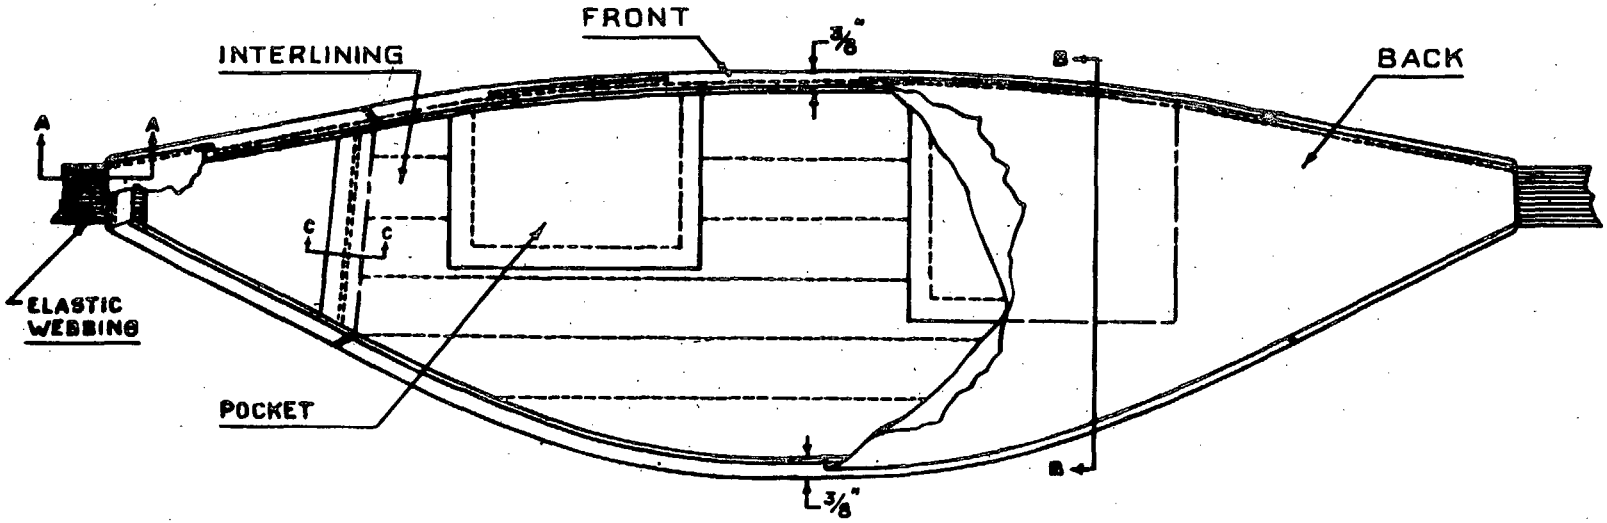



FIGURE 3. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

M.C.S.A.
826: R&F
19 Sep 73

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

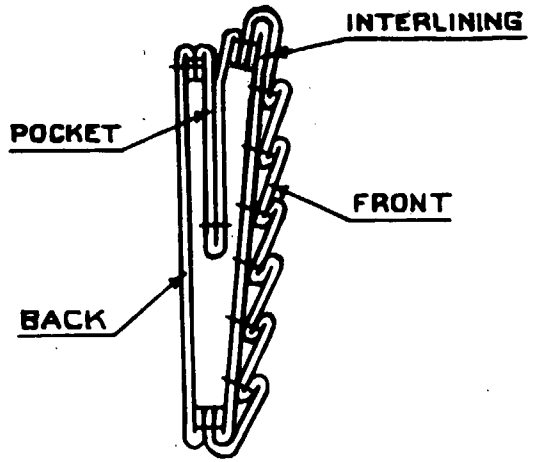

SECTION B-B

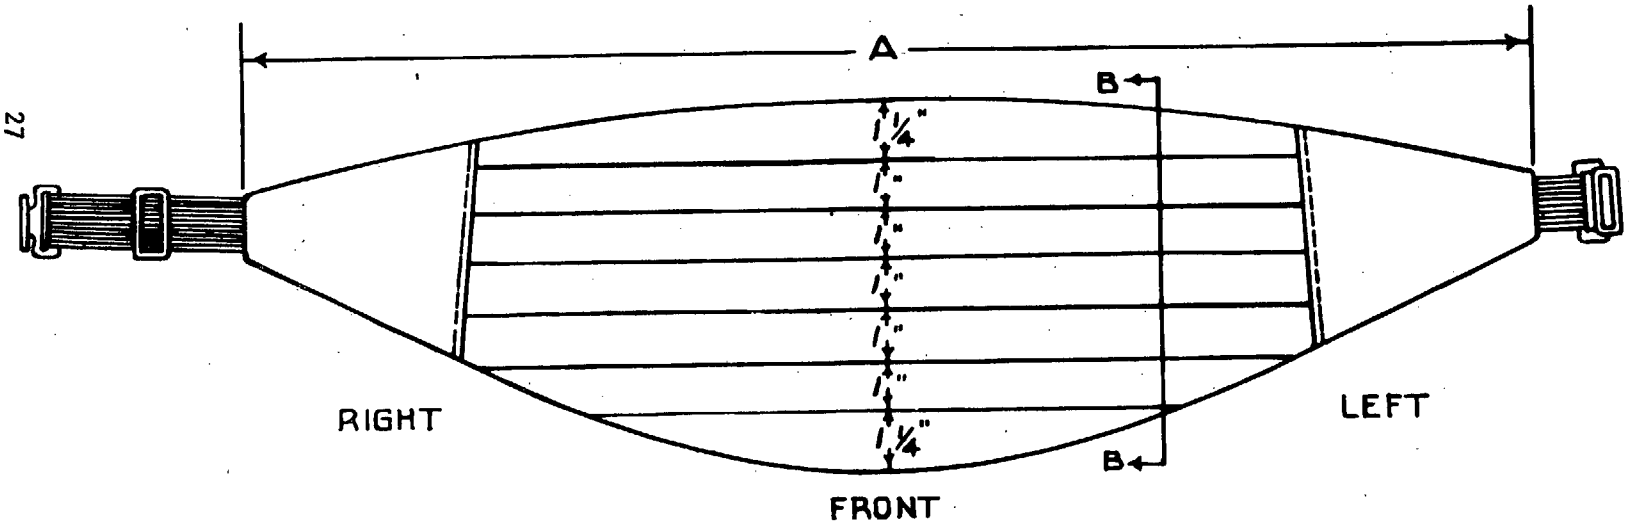

TOLERANCE ON LENGTH A: ± 3/8 INCH

FIGURE 4. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)
6 PLEATS

M.C.S.A.
826: RGF
19 Sep '73

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DoD-317

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.