INCH-POUND

MIL-C-82162B(MC)
4 MAY 1990
SUPERSEDING
MIL-C-82162A(MC)
19 September 1973

MILITARY SPECIFICATION

CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a man's scarlet cummerbund.

1.2 Classification. The cummerbund shall be of one type in the following classes and sizes as specified (see 6.2):

Class 1 - Scarlet with five horizontal pleats.
Class 2 - Scarlet with six horizontal pleats.

Sizes - 28-30 31-34 35-38 39-42

1.3 Individual orders. When cummerbunds are custom tailored to an individual order, this specification shall govern, except the detail requirements of table I may be modified to the extent necessary for good custom tailoring practice.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton.
V-T-301	-	Thread, Silk.
CCC-C-426	-	Cloth, Cotton, Drill.
DDD-L-20	-	Label; For Clothing, Equipage, And Tentage, (General Use).
PPP-B-676	-	Boxes, Setup.

MILITARY

MIL-C-368	-	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-17757	-	Boxes, Shipping, Fiberboard (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods.
FED-STD-751	-	Stitches, Seams, And Stitching.

MILITARY

MIL-STD-105	-	Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	-	Marking For Shipment And Storage.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robins Avenue, Philadelphia, PA 19111-5094)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government document forms a part of this document to the extent specified herein. Unless otherwise specified, the issue is that cited in the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., ATTN: Tariff Order Section, 1616 P Street, N.W. Washington, DC 20026.)

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Thread 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the standard sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.3 Materials.

3.3.1 Basic material. The basic material for classes 1 and 2 shall be cloth, satin, rayon, conforming to Class 1 of MIL-C-368.

3.3.2 Cotton, drill. The body of the cummerbund shall be interlined with cloth, cotton, drill, 7.0 ounces per square yard, unbleached, conforming to type I, class 2 of CCC-C-426.

3.3.3 Elastic webbing. The elastic webbing shall be made of rayon yarn of suitable grade and denier to meet the requirements specified below, and natural or synthetic rubber strands of a suitable gage to meet the requirements specified below. The webbing shall be composed of two ground warps (one face and one back), one elastic warp, and one filling. The ground warps shall weave in a 3 up and 1 down order, with one continuous filling so as to produce a right twill effect on the face and back of the fabric. The elastic strands shall weave in such a manner as to be over all the back picks and under all the face picks. The finished webbing shall conform to the following when tested as specified in section 4, table III:

Width-inches	1-1/8 ± 1/16
Weight per linear yd-ozs	0.96 minimum
Total warp	170 minimum
Elastic strands	22 minimum
Picks per inch	56 minimum

The color of the webbing shall be white.

3.3.4 Thread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.4.1 Silk thread. The silk thread for machine sewing shall conform to type I, size A, 3-ply of V-T-301 for all outside seaming and stitching. The thread for hand sewing shall conform to type III, class C, 2-ply of V-T-301.

3.3.4.2 Cotton thread. Thread for inside seaming and stitching shall be cotton, mercerized finish, ticket No. A, 3-ply, conforming to type IC2 of V-T-276. Basting thread shall be a good commercial grade.

3.3.4.3 Color and colorfastness. The cotton and silk thread, except thread for basting, shall be scarlet, shade W, Cable 66040. The thread shall show good fastness to wet (dry) cleaning, laundry and light when tested as specified in the applicable thread specification. (See DOD Standard Color Card of Official Standardized Shades for Sewing Threads - 1968)

3.3.5 Hardware. The buckle and slide shall be made of brass or bronze, nickel plated, and shall conform to the design and dimensions shown on figure 1.

3.3.6 Label. Each cummerbund shall be provided with a combined identification-size label, conforming to type I, classes 1 and 2 combined, of DDD-L-20. The label shall measure not less than 2-1/2 by 1-1/2 inches. The content and format shall be as follows:

Nomenclature (item description)
Contract number
Name of contractor
Fiber Products Identification
Size
Stock number

Note: Size of characters for "Name of contractor" shall be minimum 6 point (approximately 1/16 inch).

The size of the cummerbund shall consist of the size designation specified in 1.2. Fastness for laundering and wet (dry) cleaning shall apply.

3.4 Design. The cummerbund shall be the U.S. Marine Corps design shown on figures 2 through 4, having a one-piece front with five or six horizontal pleats and an interlining, a plain extension piece, two pockets, a plain one-piece back provided with elastic webbing straps at each end, a clasp type metal buckle at the end of the elastic straps, and a metal adjusting slide on the left strap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The standard patterns provide a 1/4-inch allowance for front and interlining seams and 3/8-inch allowance for front and lining seams and pockets, unless otherwise specified in table I. Standard patterns shall show size, seam allowances and directional lines for cutting, and shall be marked or notched for proper placement and assembly of the component parts.

3.5.1 List of pattern parts. The cummerbunds shall be cut from the materials specified in accordance with the pattern parts indicated below:

Item	Pattern nomenclature	No. of cut parts
	Material: Cloth, satin, rayon	
1.	Front, center	1
2.	Front, extensions	2
3.	Back, lining	1
4.	Pocket, right side	1
5.	Pocket, left side	1
	Material: Cloth, cotton, drill	
6.	Front, interlining	1
	Marker	
7.	Front	-

3.6 Construction.

3.6.1 Manufacturing requirements. The cummerbunds shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in table I.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in table I, but all operations specified shall be used to manufacture the cummerbunds.

3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in table I shall conform to FED-STD-751. The number of stitches per inch as specified in table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitchings produced with 301 type stitch, when not caught in other seams or stitchings, shall be securely backtacked not less

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

3.6.1.3 Shade marking. The component parts of the cummerbund shall be shade marked to ensure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive-type tickets whose adhesive shows discoloration and which leave a residue of the adhesive material after removal of the tickets.
d. Any marking medium that would tend to leave a permanent mark.

TABLE I. Manufacturing requirements.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
1.	Cutting.					
	a. Cut cummerbund in strict accordance with patterns furnished.					
	b. Cut all materials in the direction indicated by directional lines on pattern.					
	c. Cut all component parts of the cummerbund from one piece of basic material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
	Cutting. (Cont'd.) d. Cut the elastic webbing for the left side of the cummerbund 2 inches long and for the right side cut as follows for each size cummerbund: Size — Cut length (inches) 28-30 — 8-1/2 31-34 — 10 35-38 — 13-1/2 39-42 — 16-1/2 e. The use of drill holes is prohibited.					
2.	Replacement of damaged parts. a. Replace at time of cutting any part containing damages, such as holes, or seriously weakening defects, such as smashes, multiple floats, and slubs likely to develop into holes. b. Replace any part damaged during the manufacturing process					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
	Replacement of damaged parts. (Cont'd.)					
	by needle chews, which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends and burns.					
3.	Shade marking.					
	a. Mark or ticket (see 3.6.1.3) all component parts cut from basic material in order to ensure proper assembly and a uniform shade and size throughout the cummerbund.					
	b. Adhesive tickets, when used, shall be adhered to the inside of the cummerbund.					
4.	Sew on identification-size label.					
	Finished appearance. The label shall be properly positioned and sewn to the back of the cummerbund.					
	a. Position the identification-size label at the center of the back lining, with the top edge 1 inch	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
	Sew on identification size label. (Cont'd.)					
	from the top edge of the back. Sew the label to the back lining with a single row of stitches 1/16 inch from each edge.					
5.	Make center front.					
	Finished appearance. All pleats and joining seams shall finish smooth and flat without distortions. The seams shall start and finish evenly. The pleats shall finish with the outside folded edge towards the top of the front.					
	a. The front shall be made of one ply of rayon satin material and one ply of interlining material.					
	b. Fold the center front lengthwise, inside out, in accordance with notches on the patterns, forming the pleats. Stitch each pleat from end to end with a continuous	301	OSf-1	6-10	A	A

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
	Make center front. (Cont'd.)					
	row of stitches. The stitching at the ends of each pleat shall be 1 inch from the lower folded edge and shall extend for a distance of approximately 2 inches from each end. The stitching for the remainder of the pleat shall be 1/2 inch from the folded edge.					
	c. Press front with the outside folded edge of each pleat towards the top of the cummerbund.					
	d. Position the front over the interlining with the upper raw edges even. Stitch each pleat on the underside of the front through the interlining, end to end, 3/8 inch above the lower folded edge.	301	LSae-1	8-10	A	A
	e. Seam the front and interlining together on each edge with a 1/4-inch-seam.	301	SSa-1	8-10	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
	Make center front. (Cont'd.)					
	f. Mark and trim the front in accordance with the pattern marker. Mark the upper edge for the position of two pockets.					
6.	Make pockets.					
	Finished appearance. The pockets shall be uniformly stitched and finish smooth and flat without causing distortion.					
	a. Each pocket shall be made of one ply of basic material.					
	b. Position the end of each pocket on the outside of the front at the mark, with edges even and with notches matching. Stitch the pocket to the front and interlining 3/8 inch from top edge, from notch to notch.	301	LSq-2 (a)	10-14	A	A
	c. Extend depth of notches to the seam, turn the pocket and raise stitch 1/16 to 1/8 inch from the seamed edge.	301	LSq-2 (b)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
	Make pockets. (Cont'd.)					
	d. Turn up bottom end of pocket even at the upper and side edges. Stitch the two plies of pocket together at the sides and bottom folded edge with a 1/4-inch seam. Tack the upper ends of pocket opening to the front of cummerbund to complete the pocket.	301	SSa-1 (Sides) OSf-1 (Bottom)	10-14	A	A
7.	Make right buckle strap.					
	Finished appearance. The buckle and adjustment slide shall be positioned and secured to the buckle strap.					
	a. The buckle strap shall consist of one elastic webbing each for right and left ends of cummerbund. The male half of the buckle and the adjustment slide shall be secured to the right buckle strap.					
	b. Insert one end of the elastic webbing for the right side through the adjustment slide.	301	SSb-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
	Make right buckle strap	(Cont'd.)				
	Pull enough webbing through the slide to form a 1-1/4 to 1-1/2 inch loop. Turn under the end of the webbing 1/4 to 3/8 inch and stitch to the body of the webbing 1/16 to 1/8 inch from folded edge, catching the turned under portion in the stitching.					
	c. Insert the loose end of the webbing through the male half of the buckle and through the adjustment slide as shown on figure 2.					
8.	Join extensions to center front.					
	a. Position the center front and extensions face to face, even at the side edges, and seam together 1/4 inch from the raw edge.	301	LSq-2 (a)	10-14	A	A
	b. Turn the extension and raise stitch 1/16 to 1/8 inch from seamed edge.	301	LSq-2 (b)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
9.	Assemble cummerbund.					
	Finished appearance. The assembled cummerbund shall be uniform in appearance and finish and shall be smooth and flat. Seams shall be without puckers, pleats or distortions. The buckles shall be properly aligned.					
	a. Position the right and left buckle strap, assembled as indicated in figure 2, on the outside of the cummerbund, with the ends even with the corresponding end of the cummerbund. Join the webbing to the front 1/8 to 3/16 inch from the ends.	301	SSa-1	10-14	A	A
	b. Position the lining on the outside of the cummerbund and seam to the front through the interlining and back of the pocket only, 3/8 inch from the top edge.	301	LSq-2 (a)	10-14	A	A
	c. Turn the lining and topstitch 1/16 to 1/8 inch from the seamed edge.	301	LSq-2 (b)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
	Assemble cummerbund. (Cont'd.)					
	d. Seam the lining to the front at the bottom the length of the cummerbund with a 3/8 inch seam except for a distance of approximately 3-1/2 inches which is left open for turning.	301	SSa-1	10-14	A	A
	e. Turn the seamed edges of the extensions inward as close as possible to the elastic webbing. Stitch each end of the extension with a 3/8-inch-seam, catching the webbing in the stitching.	301	SSj-1	10-14	A	A
	f. Trim the corners and raw edges of seams for proper turning.					
	g. Turn cummerbund right side out, forcing out all corners and seamed edges.					
	h. Baste edges to hold desired shape.	301	Hopper			
	i. Close the opening with felling. The lining shall not be exposed on the outside of the cummerbund.	Hand		2-3	C (silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

Opn. No.	Operation	Stch Type	Seam/ Stch Type	Stch Per Inch	Thread Ndl	Thread Bob/ Lpr
10.	Press cummerbund. Finished appearance. Pressing shall be done on a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance in accordance with good manufacturing practice. a. Press the entire cummerbund, removing all wrinkles. b. Finish press.					
11.	Clean cummerbund. a. Remove bastings, trim all ends of stitchings and remove all loose threads from the cummerbund. Remove all spots, shade tickets, markers and stains from the cummerbund without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. Finished measurements of the cummerbund shall be as shown in figure 2. The finished length (dimension "A" in figure 2) shall be as shown in table II.

TABLE II. Finished Length (Inches). 1/

Size	28-30	31-34	35-38	39-42
Length	22-1/2	24	25-1/4	26-3/4

1/ Tolerance shall be ± 1/4 inch.

3.8 Workmanship. The finished cummerbunds shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements. This does not authorize submission of known defective material, either

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test condition specified in the applicable test method document or applicable paragraphs in the specification.

4.4 First article inspections. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.5.3.1 and 4.5.3.2. The presence of any defect or failure to pass any test shall be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer (see 6.4).

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing specified in MIL-STD-105 and FED-STD-191, wherever applicable, and as listed in table III shall be followed. All requirements are applicable to sample units. When the data as to number of determinations per sample unit and the results reported are not as specified in table III, they shall be as required by the reference test method.

4.5.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with MIL-STD-105. The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE III. Test methods.

Components	Characteristics	Reqmt. para.	Test method	No. Determinations per sample unit	Results reported as:
Elastic webbing	Width	3.3.3	Visual	1	Pass or fail
	Weight/linear yard	3.3.3	5041 1/	5	Avg. of 5 det.to the nearest 0.01 oz.
	Total warp	3.3.3	Visual	1	Pass or fail
	Elastic strands	3.3.3	Visual	1	Pass or fail
	Pick per inch	3.3.3	Visual	1	Pass or fail
	Weave	3.3.3	Visual	1	Pass or fail
	Material identification 2/	3.3.3			
Buckle and slide	Material identification 2/	3.3.5			
	Plating identification 2/	3.3.5			

1/ Except that a full width specimen 4 inches in length shall be used.

2/ Acceptable under certification of compliance procedure.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

Component	Lot size expressed as	Sample unit for testing
Elastic webbing	Yard	2 continuous yards
Buckle	Buckle and slide (each)	1 buckle and 1 slide

4.5.1.3 In-process inspection. Inspections shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.2 Examination of the end item. The end item shall be examined for defects listed in 4.5.2.2 through 4.5.2.4. The sample unit for the examination shall be one cummerbund. The inspection level shall be II (see 6.5).

4.5.2.1 Classification of defects. All defects shall be classified as indicated below except those numbered 1-3 in the classification column, which shall be classified as:

Major defect - When seriously affecting appearance or serviceability.

Minor A defect - When affecting appearance or serviceability but not seriously.

4.5.2.2 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Major (*)	Minor A	Minor B
Material defects and damages	a. Any hole.	101			
	b. Any weakening defect such as a smash, multiple float, or loose slub.		1		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
Material defects and damages (Cont'd.)	c. Shade bar or unsightly slub: - on outside.		2		
	- on inside.				301
	d. Needle chew, cut, tear or mend.		3		
NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or garment or when it is so conspicuously located as to be clearly noticeable. Nonweakening conditions which are inconspicuous shall not be classified as defects.					
Shaded parts	a. Rayon satin.	102			
Cleanness	a. Basting thread not removed.			201	
	b. Two or more shade tickets				302
	c. Any spot or stain clearly noticeable: - on outside of cummerbund.	103			
	- on inside of cummerbund.				303
	d. Thread end or loose threads not removed throughout.				304
Component and assembly	a. Any part or required operation omitted (unless otherwise classified herein).	104			
	b. Any component not as specified.	105			
Cutting	a. Any component part not cut in accordance with specification requirements.	106			
Pressing	a. Burned or scorched.	107			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Major (*)	Minor A	Minor B
Pressing (Cont'd.)	b. Omitted over entire cummerbund.			202	
	c. Poorly pressed.				305
Seams and stitching	a. Accuracy of seaming.				
	1. Seams twisted, puckered or pleated (unless otherwise classified herein).				306
	2. Part of material caught in unrelated operation or stitching: - up to a distance of 1/4 inch inclusive. - for a distance greater than 1/4 inch.	108		203	
	3. Ends of stitching when not caught in other seams or stitching backtacked less than 1/4 inch.			204	
	4. Stitching overlapping the ends of thread break less than 1/2 inch.				307
	b. Gage of stitching.				
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniform (to be scored only when the condition exists on major portion of seam).			205	
	2. Not within range of gage specified, or varies more than 1/16 inch when no range is specified.				308

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Major (*)	Minor A	Minor B
Seams and stitching (Cont'd.)	c. Stitches broken or missing in joining seams, edge stitching and top sticking:				
	- up to 1/4 inch inclusive.				309
	- more than 1/4 inch but not more than 1/2 inch.			206	
	- more than 1/2 inch.	109			
	d. Skipped stitches:				
	- 1/4 inch to 1/2 inch long.				310
	- more than 1/2 inch.			207	
	e. Runoff:				
	- 1/4 inch to 1/2 inch long.				311
	- more than 1/2 inch long.			208	
	f. Raw edge:				
	- 1/8 inch up to 1/4 inch inclusive.				312
	- more than 1/4 inch up to 3/4 inch inclusive.			209	
	- more than 3/4 inch.	110			
	g. Seam type or stitch type not as specified.			210	
	h. Stitch tension.				
	1. Loose tension, resulting in a loose seam.	111			
	2. Loose tension on edge or raised stitching, resulting in loosely exposed bobbin or top thread.			211	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor A	Minor B
Seams and stitching (Cont'd.)	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	112			
	NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in lengthwise direction of seam.				
	i. Stitches per inch - to be scored only if the condition exists on major portion (i.e., over one half or more) of seam.				
	1. Less than specified: - one stitch. - two stitches. - three or more stitches.	113		212	313
	2. More than maximum specified.				314
Buckle and slide	a. Missing, broken, bent, cracked, or otherwise defective, affecting appearance and function.	114			
	b. Type, size, color, or finish other than specified.	115			

4.5.2.3 Detailed defects. Detailed defects applicable to specific parts shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Fronts	a. Pleats			
	1. Outside folded edge of one or more pleats not toward top of finished cummerbund.		213	
	2. One or more pleats set on crookedly, affecting appearance.		214	
	3. One or more pleats uneven in width by 1/4 inch or more.		215	
	4. One or more pleats twisted, affecting appearance.		216	
	b. Interlining tight, short, or twisted, causing fullness or twist on front.		217	
Fitting of back lining	a. Back lining tight or short, causing fullness on outside of cummerbund.		218	
	b. Back lining exposed on outside for a distance of:			
	- more than 1 inch but not more than 2 inches.			315
	- more than 2 inches.		219	
Pockets	a. Pockets not stitched through front and interlining at top joining seam.		220	
	b. Notches exposed at pocket openings.			
	c. Left pocket:			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Major (*)	Minor A	Minor B
Pockets (Cont'd.)	- less than 3-1/4 inches or more than 3-1/2 inches wide at opening.			222	
	- pocket depth less than 3 inches or more than 3-1/4 inches.			223	
	d. Right pocket:				
	- less than 3-1/4 inches or more than 3-1/2 inches wide at opening.			224	
	- pocket depth less than 4 inches or more than 4-1/4 inches.			225	
	e. Pockets not placed in accordance with marks on pattern.			226	
Buckle strap assembly	a. Improperly threaded, i.e., the male half of the buckle placed on the left buckle strap and the female half of the buckle placed on the right buckle strap.			227	
	b. Improperly threaded, i.e., causing buckle to finish on reverse side or to function improperly.	116			

4.5.2.4 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in table II and figure 2 shall be classified as a size measurement defect. The inspection level shall be II (see 6.5).

4.5.3 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of section 5 of this specification. Defects shall be scored in accordance with the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

list below. The sample unit shall be one shipping container fully packed, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-3 (see 6.5).

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of cummerbunds per shipping container is more or less than required.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each cummerbund shall be neatly folded to approximately 11 inches in length around a piece of smooth finish chipboard. The chipboard dimensions shall be approximately 1-1/2 by 4-3/4 inches and shall caliper not less than 0.022 inch in thickness. It is important that the chipboard not contain any ingredient that will discolor the cummerbund fabric. The folded cummerbund shall be placed in a set-up paperboard box conforming to type I, variety 1, class A, style 4, finish No. 2 of PPP-B-676. Outside dimensions of the set-up box shall be 11-1/4 inches in length, 7 inches in width and 1 inch in depth.

5.1.2 Commercial. The cummerbunds shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level B or commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

5.2.1 Level B. Fifteen (15) cummerbunds of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to domestic class, size 1A of MIL-B-17757. The fiberboard used in fabricating the boxes shall be grade 200. Shipping containers shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Commercial. Cummerbunds, packaged as specified in 5.1, shall be packed in a manner to ensure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.

6.1 Intended Use. The cummerbund covered by this specification is intended to be worn by officers of the U.S. Marine Corps.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Class and size required (see 1.2).
c. Whether first article is required (see 3.2).
d. Number of cummerbunds in first article (see 4.4)
e. Level of packaging and packing required (see 5.1 and 5.2).
f. Acceptance criteria (see 6.5).

6.3 Standard samples and shade samples. For information regarding availability of samples of the cummerbund and of standard shades specified, address inquiry to the procuring activity issuing the invitation for bids (see 3.1).

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects, 4.0 for major and minor A combined and 6.5 for major, minor A and B combined is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.6 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

6.7 Key word listing.

Dress
Enlisted (SNCO)

6.8 Marginal Notations. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensive changes.

Preparing activity:
Navy - MC
Project No. 8440-N191

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.


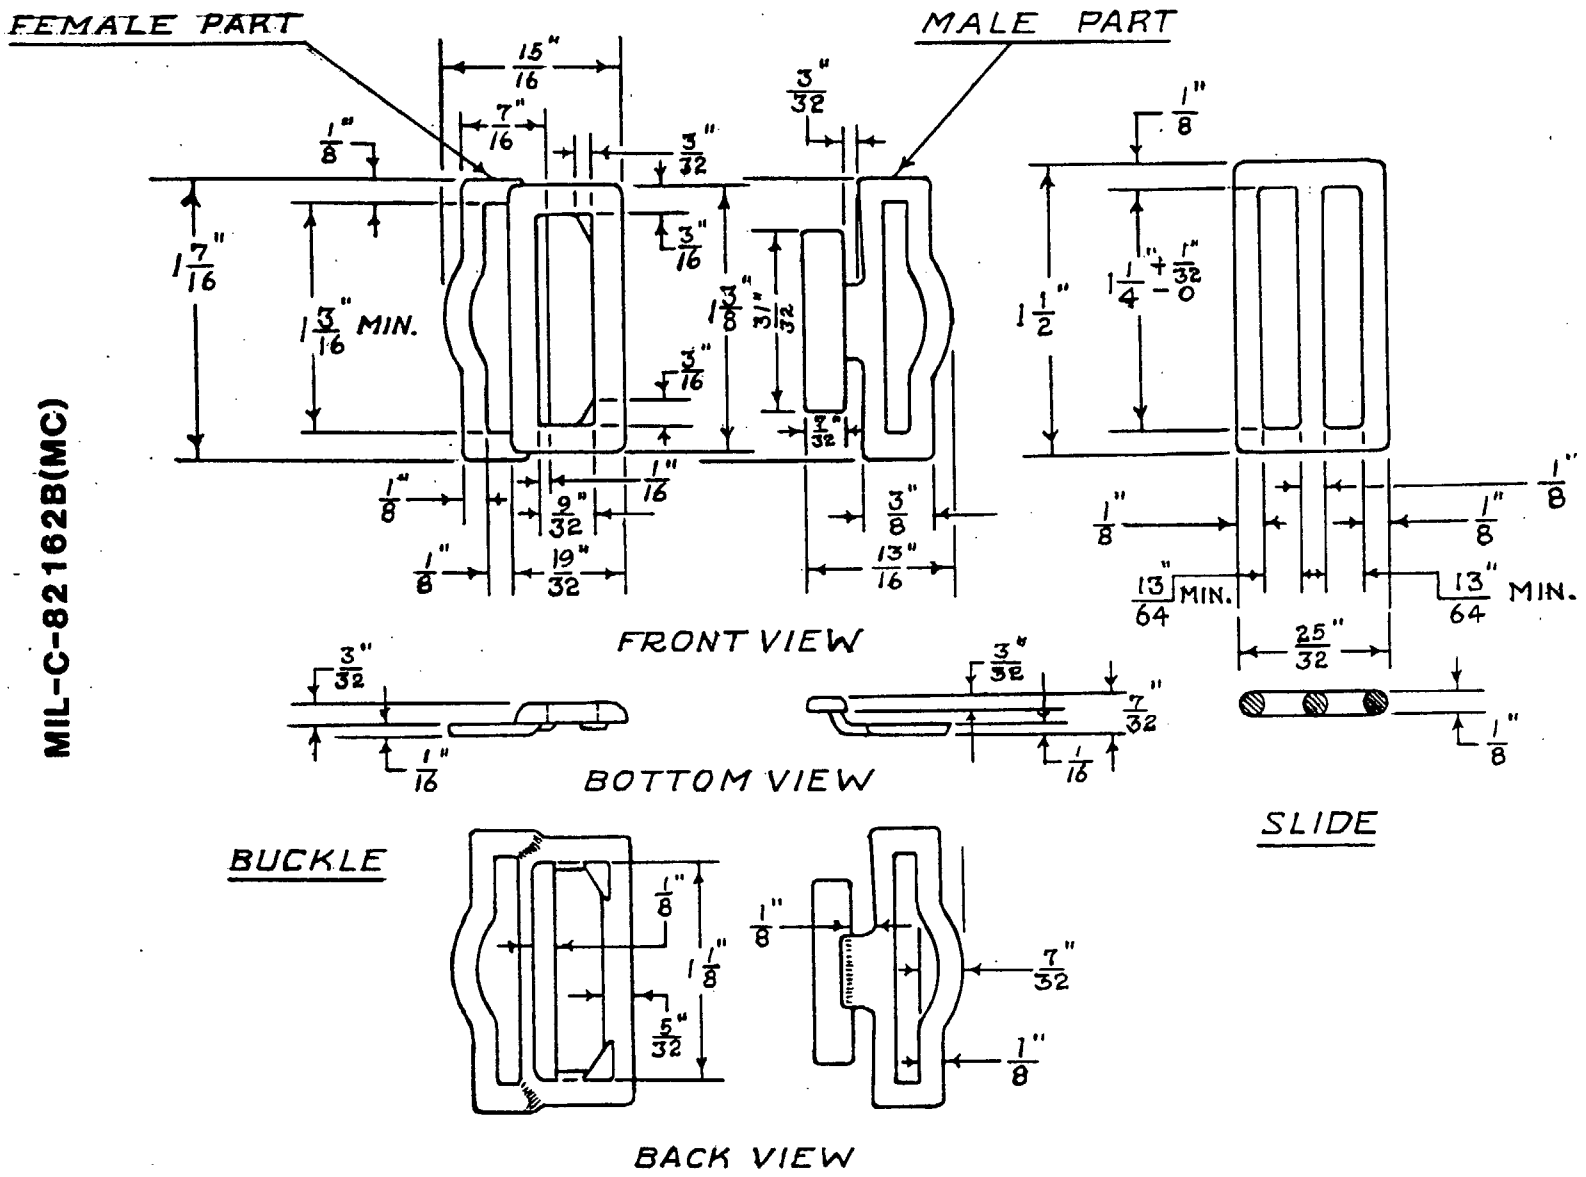


FIGURE 1. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

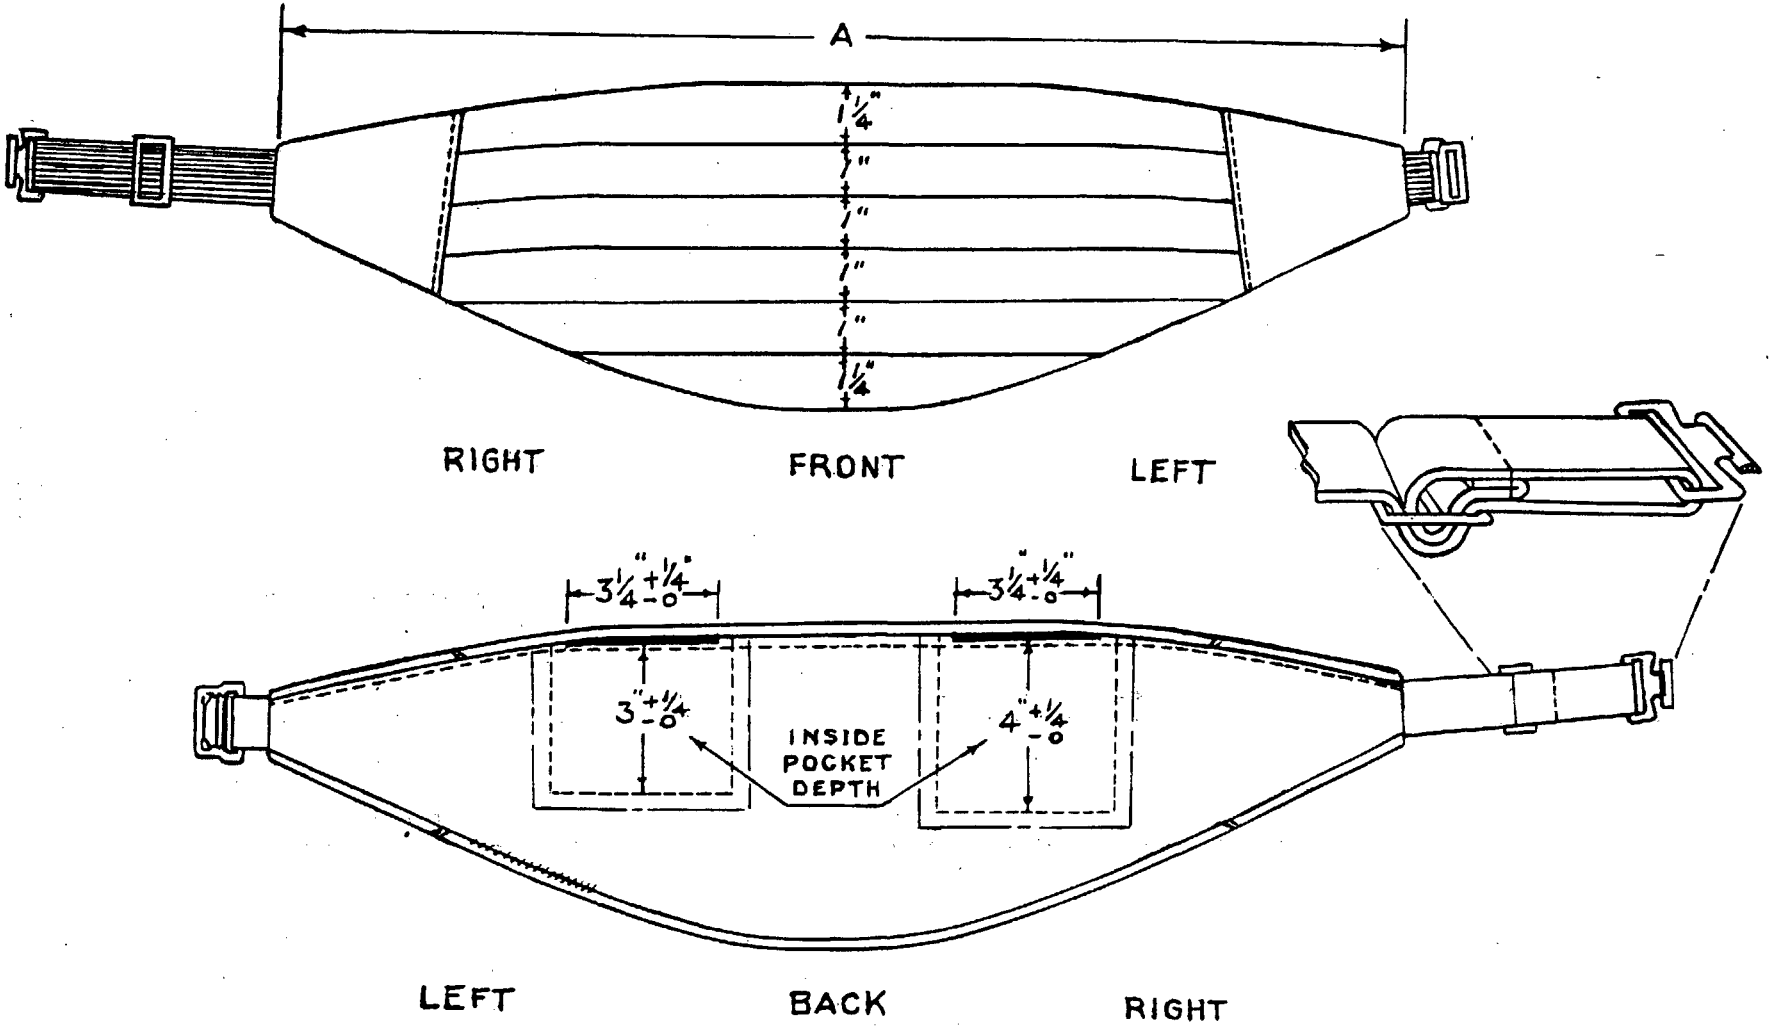

TOLERANCE ON LENGTH A: ± 3/8 INCH

FIGURE 2. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

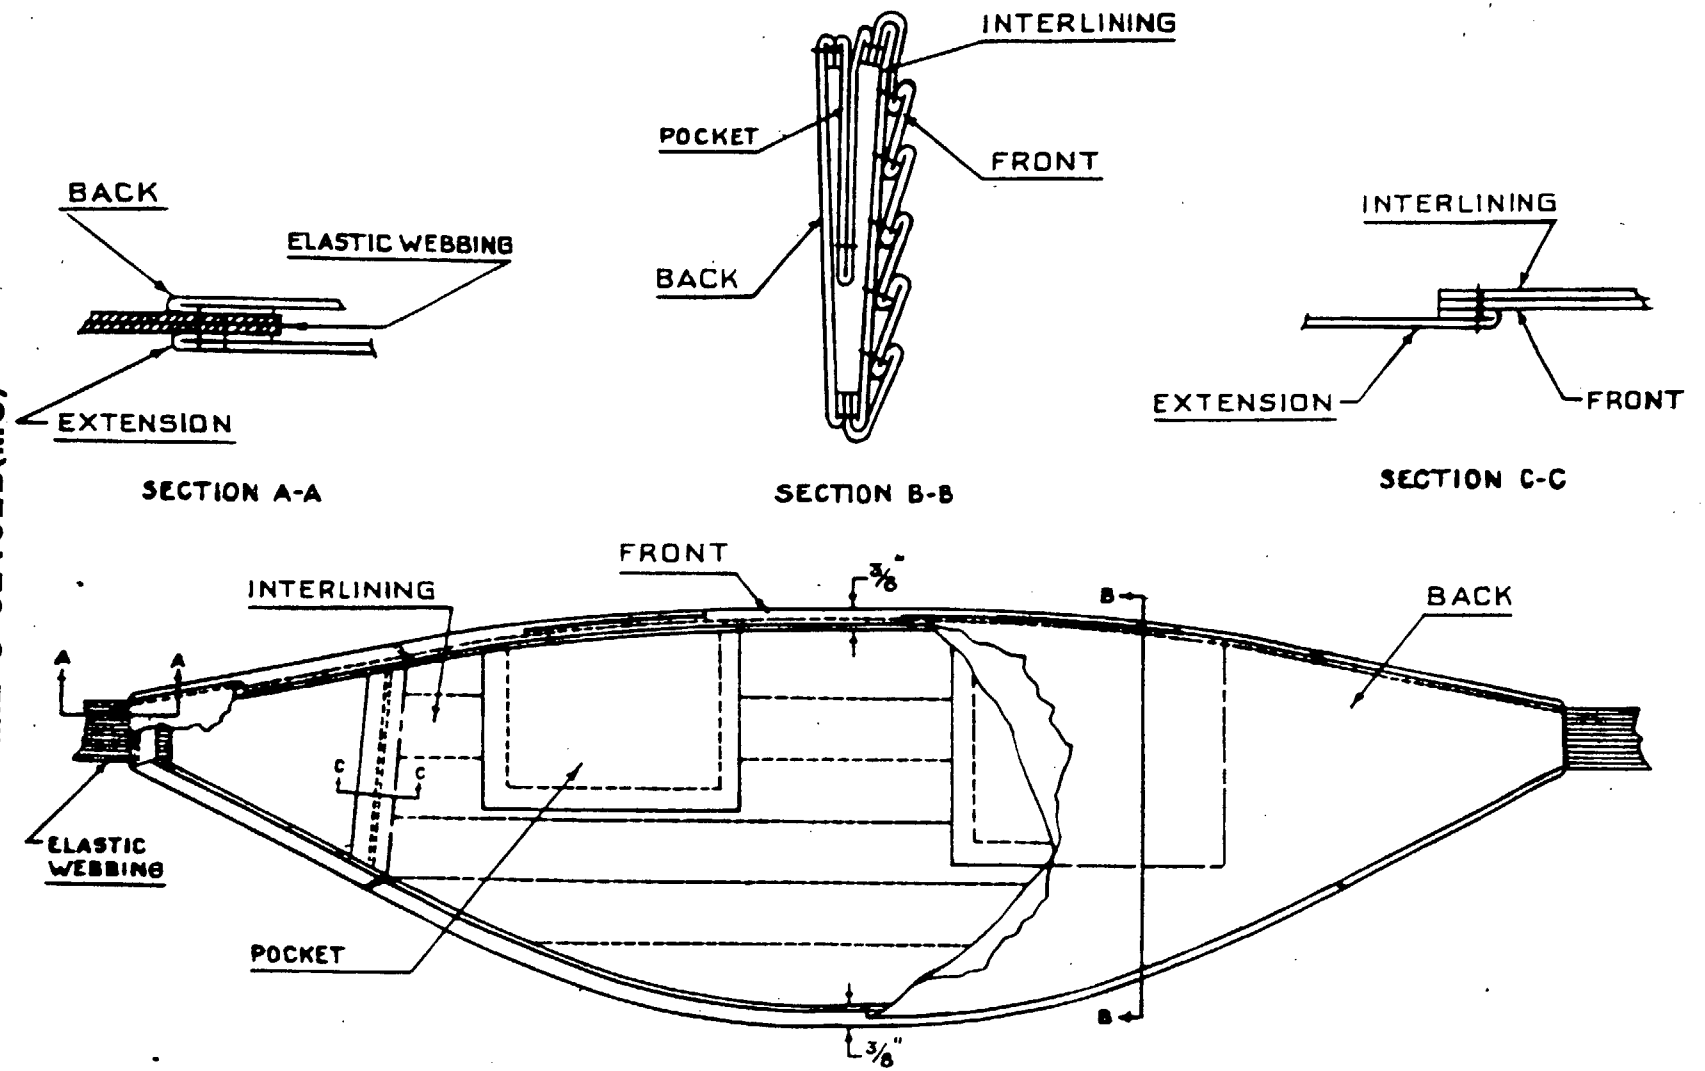


FIGURE 3. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

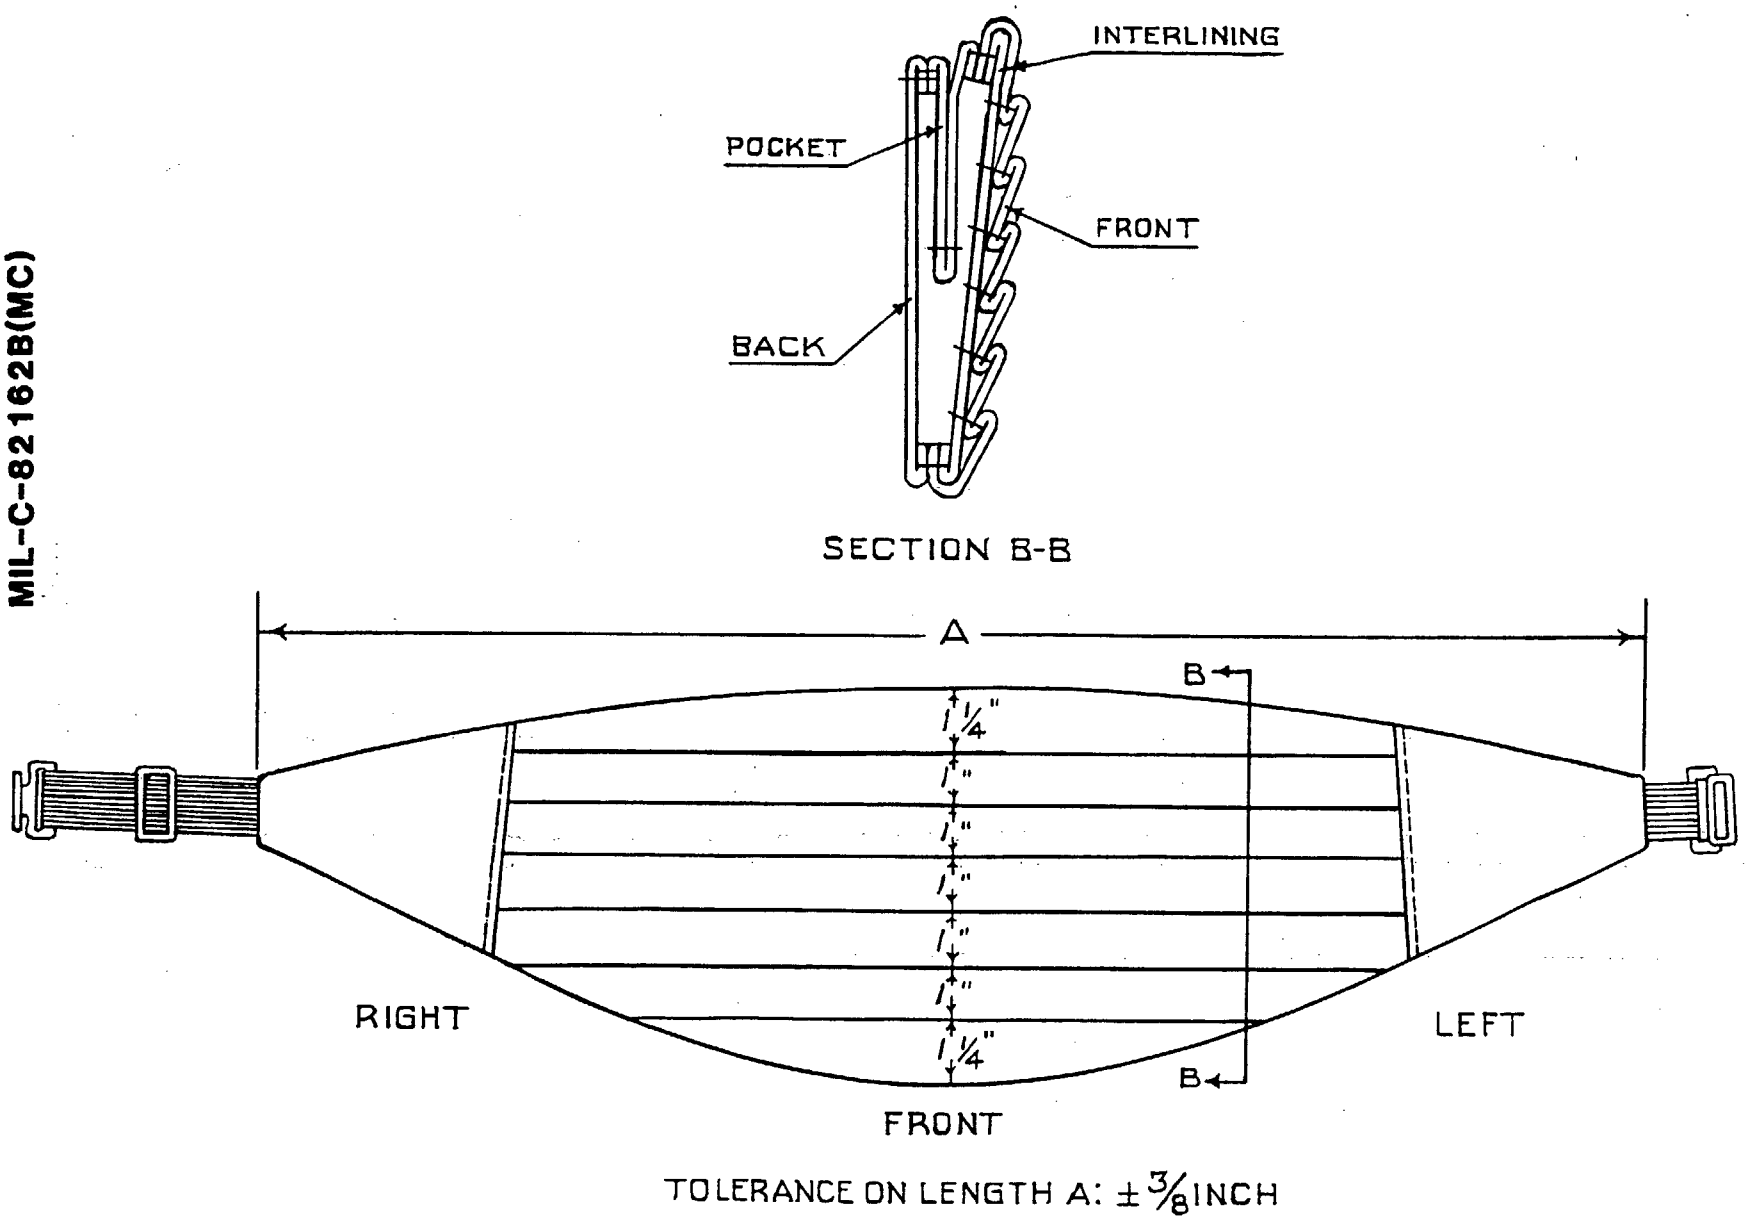


FIGURE 4. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)
6 PLEATS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-82162B(MC)	4 MAY 1990

3. DOCUMENT TITLE

CUMMERBUND, MAN'S: SCARLET OFFICER'S

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(202) 696-1186/87/88	226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, D. C. 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.