INCH-POUND

MIL-C-82162C(MC)

September 20, 1994
SUPERSEDING
MIL-C-82162B(MC)
4 May 1990

MILITARY SPECIFICATION

CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a man's scarlet cummerbund.

1.2 Classification. The cummerbund shall be of one type and size and the following classes as specified (see 6.2):

Class 1 - Scarlet with five horizontal pleats.
Class 2 - Scarlet with six horizontal pleats.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-50196	-	Thread, Silk.
A-A-52094	-	Thread, Cotton.
CCC-C-426	-	Cloth, Cotton, Drill.
DDD-L-20	-	Label; For Clothing, Equipage, And Tentage, (General Use).

MILITARY

MIL-C-368	-	Cloth, Satin, Rayon and Cloth, Twill, Rayon

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods.
FED-STD-751	-	Stitches, Seams, And Stitching.

MILITARY

MIL-STD-105	-	Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	-	Marking For Shipment And Storage.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robins Avenue, Philadelphia, PA 19111-5094)

2.1.2 Other Government publications. The following other Government publication forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Thread 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016.)

(Copies of specifications, standards and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF TESTING MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption had been obtained.

3. REQUIREMENTS

3.1 Guide sample. Guide samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the guide sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.3 Materials.

3.3.1 Basic material. The basic material for classes 1 and 2 shall be cloth, satin, rayon, twill, 3.7 ounce, scarlet shade 2504, conforming to Class 1 of MIL-C-368.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.2 Cotton, drill. The end extensions of the cummerbund shall be interlined with cloth, cotton, drill, 7.0 ounces per square yard, unbleached, conforming to type I, class 2 of CCC-C-426. As an alternate, cloth, fusible interlining may be used. Woven Kufner style #G35, National style 200 FL or Crown style 241 or equal.

3.3.3 Elastic webbing. The elastic webbing shall be made of rayon yarn of suitable grade and denier to meet the requirements specified below, and natural or synthetic rubber strands of a suitable gage to meet the requirements specified below. The webbing shall be composed of two ground warps (one face and one back), one elastic warp, and one filling. The ground warps shall weave in a 3 up and 1 down order, with one continuous filling so as to produce a right twill effect on the face and back of the fabric. The elastic strands shall weave in such a manner as to be over all the back picks and under all the face picks. The finished webbing shall conform to the following when tested as specified in section 4, table III:

Width-inches	1-1/8 ± 1/16
Weight per linear yd-ozs	0.96 minimum
Total warp	170 minimum
Elastic strands	22 minimum
Picks per inch	56 minimum

The color of the webbing shall be black, showing good fastness to laundering, wet (dry) cleaning, crocking and perspiration when tested as specified in table III.

3.3.4 Thread.

3.3.4.1 Silk thread. The silk thread for machine sewing shall conform to type I, size A, 3-ply of A-A-50196 for all outside seaming and stitching. The thread for hand sewing shall conform to type III, class C, 2-ply of A-A-50196.

3.3.4.2 Cotton thread. Thread for inside seaming and stitching shall be cotton, mercerized finish, ticket No. A, 3-ply, conforming to type III of A-A-52094. Basting thread shall be a good commercial grade.

3.3.4.3 Color and colorfastness. The cotton and silk thread, except thread for basting, shall be scarlet, shade W, Cable 66040. The thread shall show good fastness to wet (dry) cleaning, laundry and light when tested as specified in the applicable thread specification. (See DOD Standard Color Card of Official Standardized Shades for Sewing Threads - 1968)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.5 Hardware. The buckle and slide shall be made of brass or bronze, nickel plated, and shall conform to the design and dimensions shown on Figure 1. Custom Metal Crafters, Inc. 815 North Mountain Road, Newington, CT 06111 style NO's Z-301 buckle and Z-200 slide are known to be acceptable.

3.3.6 Label. Each cummerbund shall be provided with an identification label, conforming to type VI, class 1 of DDD-L-20. The label shall measure not less than 2-1/2 by 1-1/2 inches. The content and format shall be as follows:

Nomenclature (item description)
Contract number
Name of contractor
Fiber Products Identification

Note:Size of characters for "Name of contractor" shall be *minimum 6 point (approximately 1/16 inch).*

3.4 Design. The cummerbund shall be the U.S. Marine Corps design shown on figures 2 through 4, having a one-piece front, five or six horizontal pleats and fusible interlining, with end extensions, two pockets, a plain two-piece back provided with elastic webbing straps at each end, a clasp type metal buckle at the end of the elastic straps, and a metal adjusting slide on each strap.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The standard patterns provide a 1/4-inch allowance for front and interlining seams and 3/8-inch allowance for front and lining seams and pockets, unless otherwise specified in table I. Standard patterns shall show seam allowances and directional lines for cutting, and shall be marked or notched for proper placement and assembly of the component parts.

3.5.1 List of pattern parts. The cummerbunds shall be cut from the materials specified in accordance with the pattern parts indicated below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Item	Pattern Nomenclature	No. of cut parts
	Material: Cloth, satin, rayon	
1.	Front, center	1
2.	Side front, extensions	2
3.	Back, lining	1
4.	Back lining extension	1
5.	Pocket, right side	1
6.	Pocket, left side	1
	Material: Cloth, cotton, drill	
7.	Front extension lining	2
8.	Right extension tunnel lining	1
	Material: Fusible (optional)	
9.	Front interlining	1
10.	Front extension lining	2
	Marker	
11.	Front	-

3.6 Construction.

3.6.1 Manufacturing requirements. The cummerbunds shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in table I.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in table I, but all operations specified shall be used to manufacture the cummerbunds.

3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in table I shall conform to FED-STD-751. The number of stitches per inch as specified in table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitchings produced with 301 type stitch, when not caught in other seams or stitchings, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.6.1.3 Shade marking. The component parts of the cummerbund shall be shade marked to ensure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive-type tickets whose adhesive shows discoloration and which leave a residue of the adhesive material after removal of the tickets.
d. Any marking medium that would tend to leave a permanent mark.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting.					
	a. Cut cummerbund in strict accordance with patterns furnished.					
	b. Cut all materials in the direction indicated by directional lines on pattern.					
	c. Cut all component parts of the cummerbund from one piece of basic material.					
	d. Cut the elastic webbing for the left side of the cummerbund 8 inches long and for the right side 15 inches long.					
	e. The use of drill holes is prohibited.					
2	Replacement of damaged parts.					
	a. Replace at time of cutting any part containing damages, such					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2	Replacement of damaged parts. (cont'd) as holes, or seriously weakening defects, such as smashes, multiple floats, and slubs likely to develop into holes. b. Replace any part damaged during the manufacturing process by needle chews, which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends and burns.					
3	Shade marking. a. Mark or ticket (see 3.6.1.3) all component parts cut from basic material in order to ensure proper assembly and a uniform shade throughout the cummerbund. b. Adhesive tickets, when used, shall be adhered to the inside of the cummerbund.					
4	Sew on identification label. Finished appearance. The label shall be properly positioned and sewn to the back of the cummerbund. a. Position the identification label at the center of the back	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4	Sew on identification label. (cont'd) lining, with the top edge 1 inch from the top edge of the back. Sew the label to the back lining with a single row of stitches 1/16 inch from each edge.					
5	Make center front. Finished appearance. All pleats and joining seams shall finish smooth and flat without distortions. The seams shall start and finish evenly. The pleats shall finish with the outside folded edge towards the top of the front. a. The front shall be made of one ply of rayon satin material and one ply of interlining material. When the cotton drill interlining is used, the front shall be pleated first and have side extensions joined before shaping for canvas. When fusible interlining is used, the front shall be fused before pleating.					
	b. Fold the center front lengthwise, inside out, in accordance with notches on the patterns, forming the pleats. Stitch each pleat from end to end with a	301	OSf-1	6-10	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5	Make center front. (cont'd.) continuous row of stitches. The stitching at the ends of each pleat shall be 1 inch from the lower folded edge and shall extend for a distance of approximately 2 inches from each end. The stitching for the remainder of the pleat shall be 1/2 inch from the folded edge. c. Press front with the outside folded edge of each pleat towards the top of the cummerbund. d. Mark and trim the front in accordance with the pattern marker. Mark the upper edge for the position of two pockets.					
6	Make pockets. Finished appearance. The pockets shall be uniformly stitched and finish smooth and flat without causing distortion. a. Each pocket shall be made of one ply of basic material. b. Position the end of each pocket on the outside of the front at the mark, with edges even and with notches matching. Stitch	301	LSq-2 (a)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Make pockets. (cont'd)					
	the pocket to the front and interlining 3/8 inch from top edge, from notch to notch.					
	c. Extend depth of notches to the seam, turn the pocket and raise stitch 1/16 to 1/8 inch from the seamed edge.	301	LSq-2 (b)	10-14	A	A
	d. Turn up bottom end of pocket even at the upper and side edges. Stitch the two plies of pocket together at the sides and bottom folded edge with a 1/4-inch seam. Tack the upper ends of pocket opening to the front of cummerbund to complete the pocket.	301	SSa-1 (Sides) OSf-1(Bottom)	10-14	A	
7	Make right buckle strap.					
	Finished appearance. The buckle and adjustment slides shall be positioned and secured to the buckle strap.					
	a. The buckle strap shall consist of one elastic webbing each for right and left ends of cummerbund. The male half of the buckle and an adjustment slide shall be secured to the right buckle strap. The female half of the buckle and an adjustment slide shall be seamed to					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7	Make right buckle strap. (cont'd) the left strap.					
	b. Insert one end of the elastic webbing through the adjustment slide. Pull enough webbing through the slide to form a 1-1/4 to 1-1/2 inch loop. Turn under the end of the webbing 1/4 to 3/8 inch and stitch to the body of the webbing 1/16 to 1/8 inch from folded edge, catching the turned under portion in the stitching.	301	SSb-1	10-14	A	A
	c.Insert the loose end of the webbing through the male and female halves of the buckle and through the adjustment slide as shown on Figure 2.					
8	Join extensions to center front.					
	a. Position the center front and extensions face to face, even at the side edges, and seam together 1/4 inch from the raw edge.	301	LSq-2 (a)	10-14	A	A
	b. Turn the extension and raise stitch 1/16 to 1/8 inch from seamed edge.	301	LSq-2 (b)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Assemble cummerbund.					
	Finished appearance. The assembled cummerbund shall be uniform in appearance and finish and shall be smooth and flat. Seams shall be without puckers, pleats or distortions. The buckles shall be properly aligned.					
	a. Position the right and left buckle strap, assembled as indicated in Figure 2, on the outside of the cummerbund, with the ends even with the corresponding end of the cummerbund. Join the webbing to the front 1/8 to 3/16 inch from the ends.	301	SSa-1	10-14	A	A
	b. Position the lining on the outside of the cummerbund and seam to the front through the interlining and back of the pocket only, 3/8 inch from the top edge.	301	LSq-2 (a)	10-14	A	A
	c. Turn the lining and topstitch 1/16 to 1/8 inch from the seamed edge.	301	LSq-2 (b)	10-14	A	A
	d. Seam the lining to the front at the bottom the length of the cummerbund with a 3/8 inch seam except for a distance of approximately 3-1/2 inches which is left open for turning.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Assemble cummerbund. (cont'd.)					
	e. Turn the seamed edges of the extensions inward as close as possible to the elastic webbing. Stitch each end of the extension with a 3/8-inch seam, catching the webbing in the stitching.	301	SSj-1	10-14	A	A
	f. Trim the corners and raw edges of seams for proper turning.					
	g. Turn cummerbund right side out, forcing out all corners and seamed edges.					
	h. Baste edges to hold desired shape.	301 or Hopper				
	i. Close the opening with felling. The lining shall not be exposed on the outside of the cummerbund.	Hand		2-3	C (Silk)	
10	Press cummerbund.					
	Finished appearance. Pressing shall be done on a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance in accordance with good manufacturing practice.					
	a. Press the entire cummerbund, removing all wrinkles.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Press cummerbund. (cont'd) b. Finish press.					
11	Clean cummerbund. a. Remove bastings, trim all ends of stitchings and remove all loose threads from the cummerbund. Remove all spots, shade tickets, markers and stains from the cummerbund without injury to the material.					

3.7 Finished measurements. Finished measurements of the cummerbund shall be as shown in figure 2. The finished length (dimension "A" in figure 2) shall be 24-1/2 inches ± 1/4 inch.

3.8 Workmanship. The finished cummerbunds shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein.

Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements. This does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test condition specified in the applicable test method document or applicable paragraphs in the specification.

4.4 First article inspections. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.5.2.2 through 4.5.2.4. The presence of any defect or failure to pass any test shall be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer (see 6.4).

4.5 Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.1 Testing of components. Testing of components shall be in accordance with applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing specified in MIL-STD-105 and FED-STD-191, wherever applicable, and as listed in table III shall be followed. All requirements are applicable to sample units.

When the data as to number of determinations per sample unit and the results reported are not as specified in table II, they shall be as required by the reference test method.

4.5.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with MIL-STD-105. The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Test Methods.

Components	Characteristics	Reqmt. para.	Test method	No. determinations per sample	Results reported as:
Elastic webbing	Width	3.3.3	Visual	1	Pass or fail
	Weight/linear yard	3.3.3	5041 1/	5	Avg. of 5 det.to the nearest 0.01 oz.
	Total warp	3.3.3	Visual	1	Pass or fail
	Elastic strands	3.3.3	Visual	1	Pass or fail
	Pick per inch	3.3.3	Visual	1	Pass or fail
	Weave	3.3.3	Visual	1	Pass or fail
	Material identification 2/	3.3.3			
Buckle and slide	Material identification 2/	3.3.5			
	Plating identification 2/	3.3.5			

1/ Except that a full width specimen 4 inches in length shall be used.

2/ Acceptable under certification of compliance procedure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Component	Lot size expressed as	Sample unit for testing
Elastic webbing	Yard	2 continuous yards
Buckle	Buckle and slide (each)	1 buckle and 1 slide

4.5.1.3 In-process inspection. Inspections shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.2 Examination of the end item. The end item shall be examined for defects listed in 4.5.2.2 through 4.5.2.4. The sample unit for the examination shall be one cummerbund.

4.5.2.1 Classification of defects. All defects shall be classified as indicated below except those numbered 1-3 in the classification column, which shall be classified as:

Major defect - When seriously affecting appearance or serviceability.

Minor A defect - When affecting appearance or serviceability but not seriously.

4.5.2.2 General defects. General defects shall be classified as follows:

Examine	Defects	Classification Major	Minor A	Minor B
Material defects and damages	a. Any hole.	101		
	b. Any weakening defect such as a smash, multiple float, or loose slub.	102		
	c. Shade bar or unsightly slub: - on outside. - on inside.	103		301
	d. Needle chew, cut, tear or mend.	104		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or garment or when it is so conspicuously located as to be clearly noticeable. Non-weakening conditions which are inconspicuous shall not be classified as defects.				
Shaded parts	a. Rayon satin.	105		
Cleanness	a. Basting thread not removed.		201	
	b. Two or more shade tickets.			302
	c. Any spot or stain clearly noticeable: - on outside of cummerbund. - on inside of cummerbund.	106		303
	d. Thread end or loose threads not removed throughout.			304
Component and assembly	a. Any part or required operation omitted (unless otherwise classified herein).	107		
	b. Any component not as specified.	108		
Cutting	a. Any component part not cut in accordance with specification requirements.	109		
Pressing	a. Burned or scorched.	110		
	b. Omitted over entire cummerbund.		202	
	c. Poorly pressed.			305
Seams and stitching	a. Accuracy of seaming.			
	1. Seams twisted, puckered or pleated (unless otherwise classified herein).			306

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classsfication Major	Minor A	Minor B
Seams and stitching (cont'd)	2. Part of material caught in unrelated operation or stitching:			
	- up to a distance of 1/4 inch inclusive.		203	
	- for a distance greater than 1/4 inch.	111		
	3. Ends of stitching when not caught in other seams or stitching backtacked less than 1/4 inch.		204	
	4. Stitching overlapping the ends of thread break less than 1/2 inch.			307
	b. Gage of stitching.			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniform (to be scored only when the condition exists on major portion of seam).		205	
	2. Not within range of gage specified, or varies more than 1/16 inch when no range is specified.			308
	c. Stitches broken or missing in joining seams, edge stitching and top stitching:			
	- up to 1/4 inch inclusive.			309
	- more than 1/4 inch but not more than 1/2 inch.		206	
	- more than 1/2 inch.	112		
	d. Skipped stitches:			
	- 1/4 inch to 1/2 inch long.			310
	- more than 1/2 inch.		207	
	e. Runoff:			
	- 1/4 inch to 1/2 inch long.			311
	- more than 1/2 inch long.		208	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	f. Raw edge: - 1/8 inch up to 1/4 inch inclusive. - more than 1/4 inch up to 3/4 inch inclusive. - more than 3/4 inch.	113	209	312
	g. Seam type or stitch type not as specified.		210	
	h. Stitch tension.			
	1. Loose tension, resulting in a loose seam.	114		
	2. Loose tension on edge or raised stitching, resulting in loosely exposed bobbin or top thread.		211	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	115		

NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in lengthwise direction of seam.

	i. Stitches per inch - to be scored only if the condition exists on major portion (i.e., over one half or more) of seam.			
	1. Less than specified: - one stitch. - two stitches. - three or more stitches.	116	212	313
	2. More than maximum specified.			314
Buckle and slide	a. Missing, broken, bent, cracked, or otherwise defective, affecting appearance and function.	117		
	b. Type, size, color, or finish other than specified.	118		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
4.5.2.3 Detailed defects. Detailed defects applicable to specific parts shall be classified as follows:				
Fronts	a. Pleats			
	1. Outside folded edge of one or more pleats not toward top of finished cummerbund.		213	
	2. One or more pleats set on crookedly, affecting appearance.		214	
	3. One or more pleats uneven in width by 1/4 inch or more.		215	
	4. One or more pleats twisted, affecting appearance.		216	
	b. Interlining tight, short, or twisted, causing fullness or twist on front.		217	
Fitting of back lining	a. Back lining tight or short, causing fullness on outside of cummerbund.		218	
	b. Back lining exposed on outside for a distance of: - more than 1 inch but not more than 2 inches.			315
	- more than 2 inches.		219	
Pockets	a. Pockets not stitched through front and interlining at top joining seam.		220	
	b. Notches exposed at pocket openings.		221	
	c. Left pocket: - less than 3-1/4 inches or more than 3-1/2 inches wide at opening.		222	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Pockets (cont'd)	- pocket depth less than 3 inches or more than 3-1/4 inches.		223	
	d. Right pocket: - less than 3-1/4 inches or more than 3-1/2 inches wide at opening.		224	
	- pocket depth less than 4 inches or more than 4-1/4 inches.		225	
	e. Pockets not placed in accordance with marks on pattern.		226	
Buckle strap assembly	a. Improperly threaded, i.e., the male half of the buckle placed on the left buckle strap and the female half of the buckle placed on the right buckle strap.		227	
	b. Improperly threaded, i.e., causing buckle to finish on reverse side or to function improperly.	119		

4.5.2.4 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in Table II and Figure 2 shall be classified as a size measurement defect.

4.5.3 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of cummerbunds per shipping container is more or less than required.

5. PACKAGING

5.1 Preservation. Preservation shall be commercial in accordance with ASTM D 3951.

5.2 Packing. Cummerbunds preserved as specified in 5.1 shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.

6.1 Intended Use. The cummerbund covered by this specification is intended to be worn by officers and Staff NCO's of the U.S. Marine Corps.

6.2 Ordering data.

6.2.1 Acquisition data. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Whether first article is required (see 3.2).
c. Number of cummerbunds in first article (see 4.4)
d. Acceptance criteria (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

6.3 Standard samples and shade samples. For information regarding availability of samples of the cummerbund and of standard shades specified, address inquiry to the procuring activity issuing the invitation for bids (see 3.1).

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a pre-production sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria as specified in the contract or purchase order shall be binding.

6.6 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

6.7 Subject (key word) listing.

Dress
Enlisted (SNCO)
General

Preparing activity:
Navy - MC
Project No. 8440-N217

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.


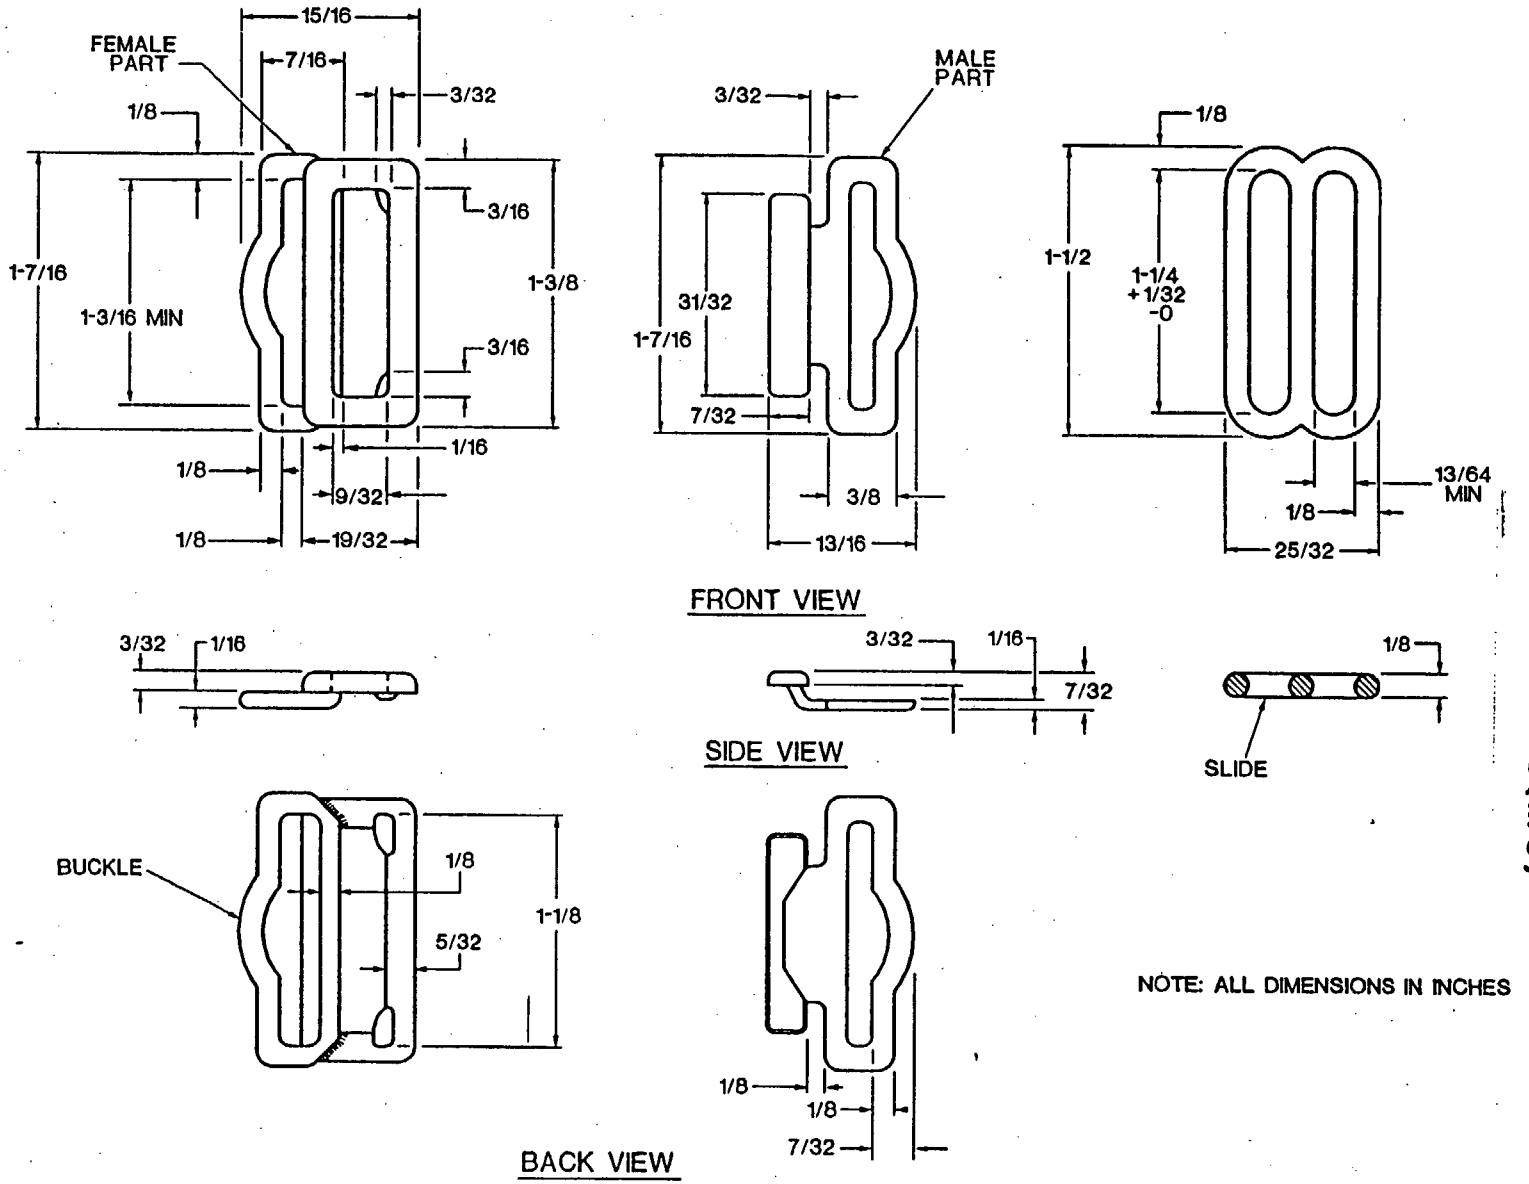


Figure 1: CUMMERBUND, MAN'S SCARLET, OFFICER'S

//AGW_71/PALMER/6-CLOTHING/CUMMER002.G4
25-AUG-1994 08:40
True Size: 42 x 51 picas = 7.0" x 8.5"
Plot Scale Factor: 1.00

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

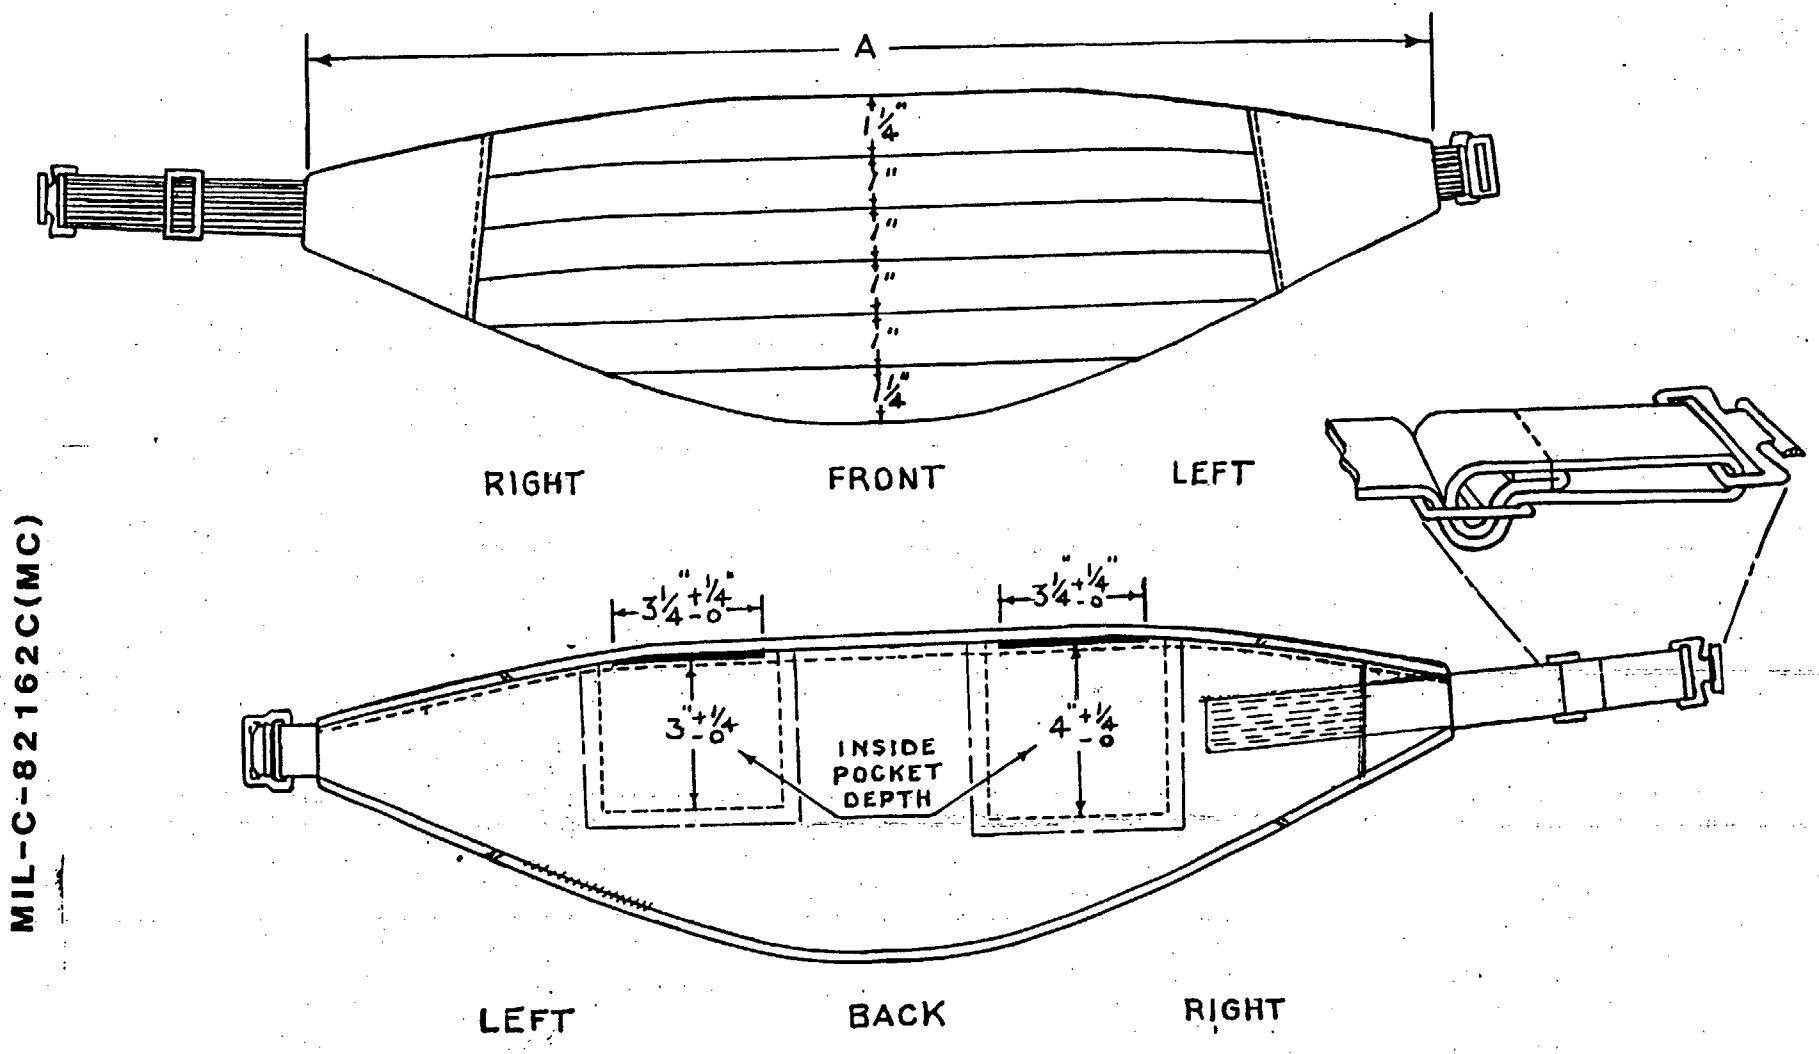

TOLERANCE ON LENGTH A: ± 3/8 INCH

FIGURE 2. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.



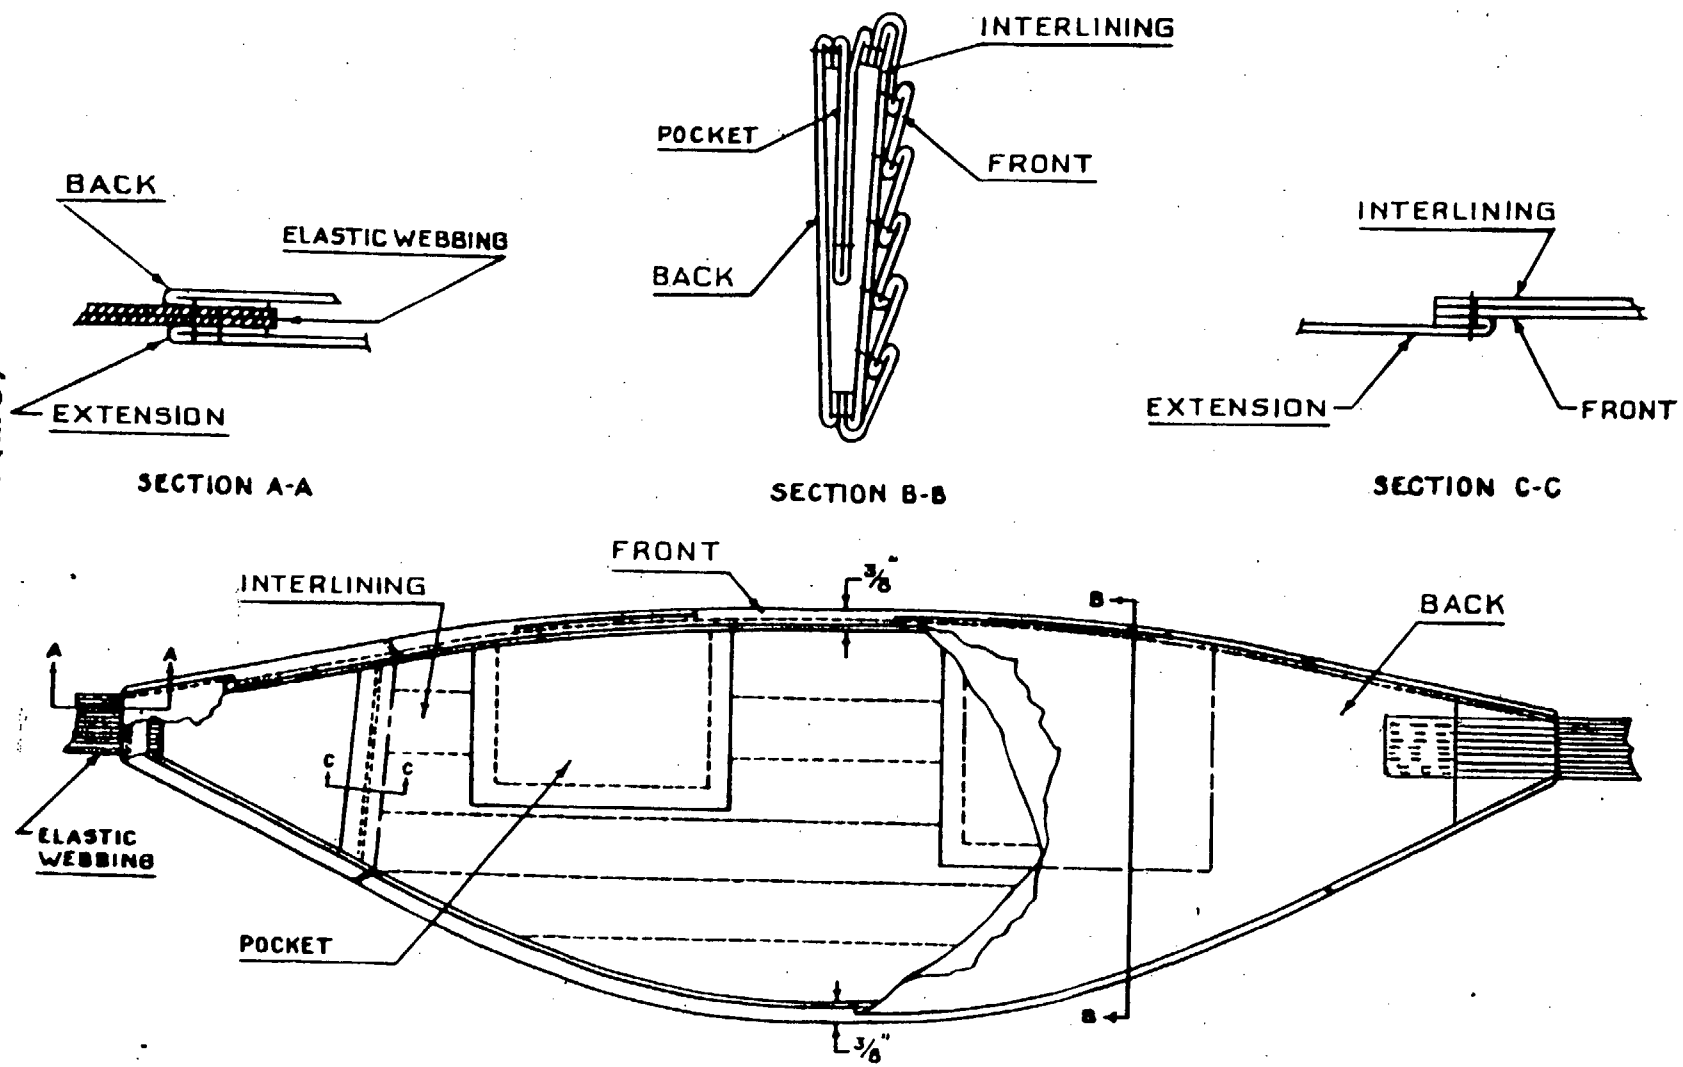


FIGURE 3. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

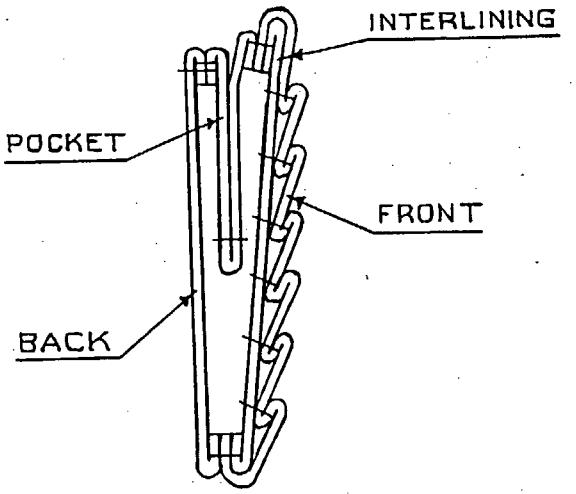

SECTION B-B

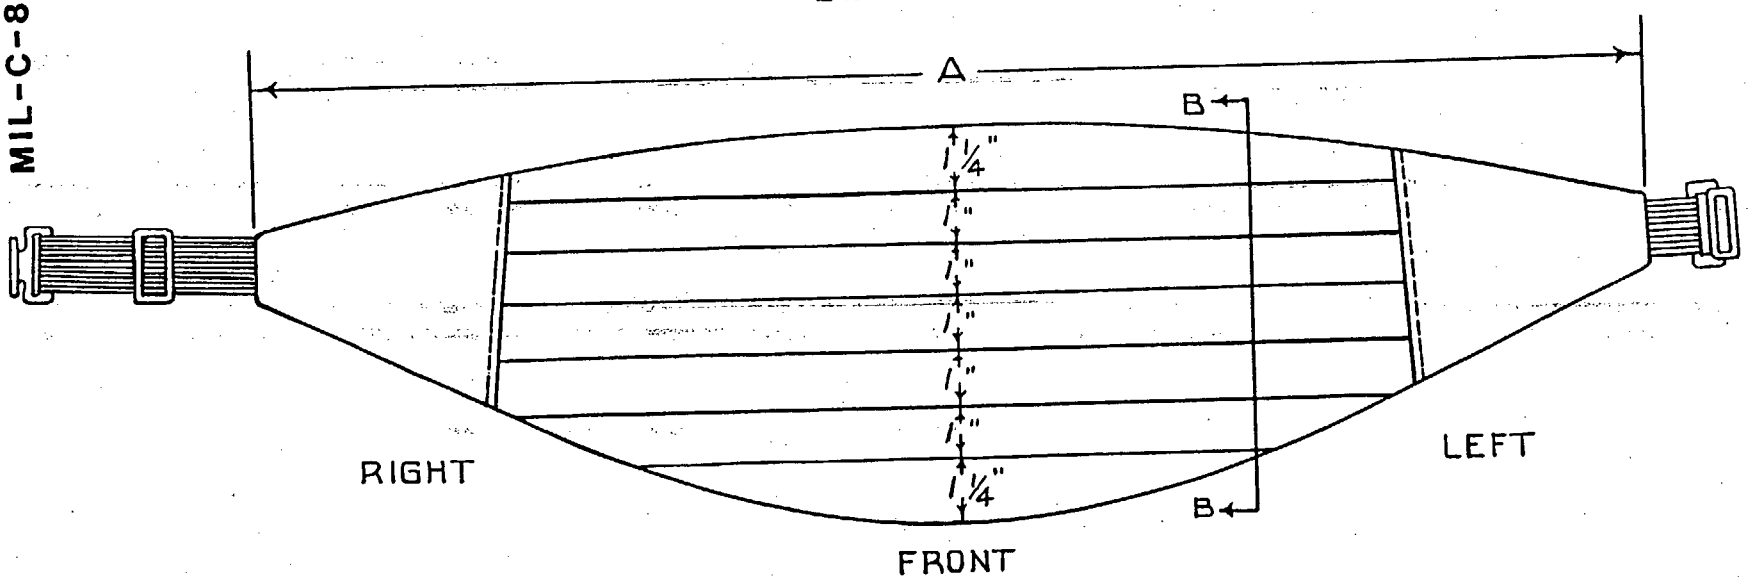

TOLERANCE ON LENGTH A: ± 3/8 INCH

FIGURE 4. CUMMERBUND, MAN'S: SCARLET (OFFICER'S)
6 PLEATS

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-82162C(MC)	20 September 1994

3. DOCUMENT TITLE

CUMMERBUND, MAN'S: SCARLET (OFFICER'S)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

SUBMITTER		
a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

PREPARING ACTIVITY		
NAME COMMANDER	b. TELEPHONE *(Include Area Code)* (1) Commercial: 703-640-4584	(2) AUTOVON: 278-4584
ADDRESS *(Include Zip Code)* PROGRAM SUPPORT DIRECTORATE, (PSE-C/S) MARCORSYSCOM, 2033 BARNETT AVE SUITE 315 QUANTICO VA 22134-5010	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.