INCH-POUND

MIL-T-82163C(MC)

September 30, 1994
SUPERSEDING
MIL-T-82163B(MC)
16 August 1990

MILITARY SPECIFICATION

TROUSERS, MEN'S: DRESS, WHITE

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for men's white trousers.

1.2 Classification. The trousers shall be of one type in the following class, styles and sizes as specified (see 6.2):

Class

Class 1 - Gabardine, polyester-rayon (white)

Styles

Style a - With side pockets and hip pockets and flaps.
Style b - With side pockets only without hip pockets and flaps.

Schedule of sizes

Waists: 27 through 46 inclusive in Extra-Short, Short, Regular, Long and Extra-Long lengths.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

1.3 Individual orders. When trousers are custom tailored to an individual order, this specification shall govern, except the detail requirements of section 3, table I, may be modified to the extent necessary for good custom tailoring practices.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-50186	- Cloth, Buckram, Woven and Non-woven.
A-A-50198	- Thread, Gimp, Cotton.
A-A-50199	- Thread, Polyester Core; Cotton, Rayon or Polyester Covered.
A-A-52106	- Cloth, Twill or Plain Weave, Polyester and Polyester Blend.
V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic).
V-F-106	- Fastener, Slide, Interlocking.
V-T-285	- Thread, Polyester.
DDD-L-20	- Label; For Clothing, Equipage, and Tentage, (General Use).

MILITARY

MIL-C-41820	- Cloth, Gabardine, Polyester and Rayon.
MIL-C-43920	- Cloth, Interlining, Cotton or Synthetic and Nylon.

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-129	- Marking For Shipment and Storage.
MIL-STD-1488	- Provisions for Evaluation Quality of Trousers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Department of Defense (DoD) Standard Shades for Buttons 1966

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Application for copies should be addressed to the Color Association of the United Sates, Inc., 343 Lexington Avenue, New York, NY 10016.)

AMERICAN SOCIETY OF TESTING MATERIALS

ASTM D - 3951 Standard Practice for Commercial Packaging

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Guide samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the guide sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.3 Materials.

3.3.1 Basic material. The basic material for the class of trousers shall be cloth, gabardine, polyester and rayon conforming to MIL-C-41820, type III, class 1, 8.0-ounce, white shade 2400 (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.2 Pocketing, lining, and interlining.

3.3.2.1 Pocket and pocket stays. The material for the pockets and pocket stays shall be cloth, polyester, polyester and cotton or polyester and rayon conforming to class 1 of A-A-52106. The color shall be white.

3.3.2.2 Lining and interlining. The material for the waistband lining, right fly, pocket flaps, crotch and left fly interlining for each class of trousers shall be cloth, polyester, polyester and cotton, or polyester and rayon conforming to class 1 of A-A-52106 in white shade.

3.3.3 Buckram. The material for interlining the waistband of each class of trousers shall be cloth, buckram, cotton 4.5-ounce, conforming to type II, class 1 of A-A-50186; white (bleached or unbleached). Commercial Ban Roll waistband may be used.

3.3.4 Slide fasteners. The slide fastener shall be type I, style 1, cam lock, size LS, short tab pull, brass chain, conforming to V-F-106, except that the salt spray test shall not apply. A staple bottom-stop shall be required. The tape shall match the shade of the basic fabric for each class of trousers or white shade C, Cable No. 66503.

3.3.5 Thread.

3.3.5.1 Polyester thread. The thread for all seaming operations shall be polyester conforming to type I, class 1, size A, 3-ply, of V-T-285. As an alternate to the polyester thread, a polyester, cotton-covered thread conforming to A-A-50199, ticket No. 50, 3 ply or ticket No. 70, 2 ply may be used.

3.3.5.2 Color and colorfastness. The polyester thread shall be white shade AG, Cable No. 66049.

3.3.6 Gimp. The buttonhole gimp shall be cotton, No. 8, soft or glazed finish, conforming to type I or type II of A-A-50198. The color of the gimp shall be white shade AG, Cable No. 66049.

3.3.7 Sewing hole buttons. The sewing hole buttons shall be melamine formaldehyde composition, glossy finish, conforming to type II, class D, style 4, 22-line of V-B-871. The color of the buttons shall be white shade BA, Cable No. 62031.

3.3.8 Labels. The labels shall show fastness to laundering. Trousers shall have a combined identification-size instruction label (see 3.3.8.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.8.1 Identification-size instruction label. The combination identification-size instruction label shall measure not less than 5-1/2 by 2-1/2 inches and shall conform to DDD-L-20, type VI, classes 1, 2 and 3 (combined). The content and format of the label shall be as follows:

Nomenclature (item description)
Contract number
Name of contractor
Size

LAUNDERING AND PRESSING INSTRUCTIONS

1. Hand laundering.

   a. Launder in warm water using mild soap.
   b. Scrub soiled areas.
   c. Rinse thoroughly in clear warm water.
   d. Dry without wringing.

2. Machine laundering.

   a. Use a mild detergent.
   b. Complete washing cycle for 30 minutes in 120°F to 140°F water.
   c. Rinse thoroughly in clear warm water.
   d. Set automatic dryer for regular fabrics and dry for 15 minutes.

3. Pressing.

   a. If pressing is required, use a cool iron.

DO NOT USE AUTOMATIC IRON ABOVE RAYON SETTING
DO NOT USE HOT IRON

4. Trousers may be dry cleaned.

3.3.9 Hook and eye. The hook and eye shall be North and Judd (Hook Flex H-49, K-50, H-89 and E-90); Universal Button Co. (Talon #3, #7 and #8 hook with #8 eye or #85 eye); Akim Co. or Patwin, Inc., Junior Series, type JB; Stimpson (P-536, D-4086, D-4457, D-4288); Rau (OA50, OX 1256, 080415); Patwin, Inc. (Slim-Slak with MB eye, and Slik-Slak); or equal. The finish shall be nickel plate. Prior to the use of an "or equal" item, the contractor shall submit the item with supporting data to the contracting officer for approval (see 4.2.2.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.10 Waistband stabilizer. The material for the waistband stabilizer shall be cloth, interlining, cotton or synthetic, and nylon conforming to type I of MIL-C-43920.

3.4 Design. The trousers shall be the U.S. Marine Corps design shown on Figures 1 and 2, having a two-piece lined waistband with hook and eye closure and outlet at seat seam; french type fly with slide fastener; 7 belt loops, straight side pockets; hip pockets with pocket flaps to button, class (a) only; outlet from crotch to knee at inseam and unfinished leg bottom.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns shall provide a seam allowance of 3/8 inch for inseams and outseams and 5/8 inch for crotch seam, and allow a seat outlet at the waist in accordance with patterns. The standard patterns provide a 4 inch allowance for bottom turnup of legs. The standard patterns show size and directional lines for cutting, and are marked and notched for proper placement and assembly of the component parts.

3.5.1 List of pattern parts. Trousers shall be cut from the materials specified in accordance with the pattern parts indicated below:

Item	Pattern nomenclature	No. of cut parts
	Material: Basic	
1.	Front	2
2.	Back	2
3.	Right fly	1
4.	Left fly	2
5.	Side pocket (facing wide)	2
6.	Side pocket (bearer narrow)	2
7.	Bearer and cord facing, hip pocket, style (a)	4
8.	Flap, hip pocket, style (a)	4
9.	Waistband	2
10.	Belt loop strip	1
11.	Fly tab	2
	Material: Cloth, twill or plain weave, polyester/cotton	
12.	Side pocket	2
13.	Hip pocket, style (a)	2
14.	Fly lining, right	1
15.	Stay, side pocket	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Item	Pattern nomenclature	No. of cut parts
	Material: Cloth, twill or plain weave, polyester/cotton	
16.	Waistband lining	2
17.	Left fly interlining	2
18.	Crotch lining	2
19.	Pocket flaps, style (a)	2
	Material: Cloth, cotton buckram	
20.	Waistband interlining	2

3.6 Construction.

3.6.1 Manufacturing requirements. Trousers shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in table I.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in table I, but all operations specified shall be used to manufacture the trousers.

3.6.1.2 Stitches, seams and stitchings. The stitch, seam, and stitching types specified in table I shall conform to FED-STD-751. The number of stitches per inch as specified in table I indicates the minimum and maximum number permitted. All overedge stitching shall be done on serging machines with a knife attachment properly set to trim the raveled edge without cutting the material. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the trousers.

3.6.1.2.1 Ends of seams and stitching. Ends of seams and stitching (stitch type 301), except the ends of a continuous line of stitching, when not caught in another seam or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. When stitch type 401 is used, ends of seams and stitching shall be caught in other seams or stitching, and skipped stitches and thread breaks shall be repaired using stitch type 301 backstitched not less than 1/2 inch on each side of the skip or break.

3.6.2 Buttonholes. Buttonholes shall be eyelet-end, taper-bar type, well worked over gimp with the end securely tacked. The finished cut length shall be 5/8 inch. The bar at the end of the buttonhole shall have a minimum of four tacks, not including the first cross-over stitch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.6.3 Shade marking. The component parts of the trousers, except parts cut from ends, shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b. Adhesive type tickets which show discolorations or leave traces of paper or adhesive mass to the material upon the removal of the tickets.

3.6.4 Pressing. All pressing operations specified in table I shall be accomplished with a heated pressing iron or pressing machine set at medium (low) temperature (285°F maximum).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cut trousers. a. Cut the trousers in strict accordance with the patterns furnished by the Government. b. Cut the material in the direction indicated by directional lines on the patterns. Lay the fronts and backs so that the directional lines are in the warp direction. c. Cut the component parts for the trousers from one piece of basic material, except the following parts may be cut from ends: belt loops, left and right flies, pocket bearers and facings, and under ply of pocket flaps. When so cut, the parts shall harmonize with the shade of the trousers. d. Cut the pockets on the straight of the material (warp direction) in accordance with patterns. Cutting of pockets in the direction of the filling is not permitted.					
2	Cut interlinings/linings and buckram. a. Cut the right fly lining in accordance with pattern furnished.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2	Cutting interlinings/ linings and buckram. (cont'd) b. Cut the left fly interlining, side pocket, hip pocket (style (a), and stays for side pockets in the warp direction. c. Cut the crotch lining pieces so that the fold will be on the bias and one of the inseam sides is in the direction of the warp. d. Cut the polyester twill for waistband linings and the buckram for the waistband interlining on the bias. or e. The waistband linings may be commercial type using the polyester twill and buckram specified herein. f. Cut waistband stabilizer of sufficient length to comply with operation 14.					
3	Replacement of damaged parts. a. Replace at time of cutting any part of the trousers containing holes; seriously weakening defects such as smashes, multiple floats, loose or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3	Replacement of damaged parts. (cont'd) weakening slubs, etc., expected to develop into holes; shade bars and dye streaks; or unsightly slubs, etc., affecting appearance. b. Replace any part damaged during the manufacturing process by needle chews which may develop into a hole, scissors or knife cuts, tears, holes, mends, burns, and large exposed drill holes.					
4	Shade marking. a. Mark or ticket all component parts (see 3.6.3) cut from one piece of basic material, except those parts cut from ends (see 1.c), to insure uniform shade and size throughout the trousers. b. Adhesive type shade tickets, when used, shall be adhered to the inside of the trousers.					
5	Overedge stitch trousers. Finished appearance. The overedge stitching shall be securely caught in the fabric. The raw edge of the overedge stitched material shall be properly trimmed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5	Overedge stitch trousers. (cont'd)					
	a. Overedge stitch the inseam, outseam and the right front edge of fronts. The overedge stitching of the inseam shall extend from the bottom of the leg to the fly notch. The overedge stitching of the outseam of front parts shall extend from the bottom notch of the side pocket to the bottom of the leg.	503 or 504	EFd-1	6-10	A/3	A/3
	b. Stitch on the front, at crotch, a folded triangle lining piece of double thickness.	301	SSa-1	12-16	A/3	A/3
	or					
	c. The folded lining piece may be stitched to the crotch in the overedge stitching operation.					
	d. Overedge stitch inseam and outseam of backs. The back edge of side pocket stay, with the bottom edge of the stay turned up, may be caught in the outseam in the overedge operation.	503 or 504	EFd-1	6-10	A/3	A/3
	e. Overedge stitch crotch seam and seat seam.	503 or 504	EFd-1	6-10	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Make hip pocket flaps style (a).					
	Finished appearance. The flaps shall finish smooth and flat, without twists, pleats, or puckers and shall be uniform in shape and size in accordance with the pattern. The edges of the flaps shall be well forced out and the edgestitching shall be uniform in width with the buttonholes correctly positioned, clean cut, and well made, and the stitching securely caught in the basic material.					
	a. Flaps shall be made of two plies of basic material, or one ply of lining.					
	b. Seam the two pieces together 3/16 to 1/4 inch from the side and bottom edges, trimming for proper turning when necessary.	301	SSe-2 (a)	12-16	A/3	A/3
	c. Turn flap, forcing out the corners, point and seamed edges. Edgestitch the seamed edges uniformly 1/16 to 3/32 inch from edges.	301	SSe-2 (b) (shows finished seam)	12-16	A/3	A/3
	d. Make a vertical, eyelet-end, taper-bar type buttonhole, cut 5/8 inch long, through the center of the flap with the edge of the eyelet 1/2 to 5/8 inch above the center	Buttonhole		48 min per buttonhole (including tack)	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Make hip pocket flaps style (a). (cont'd) point. Buttonholes shall be well worked over gimp to fit a 22-line button, with the ends of the buttonholes securely tacked. The purling of the buttonhole shall be on the outside of the flaps.					
7	Make belt loops. Finished appearance. The belt loops shall be flat without distortion or raw edges. Stitching shall be of uniform gage. The loops shall be of uniform length and width. a. The 7 belt loops shall be made from a 1 inch wide strip of the basic material and shall finish 1/2 inch wide and 3-1/4 inches long.					
	b.Fold in the raw edges of the strip so that they abut each other at the center back of the finished loop. Stitch the folded strip with a 1/4 inch gage double row of stitches and with an edge covering stitch on the back. The margin of stitching shall be uniformly 1/8 inch from the edges of the furnished loops.	406	EFh-1	10-14	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8	Make left fly. Finished appearance. The left fly shall finish smooth and flat without twists, puckers, or distortion. The stitching shall be securely caught in the fabric.					
	a. Position left fly on the left fly interlining with edges even. Stitch back edge of the fastener tape to left fly through interlining with two rows of stitches 3/16 to 1/4 inch gage. The ends of the chain shall be 1/4 to 1/2 inches above the fly notch. On the finished trousers, the edge of the chain shall be 1/2 to 5/8 inch from edge at the top end of fly, tapering to 1/4 to 3/8 inch from the edge at bottom.	301	LSBj-2	12-16	A/3	A/3
9	Make right fly. Finished appearance. The right fly shall finish without bulkiness, twists, puckers, or pleats. a. The fly shall consists of one ply of basic material and one ply of lining material.					
	b. Seam lining to front edge of fly with 3/16 inch seam, to within 1 ± 1/4 inch from top edge of fly.	301	SSe-2	12-16	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Make right fly. (cont'd)					
	c. In the finished trousers, the upper end of the fly lining shall extend to the top of the waistband, over the waistband lining. And the fly lining extension piece at the lower end shall extend not less than 1/2 inch beyond the inseam.					
10	Assemble right and left flies.					
	Finished appearance. The flies shall be even at the lower end where they join the crotch seam. The fastener parts shall be set so that there is no twisting or puckering when fly is closed.					
	a. Position flies with notches at lower end matching and seam fastener tape to back edge of right fly, stitching 1/4 inch from edge.	301	SSa-1	12-16	A/3	A/3
11	Set side pocket bearers and facings.					
	Finished appearance. The pocket bearer and facing shall be properly positioned and securely sewn with stitching of uniform gage and without pleats, puckers, or other distortion.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
11	Set side pocket bearers and facings. (cont'd) a. The side pocket bearers and facing shall each be a single piece of basic material. b. Position the bearer and facing on the pocket material in accordance with notch indicated on the pocket pattern. c. Fold under the front raw edges of bearers and facings 1/4 to 3/8 inch and stitch to the pocket 1/8 inch from the folded edge; continue stitching across the bottom raw edge. A selvage edge need not be turned.	301	LSd-1 or LSbj-1	12-16	A/3	A/3
12	Set hip pocket bearers style (a). Finished appearance. The pocket bearers shall be properly positioned and securely sewn with stitching of uniform gage and without pleats, puckers, or other distortions. a. The back pocket bearer shall be a single ply of basic material. b. Position the bearer on the pocket material in accordance with notches indicated on the pattern.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12	Set hip pocket bearers style (a). (cont'd)					
	c. Fold under the lower raw edge of bearers 1/4 to 3/8 inch and stitch to the pocket 1/8 inch from the folded edge. A selvage edge need not be turned.	301	LSd-1 or LSbj-1	12-16	A/3	A/3
13	Make waistband lining.					
	Finished appearance. The waistband lining shall be without distortion. The waistband lining shall finish 2-1/4 ± 1/8 inches wide.					
	a. The waistband lining shall be made of one ply of lining and one ply of buckram.					
	b. Overlap lining on buckram 3/4 inch and stitch 1/8 to 3/16 inch from edge of lining. Fold lining over buckram and press.	301 or 401	LSa-1	6-10	A/3	A/3
	c. Position stabilizer on interlining with one edge of stabilizer and free edge of interlining even. Stitch stabilizer to interlining 1/2 inch from edge.	301	SSa-1	6-10	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13	Make waistband lining. (cont'd) d. Use commercial buckram interlined waistband lining, provided the finished waistband conforms to the requirements specified herein (see 3.3.2 and 3.3.3).					
14	Seams darts in back. Finished appearance. The darts shall be properly positioned and finished without pleats, puckers, or gathers. In the finished trousers, the dart shall be well tapered to a flat point at lower end and shall extend to the pocket opening in class (a).					
	a. Fold the hip darts in accordance with the notches and stitch the length of the darts. The folded edge of darts shall be turned and pressed towards the seat seam.	301	OSf-1	12-16	A/3	A/3
15	Attach hip pockets and flaps style (a). Finished appearance. The pockets shall finish smooth and flat without bulkiness, bulges or other distortions on the outside of the finished trousers.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
15	Attach hip pockets and flaps style (a). (cont'd) The stitching shall be uniform and secure. The pocket openings and flaps shall be in proper alignment.					
	a. Properly position the pocketing on the underside and the flap on the outside of the back of the trousers in line with the mark for the pocket opening indicated by the pattern. Seam the flap to trousers through the pockets 3/16 to 1/4 inch from the mark.	301	LSq-2	12-16	A/3	A/3
	b. Position the cord facing with the upper edge placed under the raw edge on flaps and abutting the flap seam. Seam the cord facing to the trousers and through pocketing 3/16 to 1/4 inch from the raw edge of the cord facing. The seam shall not extend beyond the flap.	301	SSe-2 (a)	12-16	A/3	A/3
	c. Cut the opening for the pocket through the pocketing midway between the two seams. Turn the lower part of facing through the opening and raise stitch, forming a 1/8 to 3/16 inch cord edge.	301	SSe-1	12-16	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
15	Attach hip pockets and flaps style (a). (cont'd)					
	d. Turn in the bottom raw edge of the cord facing and seam to pocket 1/16 to 1/8 inch from folded edge. A selvage edge need not be turned.	301	LSd-1	12-16	A/3	A/3
	e. Fold pocket inside out, matching notches with pocket opening, and seam side raw edges.	301	SSae-2 (a)	12-16	A/3	A/3
	f. Turn pocket, forcing out corners. Fold the sides above the pocket opening and stitch 3/16 to 1/4 inch from the folded edge. Continue to stitch along the sides and across the bottom folded edge. The ends of the bearer and cord facing shall be caught in the edge stitching only.	301	SSae-2 (b) (sides OSf-1 bottom)	12-16	A/3	A/3
	g. Turn down the flap and raise stitch the upper edge of the pocket opening through the back, flap, pocket and facing 1/16 inch from the seam, closing top of pocket.	301	LSq-2 (b)	12-16	A/3	A/3
	h. Seam identification-size label on four sides to left pocket on the outer side of the material for class 1, styles a and b, trousers. Position of label on finished trousers	301	SSa-1 (each edge)	12-16	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
15	Attach hip pockets and flaps style (a). (cont'd) shall be between lower edge of waistband lining and location of pocket opening.					
	i. Securely tack both ends of the pocket opening through all plies of material.	301	SSa-1	12-16	A/3	A/3
	j. The depth of the pockets shall be 5-3/4 to 6-1/4 inches when measured on the inside of the pocket from top edge of the cord facing bottom.					
	k. The finished pocket opening (after bartacking) shall not exceed the hip pocket flap.					
	l. On the finished trousers, the pocket flaps shall be 2-1/4 ± 1/4 inches at center measured from seam to center point.					
16	Attach side pockets. Finished appearance. The edges of the pocket openings shall finish smooth and flat without distortion. Pocket openings shall be of uniform appearance. The bottom front corners of the pockets shall be backstitched, and care					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16	Attach side pockets. (cont'd) shall be taken to avoid notching the pocket, on the underside, beyond the width of the side seam outlet. a. Position the outside of the fronts on the facing of the side pocket in accordance with the notches for the pocket opening indicated by marks on the patterns.					
	b. Seam the front, facing and pocket material together from notch to notch, 1/4 inch from the edge of the front.	301	SSe-2 (a)	12-16	A/3	A/3
	c. Cut the depth of the notches for the pocket opening 1/8 inch beyond the seam and turn the pocket to the inside of the front so that the seam will finish on the inside of the pocket, 1/8 inch back from the finished edge of the pocket opening.					
	d. Topstitch the front from notch to notch through the pocket material and facing, 1/4 inch from the finished edge of the pocket opening.	301	SSe-2 (b) (shows finished seam)	12-16	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16	Attach side pockets. (cont'd)					
	e. Position the identification-size instruction label on the outside of the left side pocket. Seam label to the pocket on all four sides, 1/8 inch from each edge. Label shall finish approximately 1 inch from the bottom and front finished edges of the finished pocket on the side against the body of the wearer.	301	SSa-1	12-16	A/3	A/3
	f. Fold the pocket right side in. Seam raw edges 3/16 to 1/4 inch from edge from step to bottom and continue along the bottom edge. Notch pocket bearer and facing at top of step and turn.	301	SSe-2 (a)	12-16	A/3	A/3
	g. Securely tack both ends of the pocket opening through the front and bearer with a 1/4 to 3/8 inch tack.	301	SSa-1	12-16	A/3	A/3
	h. In the finished trousers, the top of the pockets shall extend into the waistband and be caught in the bottom stitching of the waistband lining.					
	i. The finished pocket opening (after bartacking) shall measure 6-1/2 ± 1/4 inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17	Join fly assembly to fronts. Finished appearance. The seam joining the fly assembly to the fronts shall be without pleats, puckers, twists, or other distortions.					
	a. Sew on left fly with 3/8 inch seam with notches matching. Turn fly to the inside with the seam 1/16 to 1/8 inch back of folded edge and press front edge without damages to the fastener.	301	SSa-1	12-16	A/3	A/3
	b. Sew on right fly with 3/8 inch seam with notches matching and with slide fastener tape caught in the stitching.	301	LSq-2 (a)	12-16	A/3	A/3
	c. Press right fly seam open and flat with a heated pressing iron with the fastener tape facing toward side seam.					
18	Join outseam. Finished appearance. Outseams shall be carefully joined with notches matching, and without twists, puckers or pleats. The seam shall start and finish evenly and lie smooth and flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
18	Join outseam. (cont'd)					
	a. Join outseam, with notches matching, with a 3/8 inch seam, catching the side pocket stay in the stitches with the bottom edge turned in.	301 or 401	SSa-1	12-16	A/3	A/3
	b. Spread open the outseams from top edge of trousers to bottom and press smooth and flat with a heated pressing iron or pressing machine with the pocket stay folded and pressed over the open seam.					
19	Finish side pockets.					
	a. Turn in the back edge of the side pockets and stitch through the stay piece 3/16 to 1/4 inch from edge along side seam allowance, with the stitching continuing to the front bottom edge of pockets.	301	SSc-1	12-16	A/3	A/3
20	Sew waistband and belt loops to trousers.					
	Finished appearance. The waist band shall be seamed to the waist smoothly and neatly without fullness, gathers, or pleats. The belt loops shall be properly inserted and correctly positioned with the ends securely caught in the waistband stitching.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
20	Sew waistband and belt loops to trousers. (cont'd) a. The waistband shall be made of one ply of basic material. b. Seam waistband to trousers 3/8 inch from edge with ends of belt loops inserted into the seam in the proper position and securely caught in the stitching (except center back loop). c. Position belt loops as follows: (1) One loop in center of right and left fronts and back according to notches on patterns. (2) Side loops on the back with front finished edge even with the side seams. (3) One loop on the seat seam. d. Press waistband seam flat against the waistband with a heated pressing machine or pressing iron. e. The front end of the right waistband shall be even with the right fly front. The front end of the left waistband shall finish even with the back edge of the left fly.	301	SSa-1	12-16	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
21	Overedge stitch left fly assembly and waistband.					
	Finished appearance. The overedge stitching shall be securely caught in the fabrics. The raw edges of the overedge stitched material shall be properly trimmed.					
	a. Join the back edge of the left fly and interlining together with overedge stitching and continue the stitching to the front edge of the waistband.	503 or 504	SSa-1	6-10	A/3	A/3
22	Seam front and top ends of waistband.					
	a. Continue the stitching of the right fly lining to front and top edges of waistband, rounding off the corner slightly. Trim the corner.	301	SSe-2 (a) (each edge)	12-16	A/3	A/3
	b. Turn back the end of the left waistband in line with the joining seam of the left fly to the front. Stitch across the top edge of the waistband the width of the fly.	301	SSe-2 (b)	12-16	A/3	A/3
23	Join lining to waistband.					
	a. Insert top edge of waistband between the lining and buckram of the waistband lining, with the edge of the lining turned in. Join all plies with a	301 or 404 or Hand	SSa-1 FSe-1	12-16 12-16 7-10	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
23	Join lining to waistband. (cont'd) row of imitation hand felled stitches or waistband lining may be felled by hand. b. Left end of waistband lining shall finish at the front edge of the trousers, with the end of the waistband lining trimmed slightly back from front edge on an angle. Right end of waistband lining shall extend approximately 1 inch under the fly in the finished trousers. c. Turn out the front end of the left and right waistband, forcing out the corners. Turn the lining to inside and baste or press the top edge. The corner of left end of waistband shall be pressed flat and smooth. The waistband lining shall not be exposed beyond the top edge of the waistband. d. Finished width of waistband shall be 1-3/4 ± 1/8 inches.					
24	Attach hooks and eyes. Finished appearance. In the finished trousers, when hook and eye are engaged, the closure shall					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
24	Attach hooks and eyes. (cont'd) not bulge, pucker, or twist. a. Position the hook at the center (1/4 inch off center tolerance) of the left waistband with the rolled edge of hook aligned with the slide fastener scoops. Attach hook to left waistband through suitable reinforcement. b. Position the eye at the center of the right waistband aligned with slide fastener scoops and to correspond with hook and left waistband. Attach eye to right waistband through a suitable reinforcement.					
25	Stitch pockets to lower edge of waistband. a. Stitch top end of all pockets to waistband seam allowance with pockets properly positioned and smoothed out.	301	SSa-1	12-16	A/3	A/3
26	Finish left fly. Finished appearance. The base of the fly shall be finished to avoid twisting, pleating or puckering. The seam joining the left fly to the front shall not be					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
26	Finish left fly. (cont'd)					
	exposed on the outside of the trousers.					
	a. Stitch down fly with waistband lining inserted between fly and trousers. The stitching shall be 1-1/2 ± 1/8 inches from the front edge of the fly. It shall extend from the top of the waistband, and shall be curved to the fly notch at the bottom.	301	SSa-1	12-16	A/3	A/3
27	Finish right fly.					
	a. Turn the right fly lining to the inside and edgestitch the front and top edges of the right fly and waistband 1/16 to 1/8 inch from the edge. The lining shall not be exposed on the outside of the trousers.	301	SSe-2 (b) (shows finished seam)	12-16	A/3	A/3
	b. Turn under the raw edge of the fly lining and raise stitch the fly joining the seam from the top of the waistband to the notch 1/16 inch from the seam, through the slide fastener tape and the fly lining. The lining shall lie smooth and flat without pleats.	301	LSq-2 (shows finished seam)	12-16	A/3	A/3
28	Join inseam.					
	Finished appearance. Inseams shall be carefully joined with the notches					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
28	Join inseam. (cont'd)					
	matching, and without twists or puckers. The seams shall start and finish evenly and be smooth and flat.					
	a. Join the inseam from the bottom edge of the legs to the crotch with the notches matching. Form an outlet by tapering the seam allowance of the back from 1-1/8 inches at the crotch to 3/8 inch at the knee notch.	301 or 401	SSa-1 (below knee) LSr-2 (a) (above knee)	12-16	A/3	A/3
	b. Press inseam open.					
29	Join crotch and seat seam.					
	Finished appearance. The crotch and seat seam shall be joined with proper tension resulting in sufficient elasticity of the seam to counteract any strain encountered in sitting or stooping. In the joining of the seat seam, the inseams shall meet.					
	a. Measure the waistband to proper size before joining the crotch and seat seam.					
	b. Place the left and right assemblies together, aligning the edges of the crotch seam allowance. The right and left waistband joining seam					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
29	Join crotch and seat seam. (cont'd) shall be aligned and the notches at the lower end of the flies shall match. The base of the left fly shall cover the right fly on the outside of the finished trousers.					
	c. Join the left and right assemblies at the crotch and seat seam from the fly notch to the end of waistband lining. Use two rows of stitches 1/64 to 1/32 inch apart. The left and right assemblies shall be joined at the crotch with a 3/8 inch seam.	401	SSa-2	10-14	A/3	A/3
	d. Press crotch and seat open.					
	e. Fold back the waistband lining at the joining seam and single stitch each end to the outlet 1/8 to 1/4 inch from seat seam with the lower corner diagonally folded and caught in the stitching. Turn and force out upper corners.	301	SSa-1 (each end)	12-16	A/3	A/3
30	Assemble slide fastener. a. Attach slider and securely staple the bottom of the fastener together even with the ends of the chain and the head of the					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
30	Assemble slide fastener. (cont'd) staple towards the outside.					
31	Stitch the right fly lining extension to the crotch seams.					
	a. Turn under the raw edges of the right fly lining extension and stitch by machine or hand fell to each side of the open crotch and seat seam.	301 or Hand	SSac-3 (d) (finished seam)	12-16 7-10	A/3	A/3
	b. The right fly lining shall extend not less than 1/2 inch beyond the inseam in the finished trousers.					
32	Finish waistband.					
	Finished appearance. The waistband shall finish smooth, even, and flat without gathers, puckers, pleats, or other distortions either in the waistband or the trousers at waistband joining. On the finished trousers, the waistband shall be uniformly 1-3/4 ± 1/8 inches wide. The top edge of the waistband shall be 4-1/2 ± 1/4 inches from the top of hip pocket flaps (style a). The waistband lining shall finish 2-1/4 ± 1/8 inches wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
32	Finish waistband. (cont'd)					
	a. Raise stitch the waistband 1/16 inch from the seam joining the waistband to the trousers, catching the waistband lining. The stitching shall extend to the stitching of the left fly (not across) and to the back edge of the right fly.	301	LSq-2 (shows finished seam)	12-16	A/3	A/3
33	Finish belt loops.					
	Finished appearance. All belt loops shall measure 2 inches ± 1/8 inch from the tacking at the top of the loop to the bottom folded edge. Tacking shall extend the width of the loop, not beyond. All belt loops shall be vertically straight.					
	a. Drop loops and securely stitch them to the trousers 3/16 to 1/4 inch below the waistband seam. The tacking shall be hidden by the loops when the trousers are finished.	301	SSa-1	12-16	A/3	A/3
	b. Turn under the top end of belt loops and align the folded top edge of the loops with the top edge of the waistband. Securely stitch or bartack the turned ends of the loops through the waistband.	301 or Bartack	SSb-1	12-16 28 per bartack	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
33	Finish belt loops. (cont'd)					
	c. Position the center back loop over the seat seam with the finished side up. The top end of the loop shall be 1/2 ± 1/8 inch below the top of the waistband. Stitch or bartack across the entire width of the top end of loop through the waistband.	301 or Bartack	LSq-2 (a)	12-16 28 per bartack	A/3	A/3
	d. Turn up the loop, covering the attached end and stitch or bartack the width of the loop above and adjacent to the first tacking.	301 or Bartack	LSq-2 (b)	12-16 28 per bartack	A/3	A/3
	e. Fold the loop back even with the top edge of the waistband. Turn under the bottom raw end and seam or bartack it to the trousers, the width of the loop, 1/4 ± 1/8 inch below the waistband joining seam.	301 or Bartack	LSd-1	12-16 28 per bartack	A/3	A/3
34	Make buttonholes. Finished appearance. Buttonholes shall be clean cut, well made, and correctly positioned. The stitching shall be securely caught in the fabric.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
34	Make buttonholes. (cont'd)					
	a. Make a horizontal eyelet-end, taper-bar type buttonhole, cut 5/8 inch long, in the right fly, with the inside edge of the eyelet 1/2 to 5/8 inch from the front edge of the fly extension.	Buttonhole		48 min per buttonhole (including tack)	/3	/3
35	Bartack trousers.					
	Finished appearance. The trousers shall not be distorted by the bartacks. The pockets shall lie smooth and flat. The bartacks shall be properly positioned and correctly placed to reinforce the points of strain.					
	a. Bartack both ends of all pocket openings. Bartacks for the hip pockets and watch pockets shall be vertical. Bartacks for the side pockets shall be horizontal.	Bartack		28 per bartack	A/3	A/3
	b. Bartack the bottom end of the fly horizontally through all plies at the junction of the crotch seam and the fly.	Bartack		28 per bartack	A/3	A/3
	c. Bartack the front edge of the right fly to the back edge of the left fly with a vertical bartack. The lower end of the bartack shall be	Bartack		28 per bartack	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
35	Bartack trousers. (cont'd) approximately 3/4 inch above the horizontal bartack at the base of the fly. d. Bartacks shall be made 3/8 to 1/2 inch long. They shall be stitched through all plies of the material at the point of bartacking.					
36	Sew buttons to trousers. Finished appearance. The buttons shall be securely sewn with the ends of the stitching securely tacked. The buttons shall be properly aligned with the buttonholes to secure a smooth and complete closure without bulging or misalignment.					
	a. Sew a 22-line button by hand on the inside of the left waistband to correspond with the buttonhole in the right fly, with threads wrapped three or four times to form a shank. The stitching shall not show on the outside of the fronts.	Hand		4 double (not including shank wrapping)	A/3	A/3
	b. Sew a 22-line button on each hip pocket through the cord piece and the	101 or		20-22 per button	A/3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	STEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
36	Sew buttons to trousers. (cont'd)					
	underply of the pocket to correspond with the buttonhole in the flaps (style a).	301		14-16 per button	A/3	A/3
37	Press trousers.					
	Finished appearance. All pressing shall be done with a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance in accordance with good manufacturing practice.					
	a. Press the top, flies, and pockets smooth and flat.					
	b. Press smooth and crease the legs in the center with the seams matching at the bottom and in the crotch. The inseam in the crotch may be slightly back of the outseam.					
	c. Close flies, waistband, and pockets.					
38	Clean trousers.					
	Trim all ends of stitching and belt loops. Remove all loose thread, spots, stains and shade tickets, or markings, without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Measurements. The finished trousers shall conform to the measurements shown in Table II.

TABLE II - Measurements In Inches 1/

Size	Waist 2/	Seat 3/	Knee 4/		Bottom 5/	
			Short X-Short	Regular Long, X-Long	Short X-Short	Regular, Long, X-Long
26	26	35	18-1/2	19	17-1/2	18
27	27	36	18-1/2	19	17-1/2	18
28	28	37	19	19-1/2	18	18-1/2
29	29	38	19	19-1/2	18	18-1/2
30	30	39	19-1/2	20	18-1/2	19
31	31	40	19-1/2	20	18-1/2	19
32	32	41	20	20-1/2	19	19-1/2
33	33	42	20	20-1/2	19	19-1/2
34	34	43	20-1/2	21	19-1/2	20
35	35	44	20-1/2	21	19-1/2	20
36	36	45	20-1/2	21	19-1/2	20
37	37	46	20-1/2	21	19-1/2	20
38	38	47	21	21-1/2	20	20-1/2
39	39	48	21	21-1/2	20	20-1/2
40	40	49	21	21-1/2	20	20-1/2
41	41	50	21	21-1/2	20	20-1/2
42	42	51	21-1/2	22	20-1/2	21
43	43	52	21-1/2	22	20-1/2	21
44	44	53	21-1/2	22	20-1/2	21
45	45	54	21-1/2	22	20-1/2	21
46	46	55	22	22-1/2	21	21-1/2
Tolerance	+ 3/4 - 1/2	+ 3/4 - 1/2	± 1/2	± 1/2	± 1/2	± 1/2

Inseams: 6/

X-Short	32 inches ± 1/2
Short	34 inches ± 1/2
Regular	36 inches ± 1/2
Long	38 inches ± 1/2
X-Long	40 inches ± 1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

NOTE: Measurements for waist and seat shall be taken with the waistband and fly closed and with the trousers laid out smooth and flat.

1/ Measurements in inches.

2/ Twice the measurement taken across the top edge of the waistband from folded edge to folded edge.

3/ Twice the measurement across the trousers, 1 inch above fly bartack, from folded edge to folded edge.

4/ The location of knee measurements shall be 12-1/2 inches below the crotch seam for X-Shorts, 13-1/2 inches for Shorts, 14-1/2 inches for Regulars, 15-1/2 inches for Longs and 16-1/2 inches for X-Longs.

5/ Measure along (unhemmed) bottom edge of leg from folded edge to folded edge.

6/ Measure along inseam from the crotch seam to unhemmed bottom edge. (An allowance of 3 inches for hems is included in the inseam length.)

3.8 Finished measurements. The finished trousers shall conform to the measurements shown in table II. The trousers shall be fastened and placed flat upon a table for measuring except as otherwise indicated in table II.

3.9 Workmanship. The finished trousers shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable point value or defect limit contained in MIL-STD-1488.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract of purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test condition specified in MIL-STD-1488.

4.4 First article inspection. When specified in the contract or purchase order, a first article inspection procedure shall be prepared, inspection performed on completely fabricated trousers for conformance to all provisions of this specification, and a first article inspection report shall be prepared (see 6.4).

4.5 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1488.

4.5.1 Component and material inspection. In accordance with 4.3 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. The contractor shall furnish a certificate of compliance stating that the hooks and eyes are one of the specified types, or, if an "equal" type is used, that it conforms in all respects to that approved by the contracting officer as required in 3.3.9. In addition, the requirement that all components of the slide fastener have been furnished by one supplier shall be accepted on a certificate of compliance (see 3.3.4).

4.5.2 End item examination. Samples and examination of the end item shall be performed for dress (D) trousers in accordance with the provisions of MIL-STD-1488.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.3 Dimensional examination. The dimensional examination provisions for the finished trousers shall be as listed in table II and as specified in MIL-STD-1488.

4.5.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing, and marking requirements of section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as: incomplete closure of case liners, container flaps, loose strapping, or inadequate stapling. Bulging or distorted container.
Contents (exterior and interior)	Number of trousers per shipping container is more or less than required.

5. PACKAGING

5.1 Preservation. Preservation shall be commercial as specified in ASTM D 3951..

5.2 Packing. Packing shall be commercial.

5.2.1 Commercial. Trousers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The trousers described herein are intended for wear by male personnel of the U.S. Marine Corps as follows:

Class 1, style a - U.S. Marine Corps Officers.
Class 1, style b - U.S. Marine Corps Band, Drum and Bugle Corps, and Ceremonial Troops.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Styles and sizes required (see 1.2).
c. Whether first article is required (see 3.2).
d. Number of trousers in first article (see 3.2).

6.3 Samples and standard shades. For information regarding the availability of sample trousers and standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between this specification and the figures, this specification shall govern.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.7 Subject term (key word) listing.

Band
Enlisted
Officer's

Preparing activity:
Navy - MC
Project No. 8405-N252

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

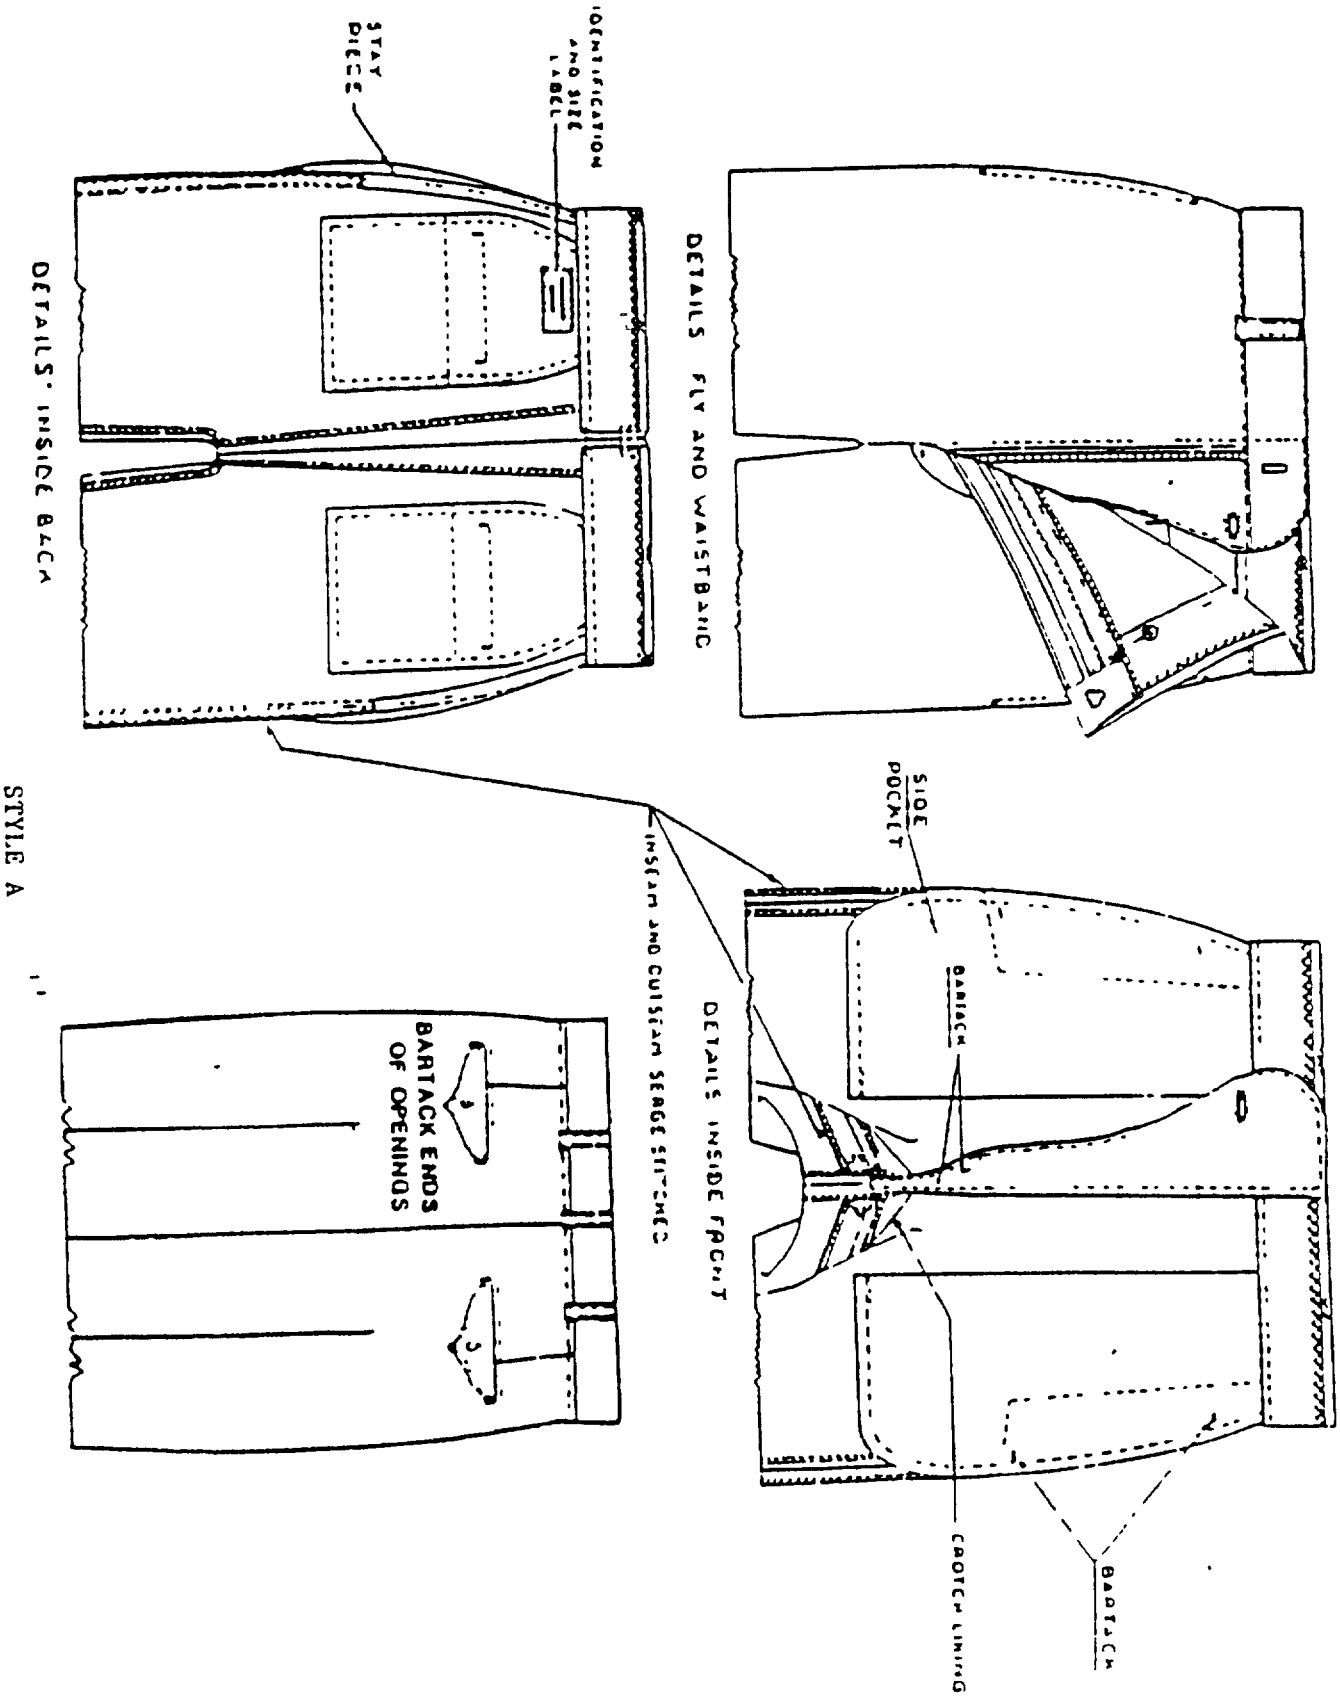


Figure 1: Trousers, Men's, Dress, White

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

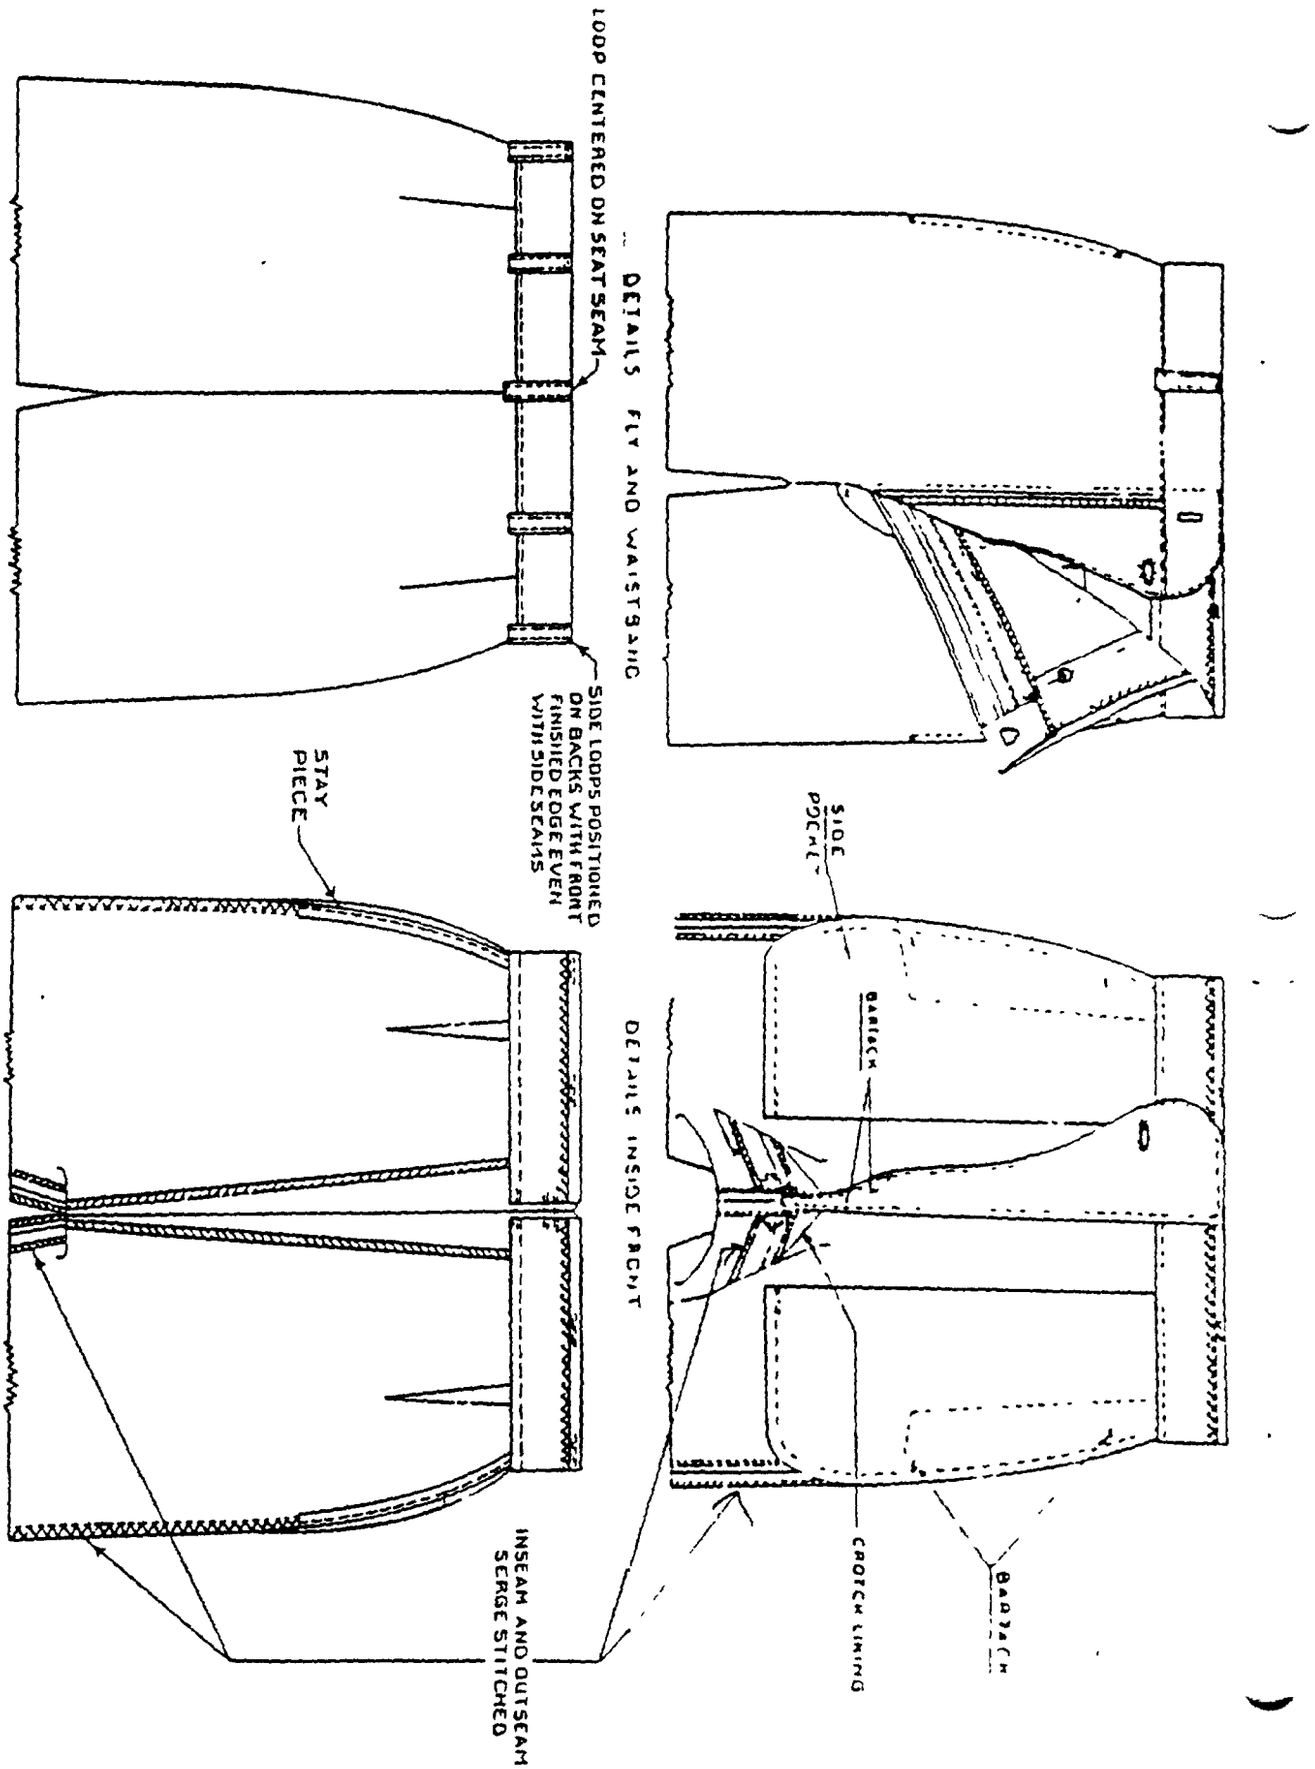


FIGURE 2 TROUSERS, MEN'S: DRESS, WHITE; STYLE B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER	2 DOCUMENT DATE (YYMMDD)
	MIL-T-82163C(MC)	30 September 1994

3 DOCUMENT TITLE
TROUSER'S, MEN'S: DRESS, WHITE

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5 REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
COMMANDER	703-640-4584	278-4584
c. ADDRESS (Include Zip Code) PROGRAM SUPPORT DIRECTORATE, (PSE-C/S), MARCORSYSCOM, 2033 BARNETT AVE, SUITE 315, QUANTICO VA 22134-5010	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289 2340	

DD Form 1426, OCT 89 — Previous editions are obsolete. — 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.