INCH-POUND

MIL-J-82193B(MC)

23 May 1994

SUPERSEDING
MIL-J-82193A(MC)
19 Jun 1981

MILITARY SPECIFICATION

JACKET, MAN'S: EVENING DRESS (OFFICER'S)

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1 SCOPE

1.1 Scope. This specification covers requirements for men's evening dress jackets.

1.2 Classification. The jacket shall be of one type in the following sizes as specified (see 6.2):

Schedule of Sizes

Short	Regular	Long	Extra Long
36	36	36	36
38	38	38	38
40	40	40	40
42	42	42	42
44	44	44	44
	46	46	

1.3 Individual order. When the jacket is made for an individual order, this specification shall govern, except that the detailed requirements of Section 3, Table I may be modified to the extent necessary for good custom tailoring practices.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

A-A-50186	- Cloth, Buckram, Woven and Non-Woven
A-A-50196	- Thread, Silk.
A-A-50198	- Thread, Gimp, Cotton, Buttonhole.
A-A-50199	- Thread, Polyester Core, Cotton or Polyester Covered
A-A-52094	- Thread, Cotton.
A-A-52106	- Cloth, Twill or Plain Weave, Polyester or Polyester Blend
[illegible] 871	- Button, Sewing Hole, and Button, Staple, (Plastic).
DDD-L-20	- Label; For Clothing, Equipage, and Tentage, (General Use).
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed).

MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp, and Spun Hair-Wool Filling.
MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill Rayon.
MIL-B-3461	- Buttons, Insignia, Metal, Uniform and Cap.
MIL-C-15064	- Pad, Shoulder and Sleeve-Head.
MIL-C-16375	- Cloth, Wigan, Cotton.
MIL-C-29405	- Cloth, Broadcloth, Wool, and Wool Synthetic.
MIL-C-82128	- Cloth, Satin, Rayon: Cuprammonium, Scarlet.
MIL-O-82194	- Ornamentation: For Jacket, Man's, Evening Dress, Officers'.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables For Inspection By Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officers).

2.2 Other publications. The following documents form a part of this specification to the extent specified therein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

Department of Defense (DoD) Standard Shades for Buttons 1966

(Copies may be obtained from the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

3. REQUIREMENTS

3.1 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), before production is commenced, the first article, consisting of the number of jackets specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for inspection. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material shall be wool broadcloth, Hamburger Woolen Company, style 839 (see 6.3), 12 ounce, conforming to type I, class 2 of MIL-C-29405.

3.3.2 Lining. The material for lining the jacket, collar and inside pocket facing shall be cloth, satin, rayon; scarlet 2504 (see 6.3), conforming to class 2 of MIL-C-368.

3.3.3 Lining for shoulder straps. The material for lining the shoulder straps shall be cloth, twill, rayon, black 2604 (see 6.3), 3.7 ounce, conforming to class 1 of MIL-C-368.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.4 Twill or plain weave polyester or polyester blend. The material for making the inside pocket and collar interlining shall be cloth, twill or plain weave polyester or polyester blend, black 5.5-ounce, conforming to class 1 of A-A-52106.

3.3.5 Wigan. The material for reinforcing the bottom edge of sleeves and jacket shall be cloth, wigan, cotton, 2.5-ounce, conforming to type I of MIL-C-16375.

3.3.6 Collar interlining. The material for interlining the collar shall be 2 plies of cloth; cotton, buckram, 12 ounce, conforming to type IV of A-A-50186.

3.3.7 Coat fronts. Materials for the coat front interlining shall conform to the following requirements.

3.3.7.1 Basic material. The basic material for the body of the coat front and dart stays shall be cloth, cotton warp and spun hair wool filling, conforming to type I of MIL-C-297.

3.3.7.2 Padding. The padding shall be flannel conforming to the following when tested as specified in Section 4, Table IV.

3.3.7.2.1 Flannel. The material shall be cloth, flannel, unbleac , double napped, conforming to the following:

Weight, ounces per square yard:	
minimum	4.0
maximum	5.5
Texture, threads per inch:	
warp minimum	38
filling, minimum	34
Breaking strength, pounds:	
warp minimum	30
filling, minimum	25
Shrinkage - percent (maximum):	
warp and filling	2.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.7.3 Haircloth. The front body and the reinforcement piece for the top front corner of the left and right and shoulder stay for coat fronts shall be haircloth made with natural color, 2-ply cotton yarn in the warp and natural horsehair in the filling. The finished cloth shall have a minimum thread count of 60 per inch in the warp and 40 per inch in the filling, shall weigh not less than 4.5 ounces per square yard, and shall contain not more than 1.0 percent of non-fibrous material (see Section 4, Table IV).

3.3.8 Shoulder pads. The shoulder pads shall conform to type I, class 2 of MIL-P-15064.

3.3.9 Sleeve-head pads. The sleeve-head pads shall conform to type IV of MIL-P-15064.

3.3.10 Tape, 3/8 inch. The tape for the front edges shall be 3/8 inch wide cotton, unbleached or bleached white, conforming to type III, class 1 or class 2 of DDD-T-86.

3.3.11 Thread.

3.3.11.1 Silk thread. The silk thread shall conform to A-A-50196. The thread for machine sewing shall conform to type I, size A for all outside seaming and stitching and size 0 for machine felling; size B, 3-ply and size F, 3-ply top and lower thread, respectively for buttonholes as indicated in the thread columns in Table I. The thread for hand sewing shall be type III, size C, 2-ply. The requirements for extractable material shall not apply.

3.3.11.2 Cotton thread. The cotton thread shall conform to A-A-52094 type III, mercerized finish, ticket No. A, 3-ply for all inside seaming and stitching; type II, glazed finish, ticket No. 24, 4-ply for sewing on buttons. Soft finish cotton thread, type I, ticket No. 70, 2-ply shall be used for seaming and stitching the assembled parts of the coat fronts together and ticket No. 30, 3-ply shall be used for machine tacking of the armholes, as an alternate for cotton thread, a polyester cotton covered thread conforming to A-A-50199, ticket No. 50, 2 or 3 ply may be used. The thread for basting shall be a good commercial grade.

3.3.11.3 Color and colorfastness. The cotton and silk thread for seaming and stitching the basic material shall be dyed shade black AA Cable No. 66043; and for seaming and stitching the lining, the thread shall be dyed shade scarlet W Cable No. 66040. The cotton thread for basting and for machine tacking armholes may be white. Colored thread when tested as specified in the applicable thread specification, shall, show good colorfastness to wet (dry) cleaning, and in addition the silk thread shall show good colorfastness to light. (See DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.12 Gimp. Buttonhole gimp shall be cotton, No. 8 soft or glazed finish, conforming to type I or II of A-A-50198, showing good colorfastness to wet (dry) cleaning. The color shall approximate shade black AA Cable No. 66043.

3.3.13 Buttons.

3.3.13.1 Insignia button. The insignia button for fronts, shoulder straps, and ornamented sleeve patch shall be metal, gold-plated, officer design, 27-line, conforming to type I, style 4, class A, sub-class 1 of MIL-B-3461.

3.3.13.2 Ring toggles. Ring toggles for securing buttons to ornamental sleeve patches shall conform to MIL-B-3461.

3.3.13.3 Sewing hole buttons. Sewing hole buttons shall be pearlescent-polyester composition, glossy finish, style 15, 18-line for inside of collar, conforming to type II, class K of V-B-871. Color of buttons shall be white. (See DOD Standard Shades for Buttons 1966).

3.3.14 Labels. Each jacket shall have a combined personal-clothing identification label and a size label conforming to DDD-L-20. Colorfastness for dry cleaning shall apply.

3.3.14.1 Combination personal-clothing identification label. The combination personal-clothing identification label shall conform to type I, classes 1 and 10 (combined), of DDD-L-20 except all printing and the space between the lines of printing shall be minimum 10 point (approximately 1/8 inch). The content and format shall be as follows:

Name
Service No.
Collar Size
Nomenclature (item description)

Contract No. Date
Name of Contractor
Wool Products Act Information

3.3.14.2 Size label. The size label shall be type I, class 2. The label shall consist of the numerical size designation specified in 1.2 followed by the letters S, R, L, or XL for Short, Regular, Long and Extra Long, as shown by the following example:

40R

3.3.15 Collar closure hook and eye. The hook and eye for closing the collar shall be brass, black japanned finish, conforming to the requirements herein (see Section 4, Table IV), and the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.15.1 Finish. All surfaces and edges of the hook and eye shall be clean, smooth, free from burrs, tool marks, sharp edges, and roughness. The hook and eye shall be black japanned lacquer. The dry lacquer film shall be continuous, level, adherent, free from lint, dust, or other foreign inclusions that may affect appearance or serviceability, and shall withstand the test for tackiness specified in Section 4, Table IV. All apertures of the finished lacquered hook and eye shall be completely open, and free of any lacquer film.

3.3.16 Sleeve patches. The sleeve patches are fabricated in accordance with MIL-O-82194. The sleeve patches are furnished prefabricated with ornamentation. Sleeve patches are prefabricated with ornamentation for company, field, and general officers, and may be obtained either finished or unfinished, with or without buttons attached.

3.3.17 Collar ornamentation. The ornamentation for the collar is fabricated in accordance with MIL-O-82194. Standard width of collar is 2 inches. Short length jackets require a 1-3/4 inch collar.

3.3.18 Shoulder strap ornamentation. The ornamentation for the shoulder strap is fabricated in accordance with MIL-O-82194. The shoulder strap will be furnished prefabricated with ornamentation. Shoulder straps are made in 5-1/4, 5-3/8, 5-1/2, 5-5/8, 5-3/4, and 5-7/8 inch finished lengths. The 5-1/4 inch length is intended for use on the standard size 36 jacket, the 5-3/8 inch length on size 38, etc. When the shoulder of the standard size jacket is modified for an individual, a shorter or longer strap, as required, shall be used to permit the finished strap to conform to the requirements specified in Table I, Operation 5.

3.4 Design. The jacket shall be the Marine Corps design shown on Figures 1 through 6; a formfitting jacket, designed to be worn open and held together at the collar with a single hook and eye fastener; having 13 gold-plated insignia buttons on the right front and 13 uncut buttonholes on the left front; front darts; an ornamented stand-up collar with one worked eyelet in each end for attaching Marine Corps collar insignia; ornamented shoulder straps with worked eyelet for attaching gold-plated insignia button; plain sleeves with ornamented sleeve patches; fully lined; inside pocket; and designed to be worn with a white shirt, scarlet cummerbund and dark blue evening dress trousers.

3.5 Pattern. The standard pattern furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working pattern. The standard patterns provide 3/8 inch allowance for all seams, except 3/4 inch allowance for side seams and 5/8 inch allowance for center back seam. These patterns show size, seam allowances, warp directional lines for cutting, and are marked or notched for proper placement and assembly of component parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.5.1 List of pattern parts. Jackets shall be cut from the specified materials in accordance with the pattern parts indicated:

Item	Pattern Nomenclature	No. of cut parts
	Material: Cloth, broadcloth, wool	
1.	Front	2
2.	Side front	2
3.	Side back	2
4.	Center back	2
5.	Top sleeve	2
6.	Under sleeve	2
7.	Collar tab	1
	Material: Cloth, satin rayon	
8.	Front	2
9.	Side front	2
10.	Side back	2
11.	Center back	2
12.	Collar lining	1
13.	Top sleeve	2
14.	Under sleeve	2
15.	Inside pocket facing	2
	Material: Cloth, cotton warp, spun hair-wool filling, interlining (coat front)	
16.	Front	2
17.	Stay (shoulder dart)	2
18.	Dart stay	6
	Material: Flannel	
19.	Front padding	2
	Material: Haircloth	
20.	Front	2
21.	Top front corner reinforcement	2
22.	Stay (shoulder dart)	2
	Material: Cloth, polyester twill	
23.	Collar interlining	1
24.	Inside pocket	2
	Material: Cloth, twill, rayon	
25.	Shoulder straps	2
	Material: Cloth, wigan, cotton	
26.	Reinforcement (bottom edge of sleeve)	2
27.	Reinforcement (bottom edge of jacket)	1
	Material: Cloth cotton buckram	
28.	Collar interlining	1
	Shapers and markers	
29.	Button and buttonhole marker and front shaper	
30.	Finished sleeve patch and button marker	
31.	Finished shoulder straps	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Manufacturing requirements. The jacket shall be manufactured in accordance with operation and the stitch, seam, and stitching types specified in Table I.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the jacket.

3.6.1.2 Stitches, seams and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Ends of seams and stitching. Ends of seams and stitchings, except ends of a continuous line of stitching produced with 301 stitch type, when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured back of the break and ends of a continuous line of stitching shall overlap not less than 1/2 inch.

3.6.1.3 Shade markings. The component parts of jacket, cut from one piece of basic and lining materials, including pairs of sleeve lining when cut from ends, shall be marked to insure a uniform shade and size throughout the garment. Parts cut from ends that are sized shall be identified from size. The use of tickets with metal fastening device is prohibited on rayon lining. Any method of shade marking may be used except:

(1) Corrosive metal fastening devices.
(2) Adhesive-type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.
(3) Sew-on shade kits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting. a. Cut jackets in strict accordance with patterns furnished by the Government. b. Cut parts in the warp direction indicated by directional lines on the pattern. c. Cut all wool parts from one piece of basic material, except collar tab, which may be cut from ends. d. The body lining of jacket shall be cut from one piece of rayon satin lining material. All other lining parts may be cut from ends. When sleeve linings are cut from ends, the pairs of sleeve lining shall match. e. Cut polyester twill for interlining the collar in accordance with pattern furnished. f. Cut polyester twill for inside hanging pocket in accordance with pattern furnished. g. Cut cotton buckram for interlining the collar in accordance with pattern furnished. h. Cut wigan for the bottom of sleeves and jacket in accordance with pattern furnished. i. Cut coat fronts in strict accordance with applicable patterns furnished which show size and directional lines.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting. (cont'd) j. The use of drill holes is prohibited.					
2	Replacement of damaged parts. a. Replace at time of cutting any parts containing damage, such as holes or seriously weakening defect such as smashes, multiple floats and slubs likely to develop into holes. b. Replace any parts damaged during the manufacturing process by needle chews which may be expected to develop into holes, scissors or knife cuts, tears, holes, mends or burns.					
3	Shade marking. a. Mark or ticket all component parts (see 3.6.1.3) cut from one piece of basic and lining materials, pairs of sleeve linings when cut from ends, to insure uniform shade and size throughout the jacket. b. The use of tickets with metal fastening devices is prohibited on cuprammonium lining.					
4	Make coat fronts. a. Position the shoulder stay on the underside of front section at the shoulder dart with edges overlapped. Spread shoulder dart approximately 1 to 1-1/4 inches and stitch to stay.	304	FSe-1	4-8	70/2	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4	Make coat fronts. (cont'd)					
	b. Abut or overlap (1/8 inch) the edges of the chest dart, upper waist dart and lower waist dart on front sections and stitch through stays with stays on outer side. The abutted or overlapped edges may be stitched together prior to stitching through stay.	304	FSe-1	4-8	70/2	70/2
	c. Spread open shoulder dart on haircloth material and stitch 1 to 1-1/4 inches stitch to shoulder stay with edges overlapped.	304	FSe-1	4-8	70/2	70/2
	d. Abut or overlap (1/8 inch) and stitch together the edges of the chest dart, upper waist dart and lower waist dart on haircloth material.	304	FSe-1	4-8	70/2	70/2
	e. Position the haircloth reinforcement piece at the top front corner of the haircloth section on inner side of the haircloth sections and stitch together with vertical rows of stitching 3/8 to 1/2 inches apart.	304	FSe-1	4-8	70/2	70/2
	f. Abut or overlap (1/8 Inch) and stitch together the edges of the chest dart, upper waist dart, and lower waist dart on padding. The abutted or overlapped edges may be stitched together.	304	FSe-1	4-8	70/2	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4	Make coat fronts. (cont'd)					
	g. Position haircloth section and padding section on underside of front section and quilt all parts together with vertical rows of stitching 3/8 to 1/2 inches apart and curved rows toward the armhole. The shoulder portion shall be left open to accommodate the shoulder pad.	304	FSa-1	4-8	70/2	70/2
	h. Steam shrink fronts and press dry to conform to shape of body.					
5	Assemble shoulder straps.					
	Finished appearance. The shoulder straps shall be assembled without twists, gathers, puckers, pleats or raw edges. Edges of finished shoulder straps shall be uniformly 1/8 inch from outer row of embroidery. The eyelets shall be well worked with the purling on the outside of shoulder straps and shall finish with a 1/8-inch diameter opening. The straps shall be uniform in size and shape. The rayon lining shall not be exposed on outside of straps.					
	a. Form a 1/2 to 3/4 inch wide vertical pleat to the outside in the center of rayon lining.					
	b. Secure the pleat with a row of stitches on both ends of the pleat, or the pleat may be pressed in lieu of tacking.	301	SSa-1	10-14	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5	Assemble shoulder straps. (cont'd)					
	c. Trim (basic material) of shoulder strap evenly 3/8 inch beyond the outer row edge of the embroidery. Trim the crinoline evenly along the embroidered edges so that 1/8 inch of the background material will be uniformly exposed between the outer row of synthetic gold border and finished edges of strap.					
	d. Position the rayon lining on the outside of shoulder strap and seam together 1/4 inch from edges at the front and back, except at collar end which shall be stitched as close as possible to the embroidered edge.	301	SSa-1	10-14	A/3 (Cotton)	A/3
	e. Cut a vertical opening through the center of the rayon lining, allowing room to turn. The opening shall extend not less than 1 inch from the collar end. Turn the shoulder strap through lining opening, working out the edges of the seam.					
	f. Turn under one edge of the cut lining and lap to the other half of lining and fell along the folded edge.	Hand		8-10		C (Silk)
	g. Make one eyelet in each strap midway between the back and front edges and with the edge of eyelet opening 7/8 inch from the rounded end of straps.	Eyelet		20 Per eyelet (minimum)	A (Silk) (Black)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Assemble collar. Finished appearance. The collar shall be assembled without twists, gathers, puckers, or pleats. The eyelets shall be well worked with the purling on the outside of collar, and shall finish with a 1/8 inch diameter opening with the purled edge away from the opening. The basic material shall extend uniformly 1/8 inch beyond the metic gold border at the top and side edges.					
	a. Position the polyester twill collar interlining on the collar interlining (buckram) with edges even and seam together 3/16 to 1/4 inch from each edge.	301	SSa-1	10-14 (each edge)	A/3	A/3 (Cotton)
	b. Trim the upper and lower edges (basic cloth) of collar 5/8 to 3/4 inch and trim both ends of the collar 1 to 1-1/4 inches from the outer row of the synthetic gold border.					
	c. Trim the upper and side edges (ends) of the collar crinoline as close as possible to the embroidered thread.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Assemble collar. (cont'd)					
	d. Lap the upper edge of the collar interlining assembly with the buckram side up on the inside of the basic material at the upper edge 1/8 to 3/16 inches from the crinoline edge of collar. (The collar interlining assembly shall be even with the crinoline at both ends of collar) and stitch together 1/8 to 3/16 inches from the collar interlining raw edge. The stitching shall extend the length of the upper edge of collar interlining assembly.	301	LSa-1	10-14	A/3	A/3
	e. Turn the collar assembly right side out with polyester twill side up.					
	f. Position the upper raw edge of scarlet lining even with the upper raw edge of collar. The lining shall extend not less than 3/4 inch beyond both ends of collar. The line of stitching shall cover the stitching of the interlining to the collar, and shall extend 1 to 1-1/4 inches from both ends of collar.	301	SSa-1	10-14	A/3	A/3 (Cotton)
	g. Turn the interlining to the inside and stitch the lower edge of the interlining to the collar crinoline from end to end. Trim the lower edge of the collar crinoline even with the edge of the collar interlining assembly.	301	SSa-1	10-14	A/3	A/3 (Cotton)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Assemble collar. (cont'd)					
	h. Fold the side (ends) and lower raw edges of the basic material of the collar over the lower and side edges (ends) of collar interlining assembly and tack the lower and side edges (ends) to the polyester twill.	Hand		4-6		C (Silk)
	i. Make one eyelet through all plies of the collar and lining, 3/4 inch from bottom edge of collar ± 1/16 inch and 1-3/4 inches from finished end of collar ± 1/8 inch.	Eyelet		20 Per eyelet (minimum)	A (Silk)	A
7	Seam sleeves at forearm.					
	Finished appearance. The forearm seam shall finish smooth and flat without twists, gathers, puckers or pleats and shall start and finish evenly.					
	a. Position the topsleeve with upper forearm edge in line with notch at the armhole edge of undersleeve and with notches at the lower forearm edge of top and undersleeve matching and the edges even.					
	b. Stitch top and undersleeve together with a 3/8-inch seam, from the forearm edge of the sleeve, forming a tapered outlet on the undersleeve.	301	SSbd-1 to SSa-1	10-14	A	A
	c. Spread open the seam and press flat with a heated iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7	Seam sleeves at forearm. (cont'd)					
	d. Mark the top and undersleeve for the bottom turn-up as indicated by notches in the pattern.					
8	Baste wigan reinforcement to sleeve.					
	a. Position the wigan on the sleeves with the notches on the ends of the wigan in line with the turn-up notches on the sleeve.					
	b. Tack sleeves to the reinforcement piece along the forearm seam allowance of the top of undersleeve.	101 or Hand or 301		4-6 8-12	A A	 J
	c. Baste sleeve and reinforcement piece together at the mark for the bottom turn-up. Trim the ends of wigan even with backarm edges of top and undersleeve.	101 or Hand		4-6	A	
9	Seam sleeve at backarm.					
	Finished appearance. The backarm seam shall finish smooth and flat without twists, gathers, puckers, or pleats and shall start and finish evenly.					
	a. Join the topsleeve to the undersleeve at the backarm with a 3/8 inch seam, catching the ends of the wigan reinforcement piece in the stitching.	301	SSbd-1 to SSa-1	10-14	A	A
	b. Spread open the seam and press smooth and flat with a heated pressing iron.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Tack sleeve turn-up to reinforcement.					
	a. Turn up the bottom edge of the sleeve at the mark and tack the raw edge to wigan reinforcement piece with blindstitching. The basic material shall not be caught in the blindstitching. The finished bottom turn-up shall be 2 ± 1/4 inches.	103 or 301	EFc-1 (b)	4-6	A	A A
11	Seam sleeve linings.					
	Finished appearance. The pairs of sleeves shall match in shade. The seams shall start and finish evenly at the seam.					
	a. Position the topsleeve lining with upper forearm edge in line with notch at the armhole edge of undersleeve lining and with notches at the lower forearm edge of top and undersleeve lining matching.					
	b. Stitch the top and undersleeve lining together 3/8 inch from the forearm edge of top sleeve, forming a tapered outlet on the undersleeve.	301	SSbd-1 to SSa-1	10-14	A	A
	c. Join the top and undersleeve lining at the backarm with a 3/8 inch seam.	301	SSa-1	10-14	A	A
12	Assemble sleeve and sleeve lining.					
	Finished appearance. The sleeve lining seams shall be aligned with the corresponding seams in the sleeve and seamed to sleeve without twists, gathers, puckers, or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12	Assemble sleeve and sleeve lining. (cont'd)					
	a. The sleeve lining shall extend not less than 3/4 inch above top of sleeve. Tack forearm and backarm seams of sleeve lining, to forearm and backarm seams of sleeve respectively, distributing fullness in the lining. Tacking to extend from top of wigan to not more than 5 inches below top of sleeves. When tacking is done by hand, both ends of stitching shall be securely backstitched with not less than three stitches.	301 or Hand	SSa-1	4-6	A	A
13	Fell turn-up of sleeve lining; press sleeves.					
	Finished appearance. The sleeve linings shall not be short, tight, or twisted at bottom of sleeves, and shall extend to within 1 to 1-1/4 inches from finished bottom edge of sleeve.					
	a. Pull sleeves through the lining and baste the sleeve lining turn-up to the bottom of sleeves.	101 or Hand				
	b. The sleeve lining may be felled without basting. Fell the folded edge of sleeve lining to turn-up of sleeve with blindstitching.	301 or Hand	EFc-1 (b)	6-8 8-10	0 (Silk) C (Silk)	0
	c. Turn sleeves, assemble in pairs. Press the lower half smooth and flat, creasing at the backarm. The backarm crease shall be on the backarm seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14	Assemble inside pocket on left front lining.					
	a. The inside pocket shall be made with two pieces of polyester twill and two pieces of rayon satin lining for vertical piped opening.					
	b. Position a single ply of lining on a single ply of pocket material with top and front edges even. Turn under the inside and bottom edge of lining and seam the pocket facing to the pocket material 1/16 to 1/8 inch from the folded edge, catching the lower edge of the identification label in the seam at the inside edge of the pocket facing.	301	LSd-1	10-14	A	A
	c. Stitch the upper and side edges of the identification label to the pocket material (silesia) 1/16 inch from the edges.	301	SSa-1	10-14	A	A
	d. Mark the left front lining for the pocket opening as indicated by the marks on the pattern.					
	e. Position one ply of the pocket material (silesia) on the underside of the front lining at the mark for the pocket opening. The straight end of the pocket material shall extend approximately 1 inch beyond the mark for the pocket opening toward the front and top end.					
	f. Position the pocket facing on the outside of front lining with notches on the facing in line with the mark for the pocket opening.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14	Assemble inside pocket on left front lining. (cont'd)					
	g. Stitch lining (pocket facing) to front lining, and pocket material with one row of stitches 3/16 to 1/4 inch on each side of the mark for the pocket opening.	301	SSa-2	10-14	A	A
	h. Cut the opening for the pocket midway between the two rows of stitches and tongue notch each end of the opening.					
	i. Turn the pocket facing through the opening to the inside. Form the piping at the front and back edges of the opening.					
	j. Topstitch the front and back edge of opening adjacent to the seamed outer edge of pocket opening.	301	SSe-2 (each edge shows finished seam)	10-14	A	A
	k. Tack each end of piping on the underside, catching the tongue notch in the stitching.	301	SSa-1	4-6	A	A
	l. Turn under the raw edge of the back part of facing, and stitch to the pocket 1/16 inch from the folded edge.	301	LSd-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14	Assemble inside pocket on left front lining. (cont'd)					
	m. Position the two plies of pocket with edges even and stitch together along the raw edges. The line of stitching shall extend from each end of pocket opening, catching the tongue notches in the stitching. Raise the body lining, and continue to stitch the pocket through all plies at the front part adjacent to the stitch of front piping to complete the closing of the pocket.	301	SSa-1	10-14	A	A
	n. The pocket opening may be cut and piped with the use of an approved automatic type sewing machine specifically designed to position the component parts, cut the opening, and stitch and form the piped edges in one operation. When the automatic type machine is used, the front and back pipings shall be stitched adjacent to the seamed outer edge (not on pipings).					
15	Stitch waist darts in front lining.					
	Finished appearance. The waist dart shall be tapered to a point at upper end and shall finished without gathers, puckers, or pleats.					
	a. Fold the front lining with the cut edge of the waist dart even and stitch the entire length of dart 3/8 inch from the cut edges at lower end and tapering to a point at the upper end of dart, securely backtacking the pointed end.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16	Assemble body lining. Finished appearance. Front, side front, side back and center back lining shall be uniformly stitched and the lining shall finish smooth and flat without twists, gathers, puckers, pleats, or raw edge. Seams shall start and finish evenly at the line of stitching.					
	a. Position the front and side fronts with edges even and join together with a 3/8 inch seam.	301	SSa-1	10-14	A	A
	b. Position the center back lining with back edges even and upper notches matching. Seam together from the upper notches for a distance of approximately 2 inches, and from that point seam horizontally to 3/8 inch from the back edge and continue seaming to the bottom end of lining.	301	SSa-1	10-14	A	A
	c. Respectively position and join the left and right side backs to the center back parts with a 3/8 inch seam and with notches matching.	301	SSa-1 (each seam)	10-14	A	A
	d. Position the side back and side front linings and join together at the sides with a 3/4 inch seam.	301	SSa-1	10-14	A	A
17	Press lining seams darts and center back pleat. a. Press the dart, side front and side seam lining smooth and flat with a heated pressing iron toward the center back.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17	Press lining seams darts and center back pleat. (cont'd)					
	b. Press the left and right side back linings smooth and flat toward the center back.					
	c. Press the pleat smooth and flat from top to bottom edge. The folded edge of pleat on the outside of lining shall be toward the left side as worn.					
18	Assemble fronts.					
	Finished appearance. Front and side front shall be uniformly stitched and shall finish smooth and flat without twists, gathers, puckers, pleats or raw edges. Seams shall start and finish evenly at the line of stitching. The waist darts in the fronts shall be tapered to a point at upper end.					
	a. Fold the front, matching the cut edges of the waist dart and stitch the entire length of the dart 3/8 inch from the cut edges at the lower end and tapering to a point at the upper end, securely backtacking the pointed end.	301	SSa-1	10-14	A	A
	b. Position the front and side fronts with edges even and join together with a 3/8 inch seam.	301	SSa-1	10-14	A	A
	c. Spread the dart seam and side front joining seams and press smooth and flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB LPR
19	Interline fronts.					
	a. Position the left and right fronts on the corresponding coat front interlining and baste along the front center. The basting shall extend from approximately 3 inches from the shoulder edge of fronts to approximately 2 inches from the bottom edge.	Hopper or Hand				
	b. Baste across the shoulder, allowing room for setting shoulder pad and working fullness towards the armhole. Baste along the front of the armhole and continue to baste down the back edge of the interlining to approximately 2 inches from the bottom edge of front.	Hopper or Hand				
	c. Baste horizontally towards the front of the jacket starting from the top of center basting stitch. Continue to baste along the front edge to approximately 2 inches from the bottom edge of jacket.	Hopper or Hand				
20	Mark fronts.					
	a. Mark the front and bottom, on the interlining side of the jacket in accordance with the pattern marker. Trim the interlining only at the mark.					
21	Join back parts.					
	Finished appearance. The center back and side back parts shall be carefully joined without twists, gathers, or pleats. Seams shall start and finish evenly at the line of stitching.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
21	Join back parts. (cont'd)					
	a. Position the center back part with edges even, and join together at the center with a 5/8 inch seam and with notches matching.	301	SSa-1	10-14	A	A
	b. Respectively position and join the left and right side backs to the center back parts with a 3/8 inch seam and with notches matching.	301	SSa-1	10-14	A	A
22	Join back and fronts at sides.					
	Finished appearance. The back and fronts shall be carefully joined at the sides without twists, gathers, puckers, or pleats. Seams shall start and finish evenly at the line of stitching.					
	a. Position the side back and side fronts even and join together at the side with a 3/4 inch seam.	301	SSa-1	10-14	A	A
	b. Spread open the side and back seams and press flat with a heated pressing iron.					
	c. Mark the jacket for bottom turnup 1-1/2 inches from the bottom edge, and the shape of the finished bottom shall be in accordance with the shape of the pattern.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BO LP
23	Baste wigan reinforcement to bottom of jacket.					
	a. Position the wigan on the inside of the jacket, with the bottom edges of the wigan and jacket even, and both ends of the wigan overlapping the back edge of front interlining. Baste the wigan to jacket.	Hand or Hopper				
24	Fell wigan reinforcement to jacket.					
	a. Fell the wigan to front interlining at each end and to all body seams with blindstitching.	103 or Hand	SSm-1	4-6	A	
25	Baste and fell tape.					
	a. Baste tape along the front and bottom edge of interlining, with one edge of tape aligned with the front and bottom edge of front interlining. The tape shall be held slightly taut along front edge while basting.	Hand				
	b. Fell both sides of tape to the jacket and front interlining respectively with blindstitching.	Hand or 103	SSm-1 (each seam)	4-6	(Commercial) A	
26	Stitch lower front and center back corners.					
	a. Fold back each front of the jacket in line with the front edge of the interlining. Seam the lower front to the bottom turn-up at the mark. Turn the front to the inside working out the point.	301	SSe-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
26	Stitch lower front and center back corners. (cont'd)					
	b. Fold the center back face to face at the center seam and stitch together on a 45 degree angle from the bottom raw edge up to the finished bottom turn-up. Turn to the inside working out the point.	301	SSa-1	10-14	A	A
	c. Lap the front outlet over the front interlining, baste along the front and bottom turn-up.	101 or Hand				
27	Fell front and bottom edges of jacket.					
	a. Fell the raw edges of front and bottom turn-up to the front interlining and bottom reinforcement wigan with blindstitching. The blindstitching shall extend along the entire front and along bottom edges of jacket.	103	SSm-1	4-6	0	
	b. Press the front and bottom edges smooth and flat with a heated pressing iron or pressing machine.					
28	Make buttonholes.					
	Finished appearance. The buttonhole shall be uncut, well made, positioned in accordance with marking on pattern, well worked over gimp and with the stitching securely caught in the material. The purling of the buttonholes shall be on the outside.					
	a. Mark the left front in accordance with the buttonhole marker for the location of 13 buttonholes.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOI LPI
28	Make buttonholes. (cont'd)					
	b. Make one horizontal eyelet-end square bar type buttonhole, uncut 7/8 inches long at each of the marks with the purling of the buttonhole on the outside of front. The purled edge of eyelet end of buttonhole shall be 5/8 inch from the front edge of jacket.	Buttonhole		38 Per (buttonhole not including bartack)	B (Silk)	F
	c. Securely bartack the end of each buttonhole, and trim the ends of gimp and threads.	Bartack		21 Per bartack	A (Silk)	A
29	Baste body lining to jacket.					
	a. Position the body lining on the inside of jacket with side and side back seam of lining matching the respective seam of jacket.					
	b. Tack the inside breast pocket to the interlining around the pocket seam allowance.	Hand				
	c. Fold the front lining at the shoulder in accordance with notches forming the chest pleat. Baste the entire length of the pleat and along the front edge of jacket allowing room for the lining to be turned under. The folded edge of the pleat on the outside of lining shall be toward the armhole.	301 or Hand				
	d. Baste from the lower end of pleat towards the lower edge of armhole, along the side seam and across the bottom edge, allowing room for the lining turn-up.	301 or Hand				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
29	Baste body lining to jacket. (cont'd)					
	e. Position the respective left and right side backs of lining and jacket in place, and with the back pleat of lining in line with the center back seam of jacket.					
	f. Baste the entire length of the pleat to the back center seam, allowing room for bottom turn-up.	301 or Hand				
	g. Baste lining to back parts, starting at side seam and basting along armhole and shoulder edges allowing room for shoulder pad.	301 or Hand				
	h. Turn under the front and bottom edges of lining and baste lining to jacket, catching the turned under portion in the basting and with the folded edge of the lining approximately 3/8 inch from front and bottom finished edges of jacket.	301 or Hand				
	i. The fullness in the lining shall be distributed throughout the jacket without excess fullness in any area.					
30	Felling lining to front and bottom turn-up.					
	a. Fell the turned under portion of the lining to the front and bottom turn-up of the jacket with blindstitching 1/4 to 3/8 inch from bottom folded edge of lining. Only the under ply of the folded bottom edge of lining shall be caught in the blindstitching.	301 or Hand	EFc-1 (b)	6-8 6-8	0 (Silk) C	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
31	Baste shoulder pad to jacket.					
	a. Position shoulder pad between interlining and chest padding and in line with front armhole edge. Securely tack the pad to the interlining and chest padding.	301 or Hand				
32	Seam shoulder.					
	Finished appearance. The shoulder seam shall be uniformly stitched and the fullness on the backs shall be properly placed in order that the shoulder may be properly shaped.					
	a. Join the fronts and back together at shoulders with a 3/8 inch seam, working in the proper fullness on the backs in accordance with good manufacturing practice.	301	SSa-1	10-14	A	
	b. Spread open the shoulder seam and press flat, holding the shoulder short, exercising care in the pressing in order not to effect a distorted appearance in the finished seam. The pressing shall be accomplished with a heated iron or pressing machine over a suitable block.					
33	Set shoulder straps.					
	Finished appearance. The shoulder straps in the finished jacket shall be flat against the shoulder without twists, puckers, pleats or any other distortion.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
33	Set shoulder straps. (cont'd)					
	a. Position the shoulder straps with the back edge of the strap 3/8 to 1/2 inch to the back of shoulder seam at the armhole, with the embroidery at the armhole end of the strap to finish 1/8 inch from the armhole seam, and with the round end of the strap to finish 1/4 to 3/8 inch from the collar.					
	b. Seam the shoulder straps to the jacket 1/4 inch from the armhole edge of jacket only. Trim shoulder strap even with the edge of armhole where necessary.	301	SSa-1	10-14	A	A
34	Baste lining at shoulder and neckline.					
	a. Position shoulder interlining and lining in place and baste the upper part of each shoulder on the outside through all plies. Turn the jacket on the inside.	301 or Hand				
	b. Turn under and lap the shoulder edge of the back lining on front lining; baste lining to jacket along the folded edge with top end of shoulder pleat caught in the basting. Baste the lining to the back part at the neck from shoulder seam to shoulder seam.	301 or Hand				
	c. Mark jacket 1/2 inch from top of neck across back from shoulder seam to shoulder seam. Continue the marking on the fronts along the gorge with the line of marking to taper 3/8 inch from top edge of gorge.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
35	Stitch neckline hanger and size label. Finished appearance. The neckline shall finish smooth and flat without twist, pleats, or distortion. The size label and the ends of hanger shall be positioned to the inside center back of jacket at the neck.					
	a. Join front and back lining to the jacket the entire length of neckline 1/4 inch from upper raw edge of neck and with the upper edge of size label and ends of hanger caught in the stitching.	301	SSa-1	10-14	A	A
36	Set collar. Finished appearance. The collar shall be carefully joined to the jacket without twists, puckers, pleats, raw edges, or distortion.					
	a. Mark neckline and gorge on the outside 1/2 inch from the top edge for proper positioning of collar.					
	b. Position the collar with the lower edge lapped on the outside top edge of jacket at the mark.					
	c. Seam the collar from end to end to the jacket 1/8 inch from the lower edge of the collar.	301	LSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
37	Set sleeves. Finished appearance. The sleeves shall uniformly set and the fullness evenly distributed. The armhole sleeve seam shall finish smooth and flat without twists, puckers, or pleats. The armhole shall not be stretched or distorted due to pressing. a. Position sleeves on outside of jacket at the armholes, with backarm seam of sleeve matching the side back seam notch and with notch in topsleeve and front armhole matching. b. Join the sleeve to the jacket with a 3/8 inch seam, distributing the fullness in accordance with good manufacturing practice and catching the ends of the shoulder straps in the stitching. c. Press the entire armhole seam smooth and flat with a heated pressing iron to remove the fullness. Spread open the upper part of the armhole-sleeve seam from backarm sleeve seam to approximately midway between shoulder seam and notch at front of armhole and press smooth and flat with a heated pressing iron. Care shall be exercised in pressing armhole seam in order not to stretch the armhole.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
38	Baste front and back part lining at armhole.					
	a. Baste back and front lining to jacket around the entire armhole, catching the shoulder pad in the basting distributing fullness evenly. Turn the jacket on the outside.	301 or Hand				
39	Baste armhole.					
	a. Baste the armhole on the outside adjacent to the armhole seam forcing out the armhole while basting. The basting shall extend from the backarm seam of sleeve to notch at the front.	301 or Hand				
40	Tack armhole and sleeve-heads.					
	Finished appearance. The armhole shall not be distorted or puckered due to stitching the sleeve-head pads and linings at armhole.					
	a. Position sleeve-head pad on each sleeve with the edge of pad approximately 1/8 inch back from the raw edge of the armhole seam, and with the front end of pad matching the notch in fronts.					
	b. Stitch sleeve-head pad to sleeve from end to end through the armhole-sleeve seam allowance 1/8 inch from the folded edge of pad, catching the front and back part lining and shoulder pad in the stitching. Continue stitching the lining around the remainder of armhole, trimming away the excess material.	301	SSa-1	4-6	30/3	30/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
41	Fell back and front lining at shoulders.					
	a. Fell back and front lining together at the shoulders, securing the top end of pleat in the felling. The felling shall be placed over the folded edge of the back lining.	Hand		8-10		C (Silk)
42	Fell sleeve linings.					
	a. Position sleeve lining at the armhole with back and forearm seams of sleeves and linings aligned. Turn under the armhole edge of sleeve lining and lap the linings on the outside of the front and back part. Fell the sleeve lining to jacket around entire armhole, placing the fell stitches over the folded edge of sleeve lining, distributing the fullness in accordance with good commercial practice, and backstitching the lower armhole sleeve edge from approximately 1-1/2 inches to the front of forearm sleeve lining seam to the side seam of body lining.	Hand		8-10		C (Silk)
43	Sew hook and eye to collar.					
	Finished appearance. The hook and eye shall be positioned to engage each other affecting a flat, smooth closure at the front of collar without misalignment or gap.					
	a. Position and securely sew the hook to the right end and the eye to the left end of the collar.	Hand		10 Per Hook and eye (minimum)		C (Silk) (doubl thread

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
44	Finish collar.					
	a. Securely tack lower corners of the collar to the jacket.	Hand		8-10		C
	b. Turn under the bottom, upper corners and ends of collar lining and position on the neckline and collar respectively. The folded edge of lining on the right end of collar shall be positioned under the hooks and on the left end shall be positioned over the eye.					
	c. Fell the bottom edge of collar lining from end to end, fell the ends and upper corners and collar lining joining seam. The collar lining may be basted before felling to collar.	Hand		8-10	C (Silk)	
	d. Position the collar tab on the inside of collar at the left end with the collar tab extending approximately 3/4 inch beyond from the front end of collar. Fell the top, back and bottom edges of tab to collar lining.	Hand		8-10		C (Silk)
45	Clean jacket.					
	a. Pull and remove any basting thread, trim and remove any loose ends of thread, and remove any spots, stains, and shade tickets and markings without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
46	Press jacket. Finished appearance. The jacket shall be well pressed throughout with a heated pressing iron or pressing machine of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing practices. a. Press the fronts smooth and flat, straightening and shaping the front edges and working the fullness towards the chest. Care shall be exercised in pressing the fronts so that the bottom edges are even. b. Press the entire collar smooth and flat. c. Press fronts on a body machine, shrinking in and properly shaping the chest. d. Press bottom edge of jacket smooth and flat exercising care that the lining is not exposed below the bottom edge. e. Press the sides, working the fullness towards the back. f. Press the back smooth and flat, removing all fullness. g. Press the shoulder smooth on a shoulder shaping machine with shoulder straps away from shoulder seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB. LPR
46	Press jacket. (cont'd) h. Block armholes solid from the inside, creasing the edge of the jacket armhole seam allowance in front, back, and lower part of the armhole. i. Press the sleeves smooth and flat, creasing at the backarm and forearm. The backarm crease shall be on the backarm seam. The forearm crease shall extend from bottom of sleeve up to half the inseam length and the backarm crease 3 to 5 inches above the forearm crease. j. Remove all wrinkles and impressions under the collar and shoulder straps. k. Press pleat at shoulder of front lining and center back lining smooth and flat. l. Press lining throughout with a heated pressing iron, removing all wrinkles.					
47	Mark for buttons. a. Mark the location for sewing thirteen 27-line insignia buttons on the right front in accordance with the button marker. b. Mark the location for one 27-line insignia button to each shoulder corresponding with eyelet in the shoulder strap, with the strap flat against the shoulder.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
47	Mark for buttons. (cont'd)					
	c. Mark the location for five 18-line sewing hole buttons on the inside of collar lining in accordance with the buttonholes on the white collar.					
	NOTE: The officer has the option to furnish the supplier the white collar when ordering the jacket.					
48	Sew on buttons.					
	a. The buttons shall be securely sewn to the jacket with the thread ends securely tacked off.					
	b. Insert one 27-line insignia button through the eyelet hole and sew at the mark on each shoulder. The buttons shall not be sewn through the lining.	Hand		4-6 Per button (double thread)		16/4
	c. Sew one 27-line insignia button at each of the marks in the right front. The buttons shall not be sewn through the lining.	Hand		4-6 Per button (double thread)		16/4
	d. Sew one 18-line sewing hole button at each of the marks on the inside of collar. The buttons shall not be sewn through the collar lining.	Hand		4-6 Per button (double thread)		16/4
	e. The insignia buttons on the front shall be sewn with the eagle upright. The shoulder buttons shall be sewn with the eagle in an upright position towards the lower edge of the collar.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
49	Sleeve patches.					
	a. Prefabricated sleeve patches shall be positioned with the scallop edges towards the backarm seam; the front edges in line with the forearm crease and bottom edge 1/8 to 3/16 inch above the finished bottom turn-up of sleeves (see Figure 1). Patches shall be securely felled to the sleeves on the underside of the patches.	Hand		4-6		C (Silk)
51	Grade patches.					
	a. Insignia of grade patches shall be positioned and stitched to shoulder strap 5/8 inch from the outer row of the synthetic gold border (see Figures 6 through 10).	Hand				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished jacket shall conform to the measurements shown in Table II.

Table II. Finished measurements 1/

Size	Breast 2/	Back Length 3/ inches	Sleeve Length 4/ inches	Collar 5/ length inches	Collar width inches
		Short			
36	34	20	17	16	1-3/4
38	36	20	17	16-1/2	1-3/4
40	38	20	17	17	1-3/4
42	40	20	17	17-1/2	1-3/4
44	42	20	17	18	1-3/4
		Regular			
36	34	21	18	16	2
38	36	21	18	16-1/2	2
40	38	21	18	17	2
42	40	21	18	17-1/2	2
44	42	21	18	18	2
46	44	21	18	18-1/2	2
		Long			
36	34	22	20	16	2
38	36	22	20	16-1/2	2
40	38	22	20	17	2
42	40	22	20	17-1/2	2
44	42	22	20	18	2
46	44	22	20	18-1/2	2
		Extra Long			
36	34	23-1/2	21	16	2
38	36	23-1/2	21	16-1/2	2
40	38	23-1/2	21	17	2
42	40	23-1/2	21	17-1/2	2
44	42	23-1/2	21	18	2

1/ Tolerance on all measurements except collar: ± 3/8 inch. Tolerance for collar length measurement: ± 1/4 inch.

2/ Breast measurements taken from front edge of jacket to center back seam in line with pit of armhole.

3/ Back length measurement shall be taken along center back seam from lower edge of collar to bottom edge of jacket.

4/ Sleeve length measurement shall be taken along forearm seam from pit of armhole to bottom edge of sleeve.

5/ Collar sizes represent length of collar in inches measured from end to end along the center.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

6/ Collar width is measured from top folded edge to bottom folded edge.

3.8 Workmanship. The finished jackets shall conform to the quality o grade of product established by this specification. The occurrence o defects shall not exceed the levels set by the applicable acceptable qualit levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in th contract or purchase order, the contractor is responsible for the performanc of all inspection requirements as specified herein. Except as otherwis specified in the contract or order, the contractor may use his own or an other facilities suitable for the performance of the inspection requirement specified herein, unless disapproved by the Government. The Governmen reserves the right to perform any of the inspections set forth in th specification where such inspections are deemed necessary to assure supplie and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificate of compliance i submitted, the Government reserves the right to check test such items t determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specifie herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. All inspections shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated jacket for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in FED-STD-191, wherever applicable. Testing shall be performed on components listed in Table IV for characteristics noted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with Table III. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The unit for expressing lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Lot Size	Sample Size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The unit for expressing lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specifications as follows:

Component	Expressed as:	Sample unit for testing
Padding for front interlining	yards	1/4 yard full width
Hook and eye	100 ea.	2 ea., hook and eye
Buttons (each type and size)	gross	20 ea.
Ring toggles	gross	20 ea.
Threads (all sizes) 1/	bobbins (when used)	Sufficient number of bobbins to total a minimum of 360 yards

1/ When threads are purchased in the form of cones or spools and on bobbins, thread from each shall be tested.

4.5.1.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

Table IV

	Characteristics	Rqmt Para	Test Method	Det Per S/Units	Results reported as
Padding, flannel (for collar)	Material Ident. 1/	3.3.7	1200	1	Pass or fail.
	Weight-oz/sq yd.	3.3.7.2	5041	5	Avg. of the 5 det to nearest 0.1 oz.
	Texture	3.3.7.2.1	5050		To the nearest whole no.
	Breaking strength	3.3.7.2.1	5100		Avg. of the 5 det in each direction
	Shrinkage	3.3.7.2.1	5550		To the nearest 0.1%
Haircloth	Material Ident. 1/	3.3.7.3	1200	1	Pass or fail.
	Texture	3.3.7.3	5050	3	To the nearest whole number.
	Weight oz/sq. yd.	3.3.7.3	5041	5	To the nearest 0.1 oz.
	Non-Fibrous Material	3.3.7.3	2611	2	To the nearest %.
Hook and eye	Material Ident. 1/	3.3.15	std com'l	1	Pass or fail.
	Finish	3.3.15.1	std com'l	1	Pass or fail.
	Finish (Tackiness)	3.3.15.1	4.6.2	1	Pass or fail.
	Design Measurements	Fig. 5 Fig. 5	Visual		

1/ Accept a certificate of compliance for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.2 Examination of end item. The classification of defects found during the examination shall be in accordance with list shown in 4.5.2.2, 4.5.2.3, and 4.5.2.4.

4.5.2.1 Classification of defects. All defects shall be classified as indicated below:

Major defect - When seriously affecting appearance or serviceability.
Minor defect - When affecting appearance or serviceability but not seriously.

4.5.2.2 General defects.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Buttonholes (construction)	a. One or more omitted or added.	101		
	b. Wrong type or cut.		201	
	c. Buttonhole less than 3/4 inch or more than 1 inch (measure at inside or purling.		202	
	d. Bartack missing or loose on:			
	-one buttonhole.		203	
	-two or more buttonholes.	102		
	e. Bartack misplaced not serving intended purpose on:			
	-one buttonhole.			204
	-two or more buttonholes.		205	
	f. One or more broken stitches in:			
	-one buttonhole.		206	
	-two or more buttonholes.	103		
	g. More than 2 skipped stitches in:			
	-one buttonhole.			207
	-two or more buttonholes.		208	
	h. Ends of gimp or thread not trimmed or poorly trimmed.		209	
	i. Gimp omitted in one or more buttonholes.		210	
	j. Stitches per buttonhole (not including bartack) less than the minimum specified:			211
	-one or two stitches.		212	
	-three or more stitches.	104		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Buttonholes (construction) (cont'd)	k. One or more buttonholes finished with purling on the underside.	105		
Buttons or ring toggles	a. Missing, loose, broken, or defective:			
	-1 button or ring toggle.		213	
	-2 or more buttons or 2 or more ring toggles.	106	214	
	b. Not specified type, size, color or finish.		215	
	c. One or more buttons on right front sewn with the head of the eagle in other than upright position.			21(
	NOTE: Buttons shall be considered defective if they have sharp, rough or cracked edges; scratches, blemished or embeded foreign matter on face side of button, loose shanks; or badley shaded.			
Cleanness	a. One or more spots or stains clearly noticeable, outside of jacket.		217	
	b. One or more spots or stains clearly noticeable, inside of jacket.			218
	c. Thread ends not trimmed throughout garment, or one or more bastings not removed, or two or more shade tickets not removed.		219	
Components and assembly	a. Any defective component or defect of assembly (not herein classified).	1		
	b. Any component part or required operation omitted (not herein classified).	2		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Cutting	a. Any component part of basic wool material not cut in accordance with directional lines on patterns, or in accordance with specification requirements.	107		
	b. Any lining part not cut in accordance with directional lines on patterns.			220
Eyelets (construction)	a. One or more omitted or added.	108		
	b. Wrong type.		221	
	c. Eyelet stitching not securely caught on fabric, causing stitching to pull away from fabric.		222	
	d. Diameter of inside opening less than 1/8 inch or more than 1/4 inch.			223
	e. One or more eyelet uncut.		224	
	f. One or more broken stitches in:			
	-one eyelet.			225
	-two or more eyelets.		226	
	g. More than two skipped stitches in one or more eyelets.			
	h. One or more eyelets finished with the purling on the underside.		227	
Hook and eye	a. Hook or eye omitted.	109		
	b. Not specified type or size.		228	
	c. Not aligned, causing collar ends to be uneven by 1/4 inch or more when hook and eye are fastened.		229	
	d. Hook or eye not securely tacked to ends of collar.		230	
	e. Hook or eye misplaced, i.e., hook positioned on left end eye positioned on right end of collar.		231	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Material defects and damages	a. Any weakening defect such as smash, multiple float, loose slub, etc., that may develop into a hole.	3		
	b. Any hole.	4		
	c. Shade bar, unsightly slubs, etc:			
	-on outside.	5		
	-on inside.			232
	d. Needle chews which may develop into a hole.	6		
	e. Scissors or knife cut, tear, mend or burn.	7		
	NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on seviceability are to be classified as follows:			
Pressing	a. Burned or scorched.	8		
	b. Pressing omitted (entire garment).	110		
	c. Poorly pressed (unless otherwise classified).	111		
	d. Armhole stretched, affecting appearance.		233	
	e. Basting or pressing impressions not removed on major portions of jacket.		234	
	f. Gloss not removed throughout jacket, affecting appearance.		235	
	g. Armholes not blocked or blocked poorly.	112		
	h. Inside of armholes not pressed solid.	113		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Pressing (cont'd)	i. Edges bulky, i.e., not pressed solid affecting appearance.		236	
	j. Sleeves not creased as required on forearm and back arm seam.		237	
	k. Armhole sleeve seam not pressed open from backarm seam of sleeve and across top as specified.	114		
	l. Linings not pressed smooth.			238
Seams and stitching	a. Accuracy of seaming:			
	1. Any seam twisted, puckered,or pleated, affecting appearance.	115		
	2. Part of garment caught in any unrelated operation or stitching.	9		
	3. Unsightly hand felling or blindstitching exposed on outside of jacket affecting appearance.		239	
	4. Ends of all stitching (when not caught in other seams or stitching not backtacked or back-stitched as required.			240
	5. Wrong color of thread used on outside of jacket affecting appearance.	10		
	b. Gage of stitching (edge or raised stitching).			
	1. Irregular, i.e., unevenly gaged, or various stitchings not uniform, affecting appearance.		241	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			242

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Seams and stitching	c. Open seams.			
	1. On outside:			
	-up to 1/4 inch inclusive.			243
	-more than 1/4 inch but not more than 1/2 inch.		244	
	-more than 1/2 inch.	116		
	2. On inside:			
	-more than 1/2 inch (except machine felling).		245	
	-up to 1/2 inch inclusive (except machine felling).			246
	-up to 1 inch inclusive (machine felling).			247
	-more than 1 inch (machine felling).		248	
	NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches constitute an open seam.			
	d. Raw edges.			
	1. On outside:			
	-up to 1/8 inch inclusive.			249
	-more than 1/8 inch but not more than 1/4 inch.		250	
	-more than 1/4 inch.		251	
	2. On inside:			
	-more than 1/8 inch but not more than 1/4 inch.			252
	-more than 1/4 inch.		253	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Seams and stitching	NOTE: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under. Raw edges not caught in stitching shall be classified as an open seam.			
	e. Run-offs (see classification of open seams).			
	f. Stitch tension:			
	1. Loose tension resulting in loose seam.	117		
	2. Loose tension on raised or edgestitching, resulting in loosely exposed bobbin or top thread.			254
	3. Tight tension (stitches break when normal strain is applied).	118		
	NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspection shall test by exerting pull in lengthwise direction of seam.			
	g. Stitches per inch (excluding labels). Less than minimum specified:			
	-one or two stitches.			255
	-three stitches.		256	
	-four stitches or more.	119		
	-one or more stitches on labels.			257
	NOTE: To be scored only if condition exists on major portion of seam.			
	h. Stitch and seam type: Wrong stitch or seam type.		258	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Seams and stitching	i. Stitching skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched):			
	-1/4 inch or more but not more than 1/2 inch.			259
	-more than 1/2 inch.		260	
Shaded parts	a. On outside.	11		
	b. On inside.			
	1. Any lining part badly shaded (except sleeve lining).		261	
	2. Any lining part badly shaded or pairs of sleeve linings not matching each other.			262
Ornamentation	a. Any part of ornamentation defective or damaged.	12		

4.5.2.3 Detailed defects. (Jacket fastened at collar on form or spread on a table).

Collar (construction and setting)	a. Buckram interlining omitted.	120		
	b. Polyester/twill interlining omitted.		263	
	c. Buckram or polyester/twill interlining tight or twisted causing puckers on collar, affecting appearance.		264	
	d. Tight at joining to front or back, causing puckers or pleats at neck of jacket, affecting appearance.	13		
	e. Distance between 1 or more edges of collar and outer row of synthetic gold border irregular, affecting appearance.		265	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Collar (construction and setting)	f. Distance between 1 or more edges of collar and outer row of synthetic gold border 1/16 inch or less or more than 3/16.	121		
	g. Collar ends overlapping when fastened.		266	
	h. Collar ends spread open by 3/8 inch when fastened.		267	
	i. Center of eyelets from finished ends of collar: -less than 1-3/4 inches but not less than 1-5/8 inches or more than 1-7/8 inches but not more than 2 inches.			268
	-less than 1-5/8 inches or more than 2 inches.		269	
	j. One or both eyelets off-center with top and bottom edges of collar by 1/4 inch or more.		270	
	k. Collar off-center by more than 3/8 inch.		271	
	l. Collar irregular in width by 1/8 inch or more.		272	
Shoulder (construction)	a. Improperly joined or set causing shoulders or back to twist.		273	
Shoulder pads	a. Not completely caught in armhole tacking.		274	
	b. Misplaced not serving intended purpose, i.e., too far back or too far forward.		275	
	c. One or both pads omitted.		276	
Shoulder straps (construction and setting)	a. Misplaced, i.e., one strap further forward or back from position of other strap, affecting appearance.		277	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Shoulder straps (construction and setting)	b. Misplaced, so that it will not lie flat when buttoned causing bulge or twist on strap.	14		
	c. Poorly shaped.			278
	d. Shoulder seam exposed beyond back edge of shoulder loop (except rounded end).		279	
	e. Rounded end of shoulder strap positioned less than 1/4 inch or more than 3/8 inch from collar edge.			280
	f. Upperside of strap full or twisted, affecting appearance.			281
	g. Back edge of strap less than 1/4 inch or more than 1/2 inch from shoulder seam at armhole.			282
	h. Distance between 1 or more edges of shoulder strap or at armhole end and outer row of synthetic gold border irregular, affecting appearance.		283	
	i. Distance between 1 or more edges of shoulder straps or at armhole end and outer row of synthetic gold border 1/16 inch or less or more than 3/16 inch.	122		
Shoulder strap and button	a. Button not aligned with eyelet causing a bulge or twist on strap or puckers on shoulder, affecting appearance.		284	
	b. Buttons not uniformly set by more than 1/4 inch.		285	
	c. Eyelet 1/4 inch or more off center.		286	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Shoulder strap and button	d. Eyelet from rounded edge: -less than 5/8 inch but not less than 1/2 inch or more than 3/4 inch.			287
	-less than 1/2 inch.		288	
Shoulder strap location of insignia rank (patches)	a. Misplaced on shoulder strap.		289	
Armholes (construction)	a. Badly stretched, affecting appearance.	15		
	b. Taped too tight, causing puckering around armhole seam affecting appearance.	16		
	c. Crooked seam, affecting appearance.		290	
	d. Tape stitching exposed and visible on outside surface.			291
	e. Sleeve-head pads not completely tacked to armholes, or misplaced not serving intended purposes.		292	
	f. One or both sleeve-head pads omitted.			293
Sleeves	a. Setting and hang:			
	1. Sleeve fullness misplaced affecting appearance.			294
	2. Backarm seam of sleeve not equally positioned from back side body seam by:			
	-more than 1/4 inch but not more than 1/2 inch.		295	
	-more than 1/2 inch.	123		
	3. Hang of sleeves on the same coat in opposite direction by more than 2 inches.		296	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Sleeves (cont'd)	4. Sleeve tight in armhole, i.e., roll effect not present.		297	
	b. Sleeve lining:			
	1. Twisted, tight, or short, causing bulge, twist or puckering on outside of sleeves.	17		
	2. Sleeve lining too long, causing lining to sag at bottom more than 1/2 inch.			298
	3. Sleeve lining seams out of alignment more than 3/4 inch with sleeve seams at armhole or at bottom of sleeves.			299
	c. Construction of sleeves:			
	1. Wigan twisted, tight or pleated, causing ridges or puckering on outside of bottom of sleeves, affecting appearance.		201a	
	2. Tacking on bottom turn-up to wigan omitted or insecure.		202a	
	3. Sleeve bottom edge un even by more than 1/4 inch.			203a
	4. Tacking on 1 or both sleeve lining seams to sleeve seams omitted, or insecure.			204a
	5. Bottom edge of sleeve lining turn-up less than 1 inch or more than 1-1/2 inches up from bottom edge of sleeve.			205a
	6. Bottom turn-up less than 1-3/4 inches or more than 2-1/4 inches.			206a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Sleeves (cont'd)	d. Sleeve ornamentation patch (construction and setting):			
	1. Distance between top, front or bottom edge of sleeve patch and outer row of synthetic gold border, irregular affecting appearance.		207a	
	2. Distance between top, front or bottom edge of sleeve patch and outer row of synthetic gold border 1/16 inch or less or more than 3/16 inch.	124		
	3. Bottom edge of sleeve patch positioned less than 1/8 inch or more than 3/16 inch from bottom edge of sleeve.		208a	
	4. Sleeve ornamentation patch set on crooked, affecting appearance.		209a	
	5. Sleeve ornamentation patch insecurely felled.		210a	
	6. Sleeve ornamentation patch reversed, i.e., left patch on right sleeve or right patch on left sleeve.	125		
Body (outside)	a. Fitting of body linings: Tight, short, or twisted, causing fullness or twist on outside of coat, affecting appearance.	18		
	b. Fitting of front interlining			
	1. Tight, short or twisted causing fullness or twist on outside of coat, affecting appearance.	19		
	2. Too full, causing coat front to have a wavy appearance.	20		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Waist darts	a. One or both omitted.	126		
	b. Top or lower end on one or both darts not properly tapered causing bulge or fullness, affecting appearance.		211a	
	c. Equal length of darts not uniform by 1/4 inch or more.			212a
	d. Alignment of both waist darts: -top or bottom end out of horizontal alignment by 1/4 inch or more.			213a
	e. Folded edge not pressed towards side seam.			214a
	f. Not pressed smooth and flat.		215a	
	g. Top or lower end on one or both darts not securely backstitched.		216a	
Length of fronts	a. Fronts uneven in length by 1/4 inch but not more than 1/2 inch.		217a	
	b. Fronts uneven in length by more than 1/2 inch.	127		
Front and bottom edges	a. Front edge stretched or puckered, affecting appearance.		218a	
	b. Bottom edge stretched or puckered, affecting appearance.		219a	
	c. Front or bottom edge irregular, affecting appearance.		220a	
	d. One or both bottom corners or center point on bottom of back poorly shaped, affecting appearance		221a	
Fold back on fronts and bottom	a. Short, tight or twisted, causing fullness or twists on front or bottom, affectin appearance.	21		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Back side panels	a. Curved panel seam on back of jacket, stretched or distorted, affecting appearance.			222a
Front buttonhole (position)	a. Top or bottom buttonhole positioned more than 1/2 inch from position indicated on buttonhole marker.		223a	
	b. More than 1/4 inch from equal spacing.		224a	
	c. Unevenly spaced from front edge by more than 3/16 inch.		225a	
	d. Position from front edge to purled edge of eyelet: -less than 1/2 inch but not less than 3/8 inch or more than 3/4 inch but not more than 7/8 inch.			226a
	-less than 3/8 inch or more than 7/8 inch.		227a	
Front buttons (position)	a. Front buttons not horizontally aligned with buttonholes by more than 1/4 inch.		228a	
	b. Position of buttons from front edge of jacket more than 1/4 inch from position indicated on button marker, or out of vertical alignment by 1/4 inch or more.		229a	
Labels	a. Any required label missing, incorrect or illegible.	128		
	b. Size label not securely caught in stitching.		230a	
	c. Combination label not stitched on four sides.			231a
Hanger	a. Hanger omitted or ends not securely stitched.		232a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Inside breast pocket	a. Inside pocket omitted.	129		
	b. Tacking of breast pocket to interlining omitted or insecure.		233a	
Body linings	a. Excessive puckering or pleats.			234a
	b. Twisted not affecting smoothness on outside of jacket.			235a
	c. Shoulder pleat omitted.		236a	
	d. Pleat omitted at center of back lining.		237a	
	e. Lining exposed beyond front or bottom edge.	130		
Inside of armhole	a. Backstitching or felling stitching omitted at armpit of sleeve.	131		
Collar tab	a. Omitted.	132		
	b. Extending less than 1/2 inch or more than 1 inch beyond left end of collar.		238a	
	c. Felling stitches insecure or not felled at top back or bottom edge.		239a	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.2.4 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in Table II shall be classified as a size measurement defect. Sleeve lengths uneven by 1/2 inch or more shall be classified as a size measurement defect.

4.5.2.5 Inspection levels and acceptable quality levels. Inspection levels and acceptable quality levels shall be as stated in the contract or purchase order.

4.5.3 Examination of packaging. An examination shall be made to determine 553-57
compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of jackets per container is more or less than required.

5. Packaging.

5.1 Preservation. Preservation shall be in accordance with ASTM D 3951.

5.2 Packing. Jackets preserved ass specified in 5.1, shall be packaged in accordance with ASTM D 3951.

5.3 Markings. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

6. NOTES

(Information in this section is of a general or explanatory nature which may be helpful, but is not mandatory).

6.1 Intended use. The jackets described herein are intended for wear by male officers of the U. S. Marine Corps.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1. Procurement requirements.

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of jackets in first article (see 3.2).

6.3 Samples and shade samples. For information regarding availability of sample jackets and standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1 through 6 show general design of the jackets with assembly details and measurements. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

6.6 Subject term (key word) listing.

Dress
Jacket
Men's

Preparing Activity

Navy - MC

Project No. 8405-N230

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

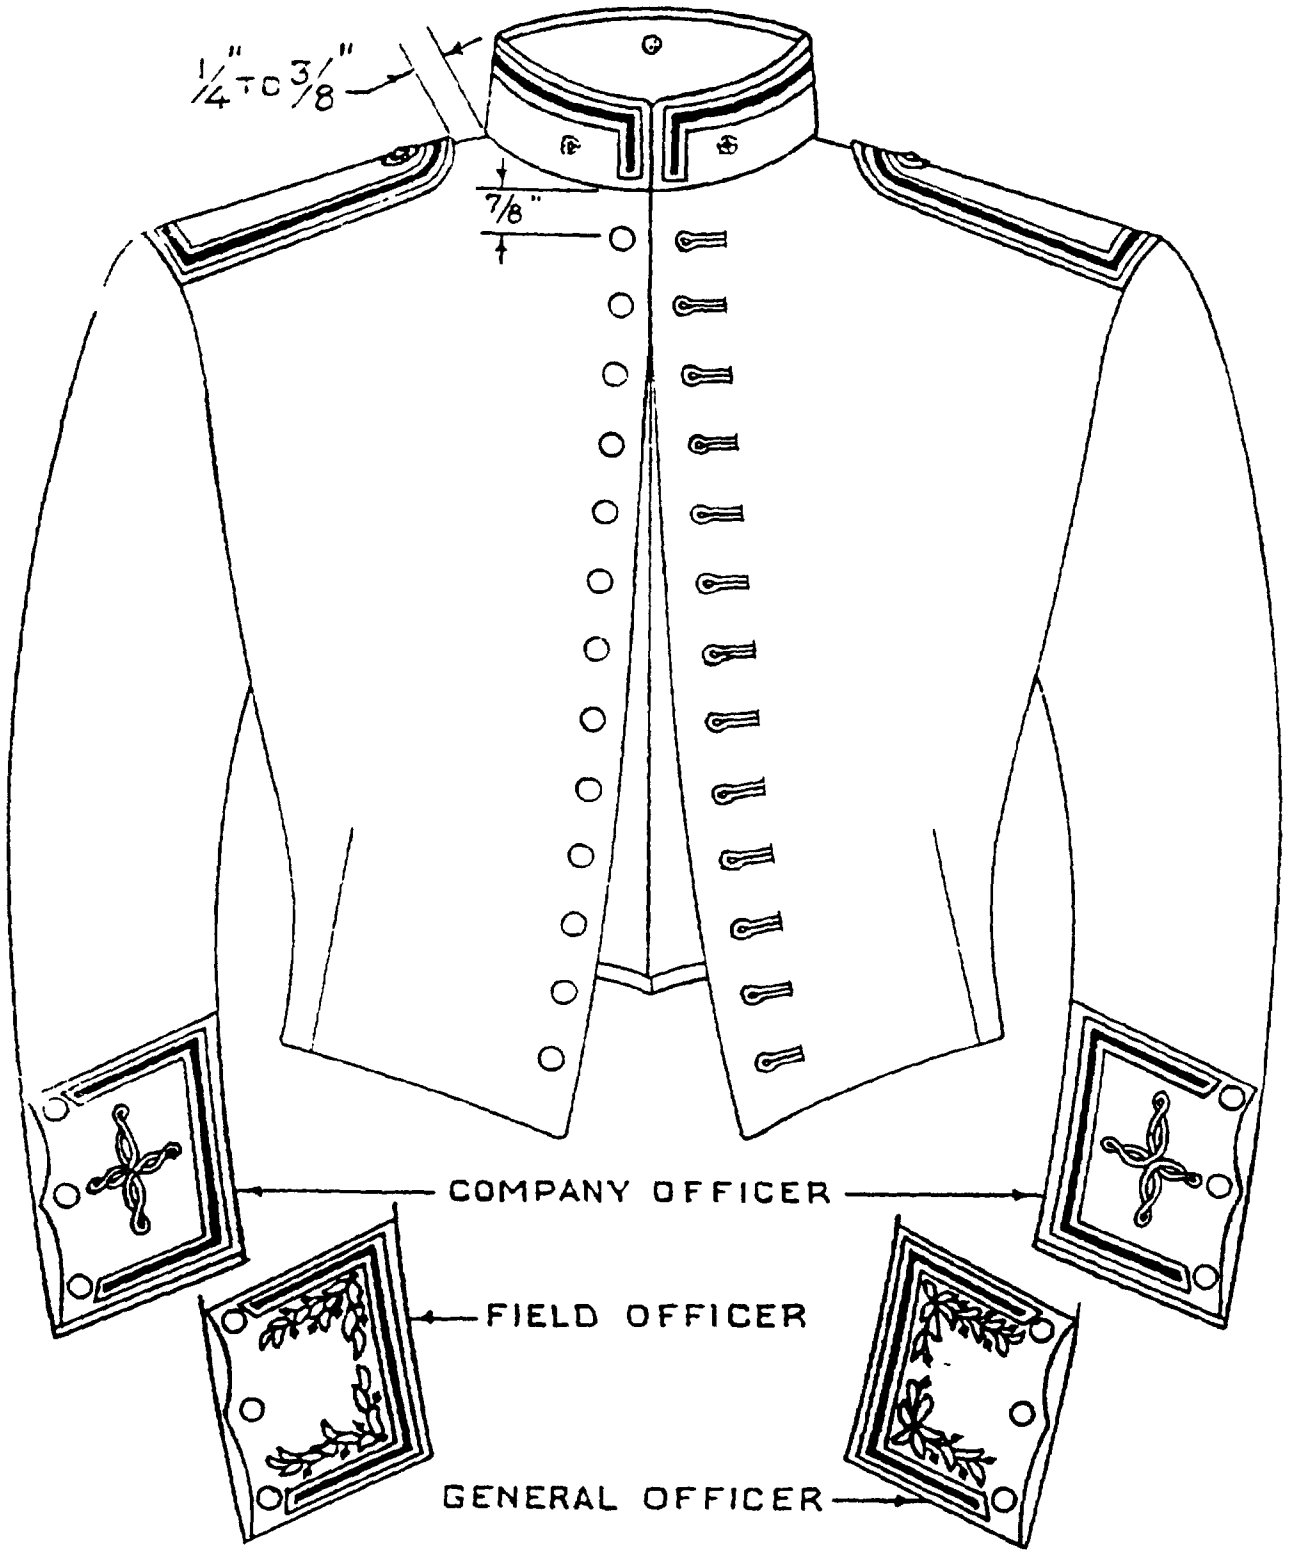


FIG. 1. JACKET, MAN'S: EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.


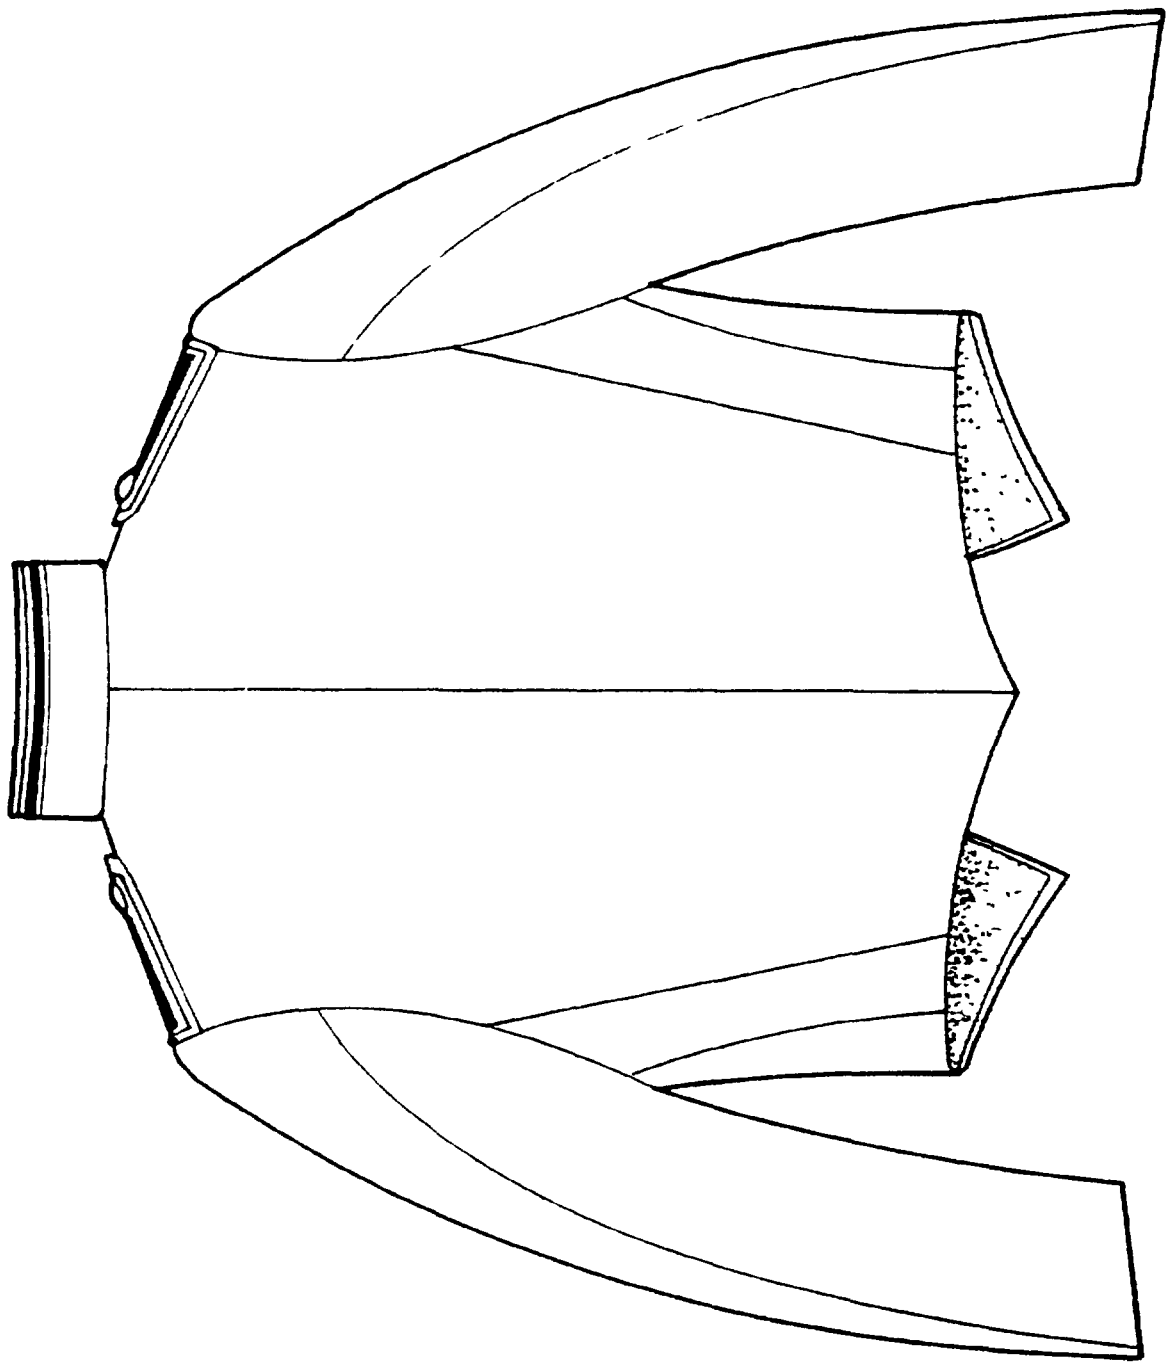


FIGURE 2. JACKET, MAN'S: EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

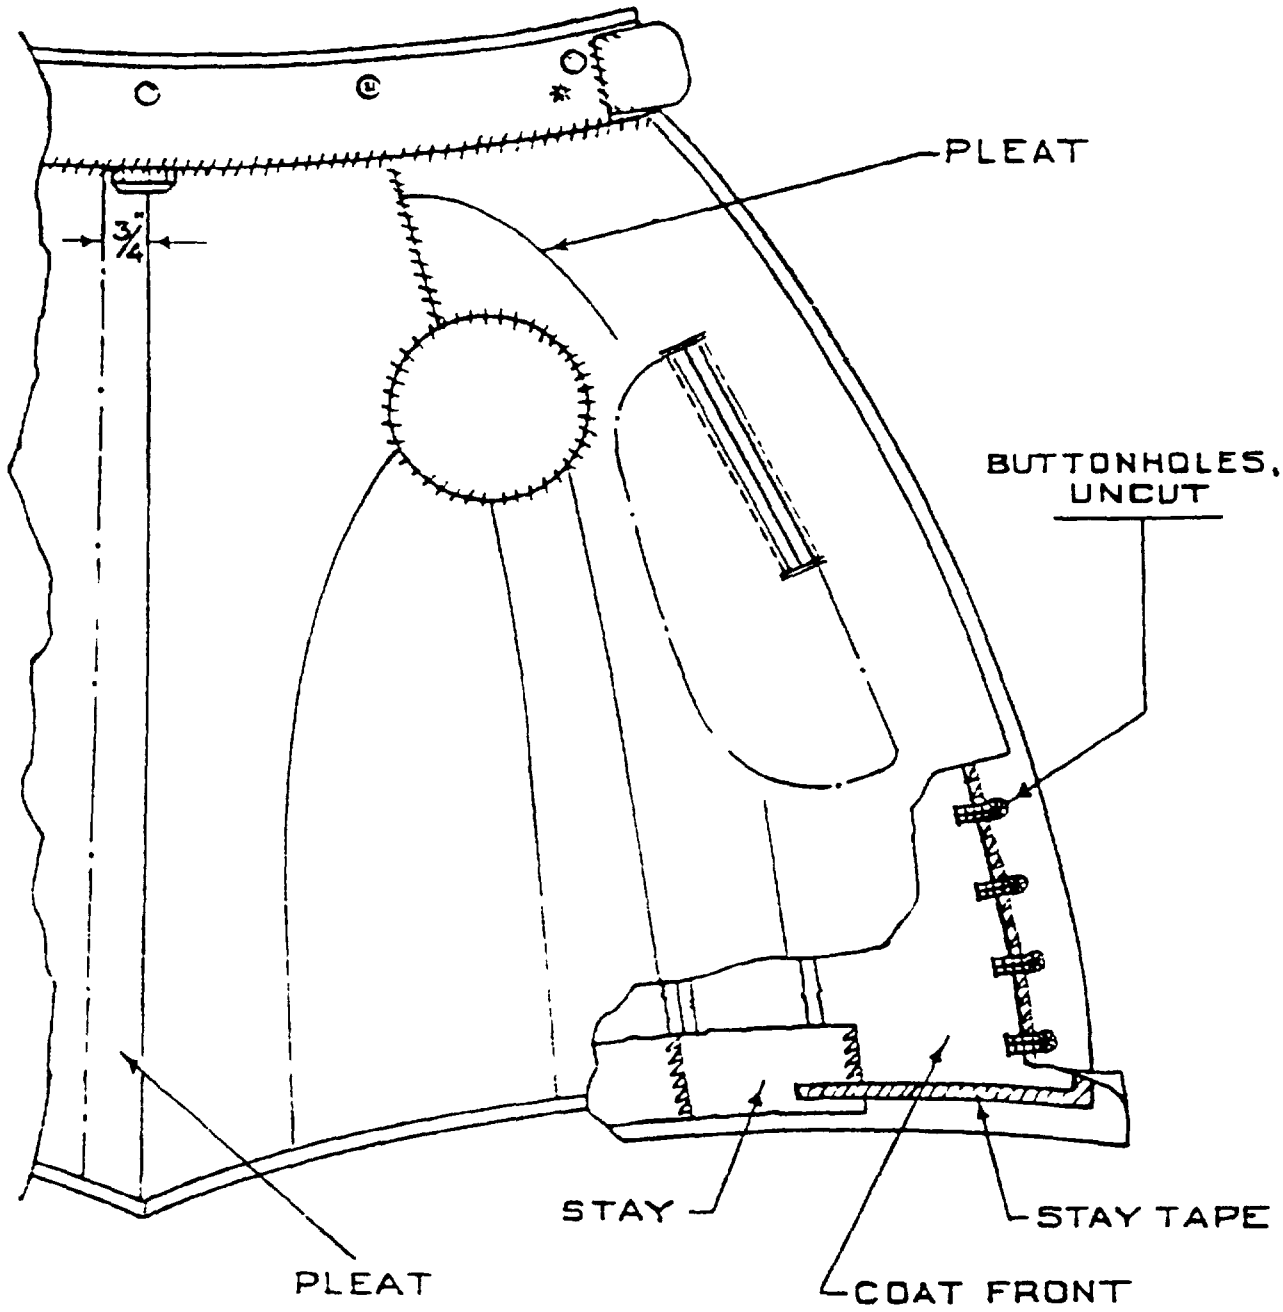

JACKET IS FULLY LINED

LEFT INSIDE— CUT-THRU VIEW

FIG. 3. JACKET, MAN'S: EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

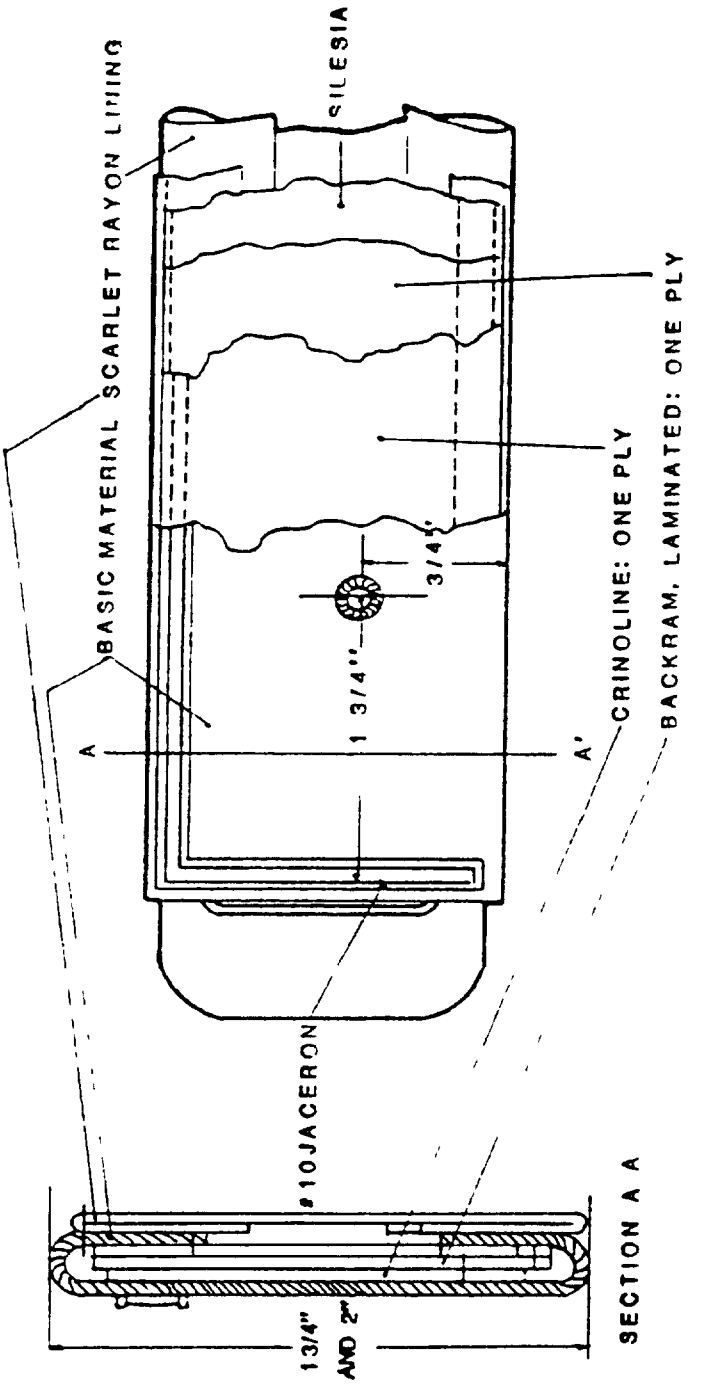


FIGURE 4. JACKET, MAN'S' EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.


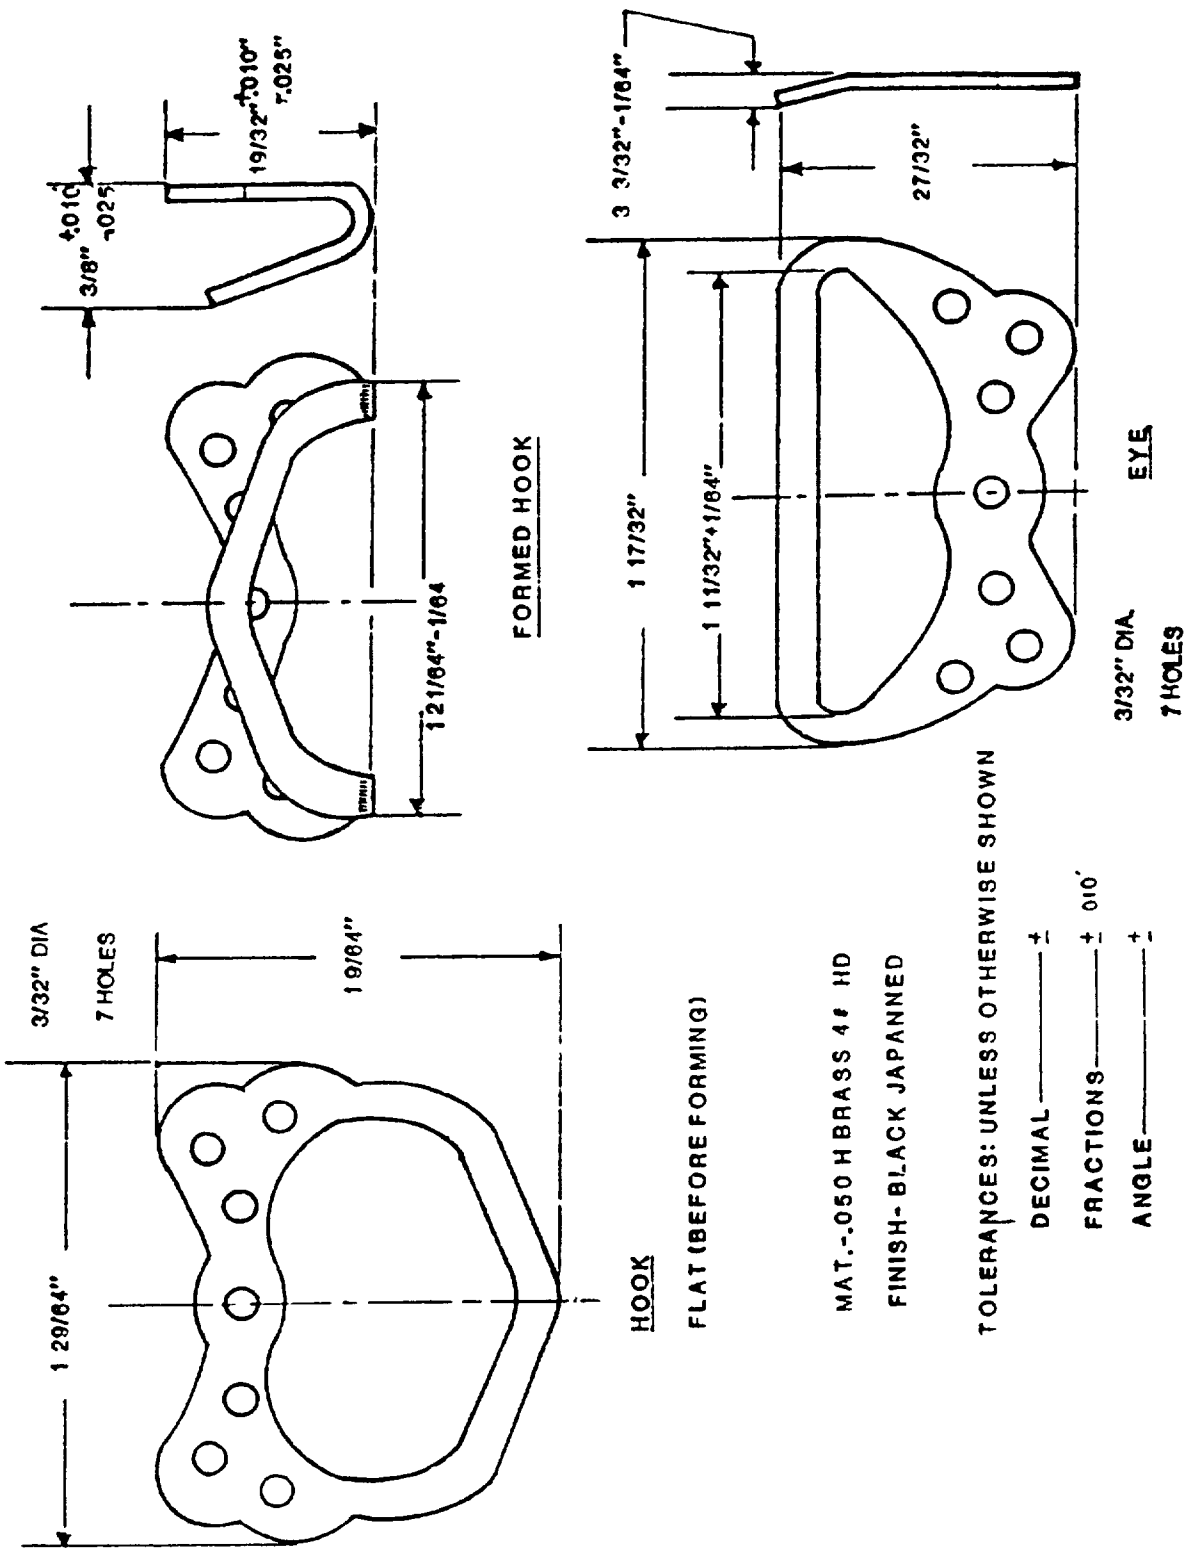


FIGURE 5. JACKET, MAN'S: EVENING DRESS (OFFICER'S) HOOK & EYE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

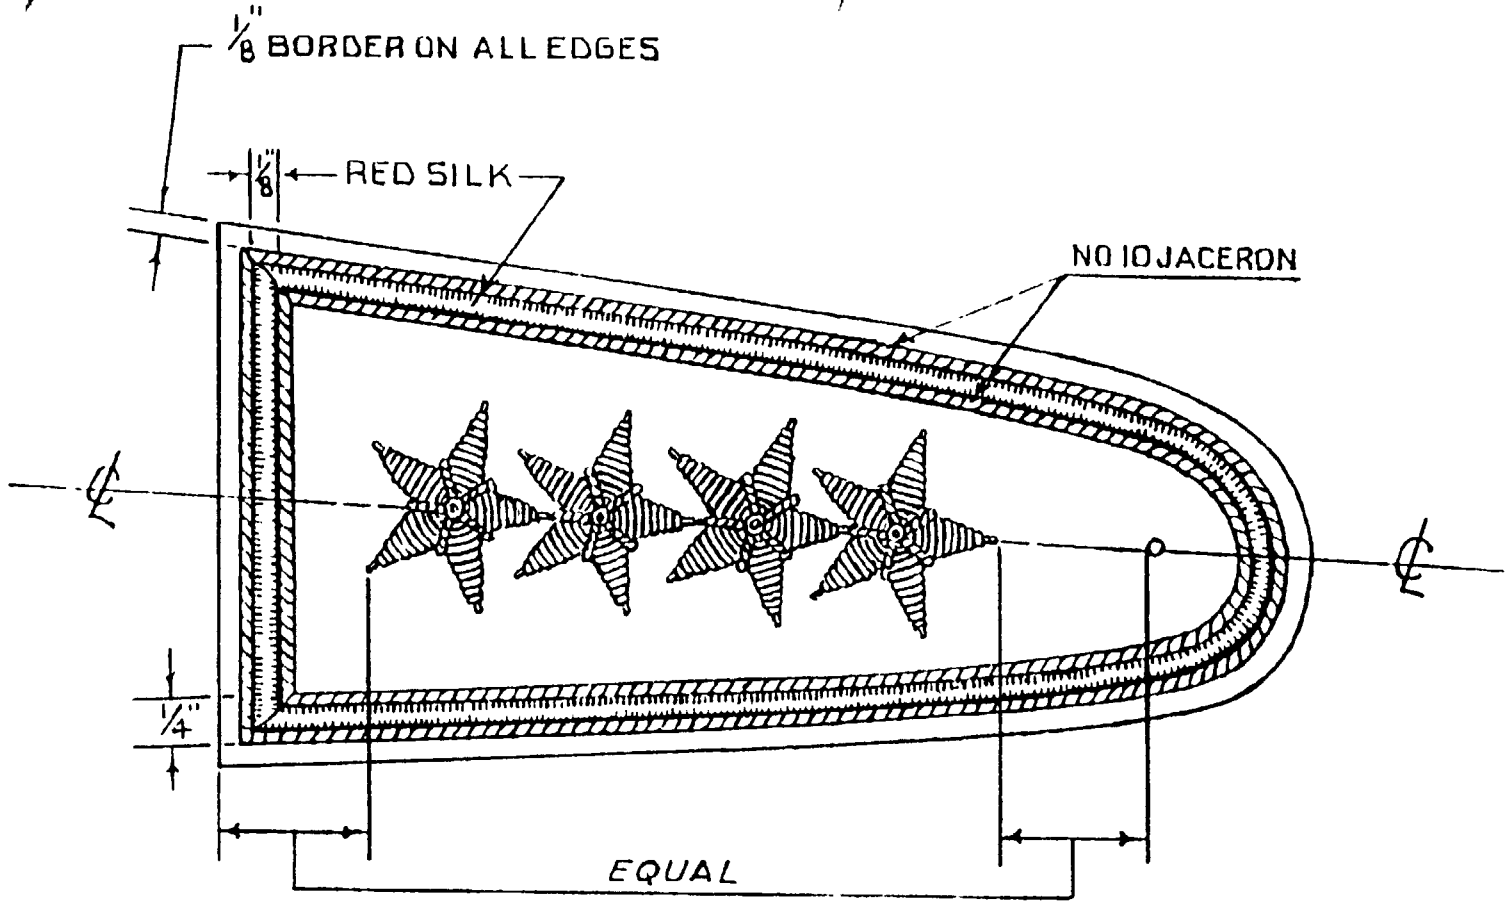


GENERAL

SHOULDER STRAP

FIG. 6. JACKET, MAN'S; EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

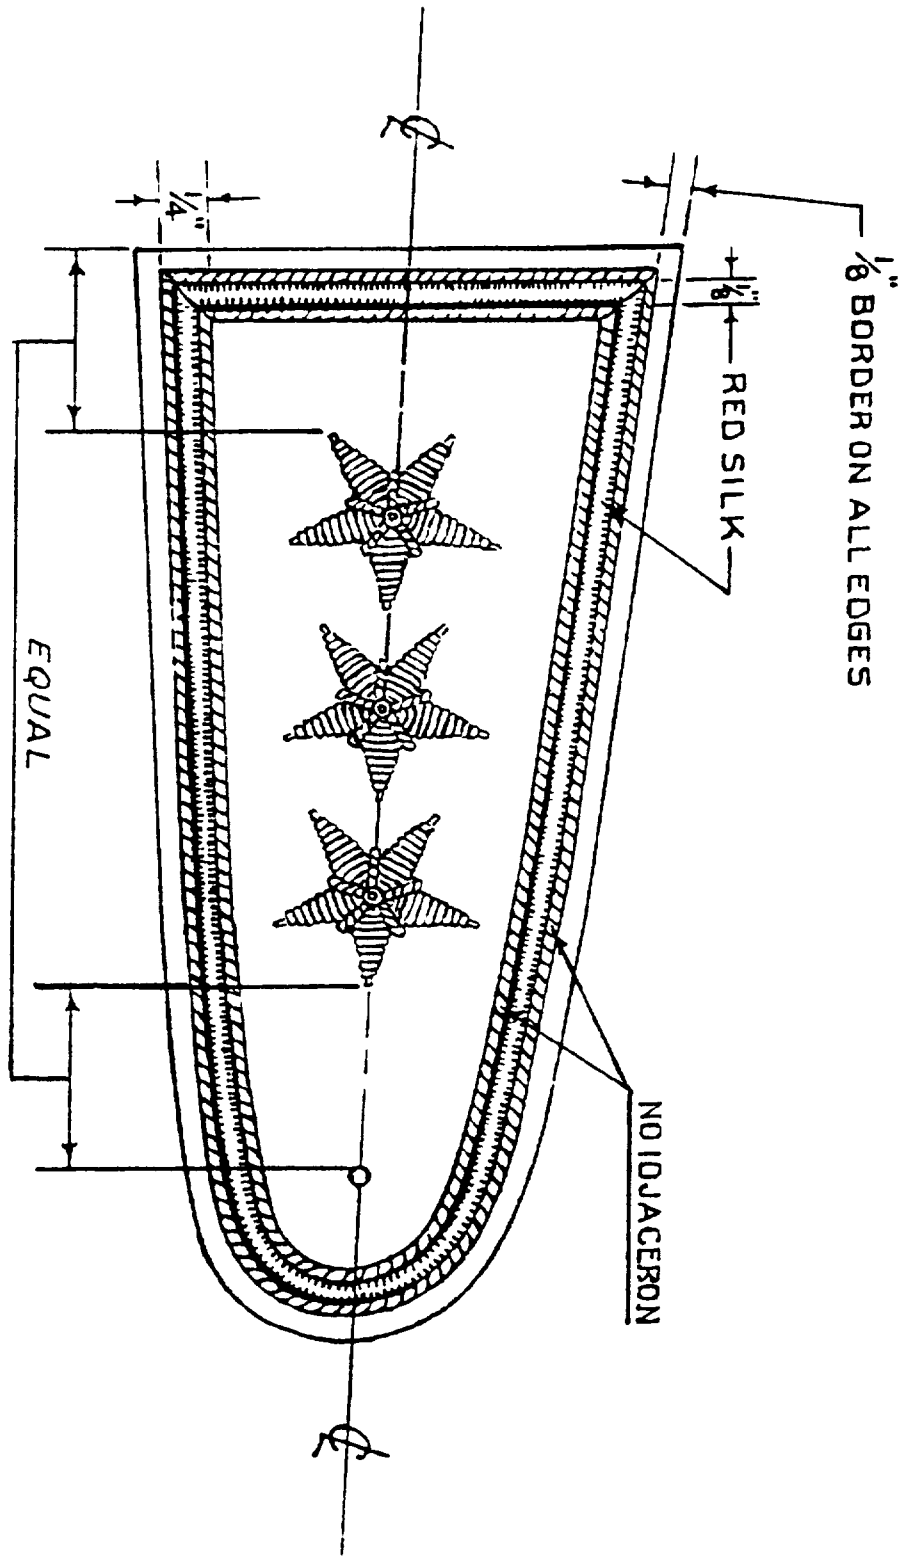


LIEUTENANT GENERAL

SHOULDER STRAP

FIG. 7. JACKET, MAN'S; EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

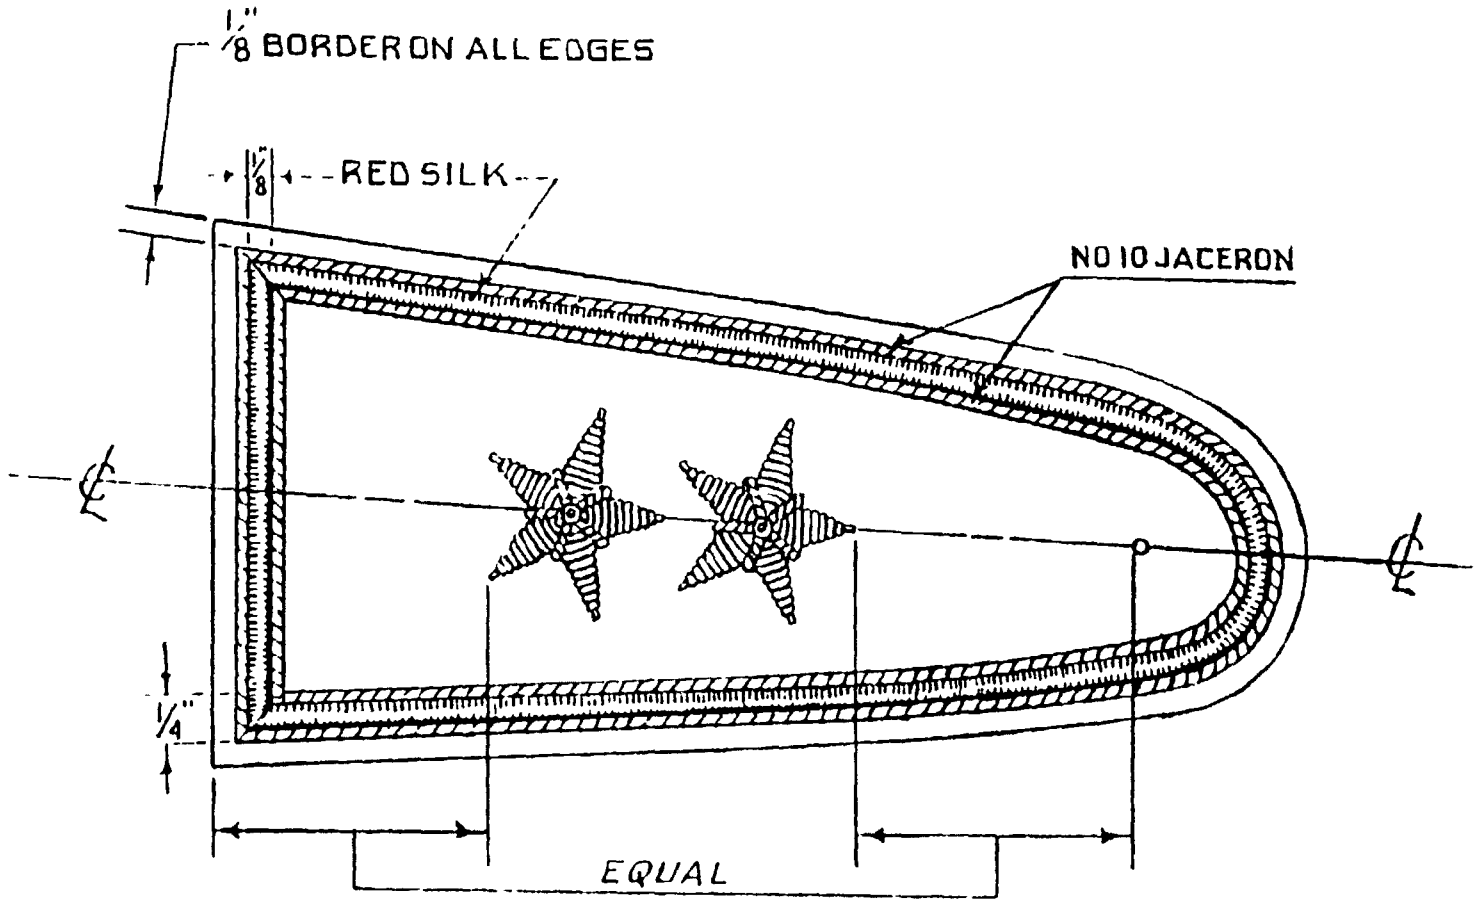


MAJOR GENERAL

SHOULDER STRAP

FIG. 8. JACKET, MAN'S; EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

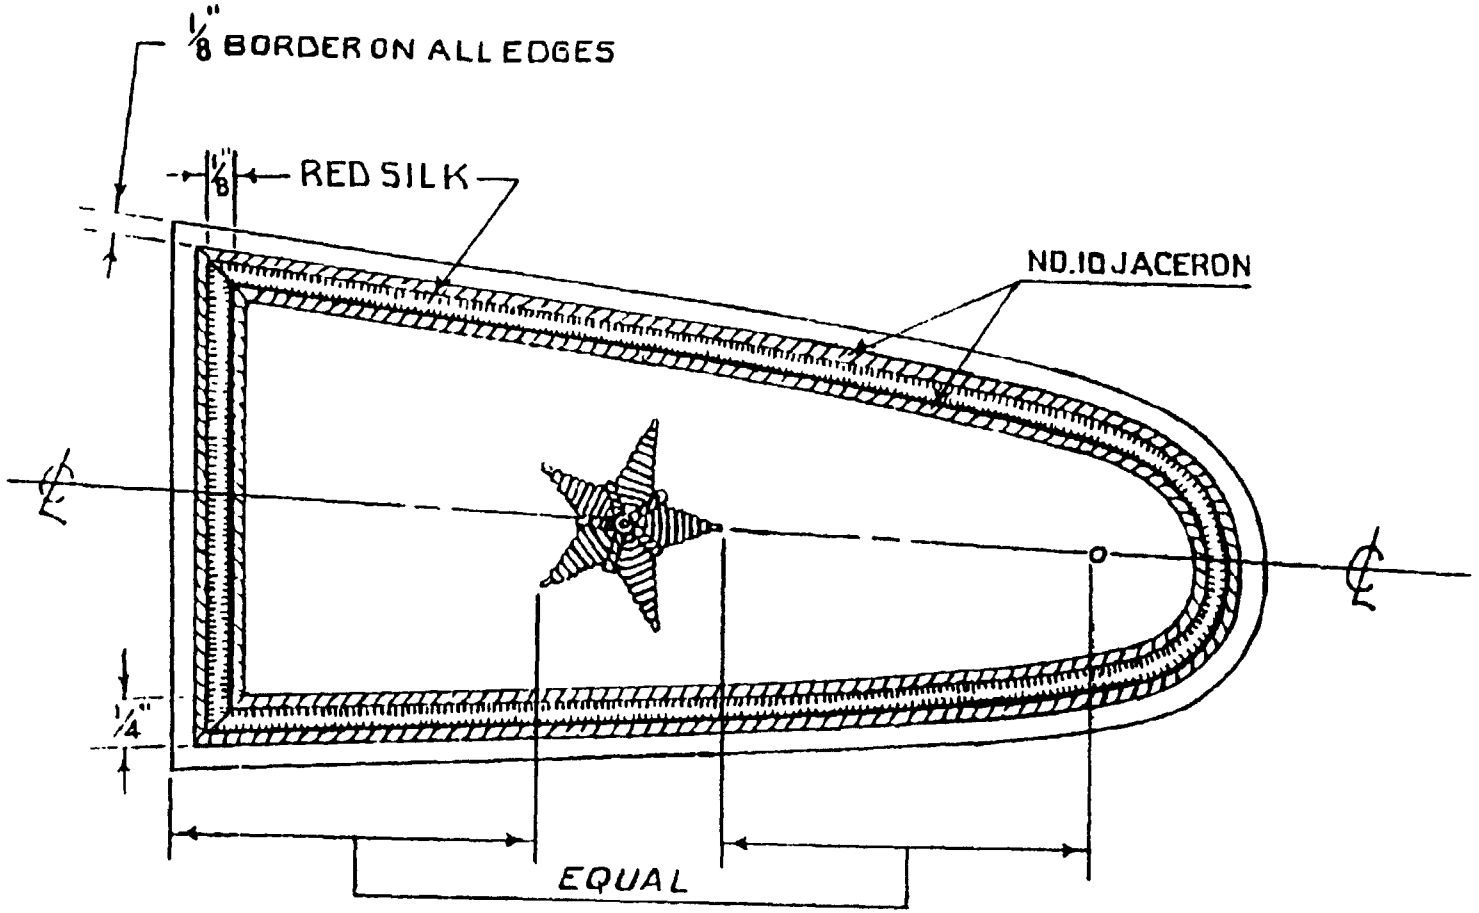


BRIGADIER GENERAL

SHOULDER STRAP

FIG. 9. JACKET, MAN'S; EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

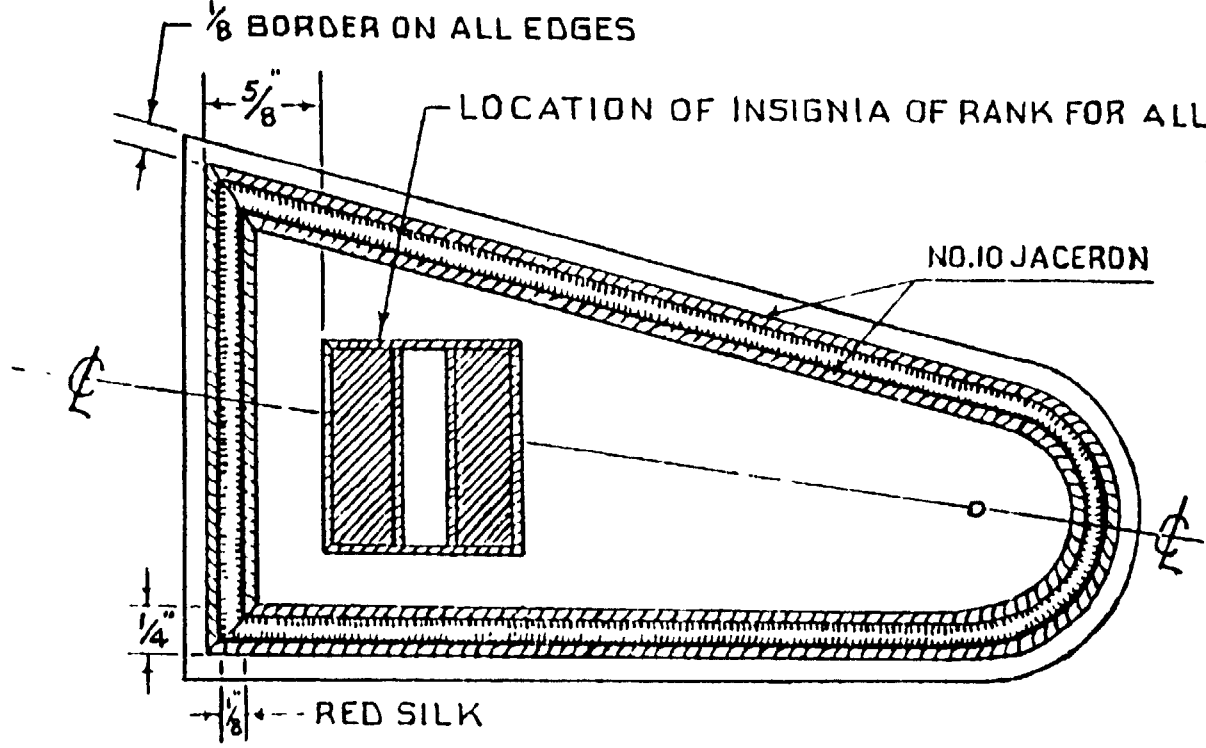

COLONEL

LT. COLONEL

MAJOR

CAPTAIN

1ST LIEUTENANT

2ND LIEUTENANT

COMMISSIONED WARRANT OFFICER

WARRANT OFFICER

SHOULDER STRAP

SHOWING INSIGNIA OF RANK FOR CAPTAIN

FIG.10 JACKET, MAN'S; EVENING DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2 3, and 8 In block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER MIL-J-82193B(MC)	2 DOCUMENT DATE (YYMMDD) 23 MAY 1994

3. DOCUMENT TITLE
JACKET, MAN'S: EVENING DRESS (OFFICER'S)

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)

5 REASON FOR RECOMMENDATION

6. SUBMITTER

a NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c ADDRESS (Include Zip Code)	d TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7 DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME COMMANDER	b TELEPHONE (Include Area Code) (1) Commercial: (703) 640-4584 (2) AUTOVON: 278-4584
c ADDRESS (Include Zip Code) PROGRAM SUPPORT DIRECTORATE, PSE-C/S MARCORSYSCOM, 2033 BARNETT AVE, SUITE 315 QUANTICO VA 22134-5010	IF YOU DO NOT PECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289 2340

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.