MIL-J-82154B(MC)
12 September 1984
SUPERSEDING
MIL-J-82154A(MC)
4 October 1973

MILITARY SPECIFICATION

JACKET, MAN'S: MESS; WHITE (OFFICER'S)

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a white mess jacket.

1.2 Classification. The jackets shall be of one type in the following sizes as specified (see 6.2).

Schedule of sizes

Short	Regular	Long	Extra Long
36	36	36	36
38	38	38	38
40	40	40	40
42	42	42	42
44	44	44	44
46	46	46	46

1.3 Individual orders. When jackets are custom tailored to an individual order, this specification shall govern, except the detail requirements of Section 3, Table I may be modified to the extent necessary for good custom tailoring practices.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps, Headquarters, U. S. Marine Corps (LMA-1), Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-280	-Thread, Cotton Gimp, Buttonhole.
V-T-285	-Thread, Polyester.
CCC-C-446	-Cloth, Muslin, Cotton.
DDD-L-20	-Label; For Clothing, Equipage, And Tentage (General Use).
DDD-T-86	-Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed).

MILITARY

MIL-T-2283	-Tape, Textile, Nylon, Woven, White or Dyed.
MIL-B-3461	-Buttons, Insignia, Metal, Uniform And Cap.
MIL-P-15064	-Pads, Shoulder And Sleeve Heads.
MIL-B-17757	-Boxes, Fiber, Corrugated (Modular Sizes).
MIL-C-41820	-Cloth, Gabardine, Polyester And Rayon.

STANDARDS

FEDERAL

FED-STD-191	-Textile Test Methods.
FED-STD-751	-Stitch, Seam And Stitching.

MILITARY

MIL-STD-105	-Sampling Procedures And Tables For Inspections By Attributes.
MIL-STD-129	-Marking For Shipment And Storage.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. Postal Service Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Order Section, 1616 P Street, N. W., Washington, D. C. 20026.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article approval. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished jackets specified by the procuring activity (see 6.2) shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with the provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, gabardine, polyester and rayon, white shade 2400, 8.0 ounces, conforming to type III class 1 of MIL-C-41820.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

3.3.2 Bias binding. Binding for the raw edges of armholes, and for making the jacket hanger, shall conform to type III, class 3, of CCC-C-446, except the total nonfibrous material shall be between 5 and 10 percent. The bias binding shall have sized edges to prevent raveling.

3.3.3 Tape, nylon. The tape for the bottom raw edge of jacket shall be nylon, 1/2 inch wide, white, conforming to MIL-T-2283.

3.3.4 Stay tape. The stay for the breakline of the lapels shall be cotton, unbleached, 1/4 inch wide, conforming to type III, class 2 of DDD-T-86.

3.3.5 Shoulder pads. The color of the shoulder pads shall be white and shall conform to type I, class 2 of MIL-P-15064.

3.3.6 Thread.

3.3.6.1 Polyester thread. The polyester thread for seaming, stitching, buttonholes, eyelets, hand felling and bartacks shall be white, size A, 3-ply conforming to type I, class 1 of V-T-285.

3.3.6.2 Cotton thread. The cotton thread for basting shall be a good commercial grade.

3.3.7 Gimp. The buttonhole gimp shall be cotton thread, white (bleached), soft or glazed finish conforming to type I or II, size 8 of V-T-280.

3.3.8 Buttons. When specified (see 6.2), buttons shall be furnished with the jacket. The buttons shall be metal, gold plated, officer design, 27-line regular shank, conforming to type I, style 3, class A, subclass 1 of MIL-B-3461.

3.3.8.1 Ring toggles. Ring toggles for securing insignia buttons to the fronts and shoulders shall conform to MIL-B-3461.

3.3.8.2 Linked buttons. A pair of insignia buttons for the front closure shall be linked together with a multiple link chain conforming to MIL-B-3461.

3.3.9 Labels. The jackets shall have a combined identification-instruction label and a size label as follows. The jackets are intended to be laundered and the labels shall show fastness to laundering.

3.3.9.1 Identification-instruction label (combined). The identification-instruction label shall conform to type VI, classes 1 and 3 (combined) of DDD-L-20 and shall measure not less than 5-1/2 by 2-1/2 inches. The content and format shall be as follows:

Nomenclature (item description)
Contract number
Name of contractor

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the currentversion before use.

LAUNDERING AND PRESSING INSTRUCTIONS

Remove buttons

1. Hand laundering

   a. Launder in warm water using mild soap.
   b. Scrub soiled areas.
   c. Rinse thoroughly in clear warm water.
   d. Dry without wringing.

2. Machine laundering

   a. Use a mild detergent.
   b. Complete washing cycle for 30 minutes in 120° to 140° F water.
   c. Rinse thoroughly in clear warm water.
   d. Set automatic dryer for regular fabrics and dry for 15 minutes.

3. Pressing

   a. If pressing is required, use a cool iron.

DO NOT USE AUTOMATIC IRON ABOVE RAYON SETTING

DO NOT USE HOT IRON

3.3.9.2 Size label. The size label shall conform to type VI, class 2 of DDD-L-20 and shall measure not less than 1-1/2 inches by 1 inch. The size shall consist of the numerical designation specified in 1.2, followed by the letters S, R, L, XL, for Short, Regular, Long and Extra Long, and the stock number, as shown in the following example:

36R
Stock Number

The stock number may be omitted from the size label, but when omitted it shall be included in the identification-instruction label.

3.4 Design. The jacket shall be semiformfitting U. S. Marine Corps design as shown in Figures 1 through 3. The unlined jacket shall have a four-piece plain back with inside back yoke, waist darts, ornamental sleeve cuffs, a roll collar with worked eyelets, peaked lapels and shoulder straps to button. Jacket shall have three worked eyelets on each front for detachable buttons and one buttonhole on each front for linked buttons. The jacket is designed to be held together at the front by the linked buttons.

3.5 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 1/4 -inch seam allowance for shoulder strap seam and for seams at the edges of the lapels and front edges of jacket; 5/8-inch seam allowance for center back

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

seam; 1-inch seam allowance for underarm seam (French seam); 3/8-inch seam allowance as indicated in operation or on patterns for all other seams, plus 1/4-inch allowance for book seams, except as otherwise specified in Table I. The patterns show size, are marked for placement and cutting and are notched or marked for proper assembly of component parts.

3.5.1 List of pattern parts. Jackets shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

PATTERN NOMENCLATURE:

Item	Material: Basic Material	No. of cut parts
1.	Front	2
2.	Side front	2
3.	Center back	2
4.	Side back	2
5.	Yoke	2
6.	Top sleeve	2
7.	Under sleeve	2
8.	Topcollar	1
9.	Undercollar	1
10.	Collar interlining	1
11.	Front interlining	2
12.	Front facing	2
13.	Shoulder straps	4
14.	Cuffs	2
	Markers	
15.	Sleeve cuff marker	
16.	Collarstand marker	
17.	Front eyelet marker	
18.	Bottom turnup marker	
	Shaper	
19.	Working lapel shaper (with front eyelet marker)	
20.	Finished collar and lapel shaper	

3.6 Construction. The jackets shall be manufactured in strict accordance with the operations and the stitch, seam and stitching types specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the jackets.

3.6.1 Stitches, seams and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.1 Thread breaks and ends of stitching. End of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

3.6.2 Shade marking. The component parts of the jacket, except those which may be cut from ends, shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.

(b) Sew-on shade tickets.

(c) Adhesive-type tickets whose adhesive causes discoloration and whose adhesive mass adheres to the material upon removal of the tickets.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the jackets in strict accordance with patterns furnished by the Government. b. Cut materials in the direction indicated by the directional lines on the patterns. The straight of the material shall indicate the warp direction. c. Cut all parts from one piece of basic material, except the following parts which may be cut from ends: interlining for collar and facing, undercollar and under ply of shoulder straps. All parts cut from ends shall harmonize with the shade of the jacket, except the interlining for collar and facing. d. The binding for the raw edges of the armholes, and for making the jacket hanger shall be bias cut 1-1/8 inches wide from the material specified in 3.3.2.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2.	Replacement of damaged parts. a. Replace, at time of cutting, all parts containing damages such as holes or seriously weakening defects such as smashes, multiple floats and slubs likely to develop into holes. b. Replace any part damaged during manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, holes, mends, burns and large exposed drill holes.					
3.	Shade marking. a. Mark or ticket (see 3.6.2) all component parts cut from basic material except those parts cut from ends (see 1.c), in order to insure proper assembly and a uniform shade and size throughout the jackets. b. Adhesive ticket when used shall be adhered to the inside of the jacket.					
4.	Make hanger. a. Fold the bias binding for the jacket hanger in half lengthwise, turning the edges to the inside to finish 1/4 inch wide, and seam 1/16 inch from the turned edge. b. Cut the hanger 3-1/4±1/4 inches long.	301	EFp-1	10-14	40/3 or A	40/3 or A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Make shoulder strap. Finished appearance. The shoulder straps shall finish smooth and flat without twists, puckers, pleats or other distortion. The edges shall be neatly and completely worked out. a. The shoulder straps shall be made of two plies of basic material. b. Position the two plies with edges even and uniformly seam together 1/4 inch from the front and back edges and around the collar end, evenly trimming the excess material on all edges.	301	SSe-12 (a)	12-16	40/3 A	40/3 or A
	c. Turn the straps, completely working the seam to the edges of the straps. Edgestitch the straps uniformly 1/8 inch from the seamed edges.	301	SSe-2 (b)	12-16	40/3 A	40/3 or A
6.	Make buttonholes in shoulder straps. Finished appearance. The buttonholes shall be cut-first type, clean cut, well made and correctly positioned. The buttonholes shall be well worked over gimp to fit a 27-line insignia button. The ends of the gimp shall be pulled through to the underside of the straps and the ends of the buttonholes securely bartacked. The purling of the buttonholes shall be on the outside of the strap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6.	Make buttonholes in shoulder straps. (con't)					
	a. Make a horizontal, eyelet end, square-bar type buttonhole, cut 3/4 inch long, in each strap, midway between the back and front edges. The inside edge of the eyelet end of the buttonhole shall be 1-3/4 ± 1/8 inches from rounded end of strap.	Buttonhole		60 per buttonhole (minimum not including bartack)	40/3 o A	40/3 r A
	b. Securely bartack the end of the buttonhole and trim ends of the gimp and thread.	Bartack		21 per bartack	40/3 o A	40/3 r A
	c. Press the straps smooth and flat with a heated pressing iron or pressing machine. The straps shall be uniform in shape and size in accordance with the pattern.					
7.	Make undercollar.					
	Finished appearance. The collar interlining and undercollar shall be uniformly seamed together and shall finish smooth and flat without twists, gathers, pleats, puckers or other distortions.					
	a. The undercollar assembly shall consist of two plies of basic material.					
	b. Mark the breakline of the undercollar on the interlining side with collarstand marker.					
	c. Position the interlining on the undercollar, with edges even and notches matching, and join together at the mark for the breakline. Continue to stitch along the sides and upper edge 1/8 to 3/16 inch from raw edges.	301	SSv-1 SSa-1 (sides and upper raw edges)	10-14 10-14	A A	A A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Make undercollar. (con't)					
	d. The breakline stitching shall measure 1-1/4±1/8 inches at the vertical center of undercollar.					
8.	Assemble topcollar and undercollar.					
	Finished appearance. The collar shall be uniformly edgestitched and shall finish smooth and flat without twists, puckers, pleats, or other distortions. The corners and seamed edges shall be well worked out. The seams shall finish at the edge of the collar.					
	a. Position undercollar assembly on the topcollar with side and upper edges even and notches matching, and join sides and upper edges together with 1/4-inch seam.	301	SSe-2 (a)	12-16	A	A
	b. Trim corner for proper turning. Turn collar, completely working out the corners and seamed edges.					
	c. Edgestitch the collar uniformly 1/8 inch from seamed edges.	301	SSe-2 (b)	12-16	A	A
	d. Trim the lower edge of topcollar even with the undercollar.					
	e. Press the entire collar smooth and flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Seam sleeves at forearm.					
	Finished appearance. The forearm seam shall finish smooth and flat without twists, puckers, pleats or other distortions. The seam shall start and finish evenly.					
	a. Position top sleeve on the undersleeve with the forearm edge of the top sleeve 1/4 inch back from the forearm edge of the undersleeve. Stitch together 3/8 inch from raw edge of top sleeve.	301	SSbd-1	10-14	40/3 o A	40/3 r A
	b. Trim the outlet for the undersleeve over the seam allowance of the top sleeve forming a book seam. Fell the turned raw edge to the seam allowance with blind stitching.	301		6-8	40/3 or A	
	c. Press the seam smooth and flat with a heated pressing iron or pressing machine. The finished edge of the seam on the inside of sleeve shall be towards the front.					
10.	Join cuffs to sleeves.					
	Finished appearance. The upper curved edge of cuffs shall be properly formed and creased and the cuffs shall be uniformly stitched to sleeves. The point of the cuff shall be centered between the lower forearm and backarm.					
	a. Mark the sleeve in accordance with the pattern for positioning the cuffs.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10.	Join cuffs to sleeves. (con't)					
	b. Fold the cuff lengthwise at the point with the wrong side out. Tack the point 1/8 inch from raw edges. Turn cuff completely, working out the point.	301	SSa-1	10-14	40/3 or A	40/3 or A
	c. Turn under the upper edge of the cuff, forming the finished curved edge and point in accordance with the shape of the pattern, and press smooth and flat with a heated pressing iron or pressing machine, creasing the edge.					
	d. In lieu of pressing, the turned under portion at the upper edge of cuff may be basted.					
	e. Position the cuffs at the mark on the sleeve and seam uniformly 1/8 inch from the upper finished edge of cuff.	301	LSd-1	10-14	40/3 or A	40/3 or A
11.	Seam sleeves at backarm; hem cuff.					
	Finished appearance. The back arm seam shall finish smooth and flat without twists, puckers, pleats or other distortions. The seam shall start and finish evenly. The hems shall be of uniform width.					
	a. Position the backarm of top sleeve 1/4 inch back from the backarm of under sleeve and sew the two plies together 3/8 inch from the raw edge of top sleeve, catching the ends of the cuff in the seam.	301	1SSbd-	10-14	40/3 or A	40/3 or A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
11	Seam sleeves at backarm; hem cuff. (con't)					
	b. Turn the outlet for under sleeve over the seam allowance of the top sleeve, forming a book seam. Fell the turned raw edge to the seam allowance with blindstitching.	103		6-8	40/3 or A	
	c. Press the seam smooth and flat with a heated pressing iron. The finished edge of the seam shall be toward the front.					
	d. Hem the lower edge of the cuff 1/4 inch, with the stitching 1/8 inch from the folded edge.	301	EFa-1	10-14	40/3 or A	40/3 or A
12	Fell cuff to sleeve.					
	Finished appearance. The bottom edge of the cuff shall finish smooth and flat without twists, puckers, pleats or other distortions. The seam shall start and finish evenly. The hems shall be of uniform width.					
	a. Turn cuff outlet to the inside, in accordance with notches, against the bottom end of the sleeve, and fell upper folded edge of the turnup to body of sleeve with blindstitching.	103	EF1-1 (finished seam)	6-8	40/3 or A	
	b. Turn sleeves right side out and press the lower half of sleeve smooth and flat, creasing at the backarm and forearm. The backarm crease shall be on the backarm seam.					
	c. On the finished coat, the length of the cuff shall be 3-1/4±1/4 inches at the front and back creased edges, and 6±1/4 inches at the point.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13.	Hem left and right yoke. Finished appearance. The hems shall be uniform in width without twists, puckers, pleats, or other distortions.					
	a. Turn under the curved edge of left and right yokes 1/4 inch and fell to body of yokes with blindstitching.	103	EF1-1	6-8	40/3 or A	
14.	Hem facings, stitch darts, and sew on labels. Finished appearance. Hems shall be uniform in width without twists, puckers, pleats or other distortions. The labels shall be properly positioned and securely sewn to the right facing. The darts shall be tapered to a point at the upper end.					
	a. Turn under back edge of facings 1/4 inch and fell to the body of the facings with blindstitching.	103	EF-1	6-8	40/3 or A	
	b. Fold the facing, matching notches for the darts and stitch the entire length of dart 1/8 inch from the notches at the lower end and taper to a point at the upper end, securely backtacking the pointed end.	301	OSf-1	12-16	A	A
	c. Press darts and hems smooth and flat with a heated pressing iron.					
	d. Sew the identification instruction label to the right facing with a single row of stitching 1/16 inch from the edges of the label.	301	SSa-1 (each edge)	10-14	40/3 or A	40/3 or A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14.	Hem left and right yoke. (con't)					
	e. The label shall be positioned at the center of the facing, with lower edge approximately 4 inches above the bottom edge of the jacket.					
15.	Assemble fronts.					
	Finished appearance. Front and side front panel shall be carefully joined, uniformly stitched and shall finish smooth and flat without twists, gathers, puckers, pleats, or raw edges. The seams shall start and finish evenly. The darts shall be tapered to a point at the upper end. The folded edge of the front darts shall be towards the back.					
	a. Fold the front, matching notches at the waist and stitch the entire length of the dart 1/8 inch back from the notches at lower end, tapering to a point at the upper end and securely backtacking the pointed end.	301	OSf-1	12-16	A	A
	b. Position front and side front panel right side out and join with a 1/4 inch seam.	301	SSa-1	12-16	A	A
	c. Turn the front and side front panel to the inside, matching the notches at the lower edge of armhole, and stitch together 3/4 inch from the seamed edge (forming a French seam).	301	SSe-2 (b) (French seam)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16.	Assemble backs. Finished appearance. The back and side backs shall be carefully joined, and the seams shall finish smooth and flat without twists, puckers, pleats or other distortions. The seams shall start and finish evenly.					
	a. Position the center backs with edges even and top notches matching and join at the center with a 7/8-inch seam.	301	SSa-1	12-16	40/3 or A	40/3 or A
	b. Trim 1/4 inch off the seam allowance of the left side of center back, to provide for a book seam.					
	c. Turn 1/4-inch outlet of the right side of center back over the seam allowance of left side of center back forming a book seam. Fell the raw edge of the outlet to the seam allowance with blindstitching.	103		6-8	40/3 or A	
	d. Position the center backs on the respective side backs, 1/4 inch back from the raw edges, and seam together 3/8 inch from the raw edges of the center backs.	301	SSbd-1	12-16	40/3 or A	40/3 or A
	e. Turn 1/4-inch outlet for the side backs over the seam allowance of center backs, forming a book seam. Fell the raw edge of the outlet to the seam allowance with blind stitching.	103		6-8	40/3 or A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17.	Join fronts and back at sides. Finished appearance. The fronts and back shall be carefully joined at the sides, and the seam shall finish smooth and flat without twists, puckers, pleats or other distortions. The seam shall start and finish evenly.					
	a. Position the side back 1/4 inch back from the side front panel, and join together 3/8 inch from the raw edge of side back.	301	SSbd-1	12-16	40/3 or A	40/3 or A
	b. Turn 1/4-inch outlet for the side front over the seam allowance of side back, forming a book seam. Fell the raw edge of the outlet to the seam allowance with blindstitching.	103		6-8	40/3 or A	
18.	Press darts and seams. Finished appearance. Darts and seams shall be pressed smooth and flat with a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance.					
	a. Press the front darts with raw edges towards the side.					
	b. The center back seam shall be pressed with the folded edge towards the left side. All other seams shall be pressed with the folded edge towards the back.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
19.	Seam interlining to fronts. Finished appearance. The interlining shall be stitched to the fronts smooth and flat without twists, puckers, pleats or other distortions. a. The front interlining shall be made of a single ply of basic material.					
	b. Overedge stitch the back raw edge of interlining.	502 or 503	EFd-1	8-10	A	A
	c. Position the left and right interlinings on the inside of the respective fronts, with front, top and armhole edges even. Seam interlining to fronts 1/8 inch from shoulder and front edges of jacket.	301	SSa-1	12-16	A	A
20.	Mark lapels and bottom edges. a. Mark the lapels in accordance with the shaper furnished for proper location of notch, and for positioning of the bridle tape. b. Mark the lower edge of jacket for bottom turnup in accordance with the pattern furnished. c. Trim the bottom edge of the interlining even with the mark for bottom turnup. Trim the bottom ends of the side and back seam, if necessary.					
21.	Stitch bridle tape to lapel. Finished appearance. The bridle tape shall be along the breakline with the proper tensions to allow the lapel to roll properly in the finished jacket.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
21.	Stitch bridle tape to lapel. (con't)					
	a. Position the 1/4-inch wide bridle tape on the interlining side of the fronts along the mark for the breakline of the lapel with the front edge of the tape in line with the notch at the gorge.					
	b. Stitch the tape to the breakline of the lapel, through all plies, 1/16 inch from the front and back edges, holding the tape taut and properly distributing the fullness.	301	SSa-1 (each edge)	10-14	40/3 o A	40/3 r A
	c. The tape shall extend from top notch at the gorge to approximately 4 inches from the lower edge of lapel.					
22.	Press lapels.					
	Finished appearance. The lapels shall finish smooth and flat.					
	a. Press the lapels smooth and flat with a heated pressing iron or pressing machine to remove the fullness.					
23.	Make eyelets in front.					
	Finished appearance. The eyelets shall be worked with the purling on the outside of the fronts, and shall finish with a 1/8-inch diameter opening.					
	a. Mark location of eyelets on right and left fronts, for removable insignia buttons, in accordance with eyelet marker.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
23.	Make eyelets in front. (con't)					
	b. Make one eyelet at each mark through fronts and interlining.	Eye-let		22 per eyelet (min-mum)	40/3 o A	40/3 r A
24.	Stitch tape to bottom turnup.					
	Finished appearance. The tape shall be uniformly stitched and the basic material shall be securely caught in the stitching. The tape shall not be tight or full causing puckers, gathers or pleats or other distortion.					
	a. Lap the 1/2-inch-wide nylon tape 1/4 to 3/8 inch on outside bottom edge of the jacket. Stitch the tape to the jacket not more than 1/16 inch from top edge with the bottom ends of lower front, side and back seam caught in the stitching.	301	LSa-1	10-14	40/3 o A	40/3 r A
	b. The tape shall extend along the entire bottom edge from back edge of the interlining.					
25.	Stitch center back point.					
	Finished appearance. Center back point shall be stitched to allow a uniform point to be located at the end of the center back.					
	a. Fold the jacket to the outside along the center seam and diagonally stitch the center back together at the lower edge. The stitching shall extend from 1-1/8 inches above the lower end of the center seam to the bottom raw edge of the back parts 5/8 inch from the center seam.	301	SSa-1	10-14	40/3 o A	40/3 r A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
26.	Seam shoulders. Finished appearance. The shoulder seams shall be carefully joined and shall finish smooth and flat without twists, puckers, pleats or other distortions.					
	a. Join fronts and back together at shoulders with a 3/8-inch seam, working in the fullness on the backs in accordance with good manufacturing practice.	301	SSa-1	10-14	40/3 or A	40/3 or A
	b. Press shoulder seams smooth and flat with a heated pressing iron or pressing machine, turning the raw edges of the seam towards the back.					
27.	Join yoke and facings at shoulders. Finished appearance. The seam joining yoke and facing at the shoulder shall finish smooth and flat with proper fullness on the back.					
	a. Join the yoke and the facing at the shoulders with a 3/8-inch seam, working in the proper fullness on the back.	301	SSa-1	10-14	40/3 or A	40/3 or A
	b. Spread open the seam and press flat with a heated pressing iron or pressing machine.					
	c. Overlap the right and left yoke at the upper edge with notches matching. The right yoke shall overlap the left yoke. Seam the overlapping plies together 1/8 inch to 3/16 inch from the raw edges.	301	SSa-1	21-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
28.	Seam yokes to backs. Finished appearance. The yokes shall be attached without twists, puckers, pleats or other distortion.					
	a. Seam left and right yokes to inside of backs along the top edge, with the left yoke overlapping the right yoke, matching notches at top of center back.	301	SSa-1	10-14	40/3 o A	40/3 r A
	b. The stitching shall extend from shoulder seam to shoulder seam.					
29.	Stitch hanger and label to jacket. Finished appearance. The size label and jacket hanger shall be properly positioned and securely stitched to the jacket.					
	a. Stitch the upper edge of the size label and the ends of the hanger to the inside center back of the jacket at the neck.	301	SSa-1	10-14	40/3 o A	40/3 r A
	b. In the finished jacket, the hanger opening shall be 1-1/2 $\pm$ 1/8 inches long when measured along the lower edge of the top collar.					
30.	Join topcollar to facing. Finished appearance. The collar shall be carefully joined to the jacket and shall finish smooth and flat without twists, puckers, pleats or other distortions.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
30.	Join topcollar to facing. (con't)					
	a. Position the collar on the inside of the jacket with the lower edge of topcollar and top edge of facing even and with the lower corners of the topcollar and lapel notch matching.					
	b. Join the topcollar to the facing at the gorge, from the lapel notch to approximately 1 inch back of the breakline of lapel.	301	SSa-1	12-16	40/3 o r A	40/3 A
	c. Notch the gorge of the facing at the end through the joining seam, and continue to stitch the under collar to front and back neck.	301	SSa-1	12-16	40/3 o r A	40/3 A
31.	Tack topcollar to front at gorge.					
	a. Spread open the seam joining topcollar to facing and tack seam allowance of topcollar to front at the gorge from lapel notch to the gorge notch.	Hand or Machine		2-4	A	
32.	Baste front and bottom turnup.					
	Finished appearance. The seams shall finish at edges of the jacket. The edges, corners and lapel point shall be neatly and completely worked out.					
	a. Turn the facing to the inside of the fronts, working out the point of the lapels completely.					
	b. Baste along the top front edges of lapels and the front edges of the jacket, working the seams to the edges. Turn the bottom turnup at the mark	101		4-6		

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
32.	Baste front and bottom turnup. (con't) and baste along the folded edge laying the facing over the turnup.					
33.	Stitch topcollar to jacket.					
	a. Turn under the lower edge of the topcollar from gorge notch to gorge notch, lapping the folded edge on the facings at the shoulders and on the yokes at the back. Stitch topcollar through all plies 1/16 inch from lower folded edge of topcollar.	301	LSb-1	10-14	40/3 o A	40/3 r A
	b. In the finished jacket, the ends of the collar and top edge of lapels shall be 1-5/8±1/8 inches and 2-1/2± 1/8 inches, respectively, when measured from juncture point of collar and lapel to finished edges. At the center along the undercollar seam, the collar shall measure 2-7/8±1/8 inches when lying flat.					
34.	Edgestitch jacket. Finished appearance. The edge stitching shall be uniform in width without twists, puckers, pleats or other distortions.					
	a. Edgestitch the jackets 1/8 inch along the top and front edge of lapels and the front and bottom edge of jacket, with the stitching along the bottom edge extending the width of facing, overlapping the bottom turnup.	301	SSe-2 top and front edges (shows finished seam) SSe-1 (bottom edge of facing)	12-16	40/3 o A	40/3 r A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
35.	Set shoulder straps. Finished appearance. The shoulder straps shall be properly positioned and uniformly stitched to the jacket without twists, puckers, pleats or other distortion. On the finished jacket, the straps shall be 2-1/2±1/8 inches wide at the armhole seam and shall taper to 1-7/8±1/8 inches at buttonhole eyelet end. a. Properly position the shoulder straps with the rounded end 1/4 to 3/8 inch above the lower edge of under collar and with the back edge of the strap 1/4 to 3/8 inch to the back of the shoulder seam at the armhole edge. b. Seam the shoulder straps to the jacket 1/4 inch from the armhole edge, trimming the straps even with the armhole when necessary.	301	SSa-1	10-14	40/3 or A	40/3 or A
36.	Make eyelet in shoulders and collar. Finished appearance. The eyelets shall be worked with the purling on the outside of the shoulder and collar, and shall finish with a 1/8-inch diameter opening. All stitches shall be securely caught in the fabric. a. Mark location of eyelet in shoulders for removable button to correspond with eyelet of buttonhole in shoulder straps, so that on the finished jacket, the straps shall lie smooth and flat without twisting and bulging.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
36.	Make eyelet in shoulders and collar. (con't)					
	b. Mark each end of collar for location or one eyelet, 1 inch from end and outer edges, respectively, of collar.					
	c. Make one eyelet at the mark on each shoulder. The eyelet shall be through front and front interlining only.	Eyelet		22 per eyelet minimum	40/3 o A	40/3 r A
	d. Make one eyelet at the mark on each end of the collar.	Eyelet		22 per	40/3 o A	40/3 r A
37.	Set shoulder pads.					
	a. Insert shoulder pad between facing yoke assembly and interlining in line with armhole edge.					
	b. Stitch the facing yoke assembly at the armhole 3/16 to 1/4 inch from edge, catching the shoulder pad and interlining in the stitching. The stitching shall extend from end of the yoke to the hemmed edge of facing at the base of armhole.	301	SSa-1	10-14	A	A
38.	Set sleeves.					
	Finished appearance. The sleeves shall be carefully set without twists, puckers, pleats or gathers and with the fullness properly distributed.					
	a. Position sleeves on outside of jacket, at the armholes, with backarm seam of sleeve matching the side back seams and with notch in top sleeve and front matching.					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:39Z
Check the source to verify that this is the currenversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
38.	Set sleeves. (Con't)					
	b. Join the sleeves to the jacket with a 3/8-inch seam, distributing the fullness in accordance with good manufacturing practice and catching the armhole end of shoulder strap, armhole edge of facing, yoke assembly, front interlining and shoulder pad in the stitching.	301	SSa-1	10-14	40/3 o A	40/3 r A
	c. Join the sleeves to the jacket with a second row of stitches 3/16 inch from armhole edge in order that the armhole may be bound with less difficulty.	301	SSa-1	10-14	40/3 o A	40/3 r A
	d. Press the entire armhole smooth and flat with a heated pressing iron, removing the fullness.					
39.	Bind armhole; bartack binding.					
	Finished appearance. The binding shall be uniformly stitched and the basic material shall be securely caught in the stitching. The binding shall not be tight or full, causing puckers gathers, or pleats.					
	a. Bind the raw edges of the armhole seam together with 1-1/8-inch-wide bias binding, with the edge of the binding turned under and leaving approximately 1/2 inch extension on the top end. The stitching shall be 1/16 inch from the inner folded edges of the binding.	301	SSa-1	10-14	40/3 o A	40/3 r A
	b. Turn the top end of the binding to the inside of armhole, lapping the top end on the opposite end, and	Bar-tack		28 min-imum per bartack	40/3 o A	40/3 r A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
39.	Bind armhole; bartack binding. (con't)					
	secure to armhole with a 3/8- to 1/2-inch-long bartack. The bartack shall be made on a line with the row of stitches for the binding and shall be stitched through all plies of material at the point of bartacking.					
40.	Make buttonholes.					
	Finished appearance. The buttonholes shall be cut-first type, clean cut, well made, and correctly positioned. The stitching shall be securely caught in the basic material. The buttonholes shall be well worked over gimp to fit a 27-line insignia button. The ends of the gimp shall be pulled through to the underside of buttonholes and the ends of buttonholes shall be securely bartacked. The purling of the buttonholes shall be on the outside of fronts.					
	a. Mark the left and right fronts for the location of one buttonhole on each front.					
	b. Make a horizontal, eyelet-end square-bar type buttonhole, cut 3/4 inch long, at each of the marks with the inside edge of the eyelet 5/8 inch from the front edge of the jacket.	Button-hole		65 per button-hole (minimum)	40/3 o A	40/3 r A
				not in-cluding bartack	40/3 o A	40/3 r A
	c. Securely bartack the end of each buttonhole, and trim the ends of the gimp.	Bar-tack		21 per bartack (minimum)	40/3 o A	40/3 r A
41.	Fell bottom turnup.					
	Finished appearance. The blindstitching shall not show through the outside of jacket.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
41.	Fell bottom turnup. (con't)					
	a. Fell the tape edge of the bottom turnup to the body of the jacket with blindstitching.	103	EF1-1	4-6	40/3 or A	
42.	Clean jacket.					
	a. Pull and remove all basting thread. Trim all ends of stitchings and remove all loose thread from the jacket. Remove all spots, stains and shade tickets and markings without injury to the material.					
43.	Press jacket.					
	Finished appearance. The jacket shall be well pressed throughout with heated pressing irons or pressing machines of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing procedures.					
	a. Block the shoulders to remove the fullness and press shoulders smooth on a shoulder shaping machine with shoulder straps properly positioned over shoulder seam and pressed flat. Remove any impressions under the shoulder strap, if any.					
	b. Press armholes solid from the inside, creasing the armholes at the front, back and armpit. The armpit and the back of armhole shall be held short while pressing.					
	c. Block armholes on pressing buck, shrinking in the top sleeves.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
43.	Press jacket. (con't) d. Press the sleeves smooth and flat, creasing at backarm and forearm. The backarm crease shall be on the backarm seam. The forearm crease shall extend uniformly to a point 3 to 3-1/2 inches below the armhole. e. Press the lapels smooth and flat from the breakline to the front edge, straightening the edges and working the fullness towards the center of the lapel and removing the fullness by shrinking. Lapels shall not be creased. f. Press the collar at the center-back, creasing on the breakline the length of the collar and continuing to approximately 2 inches below the top edge of lapels. g. Press the fronts smooth and flat on a body machine, straightening the front edges of the jacket. Care shall be exercised in pressing the fronts so that the bottom edges are even. h. Press bottom edge of jacket smooth and flat. i. Press the sides, working the fullness towards the back. j. Press the back smooth and flat, removing all fullness.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
44.	Attach buttons (when required). a. When insignia buttons are required for the shoulders and fronts of the jacket they shall be attached by inserting the shank of the button through the eyelet on the shoulders and fronts and securing on the inside with metal ring toggles. b. When insignia buttons are required for front closure, they shall be attached to the jacket with the multiple link chain on the inside of jacket and one button through each buttonhole to the outside.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished jacket shall conform to measurements shown in Table II.

Table II - Jacket measurements 1/

Size	Breast 2/	Back length 3/	Sleeve length 4/
		Short	
36	22	20	17
38	23	20-1/4	17
40	24	20-1/2	17
42	25	20-3/4	17
44	26	21	17
		Regular	
36	22	21	18
38	23	21-1/4	18
40	24	21-1/2	18
42	25	21-3/4	18
44	26	22	18
46	27	22-1/4	18
		Long	
36	22	22	19
38	23	22-1/4	19
40	24	22-1/2	19
42	25	22-3/4	19
44	26	23	19
46	27	23-1/4	19
		Extra Long	
36	22	23-1/2	20
38	23	23-3/4	20
40	24	24	20
42	25	24-1/4	20
44	26	24-1/2	20

1/ Tolerance on all measurements: ±1/2 inch.

2/ Breast measurement taken from the front edge to the center back seam in line with armpit and with the jacket lying open and flat.

3/ Back length measurement taken along center back seam from lower edge of undercollar to bottom edge of jacket.

4/ Sleeve length measurement taken along underarm seam from pit of armhole to bottom edge of cuff.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished jacket shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of this certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5)

4.3 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4 First article inspection. When first article is required, inspection shall be performed on a completely fabricated jacket for conformance to all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. Wherever applicable, tests shall be conducted in accordance with FED-STD-191. All test reports shall contain individual values utilized in expressing the final results.

4.5.2 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.3 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.4 Examination of end item. The defects found during examination of the end item shall be classified in accordance with 4.5.4.1, 4.5.4.2, 4.5.4.3 and 4.5.4.4. The sample unit shall be one jacket. All defects shall be as indicated below except those with an asterisk (*) in classification column which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance or serviceability, but not seriously.

4.5.4.1 General defects. General defects shall be classified as follows:

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Buttonholes and eyelets (construction)	a. One or more omitted or added.	X		
	b. Wrong type buttonhole or eyelet.			X
	c. Buttonhole or eyelet not securely caught on fabric, causing stitching to pull away from fabric.	X		
	d. Not corresponding to size of button (front and shoulder straps):			
	-too small, not permitting button to enter buttonhole.	X		
	-too large, 3/8 inch or more longer than the diameter of button (measured at inside edge of purling).		X	
	e. Bartack omitted or loose on one or more buttonholes:			
	-front buttonholes.	X		
	-shoulder straps.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	f. Bartack misplaced:			
	-on one buttonhole.			
	-two or more buttonholes.		X	
	g. One or more broken stitches in:			
	-one buttonhole.		X	
	-two or more buttonholes.	X		
	-one eyelet.		X	
	-two or more eyelets.	X		
	h. More than two skipped stitches in one or more buttonholes or eyelets:			
	-front buttonholes.		X	
	-shoulder strap buttonholes.			
	-one eyelet.			
	-two or more eyelets.		X	
	i. Gimp omitted in one or more buttonholes.	X		
	j. Ragged edges, affecting appearance.			
	k. Poorly made, affecting appearance (unless otherwise classified).		X	
	l. Ends of gimp not pulled through on the underside on one or more buttonholes.			
	m. Stitches per buttonhole, on front and shoulder loops (excluding bartack) less than minimum specified:			
	-one or two stitches.			
	-three stitches.		X	
	-four or more stitches.	X		
	n. Any uncut buttonhole.		X	
Buttons or ring toggles (when required)	a. Missing, loose or defective:			
	-one button or ring toggle.		X	
	-two or more buttons or ring toggles.	X		
	b. Not specified type or size.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
NOTE: Buttons shall be considered defective if they have sharp, rough or cracked edges; scratches, blemished or imbedded foreign matter on face side of button, loose shanks; or are badly shaded.				
Cleanness	a. One or more removable spots or stains, clearly noticeable.		X	
	b. One or more spots or stains of an obvious permanent nature.	X		
	c. Thread ends not trimmed, loose thread ends, two or more shade markings, or bastings not removed throughout garment (to be scored when the condition exists on major portion of jacket).			X
Components and assembly	a. Any defective component or defect of assembly (not herein classified).	*		
	b. Any component part or required operation omitted (not herein classified).			X
Cutting	a. Any component part of basic material not cut in accordance with directional lines on patterns, or in accordance with specification requirements.	X		
Material defects and damages	a. Any weakening defect such as smash, multiple float, loose slub, etc., that may develop into a hole.		*	
	b. Any hole		*	
	c. Shade bars, unsightly slubs, etc.		*	
	d. Needle chews which may develop into a hole.		*	
	e. Scissors or knife cut, tear, mend or burn.			*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening condition which are inconspicuous and have negligible effect on serviceability are to be classified as follows:				
Material defect Workmanship damages	-No defect -Minor B defect			
Pressing	a. Burned or scorched.		*	
	b. Pressing omitted (entire garment).	X		
	c. Poorly pressed (unless otherwise classified).		X	
	d. Basting or pressing impressions not removed on major portion of jacket.			X
	e. Armholes not blocked, or blocked poorly.		X	
	f. Inside of armholes not pressed solid.		X	
	g. Edges bulky i.e., not pressed solid, affecting appearance.			X
	h. Sleeves not creased as required on forearm and backarm seams.		X	
Seams and stitching	a. Accuracy of seaming.			
	1. Seams twisted, puckered, or pleated, affecting appearance (unless otherwise classified).		X	
	2. Part of garment caught in any unrelated operation or stitching.	X		
	3. Unsightly blindstitching exposed and visible on outside of jacket, affecting appearance.		X	
	4. Thread breaks or ends of all stitching (when not caught in other seams or stitching) not securely backstitched.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	5. Wrong shade or two shades of thread used on outside of same jacket.	X		
	b. Gage of stitching (edge or top stitching).			
	1. Irregular, i.e., unevenly gaged or various stitching not uniform, affecting appearance.		X	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams.			
	1. On outside:			
	-up to 1/4 inch inclusive.			X
	-more than 1/4 inch but not more than 1/2 inch.		X	
	-more than 1/2 inch.	X		
	2. On inside:			
	-up to 1 inch machine felling.			X
	-more than 1 inch machine felling.		X	
	d. Raw edges.			
	1. On outside:			
	-up to 1/8 inch inclusive.			X
	-more than 1/8 inch but not more than 1/4 inch.		X	
	-more than 1/4 inch.	X		
	2. On inside (except in book seams):			
	-more than 1/4 inch but not more than 1/2 inch.			X
	-more than 1/2 inch.		X	
	3. On book seam:			
	-more than 1 inch but not more than 2 inches.			X
	-more than 2 inches.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
NOTE: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under or over and stitched.				
	e. Run-offs (see classification of open seams).			
	f. Seam and stitch type.			
	1. Wrong seam type.		X	
	2. Wrong stitch type.		X	
	g. Stitch tension.			
	1. Loose tension, resulting in loose seam.	X		
	2. Loose tension on edge or raised stitching, resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		
NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspector shall test seam by exerting normal pull in the lengthwise direction of seam or stitching.				
	h. Stitches per inch (including labels) less than minimum specified:			
	-one or two stitches.			X
	-three stitches.		X	
	-four or more stitches.	X		
	-one or more on labels.			X
NOTE: To be scored only when condition exists on major portion of seam.				
	i. Stitches skipped or broken (on edge or topstitching when seam is seamed, turned, and stitched).			
	1. More than 1/4 inch but not more than 3/4 inch.			X
	2. More than 3/4 inch.		X	
Shaded parts	a. Any outside part shaded.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
4.5.4.2. Detailed defects applicable to specific parts on outside of jacket. Detailed defects applicable to specific parts on outside of jacket shall be classified as follows:				
Alignment and position of buttonholes and eyelets	a. Buttonhole on left front not in same horizontal position as buttonhole on right front by more than 1/2 inch.		X	
	b. Any eyelet on left front not in same position as corresponding eyelet on left front by more than 1/2 inch.			X
	c. Position of front buttonhole from front edge: -less than 1/2 inch but not less than 3/8 inch or more than 3/4 inch but not more than 7/8 inch.			X
	-less than 3/8 inch or more than 7/8 inch.	X		
Link buttons (when required)	Omitted.	X		
Length of front	Unbuttoned fronts unequal in length by more than 1/2 inch.			X
Collar (construction and setting)	a. Short, i.e., causing puckers on back or fronts or pulling lapels breakline, causing fronts to roll out.		*	
	b. Long, i.e., setting away from neck, or lapel not rolling to within 2 inches of top front button or buttonholes.		*	
	c. Collar not properly set, causing decided curve or bulge on creaseline at joining to gorge seam.		*	
	d. Tight at joining to gorge seam or across back, causing fullness on lapels or fullness or pleats across outside back.		*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	e. Eyelets positioned from outer edge or lower end of collar:			
	-less than 7/8 inch but not less than 3/4 inch.		X	
	-more than 1-1/8 inches but not more than 1-1/4 inch.		X	
	-more than 1-1/4 inches or less than 3/4 inch.	X		
	f. Gorge seam.			
	1. Seam not spread open.		X	
	2. Not straight, affecting appearance.		X	
	3. Tacking omitted or insecure.			
	g. Collar seam.			
	1. Crooked, affecting appearance.		X	
	2. Undercollar exposed along collar edge for distance of 3/8 inch or more, affecting appearance.		X	
	h. Tacking on ends of collar to lapels omitted or insecure.		X	
	i. Top collar.			
	1. Tight, i.e., causing edges to curl or bulging on undercollar.	*		
	2. Twisted, i.e., having a diagonal twist.	*		
	3. Full, i.e., having excessive puckers or fullness.	*		
	4. Full, i.e., collar folds 1/8 inch or more from creased edge of undercollar.		X	
	j. Undercollar.			
	1. Interlining pleated or twisted, affecting appearance and smoothness of topcollar.	*		
	2. Interlining tight or twisted, causing puckers on undercollar.			
	3. Tight at joining to fronts or back, causing puckers or pleats at neck of jacket.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	4. Center seam more than 1/4 inch from center back seam.		X	
	5. Center seam not pressed open.		X	
	6. Undercollar stand less than 1-1/8 inches or more than 1-3/8 inches wide at center.		X	
Lapels	a. Lapel facings.			
	1. Twisted, short or tight, causing lapels to curl out, affecting appearance.	*		
	2. Fullness or puckers, affecting appearance.		X	
	b. Lapel edges.			
	1. Bulky, irregular, or not properly forced out, causing crooked edges, affecting appearance.		X	
	2. Front part exposed on lapel edge, affecting appearance.		X	
	c. Bridle tape.			
	1. Misplaced, not serving intended purpose.	X		
	2. Tape partly on creased edge or on lapel side.		X	
	d. Collar and lapel shape.			
	1. Not uniform, i.e., left and right top edge of lapels or lower ends of collar vary in length by 1/4 inch or more.		X	
	2. Pointed ends poorly shaped or not of uniform shape, affecting appearance.		X	
	3. Lapels poorly shaped or not of uniform size or shape.	*		
	4. Length of collar ends:			
	-less than 1-1/2 inches but not less than 1-3/8 inches.			X
	-more than 1-3/4 inches but not more than 1-7/8 inches.			X
	-more than 1-7/8 inches or less than 1-3/8 inches.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	
	5. Length of lapel points: -less than 2-1/8 inches but not less than 2 inches or more than 2-3/8 inches but not more than 2-1/2 inches.			
	-less than 2 inches or more than 2-1/2 inches.		X	
	6. Width of lapel measured horizontally from break-line to point: -less than 4 inches but not less than 3-7/8 inches or more than 4-1/4 inches but not more than 4-3/8 inches.			
	-less than 3-7/8 inches or more than 4-3/8 inches.		X	
	7. Width of undercollar at center seam: -less than 2-3/4 inches but not less than 2-5/8 inches or more than 3 inches but not more than 3-1/8 inches.			
	-less than 2-5/8 inches or more than 3-1/8 inches.		X	
Shoulder (construction)	Improperly joined or set, causing shoulders or back to twist.	*		
Shoulder pads	a. Not completely caught in armhole joining seam.		X	
	b. Misplaced, not serving intended purpose, i.e., too far back or too far forward.		X	
Shoulder straps	a. Misplaced so that it will not lie flat when buttoned, causing bulge or twist on strap, affecting appearance.		X	
	b. Eyelet on shoulder not aligned with buttonhole, causing bulge or twist on strap when buttoned or puckers on shoulder, affecting appearance.		X	
	c. Short, i.e., rounded area of strap not completely covered by collar.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	d. Long, i.e., rounded end extending beyond collar creaseline.	X		
	e. Misplaced so that shoulder seam is exposed (excepting rounded end.)	X		
	f. Misplaced, i.e., one strap further forward or back from position of other strap, affecting appearance.		X	
	g. Upperside of strap full or twisted, affecting appearance.		X	
	h. Less than 2-1/4 inches or more than 2-1/2 inches wide at armhole.			X
	i. Less than 1-5/8 inches or more than 1-7/8 inches wide across center of buttonhole.			X
	j. Buttonhole 1/4 inch or more off center.		X	
	k. Buttonhole finished with purling on the underside.		X	
	l. Position of buttonhole from rounded end of strap: - less than 1-5/8 inches but not less than 1-1/2 inches or more than 1-7/8 inches but not more than 2 inches.			X
	- less than 1-1/2 inches or more than 2 inches.		X	
	m. Rounded end of shoulder strap less than 1/4 inch or more than 3/8 inch above lower edge of undercollar.			X
	n. Back edge of shoulder strap less than 1/4 inch or more than 3/8 inch from shoulder seam at armhole seam.			X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	o. Buttons not uniformly set by more than 1/4 inch.		X	
Armhole	Armhole seam crooked, affecting appearance.			
Sleeves	a. Setting and hang of sleeves.			
	1. Sleeve fullness misplaced, affecting appearance.		X	
	2. Backarm seam of sleeve not matching side back seam by:			
	- more than 1/4 inch but not more than 1/2 inch.			
	- more than 1/2 inch.		X	
	3. Hang of sleeves on the same coat in opposite direction by more than 2 inches.		X	
	4. Sleeve tight in armhole, affecting appearance.		X	
	b. Sleeve cuffs.			
	1. Top edge on top sleeve poorly shaped, affecting appearance.		X	
	2. Height of pointed end on both sleeves varying in length by more than 1/4 inch.		X	
	3. Sleeve puckered at joining of cuff, affecting appearance.		X	
	4. Cuff puckered or twisted at joining to sleeve, affecting appearance.		X	
	5. Ends of cuff staggered at back arm seam by:			
	- 1/8 inch or more but not more than 1/4 inch.			
	- more than 1/4 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	6. Height of cuff at point on top sleeve: - less than 5-3/4 inches but not less than 5-1/2 inches or more than 6-1/4 inches but not more than 6-1/2 inches.			X
	- less than 5-1/2 inches or more than 6-1/2 inches.		X	
	7. Height of cuff at backarm or front creased edges: - less than 3 inches but not less than 2-3/4 inches or more than 3-1/2 inches but not more than 3-3/4 inches.			X
	- less than 2-3/4 inches or more than 3-3/4 inches.	X		
	8. Point of cuff not centered between the lower forearm creased edge and the creased backarm seam by more than 1/4 inch.	X		
	9. Lower edge of cuff not prehemmed prior to blind-stitching to body of sleeve.		X	
	10. Cuff turnup less than 1-1/2 inches.			X
	c. Sleeve seam. 1. Finished edge of forearm seam not pressed toward front of sleeve.			X
	2. Finished edge of backarm seam not pressed toward front of sleeve.			X
Body (outside)	a. Fitting of front interlining. 1. Tight, short, or twisted, causing fullness or twist on outside of jacket, affecting appearance.	*		
	2. Too full, causing jacket front to have a wavy appearance.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	b. Waist dart. 1. One or both darts not properly tapered at top end, causing puckers or pleats, affecting appearance.		X	
	2. Upper end of dart not backtacked.			
	3. Raw edges of darts not pressed toward the side seam.			
Front and Bottom edges	a. Front edges stretched, affecting appearance.	X		
	b. Bottom edge stretched, puckered or uneven, affecting appearance.	X		
	c. Fronts rolling outward below button.	*		
	d. Front edge irregular or not properly forced out, causing crooked or curved edges, affecting appearance.	X		
	e. Facing exposed on left front edge, affecting appearance (score only when clearly noticeable and the condition exists along major portion of seam).			
	f. Bottom corner of one or both fronts poorly shaped, affecting appearance.	X		
	g. Tape tight on bottom hem, causing puckering on outside of coat, affecting appearance.		X	
Front facings	a. Short, tight or twisted, causing excessive fullness or twists on fronts.	*		
	b. Facing long, causing bottom corner to curl up.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Front button-holes	a. Position from front edge: -less than 1/2 inch but not less than 3/8 inch or more than 3/4 inch but not more than 7/8 inch.			X
	-less than 3/8 inch or more than 7/8 inch.		X	
	b. Buttonhole on left front not in same position from front edge as button on right front by more than 1/8 inch.			X
	c. Finished with purling on the underside.	X		

4.5.4.3 Detailed defects applicable to specific parts on inside of jacket. Detailed defects applicable to specific parts on inside of jacket shall be classified as follows:

Size label	a. Missing, incorrect, illegible or not securely caught in stitching.		X	
Hanger	a. Omitted, or one or both ends not securely stitched.		X	
	b. Less than 1-3/8 inches or more than 1-5/8 inches long measured along the lower edge of topcollar.			X
Identification-instruction label	a. Omitted	X		
	b. Incorrect or illegible.		X	
	c. Not stitched on four sides.			X
	d. Bottom edge of label positioned more than 5 inches from bottom edge of jacket.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Front facings	Lower back edge of facing not felled to jacket turnup, or felling insecure.		X	
Bottom hem and tape	a. Tape extending less than 1 inch beyond back edge of interlining.		X	
	b. Bottom hem, including tape, less than 1-1/4 inches or more than 1-1/2 inches wide.			X
Body seams	a. Finished edge of center back seam not pressed toward left side of jacket.			X
	b. Finished edge of one or more other seams not pressed towards back.			X
Armhole binding	a. Omitted.	X		
	b. End of binding not turned to inside of armhole or insecurely tacked.			X

4.5.4.4 Finished measurements. Any measurement deviating from nominal dimension and tolerance specified in Table II shall be classified as a size measurement defect. Sleeves uneven in length by 1/2 inch or more shall be classified as a size measurement defect.

4.5.4.5 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.5.4.1 through 4.5.4.3

Inspection Level III of MIL-STD-105

AQL's	Major	1.5 DHU
	Major and Minor A (combined)	10.0 DHU
	Total Major, Minor A and Minor B (combined)	25.0 DHU

4.5.4.4

Inspection Level S-3 of MIL-STD-105

One class	4.0 DHU

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

4.5.5 Examination of packaging. An examination will be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below shall be examined on a shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of case liners and container flaps; loose strapping and inadequate stapling. Bulging or distortion of containers.
Content	Number of jackets per shipping container is more or less than required.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each jacket, in the buttoned position, shall be folded to approximately 12 by 11 inches and placed in an individual polyethylene bag measuring 18 by 12 inches with a 1-inch lip along the 12-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Prior to or during the final sealing operation, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. Jackets shall be packaged in accordance with the manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A

5.2.1.1 Method 1. Twenty-five (25) jackets of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner, conforming to class-weather resistant, size 3A or MIL-B-17757 and assembled, closed, and strapped in accordance with appendix thereto. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

5.2.1.2 Method 2. When specified (see 6.2), three level B shipping containers shall be packed in a fiberboard shipping container conforming to class weather resistant, size 4 of MIL-B-17757 and assembled, closed, and strapped in accordance with appendix thereto. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Twenty-five (25) jackets of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner, conforming to class domestic, size 3A of MIL-B-17757 and assembled and closed in accordance with appendix thereto. The fiberboard used in fabricating the box and liner shall be grade 275. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Commercial. Jackets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification and the U. S. Postal Service Manual, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification:

Nomenclature
Size_____Stock Number_____
Contract Number
Name of Contractor

5.3.1 Label. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 or 4 inches with the words, designating the combination, plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity of each contained therein.

6. NOTES

6.1 Intended use. The jackets described herein are intended for wear by male officer personnel of the U. S. Marine Corps.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of jackets in first article (see 3.2).
(e) Whether buttons are required (see 3.3.8).
(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(g) When level A, method 2, packing is required (see 5.2.1.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph no.	Data requirements	Applicable DID no.	Options
(a) 4	Inspection system program plan	DI-R-4803	----
(b) 4.4	First Article Inspection Procedures	DI-T-4901	----
(c) 4.4	First Article Inspection Report	DI-T-4902	----
(d) 4.5	Production/Acceptance Inspection Procedures	DI-T-4903	----
(e) 4.5	Production Inspection Report	DI-T-4904	----

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Samples and shade samples. For information regarding availability of sample of the jacket and of standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:
Navy - MC
Project NO. 8405-N953

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.

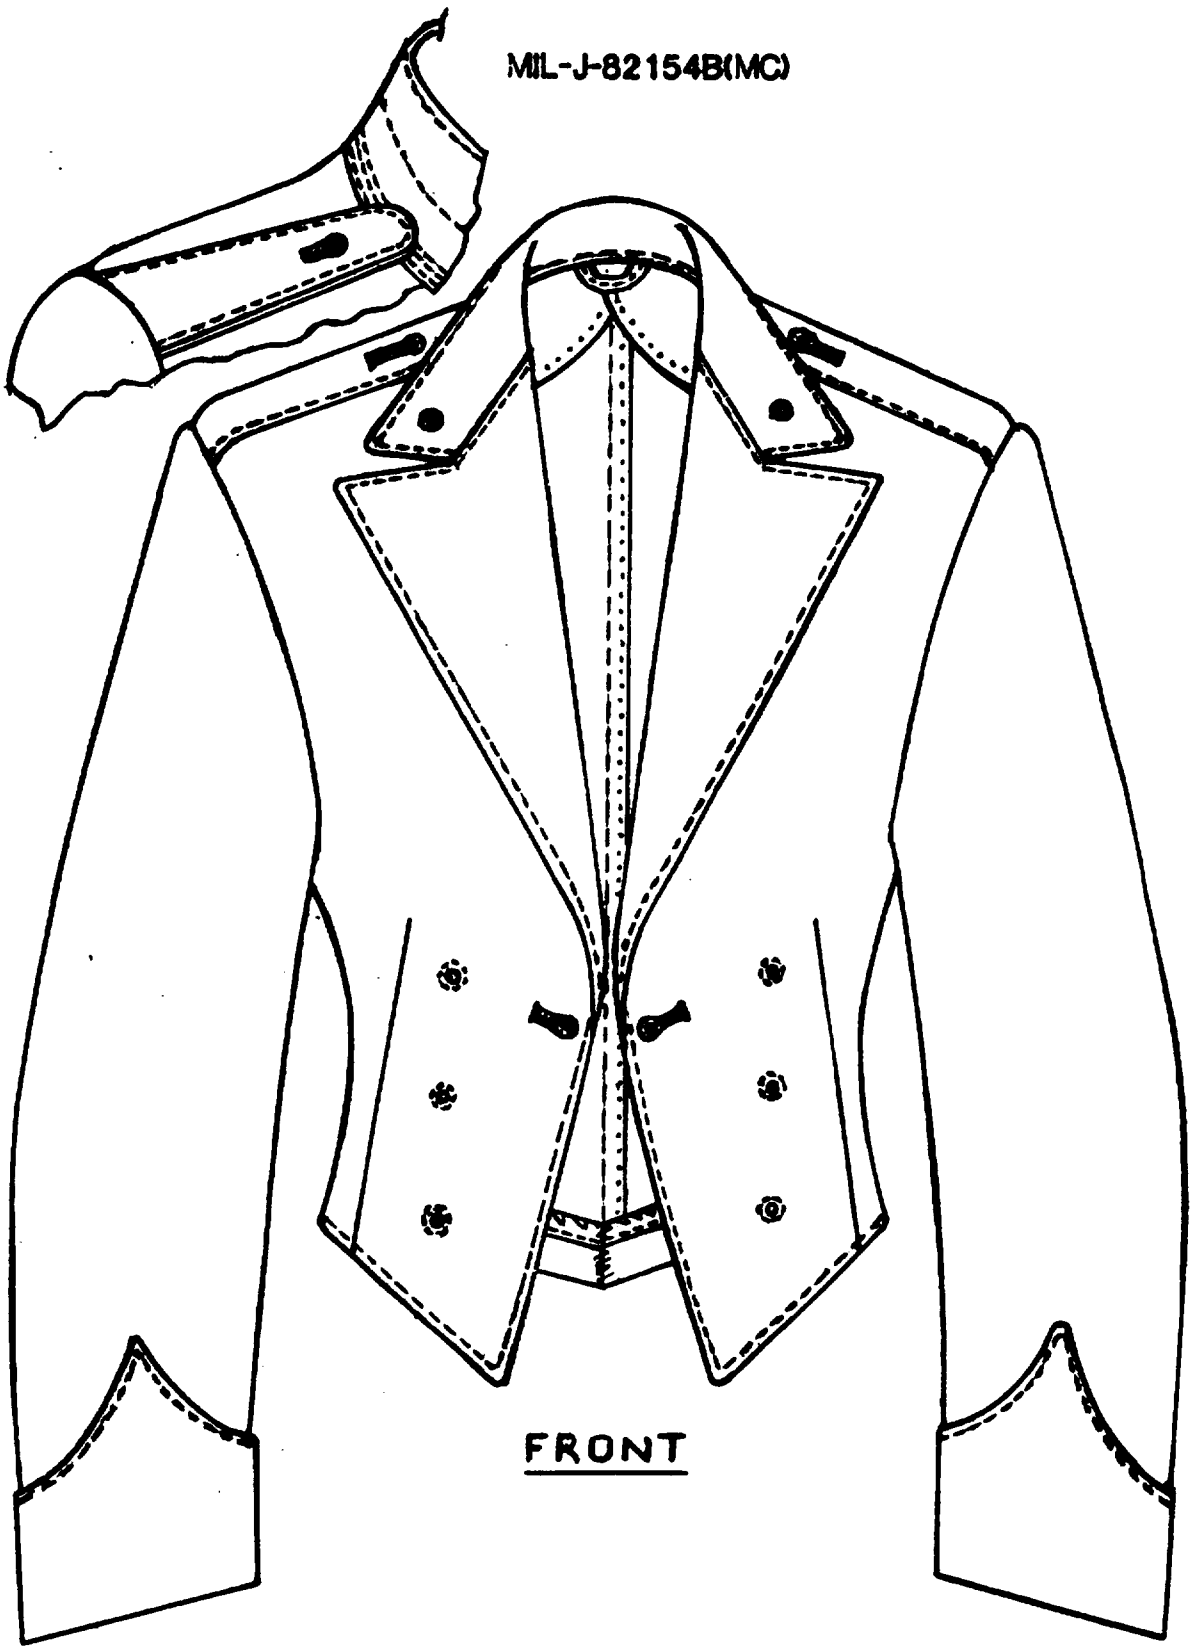


FIGURE 1. JACKET, MAN'S: MESS; WHITE (OFFICERS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.



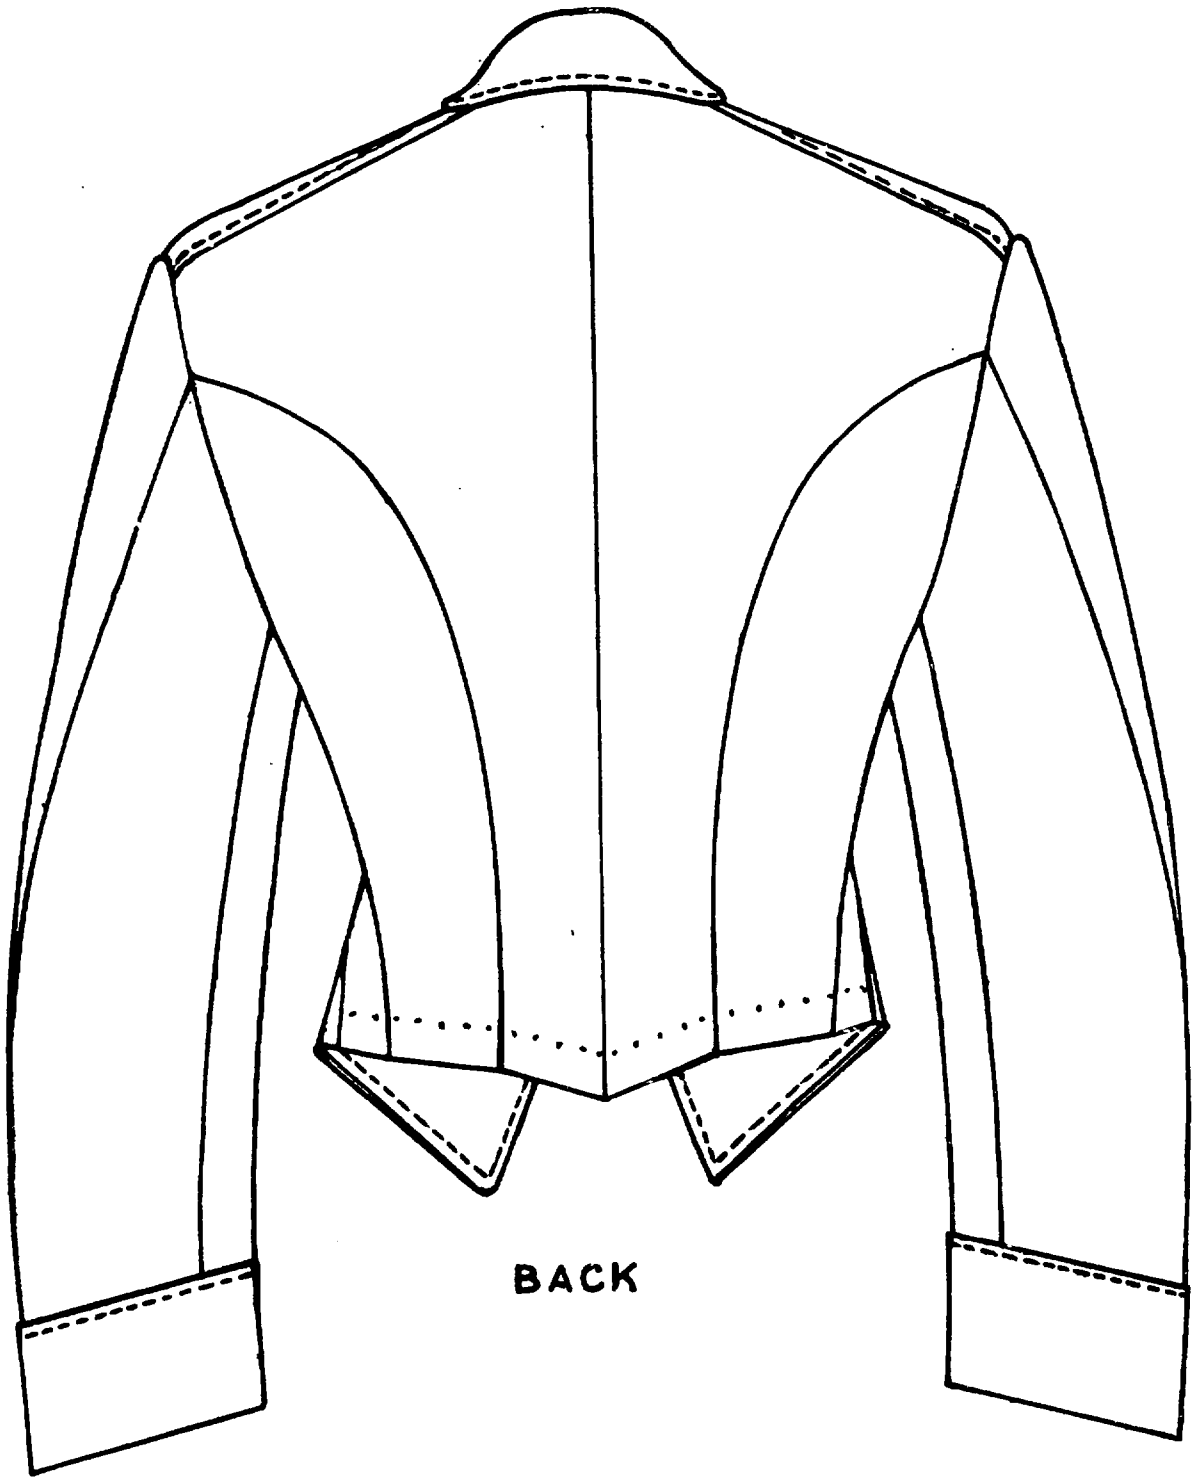


FIGURE 2. JACKET, MAN'S: MESS; WHITE (OFFICERS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

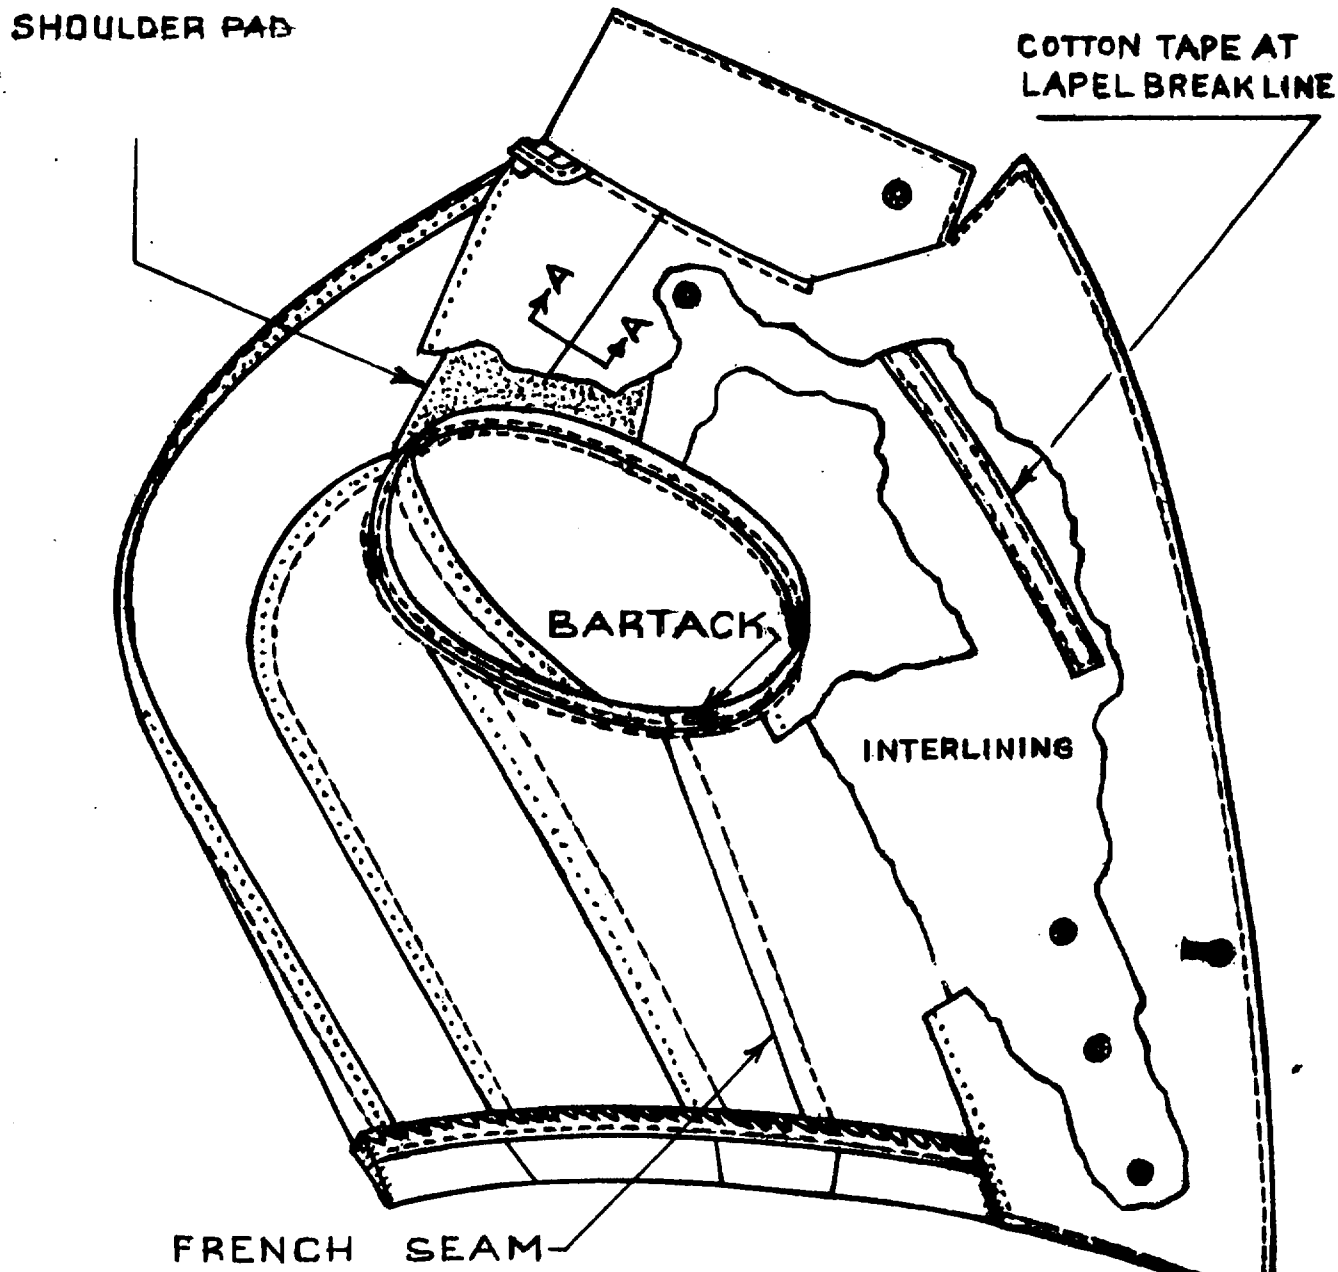

DETAIL: INSIDE LEFT FRONT

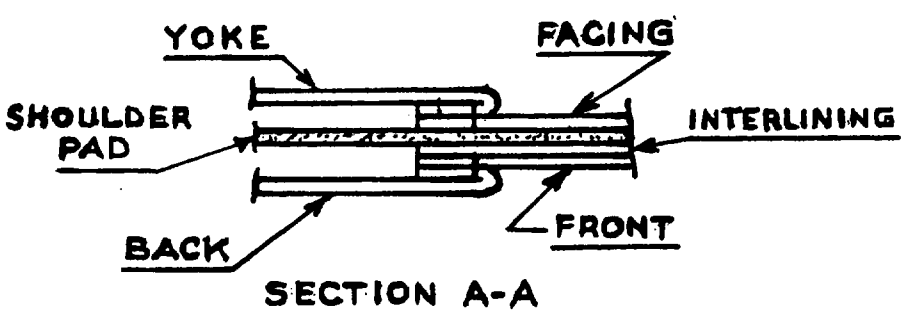

SECTION A-A

FIGURE 3. JACKET, MAN'S; MESS; WHITE (OFFICERS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-I-82154B(MC)	JACKET, MAN'S: MESS; WHITE (OFFICER'S)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026/0-26104:39Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, w too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, U.S. Marine Corps
(Code LMA-1)
Washington, D.C. 20380

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:39Z
Check the source to verify that this is the current version before use.