MIL-J-82293C(NU)
30 December 1983

SUPERSEDING
MIL-J-82293B(SA)
16 May 1977

MILITARY SPECIFICATION

JACKET, UTILITY, MAN'S, BLUE

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a utility jacket fabricated of polyester/cotton blend poplin treated with a durable water repellent finish.

1.2 Classification The jacket shall be of one type only and in the following sizes and lengths (see 6.2):

SIZES

30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50 and 52

LENGTHS

Short, regular, long, and extra long

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-F-106 - Fasteners, Slide, Interlocking
V-T-276 - Thread, Cotton
DDD-L-20 - Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-371 - Braid, Textile, Tubular
MIL-C-3735 - Cuffs, Knit, Wrist and Ankle, and Cloth, Knitted
MIL-C-17155 - Cloth, Knitted, Nylon, Fleece
MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-43482 - Cloth, Poplin: Cotton and Polyester (Water Repellent)
MIL-T-43548 - Thread, Polyester, Cotton-covered and Rayon-covered

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications The following documents form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Traffic Department, 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article When specified, the contractor shall furnish sample jackets for first article inspection and approval (see 6.2 and 4.3).

3.3 Materials

* 3.3.1 Basic material The basic material shall be water repellent 50 percent polyester/50 percent cotton blend poplin conforming to class 2, Blue 3329 of MIL-C-43482.

3.3.2 Lining The lining shall be a knitted nylon fleece conforming to Type II of MIL-C-17155.

* 3.3.3 Thread

3.3.3.1 Thread, polyester covered The thread shall be dyed shade Navy Blue AT, C.A. 66060 and shall conform to MIL-T-43548, in the following types and sizes:

Use	Ticket Number	Ply
Seaming, stitching and bartacking	50 or 70	2 or 3
Overedging	70	2 or 3

* 3.3.3.2 Thread, cotton As an alternate, cotton thread conforming to V-T-276 shall be used. The thread shall be dyed Navy Blue AT, C.A. 66060, in the following types and sizes:

Use	Type	Ticket Number	Ply
Seaming and stitching	IC2	0 or 00	3
Overedging	IA3	70	2 or 3
Bartacking	IC2	A	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.3.3.3 Colorfastness The dyed thread shall show fastness to laundering and light equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. When no standard sample is available the dyed thread shall show "good" fastness to laundering and light when tested as specified in V-T-276 or MIL-T-43548.

3.3.4 Braid The braid for the hanger loop shall be flat cotton tubular braid conforming to type III, class 1 of MIL-B-371 except that only colorfastness requirements shall be colorfastness to laundering. The color shall be black or shall be dyed to match the shade of the basic material. As an alternate, the basic cloth may be used when loop is constructed as specified in Table I.

3.3.5 Cuffs The knitted wrist cuffs shall conform to type III, class 2, size 2 of MIL-C-3735. The cuffs shall be dyed blue to match the shade of the basic material.

* 3.3.6 Labels Each jacket shall have a combination identification/instruction label and a size label conforming to the requirements of 3.3.6.1 and 3.3.6.2. The printing shall show fastness to laundering.

* 3.3.6.1 Combination label The combination label shall conform to Type VI, classes 10 and 15 of DDD-L-20, and shall bear the following inscription:

NAME:
SERVICE NO:
JACKET, UTILITY, MAN'S, BLUE
BASE FABRIC: 50% POLYESTER/50% COTTON
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:

LAUNDERING INSTRUCTIONS

Machine Wash - Hot, DO NOT BLEACH
Tumble Dry - Medium, Remove Promptly
OR
Use NAVSUPINST. - 4400.81

* 3.3.6.2 Size label The size label shall conform to Type VI, Class 2 of DDD-L-20, and shall bear the following inscription:

Size: 34 R (Example)
Stock No: 8405-00-000-0000 (Example)

NOTE: Abbreviations for applicable jacket lengths shall be "S" for Short, "R" for Regular, "L" for Long, and "XL" for Extra Long.

* 3.3.7 Slide fasteners The slide fasteners for front and pocket closures shall be brass conforming to V-F-106 as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Material	Nomenclature of pattern parts	Cut parts
Lining material; nylon fleece	Back	1
	Fronts	2
	Sleeve, back	2
	Sleeve, front	2
	Pocket, fronts	4
Template	Undercollar stitch Marker	-

3.6 Construction

3.6.1 Stitch, seam, and stitching types Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the jacket. The bight of overedge stitching shall be 3/16 to 1/4 inch. On 515, 516 and 519 stitch types the 401 safety stitch shall be 1/16 to 1/8 inch from the inner edge of overedge stitch. Unless otherwise specified, edgestitching or topstitching shall be 1/4 to 5/16 inch from the edge.

3.6.2 Thread breaks and ends of seams Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

3.6.3 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements The jackets shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished jackets are identical to those produced by following the sequence of operations as listed in Table I.

3.7.1 All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Shade and size marking The component parts of the jacket shall be marked, bundled or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Corrosive metal fastening devices. No metal device or sew-on type markings shall be used on polyester/cotton basic material.
(2) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Front - Type IV, style 8, size M, short tab pull. Lengths shall be chosen so that the top stop of the slide fastener shall be set 1/4 to 1/2 inch from the finished neck seam. The bottom stop of the slide fastener shall be set 2 to 3 inches from the bottom of the jacket.

Pocket - Type I, style 7, size L, short tab pull.

The slide fastener tapes shall approximate the shade of the basic material and shall show good fastness to laundering. All metal components of the slide fastener shall be fabricated of brass and shall be from the same supplier.

* 3.3.7.1 Plastic coil slide fastener As an alternate to the slide fastener for the pocket opening specified in 3.3.7, a slide fastener manufactured of polyester or nylon consisting of an automatic or cam lock equal to commercial size #2 may be used. The tape shall be a blend of nylon and cotton or polyester and cotton or polyester. The color shall match the basic material. The complete slide fastener shall not shrink more than 2% when tested as specified in V-F-106.

3.4 Design The jacket shall be a slide fastener front closure type, fully lined with a knitted nylon fleece. It shall have split shoulder raglan sleeves, two diagonal hand warmer type front pockets, two horizontal slide fastener closure breast pockets and knitted wrist cuffs (see figure 1).

3.4.1 Figure Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Patterns Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns provide a 3/8 inch seam allowance unless otherwise specified in Table I.

3.5.1 Pattern parts The component parts shall be cut from the material specified in accordance with the following pattern parts:

Material	Nomenclature of pattern parts	Cut parts
Basic material; Cloth, poplin, polyester/cotton	Back	1
	Front, upper	2
	Front, lower	2
	Front, side	2
	Sleeve, back	2
	Sleeve front	2
	Topcollar	1
	Facing, pocket	2
	Facing, front	2
	Welt, breast pocket	4
	Undercollar & interlining	2
	Interlining, welts	4
	Interlining, fronts	2
	Pocket, breast (inner)	2
	Pocket, breast (outer)	2

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the jackets in strict accordance with patterns which show size, shape, placement of pockets, warp directional lines, and notches for the proper assembling of all parts. b. Cut all component polyester/cotton parts out of one piece of material, except the breast pockets, pocket facings, hanger loop and interlining, which may be cut from ends. When so cut, the parts shall approximate the shade of the main assembly. c. Cut all component nylon fleece parts from one piece of material, except front pockets and sleeve linings which may be cut from ends. When so cut, the pockets shall approximate the shade of the main assembly. When sleeve linings are cut from ends, they must match each other.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 of this specification shall be removed from production and replaced with non-defective and properly matched components.					
3.	Size and shade marking (see 3.7.2) Mark, bundle or ticket components, unless otherwise specified, to insure a uniform shade and proper size assembly throughout the jacket.					

Source: https://assist.dla.mil/ - Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Prepare lining The fleeced or pile side of the knit lining material shall be considered the back side and the unfleeced side shall be considered the face side for all jacket construction operations where fleece is used.					
	a. Stitch, face to face, the back sleeves to the back according to notches.	301 or 401	SSa-1	8-10	50 50	50 70
	b. Stitch, face to face, the front sleeves to the front, according to notches.	301 or 401	SSa-1	8-10	50 50	50 70
	c. Stitch, face to face, shoulder seams and top sleeve seam.	301 or 401	SSa-1	8-10	50 50	50 70
	d. Stitch, face to face, side seams and underarm sleeve seams in one operation.	301 or 401	SSa-1	8-10	50 50	50 70
	e. Position front facing pieces to face side of front lining with raw edges even.					
	f. Turn under back edge of facings 1/4 to 5/16 inch and stitch 1/16 inch from folded edge.	301 or 401	LSd-1	8-10	50 50	50 70
	g. Stitch along front and top edge of facings to front lining 1/8 to 1/4 inch from raw edge.	301 or 401	SSa-1	8-10	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make collar					
	a. Mark undercollar for stitching lines in accordance with template.					
	b. Stitch interlining to undercollar with triangular rows of stitching.	301	SSv-1	8-10	50	50
	c. Stitch undercollar assembly to topcollar, face to face, 1/4 inch from raw edge. Trim corners.	301 or 401	SSe-2(a)	8-10	50 50	50 70
	d. Turn collar and work out points. Stitch outer edge and sides 1/4 to 5/16 inch from folded edge.	301	SSe-2(b)	8-10	50	50
	e. Stitch bottom edges of collar 1/8 (± 1/16) inch from raw edge, catching all plies.	301 or 401	SSa-1	8-10	50 50	50 70
6.	Prepare front pockets					
	a. Position, face to face, the pocket facings to the outer front pocket pieces according to notches and stitch 3/8 inch from raw edge of facing.	301 or 401	LSbj-1	8-10	50 50	50 70
	b. Fold facing to finished position and stay stitch straight edges of pocket and facing 1/8 inch from raw edge.	301 or 401	SSa-1	8-10	50 50	50 70
	or					
	As an alternate for operations 6.a and 6.b - Position face side up, pocket facing piece to face side of pocket with outside edges even. Fold under inner edge of facing 3/8 inch and stitch 1/16 to 1/8 inch from folded edge.	301 or 401	LSd-1	8-10	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of Jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Prepare front pockets (cont'd)					
	c. Position outer front pocket facing piece on lower front, face to face, in accordance with marks on pattern, and stitch 3/8 inch from raw edge as indicated by the pocket opening notches.	301 or 401	SSe-2(a)	8-10	50 50	50 70
	d. Turn lower front and pocket piece to finished position and edge stitch from notch to notch 1/4 inch from finished edge.	301	SSe-2(b)	8-10	50	50
	e. Position, face to face, front side piece to front pocket piece in accordance with marks on pattern and stitch 3/8 inch from raw edge.	301 or 401	LSs-2(a)	8-10	50 50	50 70
	f. Fold front side piece and front pocket piece to finished position. Stay stitch outer straight edge of pocket to front 3/8 to 1/2 inch from raw edge of pocket. Stitch line shall not be exposed when lower and side fronts are assembled.	301 or 401	LSs-2(b)	8-10	50 50	50 70
	OR					
	As an alternate to operation 6.e and 6.f - Position front side piece face up, on face side of front pocket piece in accordance with marks on patterns. Fold under inner edge of front side piece 3/8 inch and edge stitch 1/16 to 1/8 inch from folded edge.	301	LSb-1	8-10	50	50
	g. Position and stitch lower and side fronts, face to face leaving a pocket opening in accordance with marks on patterns. Stitching shall start and finish 3/8 inch into pocket opening.	301 or 401	LSq-2(a) and LSa-1	8-10	50 50	50 70

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Prepare front pockets (cont'd)					
	h. Fold fronts to finished position and top stitch 1/4 inch from folded edge, above and below pocket opening.	301	LSq-2(b)	8-10	50	50
	i. Stitch, face to face, front and back pocket pieces 3/8 inch from raw edge.	301 or 401	SSa-1	8-10	50 50	50 70
	j. Overedge inner and outer pocket pieces.	503 or 504 or 602	SSa-1	8-10	70	70
	OR As an alternate, operation 6.i. and 6.j. may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	SSa-2	8-10	50 (chainstitching) 70 (overedging)	70 70
7.	Prepare breast pockets					
	a. Fold breast pocket welt pieces lengthwise with the interlining between the fold and finger press.					
	b. Position prefolded welts on upper fronts as indicated by the marks on the patterns. Stitch, forming finished welts 1/4 inch from folded edge, in a suitable length to accomodate slide fastener and finish in accordance with operation 7.k.	301 or 401	Similar to LSd-1	8-10	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Prepare breast pockets (cont'd)					
	c. Slit between rows of stitching and tongue notch ends. Turn welts to finished position and stitch welt tongues to welt ends as close as possible to the pocket openings.	301	LSb-1	8-10	50	50
	d. Position slide fastener on inside welts. Position inner breast pocket piece along lower edge of welt facing upwards. Stitch, 3/8 inch from raw edge, catching slide fastener tape, inner breast pocket piece and welt.	301 or 401	LSq-2(a)	8-10	50 50	50 70
	e. Top stitch front 1/16 inch from folded edge.	301	LSq-2(b)	8-10	50	50
	f. Fold inner pocket piece down to finished position. Align the outer and inner pocket pieces. Edge stitch remaining three sides of front 1/16 inch from folded edges forming a 1/2 (+ 1/16) inch wide rectangular square (NOTE: Slide fastener assembly will determine length of opening.)	301	LSq-2(b)	8-10	50	50
	g. Close pocket catching tongues, welts, and slide fastener tape ends, 3/8 inch from raw edge.	301 or 401	SSa-1	8-10	50 50	50 70
	h. Overedge pocket pieces.	503 or 504 or 602	SSa-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Prepare breast pockets (cont'd) i. Operations g. and h. may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	SSa-2	8-10	50 (chainstitching) 70 (overedging)	70 70
	j. Slide fasteners shall be positioned to close towards the armhole.					
	k. Length of the closed slide fastener shall be as follows: Sizes 30-36 - 4 (± 1/8) inches Sizes 38-52 - 5 (± 1/8) inches NOTE: Measurement shall be taken from stop to stop. OR The breast pocket opening may be accomplished with a double welt pocket machine which stitches, cuts and turns welts in one operation. (See operation 7.a., 7.b. and 7.c.). When this machine is used, the welt piece shall be one piece and may be cut to permit insertion into the machine. The interlining shall be of a suitable material as recommended by the machine manufacturer.					
8.	Attach fronts a. Stitch, face to face, upper and lower fronts.	301 or 401	LSq-2(a)	8-10	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Attach fronts (cont'd)					
	b. Fold fronts to finished position with the seam allowance on upper fronts. Top stitch upper front 1/4 inch from folded edge.	301	Lsq-2(b)	8-10	50	50
9.	Make sleeves and join sides					
	a. Stitch front sleeve to front, face to face, positioning steps in accordance with patterns, and stitching from top 3/8 inch from raw edge to step, continuing 3/16 inch from raw edge.	301 or 401	LSq-2(a)	8-10	50 50	50 70
	b. Fold seam allowance towards front and starting at top, topstitching on front 1/4 inch from folded edge, to step break. At step break stitch square angle to within 1/16 inch from folded edge of armhole and continue topstitching 1/16 inch from folded edge.	301	LSq-2(b)	8-10	50	50
	c. Stitch back sleeve to back, face to face, positioning steps in accordance with patterns. Stitch from neck edge to step, 3/8 inch from raw edge; continue stitching 3/16 inch from raw edge.	301 or 401	LSq-2(a)	8-10	50 50	50 70
	d. Fold seam allowance towards back and topstitch back from neck edge, 1/4 inch from folded edge, to step break. At step break, stitch square angle to within 1/16 inch from folded edge of armhole, and continue topstitching 1/16 inch from folded edge.	301	LSq-2(b)	8-10	50	50

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make sleeves and join sides (cont'd)					
	e. Position, face to face, back sleeve to assembled front and front sleeve from neck edge to step outlet of front sleeve. Stagger raw edge of back sleeve 3/8 inch from raw edge of front sleeve to extend and form an outlet from step to bottom of front sleeve. Stitch from neck edge to bottom 3/8 inch from raw edge.	301 or 401	LSq-2(a)	8-10	50 50	50 70
	f. Fold seam allowance towards back sleeve and top stitch on back sleeve from neck edge to bottom of sleeve, 1/4 inch from folded edge.	301	LSq-2(b)	8-10	50	50
	g. Stitch underarm and side seams, aligning underarm seams of sleeve with side seam at armhole, face to face, 3/8 inch from raw edge.	301 or 401	SSa-1 and LSq-2(a)	8-10	50 50	50 70
	h. Fold seam allowance towards the back and topstitch the side seams only, 1/4 inch from folded edge, on the back.	301	LSq-2(b)	8-10	50	50
	i. Prepress sleeve hems as indicated by marks on pattern.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Attach slide fastener					
	a. Position edge of front interlining piece on back side of front extension, adjacent to the center fold line which is indicated by marks on patterns. Stay stitch interlining 1/8 to 3/16 inch from raw edge adjacent to center fold line.	301	LSbj-1	8-10	50	50
		or 401			50	70
	b. Press center fronts as indicated by marks on pattern.					
	c. Position and center slide fastener chain to center front fold and stitch tape through both plies of interlining and front extension 1/8 (± 1/16) inch from edge of slide fastener tape.	301	SSa-1	8-10	50	50
11.	Bartacks					
	a. Reinforce ends of front pockets and bottom of front slide fastener tape with 1/4 inch horizontal bartacks. (Bartacks for reinforcing slide fastener tape may be positioned vertically).	Bartack		28 per bartack	50	50
	b. Reinforce ends of breast pockets with 1/2 inch vertical bartacks.	Bartack		28 per bartack	50	50
12.	Attach combination label to fleece lining assembly					
	Center combination label approximately 2 inches below top edge of center back and stitch four sides approximately 1/16 inch from the edges.	301	LSbj-1	8-10	50	50
13. *	Attach lining assembly to outer assembly					
	a. Stitch, face to face, the lining assembly to the outer assembly along the fronts.	301	SSa-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Attach collar, hanger loop, and size label					
	a. Stitch collar to neckline, 1/4 inch from raw edge.	301	SSa-1	8-10	50	50
*	b. Hanger loop shall conform to 3.3.4 or shall be made of basic material. When made of basic material, the loop shall be double stitched using a coverstitch on underside or with edges folded together. Width of the hanger loop shall be 1/4 to 3/8 inch.	406	EFh-1	8-10	70	70
		or 301	EFp-2		50	50
	c. Center ends of loop on collar edge and stitch 1/8 inch from edge. The center of loop shall be positioned to extend not more than 1/2 inch from the finished neck seam.	301	SSa-1	8-10	50	50
	d. The loop shall finish 3/8 (± 1/8) inch wide with a free opening 2 1/2 (± 1/4) inches long.					
	e. Place size label on collar edge adjacent to hanger loop and stitch 1/8 inch from edge.	301	SSa-1	8-10	50	50
	f. Stitch lining assembly to the outer assembly at collar edge, face to face, assuring lining seams are open and flat, stitching 1/4 inch from raw edge.	301	SSa-1	8-10	50	50
	g. Notch curves. Neck seam shall be smooth, flat, and free from puckering.					
15.	Attach cuffs and linings to outer assembly					
	a. Fold knitted wrist cuffs in half width wise and overedge stitch the plies together.	503 or 504 or 602	SSa-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Attach cuffs and linings to outer assembly (cont'd)					
	b. Insert wrist cuffs between inside (face side) of outer sleeve and lining, as indicated by marks on pattern and stitch 1/4 to 3/8 inch from raw edge.	301	SSk-1	8-10	50	50
	or					
	As an alternate, wrist cuff may be overedged and joined to bottom of outer sleeve in one operation, prior to joining the lining.	515 or 516 or 519	SSa-2	8-10	50 (chainstitching) 70 (overedging)	70 70
	c. With sleeve bottoms folded inside out, position and fold step outlet and stitch 1/8 inch from raw edge, from bottom of folded hem to 1/2 to 3/4 inch from wrist cuff assembly. Position and fold, face to face, the pressed open underarm seam and stitch 1/8 inch from raw edge from bottom of folded hem to 1/2 to 3/4 inch from wrist cuff assembly.	301	SSa-1	8-10	50	50
	d. Position lining and outer shell underarm seams, notch to notch, with seams open and flat. Stay stitch approximately 6 inches down from top sleeve notch.	Hand or 301	SSa-1	4-8 per tack or 8-10	50 50	50
	Or					

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Attach cuffs and linings to outer assembly (cont'd)					
*	e. As an alternate to operations 15c and 15d: (1) With sleeve bottoms folded inside out, secure both sides of sleeve by stitching a 1/2 inch long bartack on each side of the sleeve. Each bartack shall be positioned 1 1/2 - 2 inches up from bottom folded edge of sleeve.	Bartack		28 per bartack	50	50
	(2) Position lining and outershell underarm seams, notch to notch, with seam allowances open and flat. Position two 1/2 inch bartacks, one at notch and one 5 1/2 to 6 inches down from top sleeve notch.	Bartack		28 per bartack	50	50
*	f. Turn lining, outer assembly, and sleeves to finished position.					
*	g. Stitch outeredge of front facing piece 1/16 inch from edge.	301 or 401	LSa-1	8-10	50 50	50 70
16.	Hem Fold hem according to notches on patterns. Fold raw edge under 1/4 to 3/8 inch and stitch 1/8 inch from inner folded edge. Finish hem to measure 1 (+ 1/8) inch wide. Turn under front ends at approximately a 45° angle stitching 1/8 inch from inner folded edge.	301	SS1-1	8-10	50	50
*17.	Close fronts Stitch along fronts 1/4 to 3/8 inch from folded edge.	301	Similar to SSb-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of jacket (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Clean jackets a. Trim all thread ends. b. Remove all loose threads. c. Remove all spots, stains, and shade tickets.					
19.	Fasten jacket Close all slide fasteners.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil/ - Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements Sizes and measurements of the finished jackets shall be shown in Table II (see figure 1). Unless otherwise indicated, all measurements and tolerances are expressed in inches.

Table II - Sizes and finished measurements

Size	A Chest	B Sleeve Inseam				C Length				D Bottom
		S	R	L	XL	S	R	L	XL	
30	36	17	18	19	20	27	28 1/2	30	31 1/2	34
32	38	17	18	19	20	27	28 1/2	30	31 1/2	36
34	40	17	18	19	20	27	28 1/2	30	31 1/2	38
36	42	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	40
38	44	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	42
40	46	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	44
42	48	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	46
44	50	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	48
46	52	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	50
48	54	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	52
50	56	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	54
52	58	17 1/2	18 1/2	19 1/2	20 1/2	27 1/2	29	30 1/2	32	56
Tolerance	± 1	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

NOTE: All measurements shall be taken with the jacket laid flat and smooth with the front slide fastener completely closed. Refer to Figure 1 for A, B, C and D measurements.

A. Chest - Twice the measurement taken across front approximately 1 inch below armhole seam from folded edge to folded edge.
B. Sleeve Inseam - Measurement taken from base of armhole at inseam to bottom of sleeve.
C. Length - Measurement taken along center of back from undercollar seam to bottom of jacket.
D. Bottom - Twice the measurement taken across bottom approximately 1 inch above bottom edge of jacket.

3.9 Workmanship The finished jackets shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections The inspection requirements herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4)

4.3 First article inspection The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:40Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspection In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 Examination of the end item Examination of the end item shall be in accordance with 4.4.2.1 thru 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The lot size shall be expressed in units of jackets. The sample unit shall be one finished jacket.

4.4.2.1 Visual examination The jackets shall be examined for defects in color, design, material, construction, workmanship and marking and the defects classified in accordance with 4.4.2.1.1.

4.4.2.1.1 General and detailed defects

Defect	Classification Major	Minor
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any hole, cut, tear, smash, mend, needle chew, burn, drill hole or scorched area		
1. On outside	X	
2. On inside		X
b. Knot, large slub, snag, misweave, shade bar, coarse yarn, missing yarn, broken yarn, thin place, woven in waste or area of no dye penetration		
1. On outside	X	
2. On inside		X
c. Permanent fold or pleat in cloth caused by seaming or stitching		
1. On outside	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
II. SHADED PART		
a. On outside:		
1. Any part shaded (except parts which may be cut from ends)	X	
2. Variation in shade within a part (except parts which may be cut from ends)	X	
3. Part cut from ends badly shaded		X
III. CLEANNESS		
a. One or more spots or stains on outside		X
b. Five or more thread ends not trimmed to 3/8 inch or less		X
c. Five or more loose threads not removed		X
d. One or more shade or size tickets not removed		X
*e. Any shade or size marking exposed or readily visible on outside of garment (undercollar is considered outside of garment)		X
IV. COMPONENTS AND ASSEMBLY		
a. Any component not as specified	X	
b. Any operation not as specified (unless otherwise classified herein)		X
c. Any component part or required operation omitted (unless otherwise classified herein)	X	
d. Any component part tight, twisted, distorted, pleated or full (unless otherwise specified herein)		X
V. CUTTING		
Any component part not cut in accordance with directional lines indicated on patterns or not in accordance with specification requirements	X	
VI. PRESSING		
a. Pressing omitted (any specified operation)		X
b. Excess gloss		X
c. Wrinkles, creases or pressing impressions not removed throughout major portion of jacket		X
d. Edge bulky; not pressed		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
VII. SEAMS AND STITCHING		
a. Accuracy of seaming		
1. Seam puckered, irregular, wavy or edge not fully worked out		X
2. Part of jacket caught in any unrelated operation or stitching	X	
*3. Needle perforations visible on outside, more than 1 inch		X
4. End of seam or stitching when not caught in another seam or stitching not securely back-tacked or back stitched less than 3/8 inch		X
5. Stitching overlapping ends of thread break less than 1/2 inch		X
6. Not specified color thread used on outside		X
7. End of a continuous line of stitching over-lapped less than 1/2 inch		X
b. Gage of stitching and seam allowance:		
1. Stitching irregular, not within range specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than half the length of seam)		X
2. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X	
3. Width of seam allowance varies more than 1/16 inch from allowance specified (score only when condition exists on more than half the length of seam)		X
c. Open seam		
1. On outside:		
(a) -more than 3/4 inch	X	
(b) -up to 3/4 inch inclusive		X
2. On inside:		
(a) -more than 1 inch	X	
(b) -up to 1 inch inclusive		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
d. Runoff, skipped or broken stitches:		
1. On joining seam - when resulting in an open seam use "Open seam" classification		
2. On edge, top or raise stitching - more than 1/4 inch (when not resulting in an open seam)		X
e. Raw edge:		
1. On outside:		
(a) -more than 3/4 inch	X	
(b) -1/4 to 3/4 inch inclusive		X
2. On inside:		
(a) -more than 1 inch		X
f. Seam and stitch type:		
1. Not specified seam or stitch type	X	
2. Any line of stitching omitted or insecure		X
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)		X
g. Stitch tension:		
1. Loose tension resulting in a loose seam		
(a) -more than 1 inch	X	
(b) -up to 1 inch inclusive		X
2. Loose tension resulting in loose or tangled loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
h. Stitches per inch (score only when condition exists on more than 1/2 the length of seam)		
1. More than the maximum specified		X
2. Less than the minimum by two or more stitches		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
i. Bartack, backtack, tack or tacking		
1. Missing, insecure, misplaced, not serving intended purpose or not specified size or type		X
2. Loose stitch tension		X
j. Seam direction		
Any seam not facing direction specified		X
VIII. COLLAR (TOP AND UNDER)		
a. Misshapen or distorted	X	
b. Tight at joining to neck seam causing puckers or pleats on fronts, sleeves or back		X
c. Points uneven in length by:		
1. 1/4 inch to 1/2 inch inclusive		X
2. more than 1/2 inch	X	
d. Collar edge crooked, irregular or wavy		X
e. Undercollar exposed along collar edge for a length of 1 inch or more		X
f. Interlining tight or twisted causing puckers on undercollar		X
g. Triangular stitching omitted on undercollar	X	
IX. SLEEVES		
a. Sleeve fullness misplaced at armhole		X
b. Sleeve tight at armhole causing puckers on front or back	X	
c. Underarm seam of sleeve staggered more than 3/8 inch with side seam at armhole		X
d. Sleeve lining twisted, tight or short causing a break or twist on the outside	X	
e. Sleeve linings not tacked to sleeve as specified		X
f. Bottom edge of sleeve uneven by:		
1. more than 1/4 to 1/2 inch inclusive		X
2. more than 1/2 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
X. POCKETS (breast and lower)		
a. Pockets set in crookedly or not uniform in size or shape		X
b. Left and right pockets out of horizontal alignment with each other by:		
1. more than 1/4 to 1/2 inch inclusive		X
2. more than 1/2 inch	X	
c. Left and right pockets finish at an unequal distance from armhole (breast pocket) and side seam (front pocket) by:		
1. more than 1/4 to 1/2 inch inclusive		X
2. more than 1/2 inch	X	
d. Welts less than 3/16 inch or more than 5/16 inch inch in width		X
e. Slide fastener chain visible for more than 1/2 the length of pocket opening when fastener is closed		X
*f. Length of breast pocket not as specified	X	
g. Pocket slide fastener does not close towards armhole	X	
h. Pocket slide fastener staple not securely clinched at end of chain	X	
*i. Length of closed slide fastener not as specified		X
XI. FRONT CLOSURE		
a. Top ends of slide fastener tape not completely caught in collar seam stitching		X
b. Fastener chain set less than 1/4 inch or more than 1/2 inch from finished neck seam or less than 2 inches or more than 3 inches from botton of jacket	X	
c. Slide fastener chain visible for more than 1/2 the length of front closure when fastener is closed		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
XII. SLIDE FASTENERS (GENERAL)		
a. Any part of assembly omitted, bent, broken or otherwise defective	X	
b. Tape set on too loose or too tight, causing bulge, twist or fullness on outside when fastener is closed	X	
c. Stitches too close to metal edge not permitting slide to pass freely	X	
XIII. FRONTS		
a. Seams joining upper and lower fronts out of alignment by:		
1. more than 1/8 to 1/4 inch inclusive		X
2. more than 1/4 inch	X	
b. Length of fronts at closure uneven at neck or bottom edge by:		
1. more than 1/4 to 1/2 inch inclusive		X
2. more than 1/2 inch	X	
c. Front facing twisted or full causing puckering on outside of jacket	X	
XIV. CUFFS		
a. Omitted or not attached as specified	X	
b. Stretch lacking, i.e., knitting tension too tight		X
c. Run or dropped stitch		X
d. Loosely knit		X
e. Mend, thin area or hole		X
f. Not double thickness	X	
g. Not uniform in width		X
h. Extends beyond sleeve opening by more than 7/8 inch		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
XV. BOTTOM HEM		
a. Width less than 7/8 inch or more than 1 1/8 inches		X
b. Irregular in width by 1/4 inch or more		X
c. Twisted, puckered or pleated		X
LABEL		
a. Missing, incorrect or illegible	X	
b. Not attached as specified, misplaced or stitching through the printing		X
XVI. HANGERLOOP		
a. Omitted or ends insecurely caught in neck edge stitching		X
b. Width less than 1/4 inch or more than 1/2 inch		X
c. Length of opening less than 2 1/4 inches or more than 2 3/4 inches		X
d. Center of loop extends more than 1/2 inch from finished neck seam		X
e. Misplaced, i.e., off center by more than 1/2 inch		X

4.4.2.2 Dimensional examination

A. Chest Sleeve inseam Length	Any measurement deviating from the dimensions and tolerances specified in table II shall be scored as a measurement defect.
B. Equal length of sleeves	Sleeve inseams unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units, for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For examination 4.4.2.1 (visual)		
Major	2.5	II
Total (Major and Minor combined)	15.0	II
For examination in 4.4.2.2 (dimension):		
One class	4.0	S-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of packaging requirements An examination shall be made to determine that packaging, packing and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closures of container flaps, improper taping, loose strapping, inadequate stapling or improperly sealed polyethylene bag.
	Bulged or distorted container.
Content	Number of packages per shipping container more or less than specified. 1/
	Size shown on one or more jackets not the same as specified on container. 1/

1/ For this defect, two shipping containers in the sample shall be examined.

5. PACKAGING

5.1 Preservation-packaging Packaging shall be level A or C as specified (see 6.2):

5.1.1 Level A Each jacket, with slide fasteners closed, shall be laid out flat, front down. Fold the sides of the jacket to the center of the back lengthwise and place sleeves lengthwise over the folded sides. Fold jacket in half by bringing bottom edge up to the collar. The completely folded jacket shall measure approximately 15 inches in length by 11 1/2 inches in width. Each folded jacket shall be inserted in a snug-fitting clear polyethylene film bag of 0.0015 inch (± 20% tolerance) thickness. All seams and closures shall be formed by heat sealing. A 1/4 inch hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required.

5.1.2 Commercial Jackets shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

5.2 Packing Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A Fifteen jackets, of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW grade V15C, size 3A of MIL-B-17757. The liner will be type CF, class domestic, in accordance with the requirements specified in MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and seven in depth within the shipping container, with the last jacket placed over the center of the two stacks. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2 Level B Fifteen jackets, of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed, and reinforced conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The liner will be type CF, class domestic, in accordance with the requirements specified in MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and seven in depth within the shipping container, with the last jacket placed over the center of the two stacks. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Commercial Jackets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use The jackets are intended to be worn as part of the Navy enlisted men's working uniform.

6.2 Ordering data Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes and lengths required (see 1.2)
(c) When first article sample is required (see 3.2).
(d) Selection of applicable levels of packing and packaging (see 5.1 and 5.2).
*(e) When a first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.

6.3 Samples and patterns For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no laibility whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU

Review activity:
DLA - CT

Preparing activity:
Navy - NU

Project No. 8405-N910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

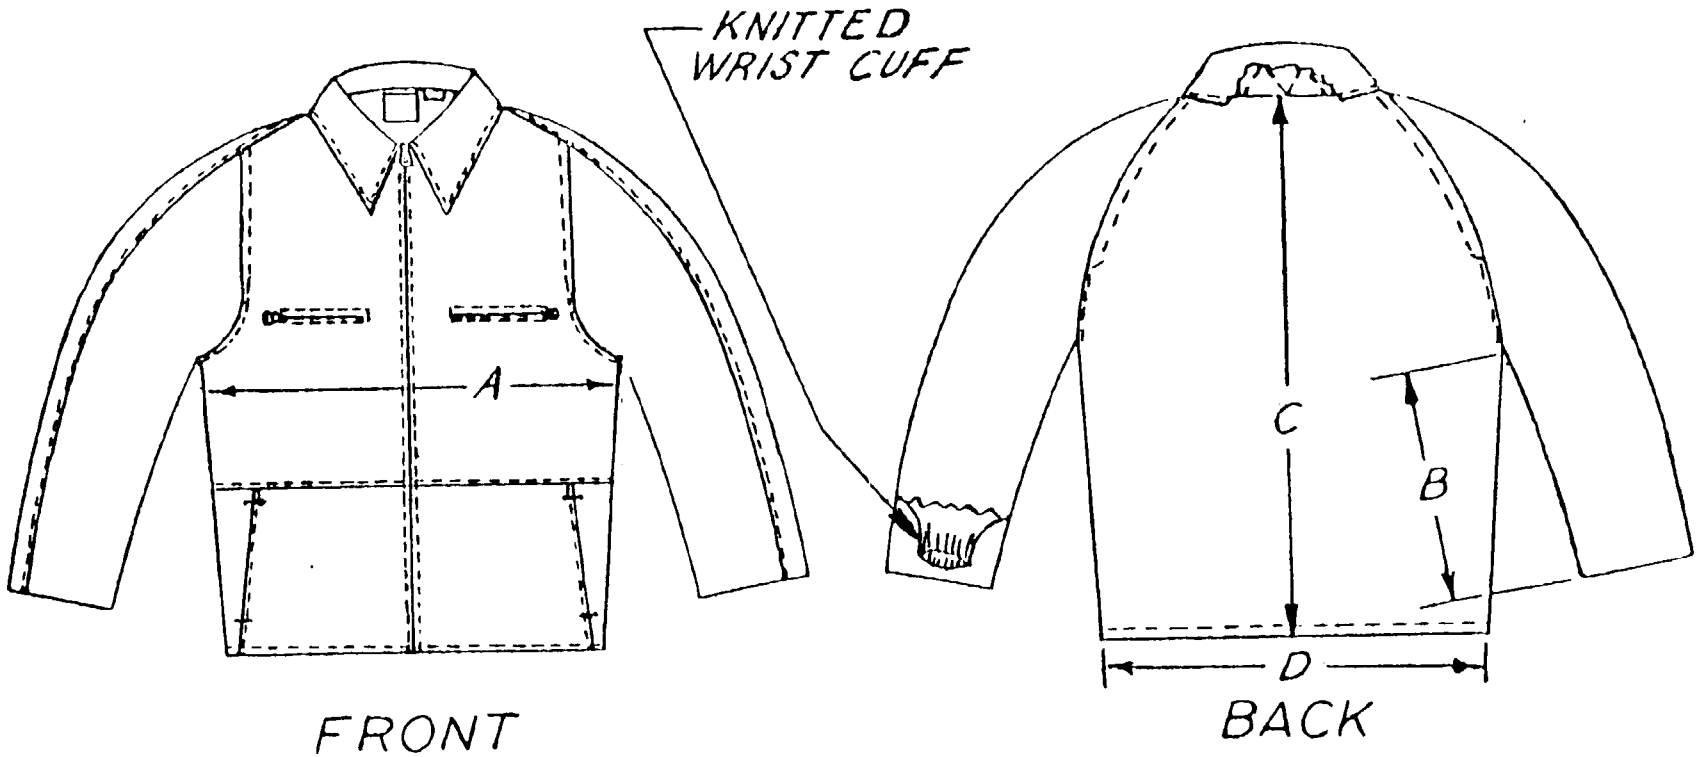


FIGURE - 1
JACKET, UTILITY, DARK BLUE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
21 Strathmore Road
Natick MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark c*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDL*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 1426 82 MAR PREVIOUS EDITIONS ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.