MIL-O-82042C
18 February 1983
SUPERSEDING
MIL-O-82042B
16 March 1979

MILITARY SPECIFICATION

OILERS, AIR LINE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers combination oilers used with air-powered tools and air-powered mechanisms in compressed air systems (hereinafter referred to as the oiler).

1.2 Classification. Air line oilers shall be of the following types, as specified (see 6.2):

Type I - Combination oiler with filter, pressure regulator, and gage.

Size 1/2 - 1/2 inch, internal, pipe thread connections.

Type II - Combination oiler and filter.

Size 1/4 - 1/4 inch, internal, pipe thread connections.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-P-116 - Preservation, Methods of.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4930

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the currentversion before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized Unit Loads.
MIL-STD-794 - Parts and Equipment, Procedures for Packaging and Packing of.
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Not applicable.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIRMENTS

3.1 Description. The type I combination oiler shall consist of a filter, pressure regulator, gage, and an oiler (lubricator) similar to figure 1. The type II unit shall consist of a filter and oiler.

3.2 First article. When specified (see 6.2), the contractor shall furnish a complete oiler for first article inspection and approval (see 4.2.1 and 6.4).

* 3.3 Standard commercial product. The oiler shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the oiler being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

3.5 Interchangeability. All oilers of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.6 Performance. Oilers with metal bowls shall be capable of withstanding pressures up to 250 pounds per square inch gage (psig) at a temperature of 100° Fahrenheit (F). Oilers with plastic bowls shall be capable of withstanding pressures up to 150 psig at a temperature of 100°F.

* 3.6.1 Type I. The type I oiler shall be capable of removing at least 90 percent of the condensed water and 95 percent of 50 micron or larger size foreign particles from an air line delivering up to 70 standard cubic feet per minute (scfm) at an inlet pressure of 100 psig. The unit shall also regulate the air pressure between 10 and 125 psig and dispense a constant, adequate supply of lubricant to the discharge air in the air supply system.

* 3.6.2 Type II. The type II oiler shall be capable of removing at least 90 percent of the condensed water and 95 percent of 50 micron or larger size foreign particles from an air line delivering up to 20 scfm at an inlet pressure of 100 psig. The unit shall function in an air supply between 10 and 125 psig and dispense a constant adequate supply of lubricant to the discharge air in the air supply system.

3.7 Construction. The oilers shall be completely assembled and ready for operation.

3.7.1 Port sizes. Unless otherwise specified (see 6.2), the port sizes shall be as specified herein.

* 3.7.2 Oiler. The oiler shall have a body, bowl, sight dome or sight glass, adjustable oil feed, filler plug, gaskets, and other necessary components. The sight glass shall be constructed of a readily removable, shatter-resistant, plastic material. A filler plug, provided with means for bleeding off pressure inside the oil chamber before removal of the plug, shall be readily accessible for refilling. A metering valve shall be furnished to accomplish adjustment of the oil feed rate from a flow of one drop per minute to maximum flow. The valve shall not change its setting as a result of jars or vibrations, such as those normally encountered in air supply systems. The oiler shall function under continuous or intermittent operation and shall not cause flooding of oil into the airline. The amount of atomized lubricant injected into the air shall be proportional to the amount of air flowing through the system. Oilers shall be capable of operating with oil having a viscosity up to 800 Saybolt Universal Seconds equivalent to SAE No.30 oil at a temperature not less than 85°F. Type I oiler shall have a capacity of not less than 8 ounces, and type II oiler shall have a capacity of not less than 4 ounces. Type I oiler shall have a maximum pressure drop of 6 pounds per square inch (psi) at an inlet pressure of 100 psig and 70 scfm, and type II oiler shall have a maximum pressure drop of 6 psi at an inlet pressure of 100 psig and 20 scfm. When specified (see 6.2), the oiler shall be so constructed that refilling of the reservoir can be accomplished without shutting off the air supply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

* 3.7.3 Filter. The filter shall be constructed with a body, transparent bowl, filter element, drain, gaskets, and other necessary components. The bowl shall be readily removable without the use of tools and constructed of shatter-resistant plastic, such as polycarbonate resin. A drain shall be provided to allow liquids and foreign matter to be drained from the bowl. Unless otherwise specified the drain shall be of the manual type. When specified (see 6.2), the drain shall be of the automatic type. The drain shall be so constructed that it cannot be disassembled when opened for drainage purposes. The design of the filter shall be such that liquids and foreign matter (dirt, rust, scale) will be separated from the compressed air and dropped to the bottom of the bowl. Means shall be provided to prevent accumulated water and foreign matter from re-entering the air stream and making contact with the filter element. Type I filters shall have 1/2-inch internal inlet and outlet connections, a bowl capacity of at least 8 ounces, and a maximum pressure drop of 3 psi at 100 psig inlet pressure and 70 scfm. Type II filters shall be 1/4-inch internal connections, a bowl capacity of at least 4 ounces, and a maximum pressure drop of 3 psi at 100 psig inlet pressure and 20 scfm. Flows and pressure drops specified shall be with new clean elements.

* 3.7.3.1 Filter element. Unless otherwise specified (see 6.2), the filter element shall be porous plastic or porous bronze or impregnated felt or other permanent and cleanable material. Unless otherwise specified (see 6.2), the filter element shall have a nominal rating of 50 microns or less. The filter element shall have means to prevent bypass of contaminants and shall be readily removable without use of tools.

* 3.7.4 Pressure regulator. The pressure regulator shall have a body, a hand-operated adjusting device. The body shall be equipped with two 1/2-inch internal thread ports, and two 1/4-inch internal thread gage ports furnished with removable plugs. The pressure adjustment shall be such that an inlet pressure of 250 psig can be reduced and regulated within the range of 10 to 125 psig. Internal components shall be constructed of corrosion-resistant materials. Unless otherwise specified (see 6.2), regulators shall be of a relieving type. While the regulator is subjected to 250 psig constant primary air pressure, and with the free flow rates ranging from 0 to 70 scfm, the regulated pressure shall vary not more than 10 psig at 100 psig.

* 3.7.5 Pressure gage. The pressure gage furnished shall conform to the following requirements. The gage shall have a 2 inch or larger size dial having a minimum pressure range of 0 to 160 psig and a back connection fitted with a 1/4-inch external thread. The gage shall have a case with a commercial finish and a shatter-resistant plastic crystal. The dial shall be numbered at intervals indicating 20 psig pressure and marked at 5 psig primary divisions. Numerical measurements shall be accurate within 2 percent of the full scale value in the middle half section of the scale and 3 percent of the full scale value in the first and last of the the four sections. When subjected to a pressure of not less than 1.3 times the maximum scale reading for 1/2 hour, the gage shall withstand the pressure without damage or change in accuracy. The gage shall retain a minimum pressure of 80 percent of the full scale reading for a period of 1/2 hour with no loss in the indicated pressure.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

* 3.7.6 Accessories. When specified (see 6.2), and when applicable, the following accessories shall be furnished:

a. Metal or plastic bowl guard for filter and oiler.
b. Metal bowl suitable for pressures of 250 psig and temperatures of 150°F.
c. Mounting bracket for regulator to be used with type I.
d. Mounting bracket for filter to be used with type II.

3.8 Treatment and painting. Unless otherwise specified (see 6.2), the equipment shall be treated and painted in accordance with the manufacturer's standard practice.

3.9 Marking for identification. The manufacturer's standard marking shall be on all units in accordance with the manufacturer's standard practice.

3.10 Workmanship.

3.10.1. Metal fabrication. The metal used in fabrication shall be free from conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the metal to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.10.2 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The contractor is responsible for insuring that supplies and materials are inspected for compliance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

4.2.1 First article inspection. The first article inspection shall be performed on one oiler when a first article is required (see 3.2 and 6.2). This inspection shall include the examination of 4.4 and the tests of 4.5. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the oiler meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining oilers to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4, the tests of 4.5.4.1 and 4.5.4.2, and the packaging inspection of 4.6. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling shall be in accordance with MIL-STD-105. All oilers of the same size, type, and characteristics, offered to the Government at one time shall be considered a lot for purposes of inspection.

4.3.1 Sampling for examination. Examination shall be based on inspection level II and an Acceptable Quality Level (AQL) of 2.5 for major defects and 4.0 for minor defects expressed in terms of defects per one hundred units.

4.3.2 Sampling for tests. Tests shall be based on inspection level S-4 and an AQL of 2.5 percent defective expressed in terms of defects per one hundred units.

4.4 Examination. Each unit shall be examined for compliance with the requirements in section 3 of this specification. This element of inspection shall encompass all visual examinations and dimensional measurements. Examination shall be as specified in table I.

TABLE I. Classification of defects.

Categories	Defects
Critical:	None
Major:	
101	Not of type or size specified (see 1.2).
102	Parts missing or damaged (see 3.7).
103	Oiler not as specified (see 3.7.2).
104	Filter not as specified (see 3.7.3).
105	Filter element not as specified (see 3.7.3.1).
106	Pressure regulator not as specified (see 3.7.4).
107	Pressure gage not as specified (see 3.7.5).
108	Accessories not as specified (see 3.7.6).
109	Workmanship not as specified (see 3.10).
Minor:	
201	Treatment and painting not as specified (see 3.8)
202	Identification marking not as specified (see 3.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

4.5 Tests. Unless otherwise specified (see 6.2), each unit selected shall be tested as specified in 4.2. Failure to pass any test shall be cause for rejection. Certified test reports from an independent laboratory approved by the contracting officer will be accepted as evidence that the unit has passed the required tests. Tests shall be conducted as outlined in the referenced documents except as otherwise specified herein. Plastic bowls shall not be subjected to pressures above 150 psig.

4.5.1 Pressure drop.

* 4.5.1.1 Filter. When tested for pressure drop, the filter shall be completely assembled with all components including the nominal filter element. The 1/2-inch filter shall be tested with a free air flow of 70 scfm at an inlet pressure of 100 psig. The 1/4-inch filter shall be tested with a free air flow of 20 scfm at an inlet pressure of 100 psig. The air flow shall be measured and controlled downstream of the filter. Pressure drop measurement shall be made between the inlet and discharge sides of the filters by separate gages. Pressure drops in excess of 3 psi shall be cause for rejection.

* 4.5.1.2 Oilers. Oilers shall be completely assembled and filled with oil to rated capacity. The 1/2-inch oiler shall be tested with a free air flow of 70 scfm at an inlet pressure of 100 psig. The 1/4-inch oiler shall be tested with a free air flow of 20 scfm at an inlet pressure of 100 psig. The air flow shall be measured and controlled downstream of the oiler. The pressure drop between the inlet and discharge sides of the oilers shall be measured by separate gages. Pressure drops in excess of 6 psi shall be cause for rejection. Leakage shall not exceed one bubble per second.

* 4.5.2 Bowl strength. The filter and oiler shall be subjected to an internal hydrostatic pressure of 150 psig for plastic bowls and 250 psig for metal bowls at a temperature of 100°F, for a period of 10 minutes. Visual evidence of leakage, damage, or permanent distortion shall be cause for rejection. Leakage exceeding two bubbles per second shall be cause for rejection.

* 4.5.3 Regulation. The pressure regulator, with gage installed, shall be connected to a compressed air supply of 250 psig. When air is discharged through the regulator at 20 scfm flow rate, adjustment shall be made to reduce the discharge air pressure to 10 psig, 50 psig, 75 psig, and 125 psig. When the pressure regulator is subjected to 250 psig primary air, tests with interrupted flow runs shall be conducted for periods of 2 minutes at each of the above specified pressure settings. The flow shall be quickly initiated by a valve and cut off at 20 second intervals at least 10 times. During the discharge stage, no indication of sustained vibration or humming of regulator parts shall be evident. When subjected to a constant primary pressure of 100 psig the regulator shall be adjusted to reduce the discharge pressure to 10 psig, 30 psig, 50 psig, and 70 psig at zero flow rate. The flow rate shall be increased to 70 scfm with no additional changes made in the adjustments for the above pressure settings. Except for the initial pressure drop at the beginning of flow, the regulated pressure variation shall not be more than 10 psig. Any of the following conditions shall be cause for rejection: regulators cannot be adjusted to the specified pressure; humming or sustained vibration during discharge; regulated pressure variation more than 10 psig after flow has been initiated.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:38Z
Check the source to verify that this is the currentversion before use.

4.5.4 Assembled oilers. The type I and type II oilers, as applicable, shall be completely assembled and contain the rated amount of lubricant for the following tests.

* 4.5.4.1 Air leakage. The type I unit shall be subjected to an initial pressure of 150 psig, reduced by the regulator to 125 psig in the oiler. The type II unit shall be subjected to a static pressure of 125 psig. The units shall maintain these pressures for a period of 1/2 hour. At the end of this time a soap bubble test shall be conducted to determine any leakage. The soap solution shall be applied to all joints. Leakage exceeding two bubbles per second shall be cause for rejection.

4.5.4.2 Oiling ability. Upon completion of the air leakage test, air shall be discharged freely through the filters and oilers. An initial pressure of 125 psig reduced to 100 psig by the regulator, shall flow through the type I units at a minimum output rate of 70 scfm. For type II units, air at 100 psig shall be discharged to flow through the units at a minimum rate of 20 scfm. The oilers shall meet the requirements specified in 3.7.2. The inside surfaces of the upstream oiler air passsage shall be relatively dry and free from lubricant.

* 4.5.4.3 Oiler refilling. When applicable (see 3.7.2), the oiler shall be refilled while the air supply line is open with a line pressure of at least 30 psig to determine whether refilling is possible under this condition.

4.6 Packaging inspection. The preservation, packing, palletization, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Methods of preservation. Cleaning processes, drying procedures, and methods of preservation are listed in MIL-P-116 and shall conform to the requirements of MIL-P-116 and any applicable specifications.

5.1.1.2 Cleaning and drying. Prior to the application of preservative compounds or paint, surfaces shall be cleaned by process C-1 and dried by any applicable procedure of MIL-P-116.

5.1.1.3 Unit protection. Each oiler shall be preserved method III.

5.1.2 Commercial. Material shall be packaged in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

5.2.1 Levels A and B. Packing shall be accordance with MIL-STD-794. Containers shall be selected from table I for the appropriate level.

5.2.2 Commercial. Material shall be packed in accordance with MIL-STD-1188.

5.3 Palletization. Material shall be palletized in accordance with MIL-STD-147 when the following criteria are met:

a. Load to consist of four or more unskidded containers; and,
b. Load shall utilize a minimum of 80 percent of the pallet base.

5.4 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Oilers are intended for use with air-powered tools and air-powered mechanisms.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type required (see 1.2).
c. When first article inspection is required (see 3.2, 4.2.1, and 6.4).
d. When port sizes are other than specified (see 3.7.1).
e. Oiler capable of being refilled without shutting off air supply, when required (see 3.7.2).
f. When automatic drain is specified (see 3.7.3).
g. Filter element material and nominal filtration rating in microns, if different (see 3.7.3.1).
h. Pressure regulator, if different (see 3.7.4).
i. Required accessories (see 3.7.6).
j. Treatment and painting, if different (see 3.8).
k. When tests are other than specified (see 4.5).
l. Level of preservation and level of packing required (see 5.1 and 5.2).

6.3 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423 and invokes the provisions of paragraph 7-104.9(n) of the Defense Acquisition Regulations (DAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data shall be delivered in accordance with the contract requirements.


6.4 First article. When a first article inspection is required, the item will be tested and should be a first production item consisting of one complete oiler The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:38Z
Check the source to verify that this is the current version before use.

6.5 Illustration. The illustration of the oiler shown on figure 1 is for convenience of identification, and is not intended to preclude the purchase of oilers otherwise conforming to this specification.

* 6.6 Definitive specification part number. The specification part number is a definitive part number which corresponds to the type of oiler units covered by this specification and defines the requirements of the options presented under this specification. The specification number, and the type designation number are combined to form the definitive specification part number.

* 6.6.2 Cataloging data. For cataloging purposes, part numbers for the oiler units are assigned as follows:



* 6.6.2 Type and size designator. The type of oiler unit is identified by a single digit number as shown in table II.

TABLE II.

Type and size	Designator
I - 1/2	A
II - 1/4	B

6.7 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Navy - YD

Review activity:

DLA - CS

User activity:

Army - ME

Preparing activity:

Navy - YD

Project no. 4930-0302

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:38Z
Check the source to verify that this is the currentversion before use.

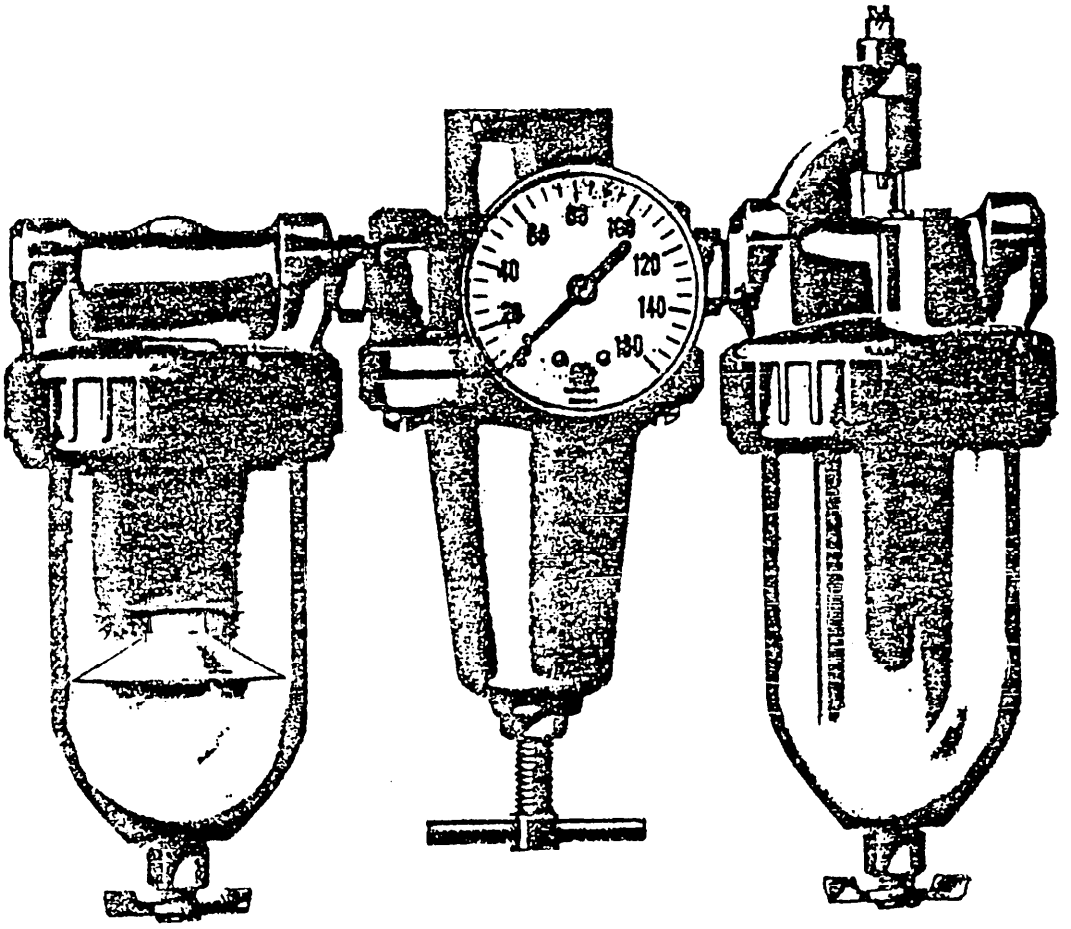


FIGURE 1 - Type I, Oiler, Filter, Regulator, Gage

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDING OFFICER (156)
NAVAL CONSTRUCTION BATTALION CENTER
PORT HUENEME, CA 93043

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. 4930-0302

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-O-82042C - OILERS, AIR LINE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:38Z
Check the source to verify that this is the currentversion before use.