MIL-R-82290C(NU)
28 March 1979
SUPERSEDING
MIL-R-82290B(SA)
20 April 1976

MILITARY SPECIFICATION

RAINCOAT, MAN'S (ENLISTED)

This specification is approved for use by Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a man's raincoat made of a polyester/cotton poplin blend fabric treated with a durable water repellent finish.

1.2 Classification The raincoat shall be of one type only and in the following sizes and lengths (see 6.2):

Sizes

Extra Small (30-32)
Small (34-36)
Medium (38-40)
Large (42-44)
Extra Large (46-48)
Extra Extra Large (50-52)

Lengths

Short, Regular, Long, and Extra Long

2. APPLICABLE DOCUMENTS

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this doucment or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

2.1 Issues of documents The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276	- Thread, Cotton
V-T-280	- Thread, Cotton Gimp, Buttonhole
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed)

MILTIARY

MIL-C-297	- Cloth, Interlining, Cotton Warp and Spun Hair-Wool Filling
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21852	- Cloth, Nylon Taffeta (2 ounce)
MIL-C-43482	- Cloth, Poplin, Cotton and Polyester (Water Repellent)
MIL-T-43548	- Thread, Polyester, Cotton-Covered
MIL-C-43836	- Cloth, Interlining, Non-Woven

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-1494	- Provisions for Evaluating Quality of Raincoats

(Copies of specifications, standards, drawings, and publications, required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Inc., Traffic Department, 1616 P Street, NW, Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

3. REQUIREMENTS

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the samples, in which case this specification shall govern.

3.2 First article approval The requirement for first article will be as specified by the procuring activity (see 6.2).

3.3 Materials (see 6.4)

3.3.1 Basic material The basic material shall be a water repellent treated cotton/polyester blend poplin shade Blue 3346 conforming to class 2 of MIL-C-43482.

3.3.2 Lining and Interlining

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.3.2.1 Body lining The material for lining the body of the raincoat and interlining the collar collarstand and pocket welts shall conform to the material specified in 3.3.1.

3.3.2.2 Sleeve lining The material for the sleeve lining shall be nylon taffeta, dyed black, conforming to type IV of MIL-C-21852, except that the colorfastness requirements shall be as specified in 3.3.2.2.1.

3.3.2.2.1 Colorfastness The dyed lining shall show fastness to perspiration, wet-dry cleaning, and crocking equal to or better than the standard sample. When no standard sample is available, the dyed lining shall show a minimum of "good" fastness to perspiration, wet-dry cleaning, and a Munsell Value for crocking not lower than 8.5. Testing shall be as specified in MIL-C-21852.

3.3.3 Interlinings

3.3.3.1 Cloth, cotton warp and spun hair-wool filling. The material for interlining the front facing shall conform to type III, class 2 of MIL-C-297. The color shall be black.

3.3.3.2 Cloth, non-woven The material for interlining the bottom of the sleeves shall conform to type II, class 1 of MIL-C-43836, except that the color shall be natural or black.

3.3.4 Tapes

3.3.4.1 Tape, cotton, herringbone The tape for the pocket opening shall be 1/2 inch wide and shall conform to type II, class 3 of DDD-T-86. The color shall be black.

3.3.4.2 Tape, fusible web The tape for the seams (sides, center back and shoulder top sleeve) shall be a non-woven thermoplastic polyamid resin, natural color, 18 to 32 grams per square yard and 3/8 inch in width (see 4.4.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.3.5 Buttons The buttons shall conform to type II, class D, style 20 and 21, lines 24, 30, and 40; and style 15, 18 line of V-B-871. The color of the buttons shall be shade Black BT, Cable No. 62001.

3.3.6 Thread

3.3.6.1 Thread, polyester/cotton-covered The polyester cotton-covered thread shall be dyed Shade Black AA, C.A. 66043 and shall conform to MIL-T-43548 as follows:

Use	Ticket No.	Ply
Seaming, stitching, buttonholes, buttons, and bartacks	50	2 or 3
Overedge stitching	70	2 or 3
Tacking:		
Machine	70	2 or 3
Hand	30	2 or 3

3.3.6.2 Thread, cotton As an alternate to the polyester/cotton covered thread, a cotton thread may be used. When this option is exercised, the thread shall match Shade Black AA C.A. 66043 and shall conform to V-T-276 as follows:

Use	Type	Ticket No.	Ply
Seaming and stitching	IC2	0	3
	IC2	00	3
Buttonholes, buttons and bartacks	IC2	A	3
Overedge stitching	IA3	70 or 60	2 or 3
Tacking:			
Machine	IA3	70	2 or 3
Hand	IB3	16	4

3.3.6.3 Colorfastness The dyed thread shall show fastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. When no standard sample is available, the dyed thread shall show "good" fastness to wet-dry cleaning and light when tested as specified in V-T-276 or MIL-T-43548.

3.3.7 Gimp, cotton The cotton gimp for reinforcing the buttonholes shall be dyed shade Black AA, C.A. 66043 and shall conform to type I or type II, size No. 8 of V-T-280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.3.7.1 Colorfastness The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample, when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show "good" fastness to wet-dry cleaning when tested as specified in V-T-280.

3.3.8 Labels Each raincoat shall have a combination identification/size/instruction and personal label. The labels shall conform to DDD-L-20 and the label printing shall show good fastness to dry cleaning.

3.3.8.1 Combination identification/size/instruction/personal label The combination label shall conform to type I, classes 14 and 10 and shall bear the following inscription:

NAME:
SERVICE NO:
NAME OF ITEM: RAINCOAT, MAN'S (ENLISTED)
BASE FABRIC: 50% POLYESTER/50% COTTON
CONTRACT NO: DLA100-00-0-0000 (EXAMPLE)
SIZE: MEDIUM (38-40) R (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)

CLEANING INSTRUCTIONS: FOR BEST RESULTS, DRY CLEAN ONLY

NOTE: Abbreviations for applicable lengths shall be "S" for Short, "R" for Regular, "L" for Long, and "XL" for Extra Long.

3.4 Description The raincoat shall be single breasted with button fly front and split shoulder raglan sleeves lined with nylon taffeta. The body portion shall be quarter lined with base fabric. The collar shall have rounded ends and a collar stand with front tab closure. Pockets shall be welt style with a through opening (see Figure 1).

3.4.1 Figure The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

3.5 Patterns Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns provide a 3/8 inch seam allowance for regular seams and unless otherwise specified in Table II, seams shall be in accordance with this seam allowance.

3.5.1 List of pattern parts The component parts of the raincoat shall be cut from the material as specified and in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of pattern parts	Cut parts
Basic material, poplin: cotton/polyester, water repellent	Front	2
	Back	2
	Front facing	2
	Front sleeve	2
	Back sleeve	2
	Topcollar	1
	Undercollar and interlining	2
	Collarstand and interlining	3
	Pocket, welts	2
	Shoulder interlining	2
	Pocket, outer ply	2
	Pocket, inner ply	2
	Facing tab	1 1/
	Fly piece	2
	Front lining	2
	Back lining	1
	Pocket welt interlining	2
Cloth, nylon taffeta	Front sleeve lining	2
	Back sleeve lining	2
Cloth, interlining, non-woven	Sleeve bottom interlining	2
Cloth, interlining, cotton warp, and spun wool filling	Facing interlining (front)	2
Template	Front fly buttonhole marker	-
	Fly marker	-
	Collar shaper marker	-
	Lapel shaper marker	-

1/ May be cut as two pieces.

3.6 Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.6.1 Stitches, seams, and stitchings Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the raincoat. Unless otherwise specified, topstitching or edgestitching shall be 1/4 to 5/16 inch from the edge. The fusible tape shall not be exposed in the seam construction.

3.6.2 Thread breaks and ends of seams Ends of all seams and stitching when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type. When stitch type 401 is permitted, as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.6.3 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in Table I, except that stay stitching operations may be performed with 6 to 10 stitches per inch in lieu of the 8 to 10 stitches listed.

3.7 Manufacturing operations requirements The raincoat shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished raincoat is identical to that produced by following the sequence as listed in Table I.

3.7.1 Shade and size marking The component parts of the raincoat shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Corrosive metal fastening devices.
(2) Sew-on shade tickets.
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.
(4) No metal fastening device shall be used on the nylon sleeve lining.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment, and wherever possible, is covered by the seam allowance.

3.7.2 Pressing All pressing as required in Table I shall be performed with a heated pressing iron or steam pressing machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the raincoat in strict accordance with patterns furnished, which shall show size, shape, placement of pockets, directional lines for cutting, and notches for proper assembly of all component parts. b. Cut all component parts for the polyester/cotton from one piece of material, except the inner and outer pocket ply, fly pieces, interlinings, facing tab, and hanger loop which may be cut from ends and when so cut shall approximate the shade of the main assembly. Nylon sleeve linings may be cut from one piece of material or ends. When sleeve linings are cut from ends, they shall be shade marked and shall match each other.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1494 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Size and shade marking (see 3.7.1) Mark or ticket components, except parts cut from ends, to insure a proper uniform shade and size assembly throughout the raincoat.					
4.	Make facing tab a. Fold tab and stitch side and point 1/8 to 3/16 inch from raw edge leaving an opening opposite the pointed end.	301	SSe-2(a)	8-10	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Make facing tab (cont'd)					
	b. Trim, turn, and stitch 1/4 to 5/16 inch from folded edge.	301	SSe-2(b)	8-10	50	50
	c. Make one horizontal, eyelet end, taper bar, or cross bar buttonhole worked over gimp. Cut opening of stitched buttonhole shall measure 3/4 to 1 inch in length. The inside edge of the eyelet shall be 1/2 to 3/4 inch from point. Purling shall be on the face side of the tab facing the wearer.	Button-hole		50-54 per buttonhole	50	50
5.	Make pocket welt					
	a. Position interlining on the underside of the under half of the open welt piece with inside raw edge of interlining adjoining the center foldline of welt. Stitch interlining to under half of welt 1/8 to 3/16 inch from inside raw edge of interlining.	301	LSb1-2(a)	8-10	50	50
	b. Fold welt in half lengthwise and stitch across width at both ends 3/16 to 5/16 inch from raw edge. Trim upper corners of welt.	301	SSe-2(a)	8-10	50	50
	c. Turn welt to face side, force out points and stitch ends and folded side 1/4 to 5/16 inch from edge. Stitching on interlining shall not be exposed on face side of welt.	301	SSe-2(b) and OSf-1	8-10	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make pocket welt (cont'd)					
	d. Stitch inner raw edge of welt together to finish 1 5/8 ± 1/8 inches wide and 8 ± 1/4 inches long.	301	SSa-1	8-10	50	50
6.	Attach welt and pocket to front					
	a. Stitch welt to front 5/16 to 7/16 inch from raw edge face to face, simultaneously stitching inner pocket piece to welt in accordance with notches.	301	SSav-2(a)	8-10	50	50
	b. Stitch one edge of 1/2 inch black tape to front, parallel to and 1/2 to 5/8 inch from pocket welt stitching.	301	SSaa-1	8-10	50	50
	c. Cut front between two lines of stitching (welt and tape) cutting a triangular tongue at each end. Care shall be taken so that the ends of the tongue notch in the fronts are not deeper than the ends of the two rows of stitching.					
	d. Turn pocket through opening and stitch inner edge of welt to front, 1/16 inch from folded edge.	301	SSav-2(b)	8-10	50	50
	e. Fold tape under forming a 1/16 to 1/8 inch welt and stitch both seamed and free edge of tape. OR	301	SSt-2	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Attach welt and pocket to front (cont'd) This operation may be performed following operation 5a. Cut front pocket opening adjacent to raw edge and within 5/8 to 3/4 inch from both ends of welt to form a triangular tongue at each end. Fold under raw edge of opening 3/16 to 5/16 inch to inside of coat. Stitch both edges of tape with edge of tape positioned 1/16 to 3/16 inch from folded edge.	301	SSt-2	8-10	90	50
	f. Stitch inner pocket piece to outer pocket piece 3/16 inch from raw edge around top, curved corners, side and bottom.	301	SSe-2(a)	8-10	50	50
	g. Notch inner pocket at front straight edge of outer pocket piece.					
	h. Turn pocket to finished position and stitch 1/4 inch from folded edge and continue stitching outer pocket piece at front straight edge to inner pocket piece.	301	SSe-2(b) and LSa-1	8-10	50	50
	i. At pocket opening turn under raw edge of inner pocket piece and stitch to outer pocket piece 1/16 inch from folded edge.	301	LSd-1	8-10	50	50
	j. Stitch both ends of welt through front and both pocket plies, catching notched tongue ends, with two rows of stitching. The inner row of stitching shall superimpose the 1/4 to 5/16 inch stitching with the outer row 1/16 inch from folded edge. A diagonal stitch shall connect the two rows at back corners of welt.	301	LSa-2	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Attach welt and pocket to front (cont'd) k. Stitch straight edge of outer pocket piece to front edge. OR Outer and inner plies of pockets may be pre-assembled prior to joining the welt and pocket to the front.	301	SSa-1	8-10	50	50
7.	Attach combination label Stitch label on all four sides 1/16 inch from edge to back edge of right inner pocket opening, centered, with long dimension in the length direction and top of label facing the side seam.	301	LSbj-1	8-10	50	50
8.	Left fly front a. Position fly piece on left front facing, face to face in accordance with notches, and stitch across width at top notch, down front 5/8 to 7/8 inch from front edge, and across bottom width at bottom notch. b. Cut facing and fly piece diagonally at each corner to line of stitching.	301	SSe-2(a)	8-10	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Left fly front (cont'd) c. Turn fly to finished position and stitch in one continuous operation horizontally 1/16 to 1/8 inch from top and bottom folded edges and vertically 3/16 to 5/16 inch from folded front edge of fly.	301	SSe-2(b)	8-10	50	50
9.	Buttonholes on fly piece a. Stitch three horizontal, eyelet end, cut-after type taper bar or automatically square bartacked buttonholes with worked over gimp, through the facing and fly piece in accordance with pattern markings. The end of the taper bar buttonhole shall have a minimum of four tack stitches, not including the first cross-over stitch. The purling of the buttonhole shall be on the facing side facing the wearer.					
	b. Buttonhole shall be 1 1/8 ± 1/8 inches long. The inside purled edge of eyelet shall be 5/8 ± 1/8 inch from front edge of fly piece.	Button-hole		70-75 per buttonhole	50	50
10.	Tack or bartack buttonhole fly Position fly piece on left fly facing and make two horizontal tacks or bartacks, centered between the three buttonholes. Tacking or bartack shall be 3/8 to 1/2 inch long, parallel to the buttonholes, and 1/2 to 1 inch in from front edge of fly piece.	Bartack or		24-28 per bartack	50	50
		301	LSa-1	8-10 per tack	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11.	Attach lining and facing tab to facing					
	a. Overedge stitch simultaneously, inner edge of interlining and front edge of front lining to inner edge of front facing from shoulder edge to bottom of front lining, simultaneously forming and catching a double folded 1/4 to 3/8 inch wide hem at bottom front edge of lining. Continue overedge stitching the inner edge of facing to bottom of the facing, simultaneously inserting facing tab in accordance with marks indicated on patterns.	503 or 504 or 505	SSa-1 and EFd-1	8-10	70	70
	b. Stitch inner edge of interlining, facing and lining together 5/16 to 7/16 inch from raw edge from shoulder to bottom of lining.	301 or 401	SSa-1	8-10	50	50
					50	70
	c. At intersection of front lining turn under the inner edge of facing 5/16 to 7/16 inch and edgestitch facing 1/8 to 3/16 inch from folded edge down to bottom of facing.	301 or 401	EFa-1	8-10	50	50
12.	Interlining to facing					
	Stitch facing, interlining and front facing together at outer front edge from shoulder line, across top of facing, down front edge and across bottom width.	301	SSa-1	8-10	50	50
13.	Sleeve to front					
	a. Stitch set-in sleeve to front armhole from shoulder to approximately 3 inches past the step on front.	301	LSq-2(a)	8-10	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Sleeve to front (cont'd)					
	b. Turn and topstitch seam with stitching on front to step as marked on pattern, 1/4 to 5/16 inch from folded edge. At step, turn and continue stitching to the joining seamline.	301	LSq-2(b)	8-10	50	50
	NOTE: The seam allowance for setting the sleeve shall be 1/2 inch at the step, reduced to 5/16 inch.					
14.	Sleeve to back					
	a. Stitch raglan sleeve to back armhole from neckline to approximately 3 inches past the step on back.	301	LSq-2(a)	8-10	50	50
	b. Turn and topstitch seam with stitching on back to step as marked on pattern, 1/4 to 5/16 inch from folded edge. At step, turn and continue stitching to the joining seamline.	301	LSq-2(b)	8-10	50	50
15.	Join backs					
	a. Place left back on right back, face to face, with raw edge of left back positioned 7/16 ± 1/32 inch back from raw edge of right back. Fold right back seam allowance over staggered left back and stitch thru all plies 1/16 to 1/8 inch from raw edge of right back, simultaneously catching the fusing tape under the line of stitching.	301	SSw-2(a)	8-10	50	50
	b. Fold left back to finished position with the folded edge of back seam facing towards the right back. Top-stitch 1/4 to 5/16 inch from folded edge.	301	SSw-2(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Join backs (cont'd) c. Press seam to fuse tape.					
16.	Join sides a. Place back on front, face to face, with raw edge of back positioned 7/16 ± 1/32 inch back from raw edge of front. Fold front seam allowance over back and stitch thru all plies 1/16 to 1/8 inch from raw edge of front, simultaneously catching the fusing tape under the line of stitching.	301	SSw-2(a)	8-10	50	50
	b. Fold back to finished position with folded edge of side seam facing towards the front of raincoat. Topstitch 1/4 to 5/16 inch from folded edge.	301	SSw-2(b)	8-10	50	50
	c. Press seam to fuse tape.					
17.	Close sleeves a. Place front sleeve on back sleeve, face to face, and join from neckline to bottom of sleeve 3/8 inch from edge, simultaneously catching the fusing tape under the line of stitching on the front sleeve side.	301	LSq-2(a)	8-10	50	50
	b. Turn front sleeve towards the front, with finished folded edge of seam facing towards back of raincoat, and topstitch 1/4 to 5/16 inch from folded edge.	301	LSq-2(b)	8-10	50	50
	c. Press seam to fuse tape.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Close sleeves (cont'd)					
	d. Stitch non-woven interlining across bottom width of sleeve.	301	SSa-1	8-10	50	50
	e. Close underarm sleeve seam. Press seam open and flat.	301	SSa-1	8-10	50	50
	f. Finish setting sleeve to armhole.	301	LSq-2(a)	8-10	50	50
	g. Turn seam allowance towards body and topstitch edge 1/16 inch from folded edge, from step on front armhole to step on back armhole.	301	LSq-2(b)	8-10	50	50
	NOTE: Operations 13b, 14b, and 17g may be performed in one operation after the sleeve has been set.					
18.	Collar					
	a. Stitch interlining to under collar at outer edge 1/8 to 3/16 inch from raw edge.	301	SSa-1	8-10	50	50
	b. Stitch undercollar to topcollar along each end and top edge of collar 3/16 to 1/4 inch from raw edge. Trim rounded corners.	301	SSe-2(a)	8-10	50	50
	c. Turn collar and stitch, 1/4 to 5/16 inch from folded edge.	301	SSe-2(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table - Construction

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Collar (cont'd) d. Stitch 1/16 inch from raw edge, bottom edge of collar.	301	SSa-1	8-10	50	50
19.	Collar stand a. Stitch interlining to undercollar stand at outer edge, 1/8 to 3/16 inch from raw edge.	301	SSa-1	8-10	50	50
	b. Stitch not less than 3 rows of horizontal stitching equally spaced across length of undercollar stand.	301 or 401	SSV-3	8-10	50 50	50 70
21.	Attach collar to collar stand and shell a. Stitch collar between outer and inner plys of collarstand and continue stitching tab on left side of collarstand in accordance with notches, 1/8 to 3/16 inch from raw edge.	301	SSq-2(a) and SSe-2(a)	8-10	50	50
	b. Close right side of collar stand. Trim corner.	301	SSe-2(a)	8-10	50	50
	c. Turn collar stand and tab to face side and top stitch collar stand through collar and around outer edge of tab, 1/16 inch from folded edge.	301	SSq-2(b) and SSe-2(b)	8-10	50	50
	d. Stitch bottom edges of collar stand together.	301	SSa-1	8-10	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
20.	Attach collar to collar stand and shell (cont'd)					
	e. Collar shall measure 2 1/4 ± 1/8 inches wide at center back with collar points 2 3/4 ± 1/8 inches long.					
	f. Stitch 3/16 to 1/4 inch from edge the collarstand to neckline with tab on left front in accordance with notches on pattern.	301	SSa-1	8-10	50	50
	g. Collar stand shall measure 1 1/4 ± 1/8 inches wide at center back and 3/4 ± 1/8 inch wide at front edge.					
	h. Tab shall finish 2 ± 1/4 inches long and 3/4 to 7/8 inch wide at front end of collar stand.					
22.	Assemble sleeve lining					
	a. Stitch set-in sleeve lining to front armhole.	301 or 401	SSa-1	8-10	50 50	50 70
	b. Overedge stitch front armhole.	503 or 504 or 505	SSa-1	8-10	70	70
	c. Stitch raglan sleeve lining to back armhole simultaneously inserting one side of shoulder interlining piece in sleeve seam.	301 or 401	SSa-1	8-10	50 50	50 70
	d. Overedge stitch back armhole.	503 or 504 or 505	SSa-1	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
22.	Assemble sleeve lining (cont'd)					
	e. Join top sleeve seam from neckline, across shoulder to bottom of sleeve, simultaneously stitching other side of shoulder interlining piece at shoulders.	301 or 401	SSa-1	8-10	50 50	50 70
	f. Overedge stitch top sleeve seam.	503 or 504 or 505	SSa-1	8-10	70	70
	g. Stitch underarm sleeve.	301 or 401	SSa-1	8-10	50 50	50 70
	h. Overedge stitch underarm seam.	503 or 504 or 505	SSa-1	8-10	70	70
	i. Stitch side seam.	301 or 401	SSa-1	8-10	50	50
	j. Overedge stitch side seam.	503 or 504 or 505	SSa-1	8-10	70	70
	NOTE: The above operations may be performed in one operation by simultaneously seaming and stitching.	515 or 516 or 519	SSa-2	8-10	50 (chain) 70 overedge)	70 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
22.	Make hem on lining Form a 1/4 to 3/8 inch wide hem along bottom of lining (front and back) and stitch 1/16 inch from inner folded edge.	301	EFb-1	8-10	50	50
23.	Attach lining to shell a. Stitch lining to shell along neckline forming a pleat not less than 3/8 inch at center back, 1/4 to 3/8 inch from raw edge. Pleat may be folded in either direction.	301	LSq-2(a)	8-10	50	50
	b. Continue stitching facing with interlining to front along top, front edge and across bottom of facing 1/4 to 3/8 inch from raw edge.	301	SSe-2(a)	8-10	50	50
	c. Turn neck seam towards bottom hem of lining and stitch lining only to bottom edge of collar stand, 1/16 inch from edge.	301	LSq-2(b)	8-10	50	50
	d. Overedge stitch bottom of sleeve lining to shell with a 3/16 to 1/4 inch bight.	503 or 504 or 505	SSa-1	8-10	70	70
	e. Stitch bottom of sleeve lining to shell 1/8 inch from and parallel to the inner edge of overedge stitching.	301 or 401	SSa-1	8-10	50 50	50 70
	NOTE: The above operations may be performed in one operation by simultaneously seaming and stitching.	515 or 516 or 519	SSa-2	8-10	50 (chain) 70 (overedge)	70 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
23.	Attach lining to shell (cont'd)					
	f. Stitch bottom of sleeve lining to shell 7/8 to 1 inch from the outer edge of overedge stitching.	301 or 401	SSa-1	8-10	50 50	50 70
	g. Turn shell to finished position and starting at bottom of collarstand, stitch along top of interlined facing down front edge, and across bottom width of facing, 1/4 to 5/16 inch from folded edge.)	301	SSe-2(b)	8-10	50	50
24.	Attach fly to front Mark and stitch back edge of buttonhole fly, through all plies according to fly template. Stitching shall start from base of collar neck seam, parallel to the finished front edge, tapering to bottom opening of fly front. Stitching shall measure 2 1/2 ± 1/8 inches from front edge.	301	LSbj-1	8-10	50	50
25.	Hem Hem bottom edge of raincoat, 1 ± 1/8 inch wide, closing each end of facing to the line of stitching at bottom edge of facing.	301	EFb-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
26.	Finish tab facing Turn facing tab to finished position with point towards front edge and stitch entire top edge with stitching superimposed on edge stitching of tab. The purling of buttonhole shall be on the facing side facing the wearer. Facing tab shall finish 3 ± 1/8 inches long from back folded straight edge to point and 1 3/8 ± 1/4 inches wide at the back folded straight edge.	301	LSbj-1	8-10	50	50
27.	Hanger loop a. Hanger loop shall be made of basic material. Loop shall be double stitched using a coverstitch on underside, or with edges folded under.	406 or 301	EFh-1 or EFp-2	8-10 8-10	70 50	70 50
	b. Turn under each end of loop, center it to collarstand bartack the folded edges.	Bartack	LSd-1	24-28 per bartack	50	50
	c. Loop shall finish 3/8 ± 1/8 inch wide with a free opening 2 1/2 ± 1/4 inches long between bartacks.					
28.	Tack lining to shell a. Stitch sleeve lining to shell at underarm seam 3 ± 1/2 inches from bottom of sleeve for a distance of 6 1/2 ± 1/2 inches.	301	SSa-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin or Looper
28.	Tack lining to shell (cont'd)					
	b. Tack bottom of lining to shell at sides. When a 301 stitch type is used, a 3/4 to 1 inch long tack shall be superimposed on the row of side seam top stitching. As an alternate, stitch together the side seam allowances of lining and shell 3/4 to 1 inch in length and 1/4 to 1/2 inch above hem of lining.	Hand or 301	SSa-1	4-8/tack 8-10	30 70	70
	c. Stitch inner folded edge of interlined facing to outer ply of pocket from folded bottom edge of lining to within 3/4 inch from bottom of pocket and securely backtack.	301	LSd-1	8-10	70	70
29.	Buttonholes					
	a. Buttonholes shall be eyelet end, cut-after taper bar type or cut-after cross bar type, worked over gimp with the end securely tacked. The end of the taper bar buttonhole shall have a minimum of four tack stitches, not including the first cross-over stitch.					
	Buttonholes shall be measured from center of eyelet and placed as follows:					
	b. One horizontal buttonhole, centered on collar stand tab. Buttonhole shall be 5/8 to 3/4 inch long and 3/8 ± 1/8 inch from front edge of tab. The purling of the buttonhole shall face the wearer when tab is not buttoned (unfastened).	Button-hole		40-44 per buttonhole including tack	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd).

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
29.	Buttonholes (cont'd)					
	c. One horizontal buttonhole on left front 1 1/8 ± 1/8 inches from top edge and 5/8 ± 1/8 inch from folded front edge. Buttonhole shall be 7/8 to 1 inch long. The purling of the buttonhole shall face the wearer when buttoned.	Button-hole		50-54 per buttonhole including tack	50	50
30.	Buttons					
	a. Buttons shall be sewn to correspond with button-holes and shall be measured from center of buttons for position. Ends of hand shank wrapped buttons shall be tacked off with not less than two stitches.					
	b. Two 24 line buttons, one on each side of the collarstand shall be positioned to align with tab buttonhole when tab is in either the stay or closed position.	301		14-16 per button	50	50
		or 101		14-16 per button	50	
	c. One 30 line button on top right front, 2 5/8 ± 1/8 inches from front edge, reinforced with 18 line button. Button shall be shank wrapped by hand or machine.	301		14-16 per button	50	50
		or 101		14-16 per button	50	
	d. Three 40 line buttons, on right front, 2 1/4 ± 1/8 inches from front edge, reinforced with 18 line buttons. Button shall be shank wrapped by hand or machine.	301		14-16 per button	50	50
		or 101		14-16 per button	50	

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
30.	Buttons (cont'd)					
	e. One 30 line button, on right front (facing tab) 1 1/2 ± 1/8 inches from front edge reinforced with 18 line button. Button shall be shank wrapped by hand or machine.	301 or 101		14-16 per button 14-16 per button	50 50	50
31.	Cleaning					
	a. Trim and remove all loose thread. b. Remove any spot or stain. c. Remove all shade marking tickets.					
32.	Pressing					
	a. Press garment neatly throughout. b. Remove all wrinkles, creases, gloss marks or pressing impressions. c. Roll press sleeves					
33.	Button coat					
	Button entire front closure, including the facing tab.					
34.	Fold each raincoat					
	Refer to Section 5 for instructions.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements Sizes and measurements of the finished raincoats shall be as shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and measurements (inches)

Size	(A) Chest	Sleeve Inseam Length (B) Short	Regular	Long	X-Long	Back Center Length (C) Short	Regular	Long	X-Long
X-Small (30-32)	40	16 1/2	17 1/2	18	20	39 1/4	41 1/4	43 1/2	45 3/4
Small (34-36)	44	16 1/2	17 1/2	18	20	39 5/8	41 3/8	43 7/8	46 1/8
Medium (38-40)	48	16 1/2	17 1/2	18	20	40	42	44 1/4	46 1/2
Large (42-44)	52	16 1/2	17 1/2	18	20	40 3/8	42 3/8	44 5/8	46 7/8
X-Large (46-48)	56	16 1/2	17 1/2	18	20	40 3/4	42 3/4	45	47 1/4
XX-Large (50-52)	60	16 1/2	17 1/2	18	20	41 1/8	43 1/8	45 3/8	47 5/8
Tolerance	± 1	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: All measurements shall be taken with raincoat flat, smooth, and buttoned. Refer to Figure 1 for A, B, and C measurements.

(A) Chest - Twice the measurement taken across the chest from armhole seam to armhole seam.
(B) Sleeve inseam length - Measurement taken from base of armhole at inseam to bottom of sleeve.
(C) Back center length - Measurement taken on center back seam from lower edge of collarstand to bottom of raincoat.

3.9 Workmanship The finished raincoats shall conform to the quality of product established by this specification. As a final step in the contractor's production control plan, before formation of a lot, each raincoat shall be examined after pressing and prior to folding for packaging, and a raincoat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1494 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).
3. Component and material inspection (see 4.4.1).

4.3 First article inspection The first article submitted in accordance with 3.2 shall be inspected as specified for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection Sampling for inspection shall be performed in accordance with MIL-STD-1494.

4.4.1 Component and material inspection In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. The contractor shall furnish a certificate of compliance for the fusible web tape requirements of 3.3.4.2.

4.4.2 Examination of the end item. The end item examination provisions for finished raincoats shall be as specified in MIL-STD-1494.

4.4.3 Packaging inspection Packaging inspection shall be in accordance with MIL-STD-1494.

5. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

5.1 Preservation-packaging Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A Each fully buttoned raincoat shall be folded to measure approximately 14 1/2 by 11 1/2 inches Each folded raincoat shall be inserted in a snug-fitting clear polyethylene film bag of 0.0015 inch thickness (+ 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. The bag shall be not less than 1 inch greater in length than the folded garment. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required.

5.1.2 Level C (Commercial Packaging) Raincoats shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A Twenty raincoats, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type SF, class weather-resistant, grade V2s, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat, front up, alternated end for end, two in length, one in width, and 10 in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B Twenty raincoats, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, variety SW or DW, grade 275 of MIL-B-17757. Level A packages shall be packed flat, front up, alternated end for end, two in length, one in width , and 10 in depth within the shipping container. Each container shall have the content completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2, the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (Commercial Packing) Raincoats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
SIZE
QUANTITY

5.3.2 Labels, mixed sizes Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use The raincoats are intended for wear by enlisted male personnel of the Department of the Navy.

6.2 Ordering data Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2).
c. Whether first article sample is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. Whether V-board shipping containers are required for level B shipments (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns For access to samples and patterns, address the procuring office issuing the invitation for bids.

6.4 Recycled material It is encouraged that recycled materials be used when practical as long as they meet requirements of this specification.

6.5 Changes from previous issue Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Project No. 8405-N808

Review
DDSC-CT

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

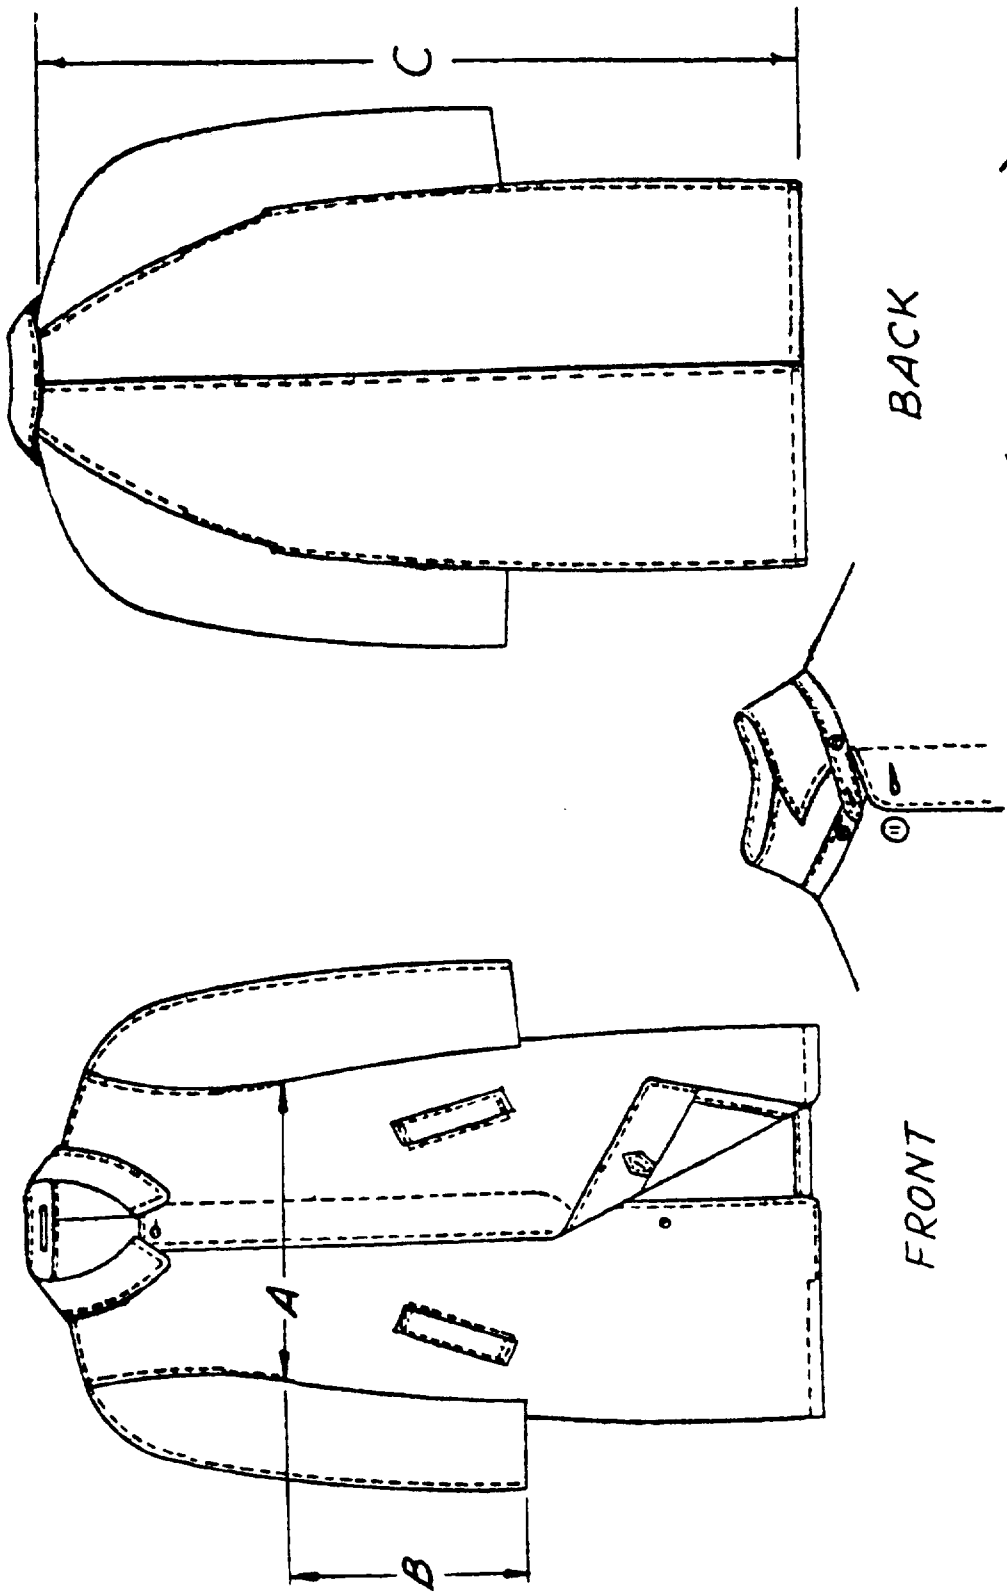


FIG. 1 – RAINCOAT, MAN'S (ENLISTED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.