MIL-R-82292B(NU)
28 March 1979
SUPERSEDING
MIL-R-82292A(SA)
17 May 1978

MILITARY SPECIFICATION

RAINCOAT, WOMAN'S (ENLISTED)

This specification is approved for use by Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.-

1.1 Scope.- This specification covers the requirements for an enlisted women's raincoat made of polyester/cotton blend fabric treated with a durable water repellent finish.

1.2 Classification.- The raincoat shall be of one type only in the following sizes and lengths. (see 6.2):

Sizes

6, 8, 10, 12, 14, 16, 18, 20, 38, 40, 42 and 44

Lengths

Short, Regular, and Long

2. APPLICABLE DOCUMENTS

* 2.1 Issue of documents.- The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA., 01760) by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871 - Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276 - Thread, Cotton
V-T-280 - Thread, Cotton Gimp, Buttonhole
DDD-L-20 - Label; for Clothing, Equipage and Tentage (General Use)

MILITARY

*MIL-C-297 - Cloth, Interlining, Cotton Warp, and Spun Hair-Wool filling
MIL-C-16375 - Cloth, Wigan, Cotton
MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21852 - Cloth, Taffeta, Nylon
MIL-C-43482 - Cloth, Poplin, Cotton and Polyester (Water Repellent)
MIL-T-43548 - Thread, Polyester, Cotton-Covered
MIL-C-43836 - Cloth, Interlining, Non-Woven

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams and Stitchings
FED-STD-191 - Textile Test Methods

MILITARY

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1494 - Provisions For Evaluating Quality of Raincoats

(Copies of specifications, standards, drawings and publications, required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Laws and Regulation

U. S. Postal Service Manual

(Copies may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402).

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, ATTN: Traffic Department, 1616 P Street, N. W., Washington, D. C. 20036).

Uniform Classification Committee, Agent

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

3. REQUIREMENTS

3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

* 3.2 First article.- When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

* 3.3 Materials.- (see 6.4)

* 3.3.1 Basic material.- The basic material shall be water repellent treated cotton/polyester blend poplin, shade blue 3346 conforming to Class 2 of MIL-C-43482.

3.3.2 Linings and interlinings.-

* 3.3.2.1 Lining (quarter) and interlining.- The material for the quarter lining and interlining the collar, collarstand and pocket welt shall be the same material as specified in 3.3.1.

3.3.2.2 Sleeve lining.- The material for lining the sleeves shall be a nylon taffeta cloth conforming to type IV of MIL-C-21852.

3.3.3 Interlinings.-

3.3.3.1 Cloth, cotton warp and spun hair-wool filling.- The material for interlining the front facing shall conform to type III of MIL-C-297. The collar shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

* 3.3.3.2 Cloth, cotton, wigan.- The material for interlining the bottom of the sleeves shall conform to type I of MIL-C-16375. The color shall be natural or gray.

or

As an alternate, a non-woven cloth conforming to type II, class 1 of MIL-C-43836 may be used; except that the color shall be natural or black.

* 3.3.4 Tape, fusible.- The tape for the seams (sides, center back, shoulder and top sleeve) shall be non-woven thermo plastic polyamide resin, natural color, 18 to 32 grams per square yard, and 3/8 inch (.9cm) in width. The material identification of the tape shall be tested as specified in 4.4.1.

3.3.5 Buttons.- The buttons shall conform to type II, class D, style 20 and 21, lines 24 and 40, style 15, 18 line of V-B-871. The color of the buttons shall be shade Black BT, Cable No. 62001.

* 3.3.6 Thread, polyester/cotton covered.- The polyester/cotton covered thread shall be dyed Black AA, C. A. 66043 conforming to MIL-T-43548 as follows:

Use	Ticket No.	Ply
Seaming, stitching, buttonholes		
buttons and bartacks	50	2 or 3
Overedge stitching	70	2 or 3
Tacking		
Hand	70	2 or 3
Machine	30	2 or 3

* 3.3.6.1 Thread, cotton.- As an alternate to the polyester/cotton covered thread, a cotton thread may be used. When this option is exercised, the thread shall match shade Black AA, C. A. 66043 and shall conform to V-T-276 as follows:

Use	Type	Ticket No.	Ply
Seaming and stitching	IC2	0	3
		00	3
Buttonholes, buttons and bartacks	IC2	A	3
Overedge stitching	IA3	70	2
Tacking			
Machine	IA3	70	3
Hand	IB3	16	4

3.3.6.2 Colorfastness.- The dyed thread shall show fastness to wet-dry-cleaning, and light equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. When no standard sample is available, the dyed thread shall show "good" fastness to wet-dry cleaning and light when tested as specified in V-T-276 or MIL-T-43548.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:40Z
Check the source to verify that this is the current version before use.

3.3.7 Gimp, cotton.- The cotton gimp for reinforcing the buttonholes shall be shade Black CA 66043 and shall conform to type I or type II, size No. 8 of V-T-280.

3.3.7.1 Colorfastness.- The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. When no standard sample is available the dyed gimp shall show "good" fastness to wet-drycleaning when tested as specified in V-T-280.

* 3.3.8 Combination identification personal and instruction label.- Each raincoat shall have a combination identification personal instruction label that conforms to type I, classes 1, 3 and 10 of DDD-L-20. The printing shall show fastness to dry cleaning and shall bear the following inscription:

NAME:
SERVICE NO:
Raincoat, Woman's (Enlisted)
FIBER CONTENT: Polyester 50% and Cotton 50% 1/
CONTRACT NO: DLA100-00-0-0000 (Example)
NAME OF SUPPLIER:

Cleaning Instructions: For best results,
DRY CLEAN ONLY

1/ If the blend is other than 50% polyester and 50% cotton, the applicable fiber blend must be specified.

* 3.3.8.1 Size label.- Each raincoat shall have a size label conforming to type I, class 2 of DDD-L-20. The printing shall show fastness to dry cleaning and bear the following inscription: .

Size: 12R (Example)
Stock No: 8410-00-000-0000 (Example)

NOTE: Abbreviations to be used for the applicable lengths shall be "S" for Short, "R" for Regular and "L" for Long.

3.4 Description.- The raincoat shall be single breasted with button fly front and button tab closure on lower right facing; quarter lined with basic fabric; split shoulder raglan sleeves with button tabs and lined with nylon cloth; and have a center back vent with button closure. The collar shall be convertible with round ends and collar stand. The pocket shall be welt style (see figure 1).

3.4.1 Figure.- The figure is furnished for information only. Any inconsistencies between the specification and the figure, the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.5 Patterns.- Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

* 3.5.1 List of pattern parts.- The component parts of the raincoat shall be cut from the materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of Pattern Part	Cut Parts
Basic material, poplin: Cotton/polyester, water repellent	Back	2
	Front	2
	Front facing	2
	Back sleeve	2
	Front sleeve	2
	Pocket welts	2
	Pocket, outer ply	2
	Pocket, inner ply	2
	Fly piece	2
	Facing tab	1
	Sleeve tab	4
	Topcollar	1
	Undercollar and interlining	2
	Collarstand and interlining	3
	Shoulder interlining	2
	Pocket welt, interlining	2
	Back lining	1
	Front lining	2
Cloth, Nylon, Taffeta	Back sleeve, lining	2
	Front sleeve, lining	2
Cotton Warp. and Spun hair, wool filling, interlining	Front facings	2
Cloth, cotton wigan or Cloth, Non-woven	Sleeve bottom interlining	2
Templates	Fly marker	-
	Front fly buttonhole marker	-
	Collar shaper, marker	-
	Lapel shaper, marker	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.6 Construction.-

3.6.1 Stitches, seams, and stitching.- Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper, that is the underthread shall be on the inside of the raincoat. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats or open seams will result. Unless otherwise specified, top stitching or edgestitching shall be 1/4 to 5/16 inch from the edge. The fusing tape shall not be exposed in the seam construction.

3.6.2 Thread breaks and ends of seams.- Ends of all seams and stitchings with stitch type 301 when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.6.3 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in table I.

3.7 Manufacturing operations requirements.- The raincoat shall be manufactured in accordance with operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations provided the finished raincoat is identical to that produced by following the sequence as listed in table I.

3.7.1 Shade and size marking.- The component parts of the raincoat shall be marked to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

3.7.2 Pressing.- All pressing as required in table I shall be performed with a heated pressing machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*1.	Cutting.- a. Cut the raincoat in strict accordance with patterns furnished, which shall show size, notches for proper assembly of parts, perforations, warp directional lines for cutting, and instructions for proper assembly of all component parts. b. Cut all component parts of the polyester/cotton from one piece of material, except inner and outer pocket plies, fly pieces, facing tab, front and back quarter lining, undercollar, undercollar stand, underply of sleeve tab, interlinings (shoulder, undercollar collar, collarstand, pocket welts) and hanger loop which may be cut from ends and when so cut shall approximate the shade of the main assembly. When the outer pocket parts and front and back lining parts are cut from ends, they shall match each other. Cut all component parts of the nylon taffeta from one piece of material. When pairs of sleeves are cut from ends they shall be shade marked and shall match each other.					
*2.	Replacement of defective components.- During the spreading, cutting and manufacturing process, components having material defects as specified in MIL-STD-1494 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Size and shade marking (see 3.7.1).- a. Mark all components except parts cut from ends to insure a proper uniform shade and size assembly throughout the raincoat.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Size and shade marking (see 3.7.1).- (cont'd)					
	b. The use of ink pad numbering machine, rubber stamp or pencil is allowed provided the numbering does not show on the outside of the garment and wherever possible is covered by the seam allowance.					
4.	Facing and sleeve tabs.-					
	a. Fold facing tab in half lengthwise. Stitch point and unfolded length edge. Trim, turn and edgestitch, 1/4 to 5/16 inch from folded edge.	301	SSe-2 and OSf-1	8-10	50	50
	b. Stitch point and length edges of sleeve tab. Trim turn and edgestitch, 1/4 to 5/16 inch from folded edge. The underside of the loop along the edges shall not be exposed from the top side.	301	SSe-2	8-10	50	50
	c. Make one horizontal, eyelet end, cut-first square bar type or cut after cross bar type buttonhole worked over gimp on each tab. (see operation 31c.)	Buttonhole		52 per buttonhole	50	50
	d. Cut length of the buttonhole on each tab shall be 5/8 (± 1/8) long measured from center of eyelet and the center of buttonhole eyelet 1/2 (± 1/8) inch from point. The purling of the buttonhole shall be on the face side of tab and the gimp pulled through the underside.					
	e. Facing tab shall measure 3 1/4 (± 1/4) inches, long from pointed edge to back straight edge and 1 1/2 (± 1/4) inches wide at back straight edge finished.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Facing and sleeve tabs.- (cont'd) f. The width of the finished sleeve tabs at the back straight edge (for all sizes) shall be 1 1/2 (± 1/4) inches. The length of the finished sleeve tabs from the pointed edge to the back straight edge shall be as follows: sizes 6, 8 and 10 - 4 3/4 (± 1/4) inches sizes 12 and 14 - 5 (± 1/4) inches sizes 16 and 18 - 5 1/4 (± 1/4) inches sizes 20 and over - 5 1/2 (± 1/4) inches					
*5.	Pocket welt a. Position interlining on the underside of the open welt piece and on the under half with the edge at center fold line and stitch 1/8 to 3/16 inch gauge from raw edge of interlining.	301	LSa-1	8-10	50	50
	b. Fold welt in half lengthwise and stitch 3/16 to 1/4 inch the ends. Trim upper and lower corners of welt.	301	SSe-2(a)	8-10	50	50
	c. Turn welt to face side and edge stitch ends and folded edge 1/4 to 5/16 inch from the edge. Stitching on interlining shall not be exposed on face side of welt.	301	SSe-2(b) and OSf-1	8-10	50	50
	d. Stitch inner raw edge of welt together. The welt shall finish 1 1/2 (± 1/8) inches wide and 7 (± 1/4) inches long.	301	SSa-1	8-10	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Attach welt and pocket to front.-					
	a. Position face side of welt against front and simultaneously stitch inner pocket piece and welt to front 3/8 inch from slash mark indicated on patterns.	301	SSaw-2(a)	8-10	50	50
	b. Stitch inner pocket piece to the front, parallel to and 3/8 inch from slash mark indicated on patterns.	301	SSe-2(a)	8-10	50	50
	c. Cut the front between the two parallel lines of stitching on the inner pocket piece cutting a triangular tongue at each end in the front. Care shall be taken so that the ends of the tongue notch in the fronts will not be deeper than the ends of the two rows of stitching.					
	d. Turn the welt against the inner pocket piece and the welt joining seam allowances against the front. Raise stitch the welt joining seam 1/16 inch from the seamline.	301	SSaw-2(b)	8-10	50	50
	e. Turn the inner pocket piece through opening and edgestitch front and inner pocket piece 1/16 inch from folded edge.	301	SSe-2(b)	8-10	50	50
	f. Turn the inner pocket piece to the outside and stitch to outer pocket piece around top, sides and bottom.	301	SSe-2(a)	8-10	50	50
	g. Notch seam allowance of inner and outer pockets to end of stitching at front straight edge of outer pocket piece.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Attach welt and pocket to front.- (cont'd)					
	h. Turn pocket to the inside and stitch 3/16 to 1/4 inch from the folded edge and continue stitching the outer pocket piece along front straight edge of the inner pocket piece 1/4 inch from the raw edge.	301	SSe-2(b) and LSbj-1	8-10	50	50
	i. Smooth out pocket and welt on outer pocket piece and edgestitch back edge of pocket opening to outer pocket piece 1/16 inch from folded edge.	301	SSe-2(b)	8-10	50	50
	j. Smooth the welt over the pocket opening with the tongue notch at each end under the welt. Tack the ends of the welt with two connected rows of stitching at the back corners of the welt through the outer and inner pocket plies.					
	Stitch 1/16 inch from the end of the welt to the corner of the welt, and then stitch diagonally inward to the edge stitching on the welt and along the stitching to the raise stitching on the welt joining seam.	301	LSa-1	8-10	50	50
	k. Stitch straight edge of outer pocket piece to front edge of coat	301	SSa-1	8-10	50	50
	OR					
	l. As an option the inner and outer pocket pieces may be preassembled prior to joining the welt and pocket pieces to the front.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Attach combination identification and instruction label.- Stitch label on all four sides 1/16 inch from edge, centered on back lining with bottom edge positioned 3/8 to 1/2 inch above bottom folded edge of hem. Long dimension of label shall be parallel to hem.	301	LSbj-1	8-10	50	50
8.	Shoulder dart.- a. Stitch front shoulder dart tapering to a point 1 (± 1/2) inch below edge of dart. b. Press seam open flat and folded edge at bottom of dart toward the center front.	301	SSa-1	8-10	50	50
9.	Right fly front.- a. Position a fly piece on the right front facing, face-to-face, in accordance with notches and stitch inward at top notch, parallel to front edge and outward at bottom notch, 3/4 (± 1/8) inch from front edge. b. Cut facing and fly piece diagonally at each corner to line of stitching.	301	SSe-2(a)	8-10	50	50
	c. Turn fly and facing enclosing the seam, forcing the seam line out to the edge, and stitch front edge, 1/4 (± 1/8) inch gauge, backtacking each end.	301	SSe-2(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Buttonholes on fly piece.-					
	a. Make three horizontal, eyelet end, cut-after taper bar type or cut after cross bar type buttonholes worked over gimp through the facing and fly piece in accordance with the pattern markings. The ends of the buttonholes shall be securely tacked. The purling of the buttonhole shall be on the facing side.					
	b. Buttonhole shall be 1 1/8 (+ 1/8) inches long measured from center of eyelet and 5/8 (+ 1/8) inch from front edge of fly facing piece.	Buttonhole		75 per buttonhole	50	50
11.	Tack or bartack buttonhole fly.-					
	a. Position second fly piece under the right fly-facing with the raw edges above and below the notches even and the front edge of the fly-facing between the notches 3/4 (+ 1/8) inch from the raw edge of the fly piece.					
	b. Make two horizontal tacks or bartacks, centered, between the three buttonholes. Tacking or bartack between each buttonhole shall be perpendicular to the front edge of the fly, 3/4 (+ 1/4) inch from front edge of fly and shall be 3/8 to 1/2 inch long.	Bartack or 301	LSa-1	28 per bartack 8-10	50 50	50 50
12.	Attach facings to front lining.-					
	a. Overedge stitch inner edge of interlining, facing from the shoulder edge to bottom of front lining, simultaneous by forming and catching a double fold at the bottom front edge of lining for a 1/4 (+ 1/8) inch hem; continue overedge stitching the inner edge of the facing to the bottom of the facing inserting facing tab in accordance with pattern markings.	503 or 504 or 505	SSa-1 and EFd-1	8-10	50	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Attach facings to front lining.- (cont'd)					
	b. Stitch inner edge of interlining, facing and front edge of lining together 3/8 (± 1/16) inch from the edge from shoulders to bottom of lining.	301 or 401	SSa-1	8-10	50 50	50 50
	c. At intersection of front lining turn under the inner edge of the interlining, facing 1/2 (± 1/8) inch and edgestitch 1/8 to 3/16 inch from folded edge down to bottom of interlining of facing.	301	EFa-1	8-10	50	50
14.	Interlining to facing.- Stitch interlining and facing together from the shoulder edge along the neck edge along the front edge of the right facing and extending edge of fly piece and front edge of the left facing to the bottom of facing across the bottom edge of the facings, 1/8 to 3/16 inch gauge.	301	SSa-1	8-10	50	50
14.	Sleeve to front.- a. Stitch set-in sleeve to front armhole from shoulder to approximately 3 inches below the step on front.	301	LSq-2(a)	8-10	50	50
	b. Turn and topstitch seam with stitching on front to step as marked on pattern, 1/4 to 5/16 inch from folded edge. At step, turn and continue stitching to the joining seamline. NOTE: The seam allowance for setting the sleeve shall be 1/2 inch to the step, reduced to 5/16 inch below the step.	301	LSq-2(b)	8-10	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Sleeve to back.-					
	a. Stitch raglan sleeve to back armhole from neckline to approximately 3 inch past the step on back.	301	LSq-2(a)	8-10	50	50
	b. Turn and topstitch seam with stitching on back to step as marked on pattern, 1/4 to 5/16 inch from folded edge. At step, turn and continue stitching to the joining seamline.	301	LSq-2(b)	8-10	50	50
16.	Back and vent.-					
	a. Place left back on right back, face to face, with the raw edge of left back positioned 7/16 (± 1/32) inch back from raw edge of right back. Fold right back seam allowance over staggered left back and stitch thru all plies 1/16 to 3/32 inch from raw edge of right back, simultaneously catching the fusing tape under the line of stitching. Line of stitching and fusing tape shall start approximately 1/4 inch below top of vent to neckline.	301	SSw-2(a)	8-10	50	50
	b. Fold left back to finished position with the folded edge of back seam facing towards the right back. Topstitch 1/4 to 5/16 inch from folded edge.	301	SSw-2(b)	8-10	50	50
	c. Press seam above the vent and fuse tape.					
	d. Press left vent on fold line, as indicated on patterns.					
	e. Fold left vent 1 1/2 (± 1/8) inches wide. Stitch one vertical end, cut-after taper bar type or cut-after cross bar type, worked over gimp with the eyelet end towards the top of vent. Buttonhole shall be 5/8 (±1/8)	Buttonhole		44 per Buttonhole	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Back and vent.- (cont'd) inches long, measured from center of eyelet and positioned midway for length of vent opening. The purling of the buttonhole shall be on the underside.					
	f. Double fold left back vent 1 1/2 (± 1/8) inches wide and stitch folded edge at center back, 1/4 to 5/16 inch insuring that raw edge of first fold is caught in the line of stitching.	301	OSf-1	8-10	50	50
	g. Hem right vent 1 1/2 (± 1/8) inches wide, and stitch 1/16 inch from inner edge of hem.	301	EFb-1	8-10	50	50
	h. At top of vent, trim left vent across top; fold right vent under and boxstitch vent through all plies with left back vent overlapping right back vent 1 3/8 (± 1/8) inches.	301	LSd-1	8-10	50	50
	i. Boxstitch shall be made diagonal to the center seam 1 3/8 (± 1/8) inches long and 3/8 (± 1/8) inch wide.					
17.	Join sides.-					
	a. Place back on front, face to face, with raw edge of back positioned 7/16 (± 1/32) inch back from raw edge of front. Fold front seam allowance over back and stitch thru all plies 1/16 to 3/32 inch from raw edge of front, simultaneously catching the fusing tape under the line of stitching.	301	SSw-2(a)	8-10	50	50
	b. Fold back to finished position with folded edge of side seam facing towards front of raincoat. Top stitch 1/4 to 5/16 inch from folded edge.	301	SSw-2(b)	8-10	50	50
	c. Press seam to fuse tape.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*18.	Close sleeves.-					
	a. Place front sleeve on back sleeve, face to face, and join from neckline to bottom of sleeve 3/8 inch from raw edge simultaneously catching the fusing tape under the line of stitching on the front sleeve side.	301	LSq-2(a)	8-10	50	50
	b. Turn front sleeve towards the front with finished folded edge of seam facing towards back of raincoat, and topstitch 1/4 to 5/16 inch from folded edge.	301	LSq-2(b)	8-10	50	50
	c. Press seam to fuse tape.					
	d. Stitch non-woven or wigan interlining across bottom width of sleeve.	301	SSa-1	8-10	50	50
	e. Close underarm sleeve seam catching the sleeve tab as indicated by the pattern marking. Press seam open and flat (see operation 4).	301	SSa-1	8-10	50	50
	f. Finish setting sleeve to armhole.	301	LSq-2(a)	8-10	50	50
	g. Turn seam allowance towards body and topstitch edge 1/16 inch from folded edge, from step on front armhole to step on back armhole.	301	LSq-2(b)	8-10	50	50
	OR					
	NOTE: Operations 14b, 15b and 18g may be performed in one operation after the sleeve has been set.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
19.	Collar.-					
	a. Stitch interlining to undercollar at outer edge, 1/8 to 3/16 inch gauge.	301	SSa-1	8-10	50	50
	b. Stitch undercollar to top collar at outer edge, 3/16 to 1/4 inch from raw edge. Trim rounded corners.	301	SSe-2(a)	8-10	50	50
	c. Turn collar and stitch, 1/4 to 5/16 inch from folded edge.	301	SSe-2(b)	8-10	50	50
	d. Stitch 1/16 from edge, the inner edge of collar.	301	SSa-1	8-10	50	50
20.	Collarstand.-					
	a. Stitch interlining to undercollar stand at outer edges, 1/8 to 3/16 inch gauge.	301	SSa-1	8-10	50	50
	b. Stitch not less than 3 rows of horizontal stitching equally spaced across length of undercollar stand.	301 or 401	SSv-3 SSv-3	8-10 8-10	50 50	50 50
21.	Attach collar to collarstand and shell.-					
	a. Stitch collar between under and top collarstand in accordance with notches, 3/16 to 1/4 inch from raw edges.	301	SSq-2(a)	8-10	50	50
	b. Turn the collarstands face side out with the seam allowances against the collarstand and top stitch the seam through all plies with the stitching on the collarstands, 1/16 inch from folded edge.	301	SSq-2(b)	8-10	50	50
	c. Stitch bottom edge of collar and collarstand together.	301	SSa-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2021-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
21.	Attach collar to collarstand and shell.- (cont'd)					
	d. Collar shall measure 2 1/4 (± 1/8) inches wide at center back.					
	e. Stitch bottom edge of collar and collarstand to neckline of shell, in accordance with notches, from lapel notch to lapel notch.	301	SSa-1	8-10	50	50
	f. Collarstand shall measure 1 1/4 (± 1/8) inches wide at center back.					
22.	Assemble sleeve lining.-					
	a. Stitch front shoulder dart tapering to a point 1 (± 1/2) inch below raw edge at bottom of dart.	301	SSa-1	8-10	50	50
	b. Press seam open and flat.					
	c. Stitch set-in sleeve lining to front armhole.	301 or 401	SSa-1	8-10	50 50	50 70
	d. Overedge stitch front armhole.	503 or 504 or 602	SSa-1	8-10	70	70
	e. Position the shoulder interlining on the underside of the back sleeve lining with the corresponding edges even and stitch the raglan sleeve lining and edge of interlining piece to the back armhole.	301 or 401	SSa-1	8-10	50 50	50 70
	f. Overedge stitch back armhole.	503 or 504 or 602	SSa-1	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread: Needle	Thread: Bobbin or Looper
22.	Assemble sleeve lining.- (cont'd)					
	g. Join top sleeve seam from neckline, across shoulder to bottom of sleeve, catching the shoulder edge of the shoulder interlining in the seam.	301 or 401	SSa-1	8-10	50 50	50 70
	h. Overedge stitch top sleeve seam.	503 or 504 or 602	SSa-1	8-10	70	70
	i. Stitch underarm sleeve seam.	301 or 401	SSa-1	8-10	50 50	50 70
	j. Overedge stitch underarm seam.	503 or 504 or 602	SSa-1	8-10	70	70
	k. Stitch side seam.	301 or 401	SSa-1	8-10	50 50	50 70
	l. Overedge stitch side seam.	503 or 504 or 602	SSa-1	8-10	70	70
	NOTE: The above operations may be performed by simultaneously seaming and stitching	515 or 516 or 519	SSa-2	8-10	50 Chainstitching 70 Overedgestitching	70 70
23.	Hem lining.- Hem bottom of lining (front and back) 1/4 (± 1/8) inch, and stitch 1/16 inch from folded edge.	301	EFb-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
24.	Attach lining to shell.-					
	a. Stitch lining to shell along neckline forming a 1/2 (± 1/8) inch pleat at center back 5/16 (± 1/16) inch from the edge. Pleat shall be folded towards the left side as worn.	301	SSa-1	8-10	50	50
	b. Continue stitching facing with interlining to front along top, front edge and across bottom width of facing, 5/16 (± 1/16) inch gauge. Turn neck seam towards the hem of the lining, and stitch lining only along bottom edge of collarstand 1/16 inch gauge, simultaneously centering and catching top edge of size label.	301	SSe-2(a) and LSq-2(b)	8-10	50	50
	c. Stitch bottom of sleeve lining to shell.	301 or 401	SSa-1	8-10	50 50	50 70
	d. Overedge stitch bottom of sleeve lining to shell.	503 or 504 or 602	SSa-1	8-10	70	70
	NOTE: The above operations may be performed by simultaneously seaming and stitching.	515 or 516 or 519	SSa-2	8-10	50 (Chainstitching) 70 (overedge stitching)	70 70
	e. Stitch bottom of sleeve lining to shell 1 inch from serged edge.	301	SSa-1	8-10	50	50
	f. Turn shell to finished position and topstitch from lapel notch, along front edge and across bottom width of facing.	301	SSe-2(b)	8-10	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
25.	Fly to front.- Topstitch the right front 2 1/4 to 2 1/2 inches from the front edge through the plies and facing from the top of the fly opening, tapering the stitching at the bottom of the fly in a curve to the front edge 2 1/2 to 3 1/2 inches below the bottom buttonhole.	301	OSa-1	8-10	50	50
26.	Hem.- a. Hem bottom edge of raincoat, 1 (± 1/8) inch wide, closing each end of facing from the top of the hem to the line of stitching at front bottom edge. b. The ends of the hem at center back of vent opening shall be the same depth.	301	EFb-1	8-10	50	50
27.	Finish facing tab.- Turn facing tab with point towards front edge, and stitch entire top edge with stitching superimposed on edge stitching.	301	LSa-1	8-10	50	50
28.	Hanger loop.- a. Hanger loop shall be made of basic material. Loop shall be double stitched using a coverstitch on underside, or with edges folded under.	406 or 301	EFh-1 or EFp-2	8-10 8-10	50 50	70 50
	b. Turn under each end of loop, center it to collar-stand and backstitch or bartack the folded edges.	301 or bartack	LSd-1	8-10 28 per bartack	50 50	50 50
	c. Loop shall finish 3/8 (± 1/8) inch wide with a free opening 2 1/2 (± 1/4) inches long between tack at ends.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil - Downloaded: 2022610-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
29.	Tack lining to shell.-					
	a. Stitch sleeve lining to shell at underarm seam 3 (± 1/2) inches from bottom of sleeve for a distance of 6 1/2 (± 1/2) inches.	301	SSa-1	8-10	50	50
	b. Tack bottom of lining to shell at side seams. When 301 stitch type is used, a 3/4 to 1 inch long tack shall be superimposed on the row of side seam raise stitching.	Hand or 301	SSa-1	4-8 per tack or 8-10	30 70	 70
	c. Tack back edge of facing to bottom of pocket with a 3/8 inch horizontal tack or bartack not more than 1/4 inch from bottom edge of pocket.	Hand or 301 or bartack		4-8 per tack or 8-10 or 28 per bartack	30 70 50	 70 50
30.	Lapel buttonhole.-					
	a. One horizontal eyelet and, cut first square bar type or cut-after cross bar type buttonhole shall be placed on right front 1/2 inch from front edge and 1 inch from top (step) edge.	Buttonhole		52 per buttonhole not including bartack	50	50
	b. The cut length of the buttonhole shall be 5/8 (± 1/8) inch long and shall be measured from center of eyelet. The purling of the buttonhole shall be on the face side of lapel and the ends of the gimp pulled through underside.					
	c. The end of the cut first square bar type buttonhole shall be tacked with a 3/16 inch bartack in a separate operation from buttonhole making; securely catching ends of the gimp and covering the depth of the stitches on each side of the opening.	Bartack		21 per bartack	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
31.	Buttons.-					
	a. Sew buttons to correspond with buttonholes and shall be measured from center of button as follows:	101 or 301		14-16 per button on	50	
				14-16 per button	50	50
	b. Two, 24 line, on sleeve: one on the front sleeve corresponding to the eyelet of the sleeve tab buttonhole and the second on top sleeve seam the same distance from the bottom of the sleeve as the sleeve tab.					
	c. One, 24 line, on right back vent to correspond with eyelet end of buttonhole on left back vent.					
	d. One, 24 line, on top left front to correspond with buttonhole eyelet on right front with the fronts lapped so that the collar ends meet. Button shall be shank wrapped by hand or machine. Tack off ends of hand shank wrapped buttons with not less than two stitches.					
	e. Three, 40 line, on left front, 2 1/4 (± 1/8) inches from front edge, reinforced with 18 line buttons. Button shall be shank wrapped by hand or machine. Tack off ends of hand shank wrapped buttons with not less than two stitches.					
	f. One, 24 line, on left front to correspond with facing tab buttonhole eyelet on right front facing. Button shall be shank wrapped by hand or machine. Tack off ends of hand shank wrapped buttons with not less than two stitches.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
32.	Cleaning.- a. Trim and remove all loose threads. b. Remove any soil or spots. c. Remove all shade marking tickets.					
33.	Pressing.- a. Press garment neatly throughout. b. Remove all wrinkles, creases, gloss marks or pressing impressions. c. Roll press sleeves.					
34.	Button and fold garment.- Button the front of the raincoat including facing and sleeve tabs.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements.- Sizes and measurements of the finished raincoat shall be as shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and measurements of raincoat

Size	Bust (A)	Sleeve Inseam Length (B)			Back Center Length (C)		
		Short	Regular	Long	Short	Regular	Long
6	39 1/2	15 1/2	16 1/2	17 3/4	38 5/8	40 5/8	42 5/8
8	42 1/4	15 3/4	16 3/4	18	38 7/8	40 7/8	43 1/8
10	43 1/4	15 3/4	16 3/4	18	39	41	43 1/4
12	44 1/4	15 3/4	16 3/4	18	39 1/8	41 1/8	43 3/8
14	45 3/4	15 3/4	16 3/4	18	39 1/4	41 1/4	43 1/2
16	47 1/4	15 3/4	16 3/4	18	39 3/8	41 3/8	43 5/8
18	48 3/4	15 3/4	16 3/4	18	39 1/2	41 1/2	43 3/4
20	50 1/4	15 3/4	16 3/4	18	39 5/8	41 5/8	43 7/8
38	51 1/4	15 3/4	16 3/4	18	39 3/4	41 3/4	44
40	53 1/4	15 3/4	16 3/4	18	39 7/8	41 7/8	44 1/8
42	55 1/4	15 3/4	16 3/4	18	40	42	44 1/4
44	57 1/4	15 3/4	16 3/4	18	40 1/8	42 1/8	44 3/8
Tolerance	± 3/4	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: A, B, and C refer to figure 1.
All measurements shall be taken with raincoat flat, smooth and buttoned.

(A) Bust - Twice the measurement taken across the bust from armhole seam to armhole seam.

(B) Sleeve inseam length - Measurement taken from base of armhole at inseam to bottom of sleeve.

(C) Length - Measurement taken on center back seam from lower edge of collarstand to bottom of raincoat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

3.9 Workmanship.- The finished raincoats shall conform to the quality of product established by this specification. As a final step in the contractor's production control plan, before formation of a lot, each raincoat shall be examined after pressing and prior to folding for packaging, and a raincoat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1494 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection.- The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).
3. Component and material inspection (see 4.4.1).

4.3 First article inspection.- The first article submitted in accordance with 3.2 shall be inspected as specified for compliance with design, construction, workmanship and dimensional requirements.

* 4.4 Quality conformance inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-1494.

* 4.4.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. The contractor shall furnish a certificate of compliance for the color requirements of 3.3.2.2.1 and the fusible tape requirements of 3.3.4.

* 4.4.2 Examination of the end item.- The end item examination provisions for finished raincoats shall be as specified in MIL-STD-1494.

4.4.3 Packaging inspection.- Packaging inspection shall be in accordance with MIL-STD-1494.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- Each fully buttoned raincoat shall be folded to measure approximately 14 1/2 by 11 1/2 inches. Each folded raincoat shall be inserted in a snug-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (± 20% tolerance). The polyethelene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag shall be not less than 1 inch greater in length than the folded garment. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner hole are not required.

* 5.1.2 Level C (commercial packaging).- Raincoats, shall be packed to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Twenty raincoats, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat front up, alternated end for end, two in length, one in width, and 10 in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2 Level B.- Twenty raincoats, of one size only, packed as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, variety DW, grade 200 of MIL-B-17757. Level A packages shall be packed flat front up, alternated end for end, two in length, one in width, and 10 in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757, and closed in accordance with the appendix of the container specification.

* 5.2.3 Level C (Commercial packing).- Raincoats packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Container shall comply with the U. S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER:
NOMENCLATURE:
SIZE:
QUANTITY:

5.3.2 Labels, mixed sizes.- Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes container therein.

6. NOTES

6.1 Intended use.- The raincoats are intended for wear by the enlisted female personnel of the Department of the Navy.

* 6.2 Ordering data.- Procurement documents should specified the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2).
c. When first article sample is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for Level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns.- For access to samples and patterns address the procuring office issuing the invitation for bids.

* 6.4 Recycled material.- It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

6.5 Changes from previous issue.- The margins of this specification are marked with an asterisk to indicated where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assums no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian:
Navy - NU

Review Activity:
DPSC - CT


Preparing Activity:
Navy - NU

Project No. 8410-N452

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:40Z
Check the source to verify that this is the currenversion before use.

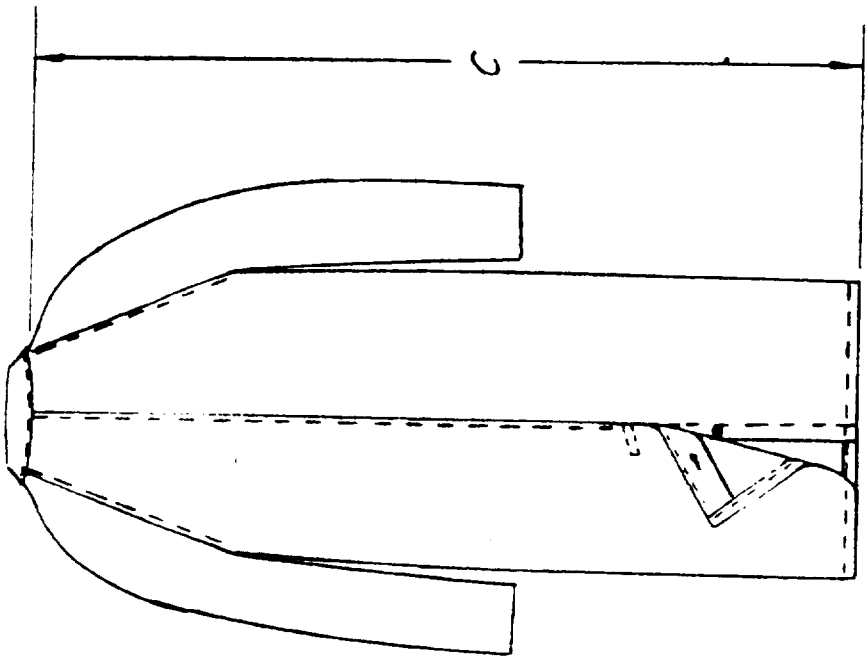

BACK VIEW

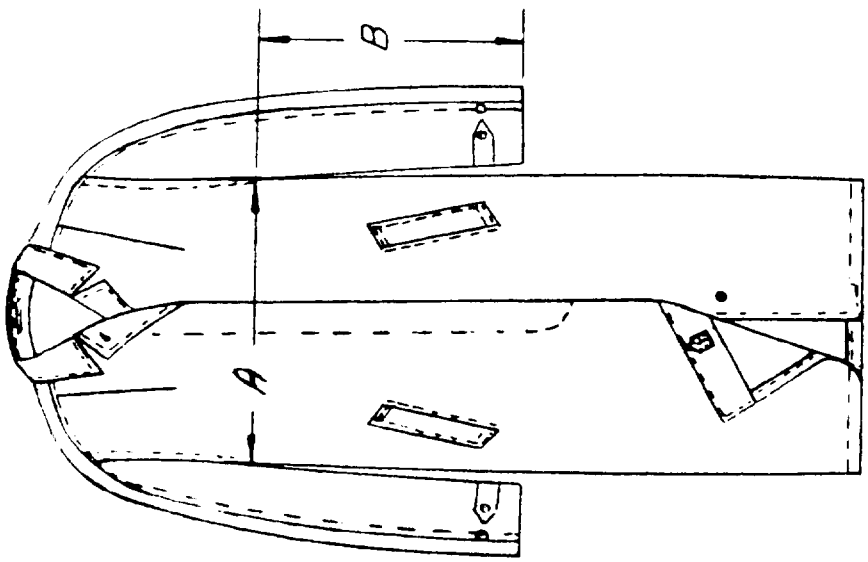

FRONT VIEW

FIGURE-1 RAINCOAT, WOMAN'S (ENLISTED)

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/1694

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S. MAIL

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-R-82292B(NU) RAINCOAT, WOMAN'S (ENLISTED)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:40Z
Check the source to verify that this is the current version before use.